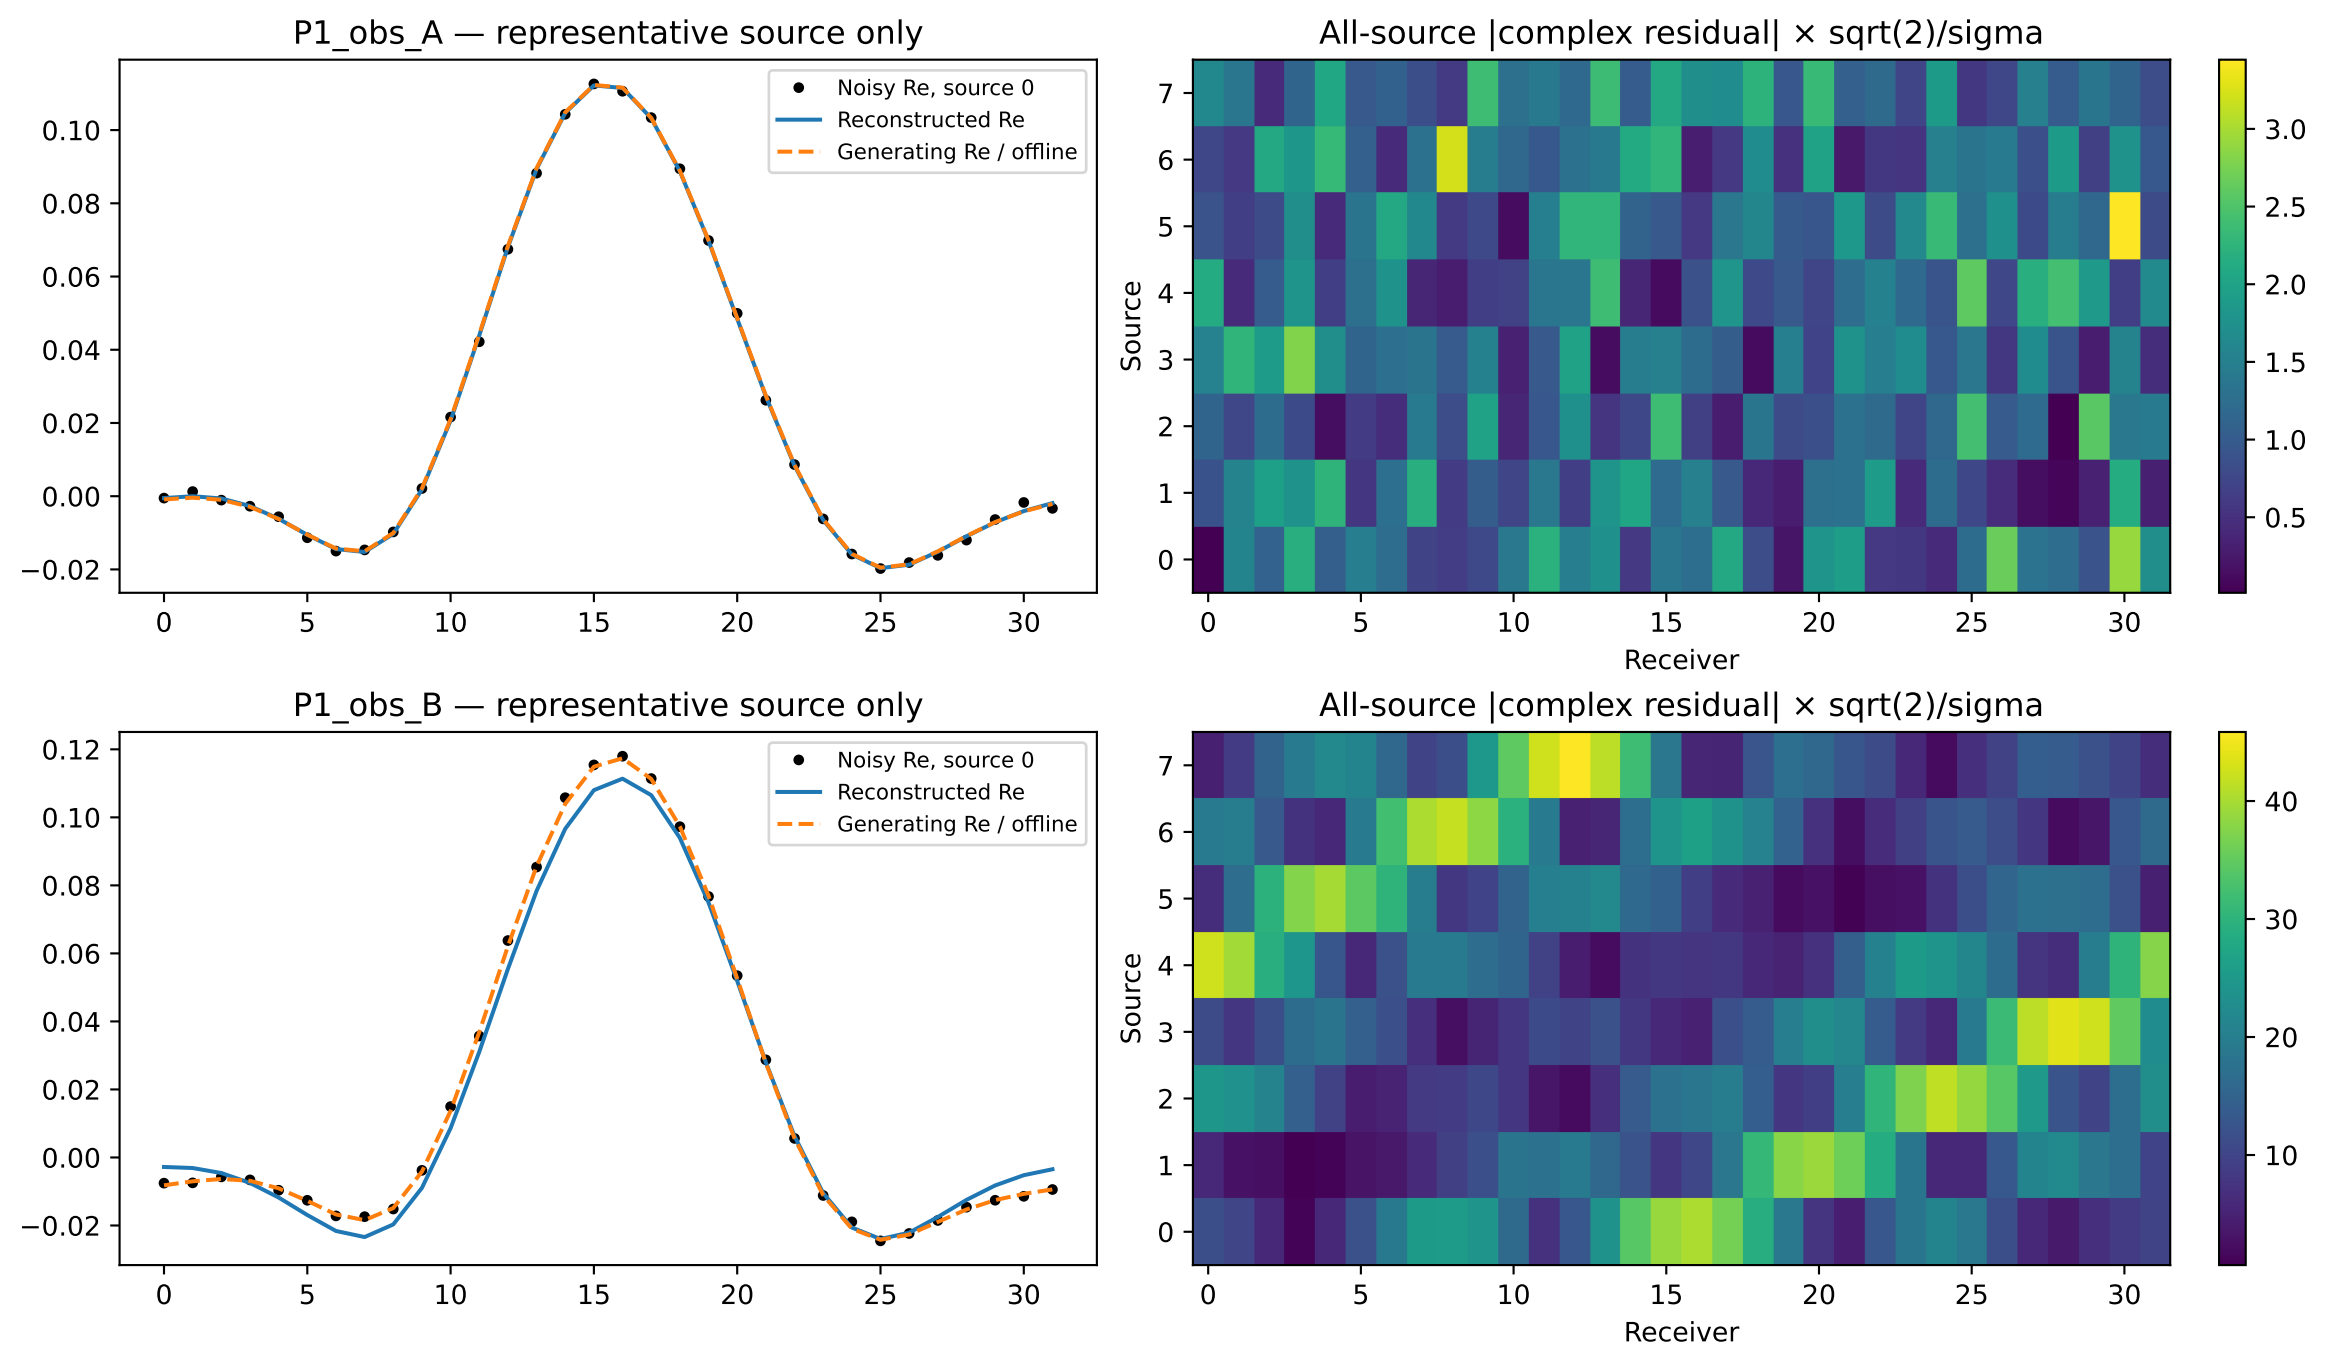
P1_obs_A — representative source only
Noisy Re, source 0
Reconstructed Re
Generating Re / offline
All-source |complex residual| × sqrt(2)/sigma
Source
Receiver
P1_obs_B — representative source only
Noisy Re, source 0
Reconstructed Re
Generating Re / offline
All-source |complex residual| × sqrt(2)/sigma
Source
Receiver