A shared wall couples every observation

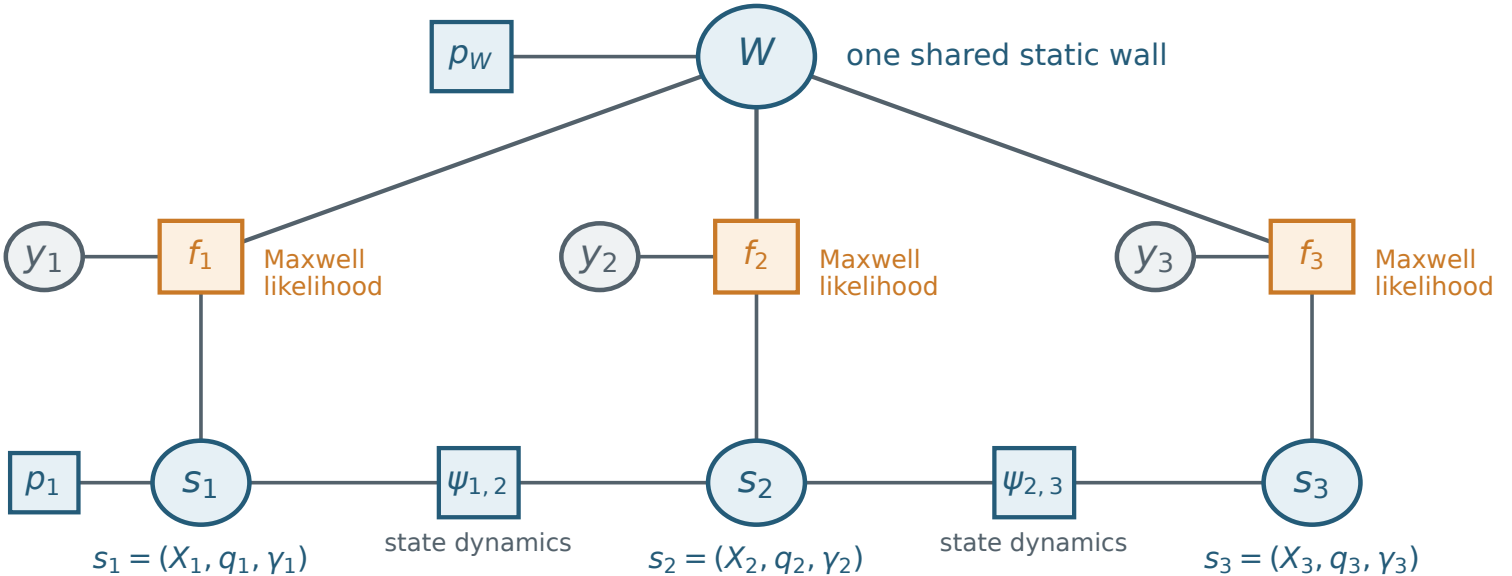

$f_t = p(y_t \mid W, X_t, q_t, \gamma_t)$ • circles: variables squares: factors shaded gray: observed data

Markov state dynamics are shown. A non-Markov calibration prior requires additional temporal factors.
Each likelihood appears once; eliminating electromagnetic fields generally yields global map sensitivity.