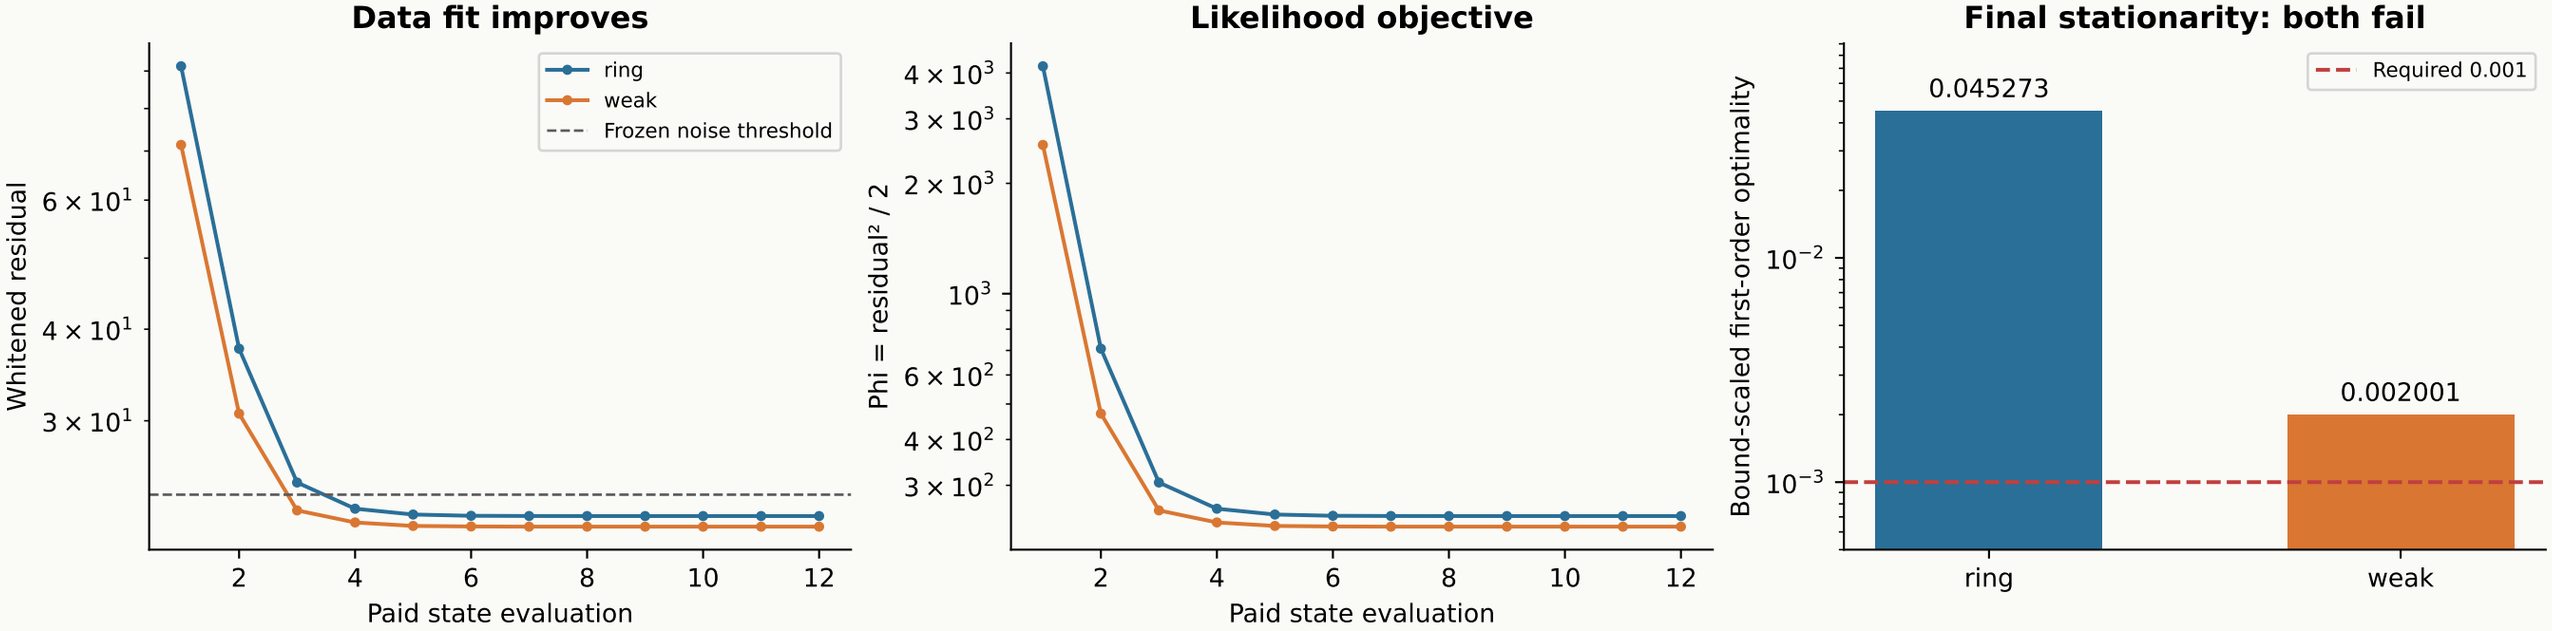
F1: residual-qualified endpoints, without a qualified stationary anchor
Data fit improves
Whitened residual
6×10^1
4×10^1
3×10^1
ring
weak
Frozen noise threshold
2
4
6
8
10
12
Paid state evaluation
Likelihood objective
Phi = residual² / 2
4×10^3
3×10^3
2×10^3
10^3
6×10^2
4×10^2
3×10^2
2
4
6
8
10
12
Paid state evaluation
Final stationarity: both fail
Bound-scaled first-order optimality
10^{-2}
10^{-3}
Required 0.001
0.045273
0.002001
ring
weak
24 new states / 960 complex RHS total. Only final optimality is available; no intermediate KKT is invented.