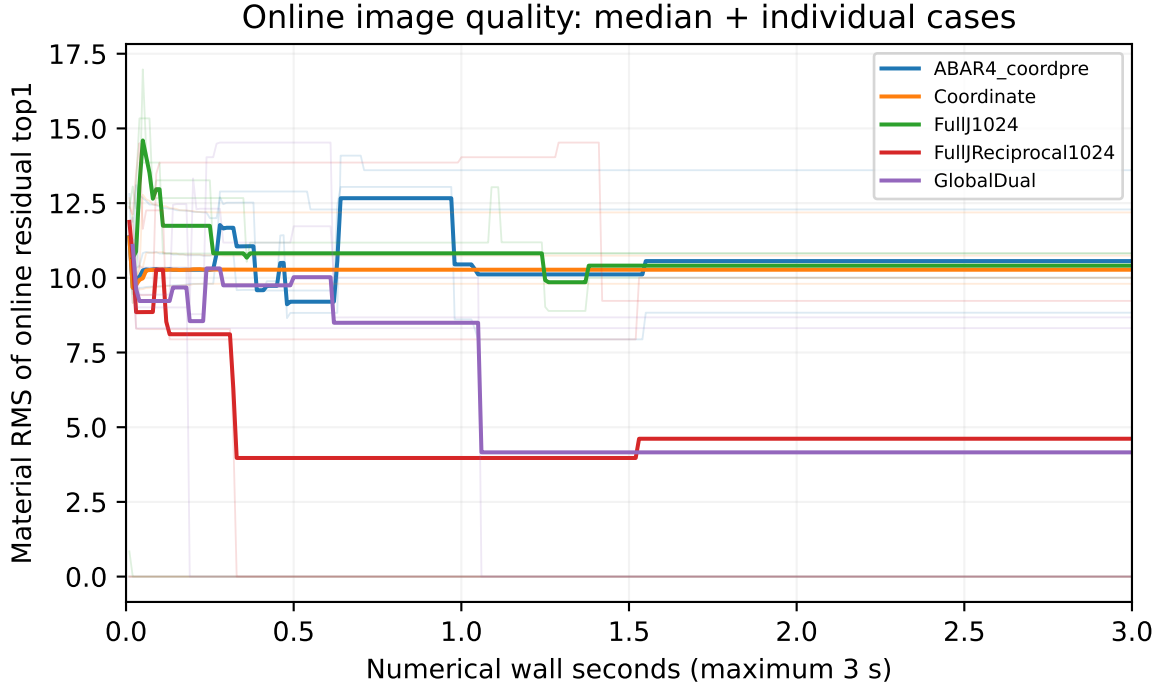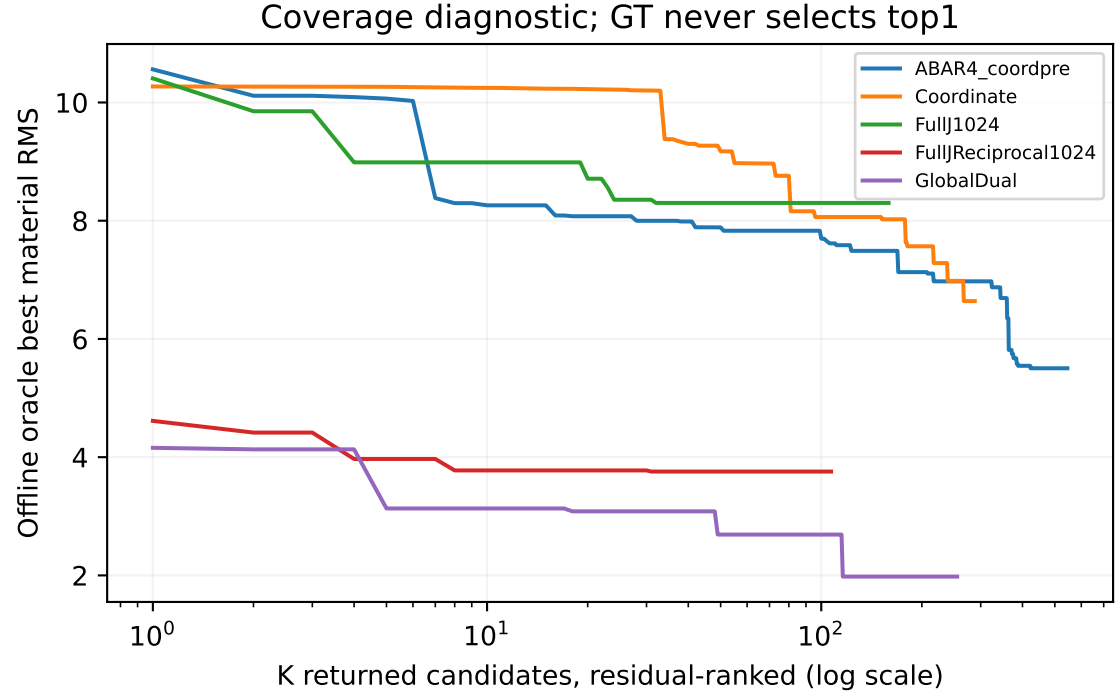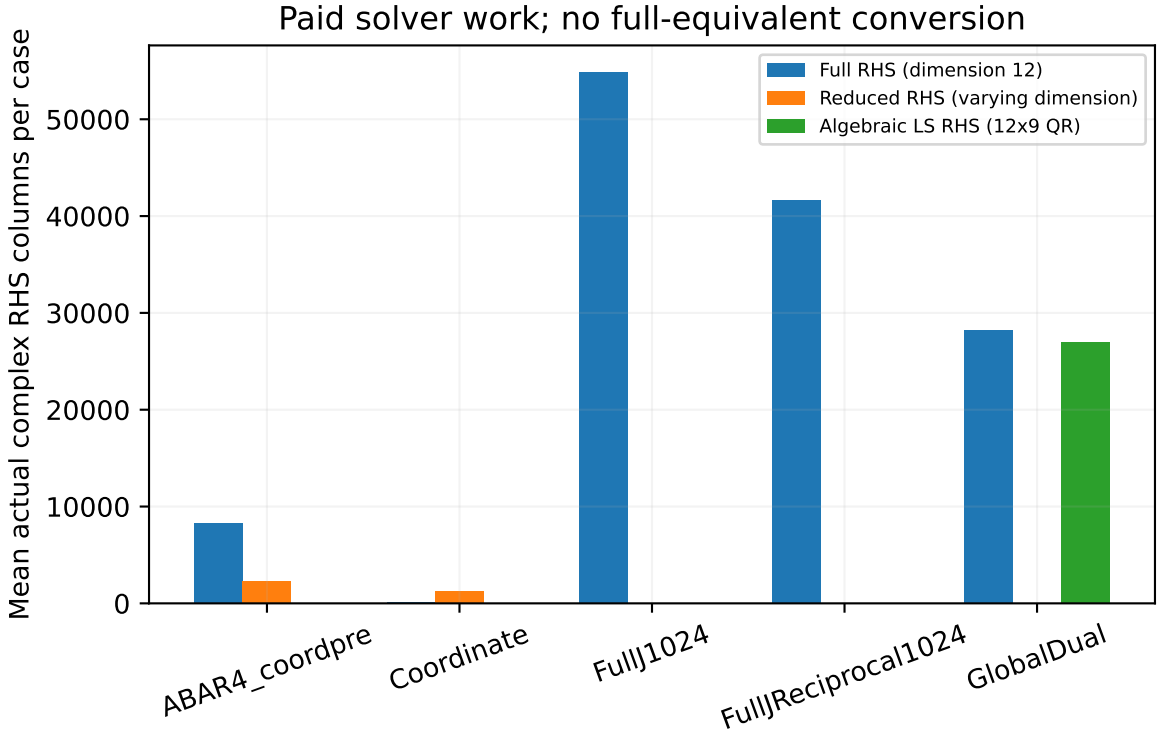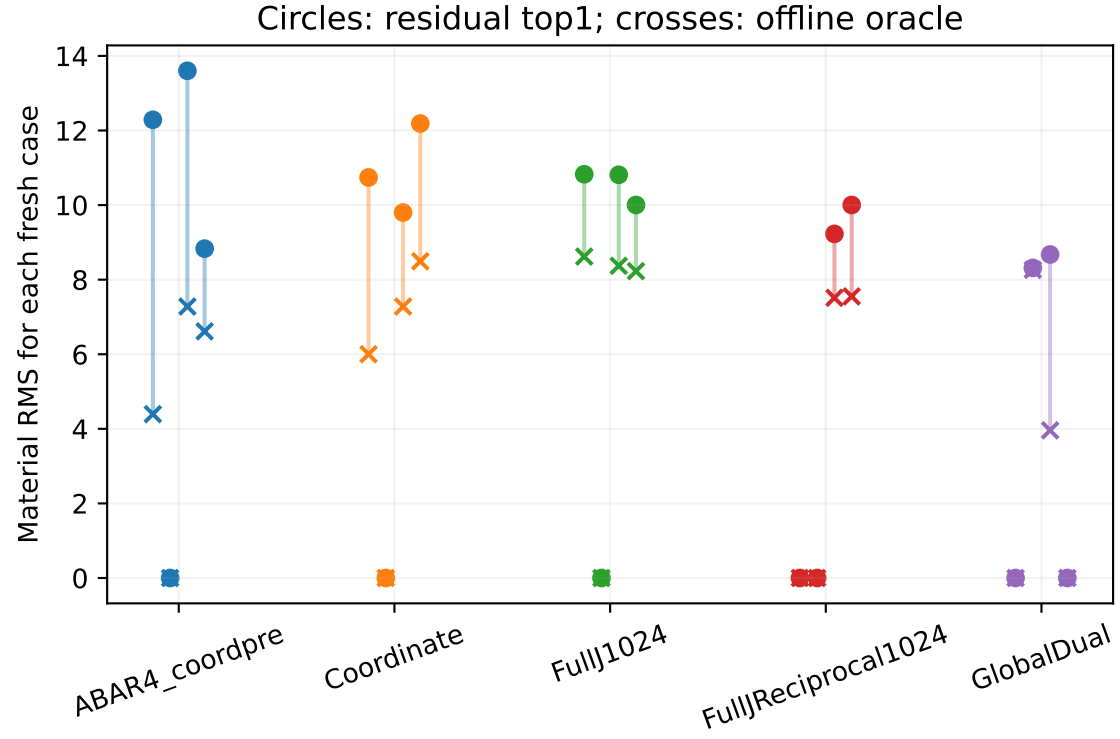Equal maximum 3 s numerical budgets; four held-out targets; all methods share public initialization
Independent validation, generation and all exploratory paid costs are retained separately in COST_LEDGER.json.