Four fresh blind targets; all 12 material values unknown; 3 s per method
Top1 uses all-data residual. Oracle column uses GT only after predictions froze.

HOLDOUT12_00

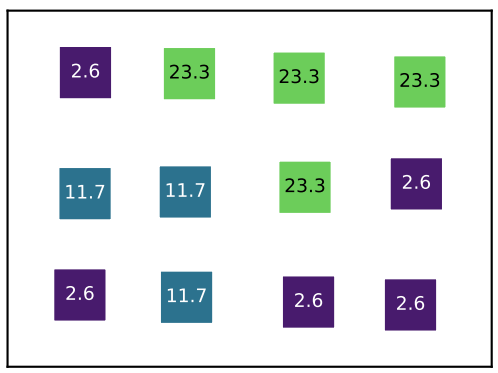

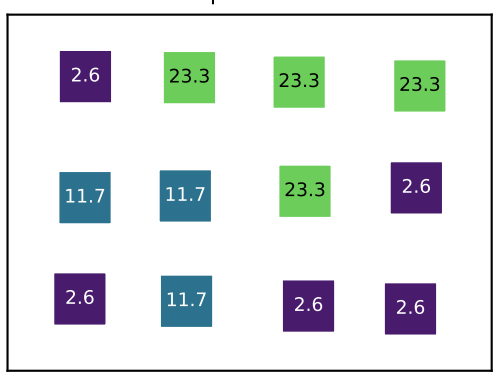

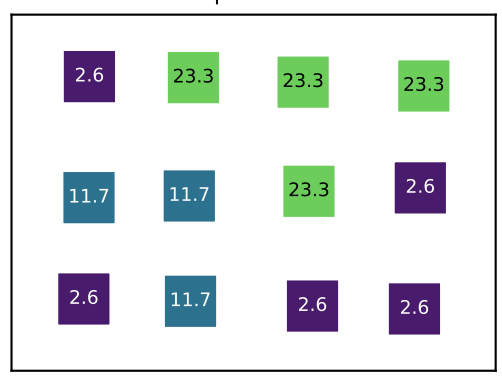

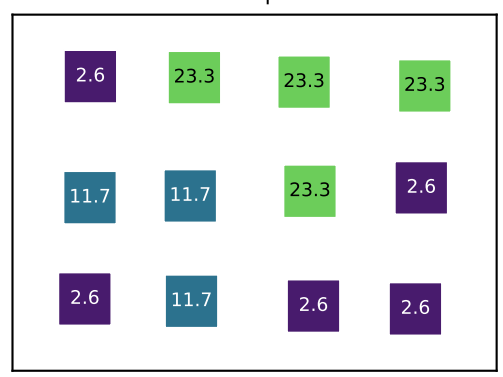

HOLDOUT12_01

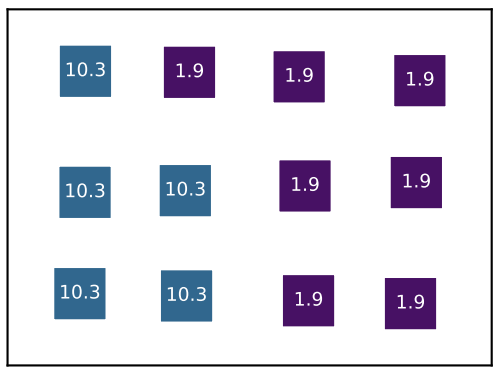

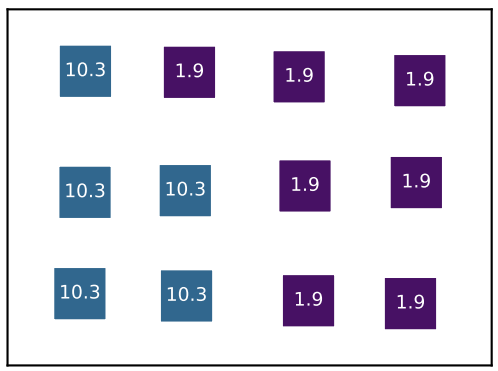

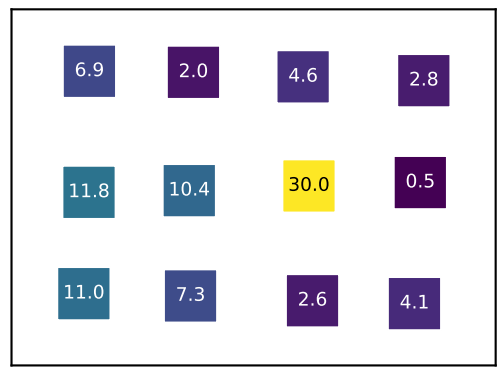

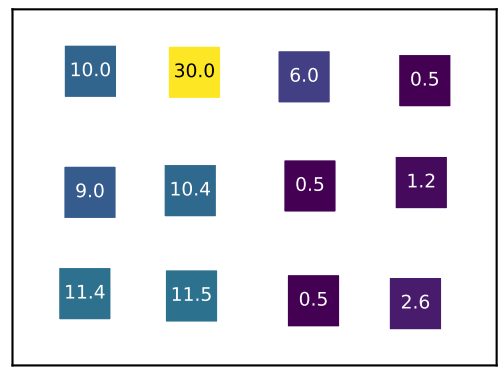

HOLDOUT12_02

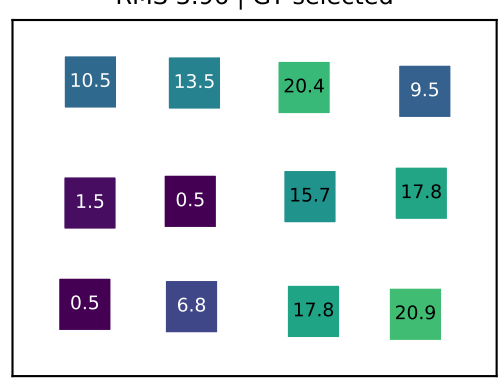
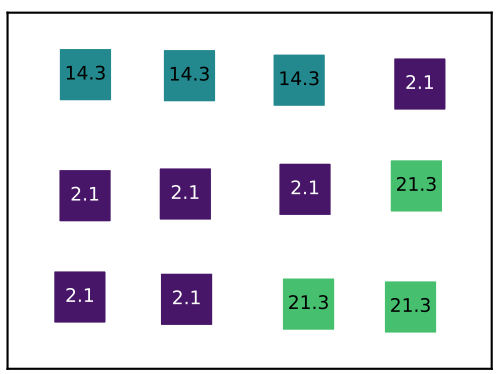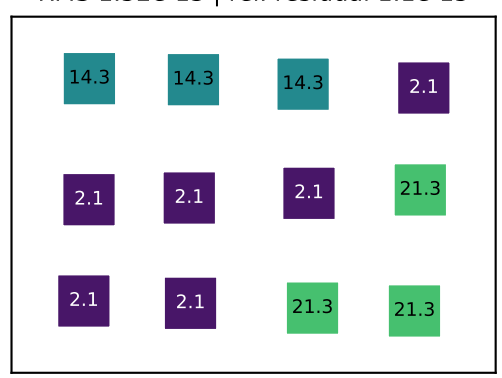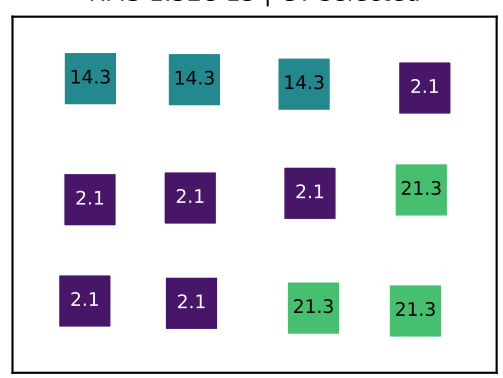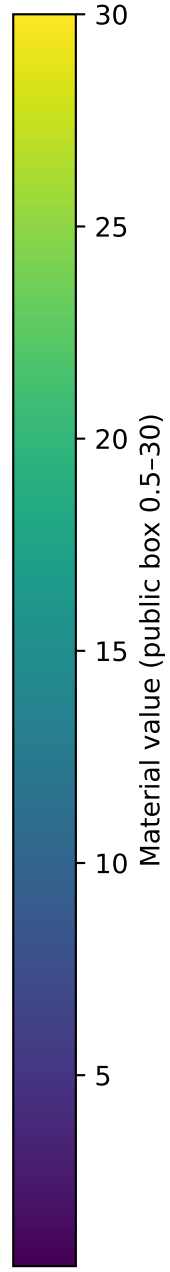
HOLDOUT12_03