UNIAGRARIA
LA U VERDE DE COLOMBIA

II SEMINARIO INTERNACIONAL
Investigación Interdisciplinar:
Innovación y Sostenibilidad

Deep Reinforcement Learning on Robotics Simulations using Webots

Miguel A. Solís

Universidad Andrés Bello, Chile

miguel.solis@unab.cl

www.miguelsolis.info → Invited Talks

November 10th, 2026

// MOTIVATION

Robotics

Areas

- Mobile Robotics
- Bio-inspired Robotics
- Cognitive Robotics
- Intelligent Robotics
- Human-Robot Interaction
- Tele-operated Robotics
- Swarm Robotics

...



Perception and Action


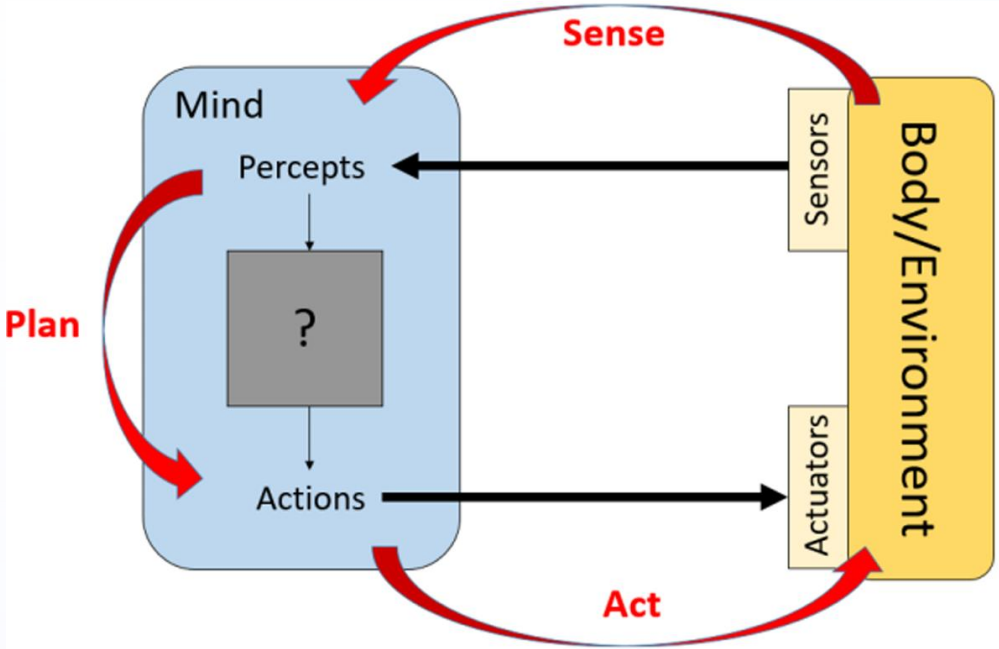


Image extracted from “Robotic Systems” de Kris Hauser, University of Illinois at Urbana-Champaign.

Reinforcement Learning

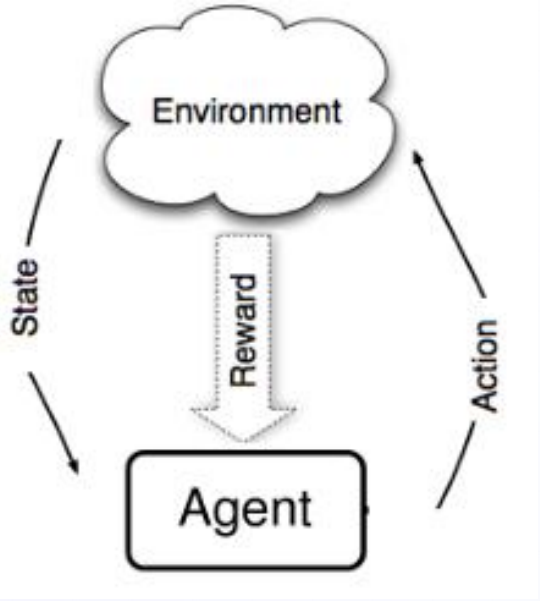

Agent interacts with the environment through trial and error.

- **Receives an input (perception), with current state “s”.**
- **Then, decides (acts) with an action “a” as output.**
- **Receives a reward (reinforcement) “r”.**

// SCHEME

Sequential Decision Problem

state “s” belongs to a Markovian Decision Process if and only if:

$$Pr\{s_{k+1}|s_k\} = Pr\{s_{k+1}|s_1, ..., s_k\}.$$

Reinforcement Learning Problem

S: set of states.

A: set of actions.

$T : S \times A \times S \to [0, 1]$ **transition function**

R: $S \times A \times S \to \mathbb{R}$


$\pi : S \to A$ **rewards function**

Return $V^{\pi}(s_k) = r_k + \gamma r_{k+1} + \gamma^2 r_{k+2} + ...$

$$= \sum_{i=0}^{\infty} \gamma^i r_{k+i}.$$

Example

Grid-world

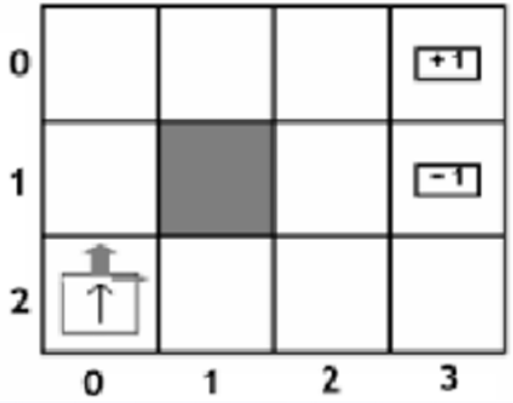

States: location on the grid.

Actions: up, down, left, right.

Rewards: +1 on the goal
-1 on prohibited zone
-0.1 otherwise

Basic (and tabular) methods: Value Iteration, Policy Iteration

Value Iteration

0	0.62	0.8	1	+1
1	0.46		0.8	-1
2	0.31	0.46	0.62	0.46
	0	1	2	3

Policy Iteration

0	der.	der.	der.	meta
1	arr.		arr.	prohib
2	arr.	der.	arr.	izq.
	0	1	2	3

Q-learning

Update rule:

$$Q(s_k, a_k) \leftarrow (1-\alpha)Q(s_k, a_k) + \alpha\left(r_{k+1} + \gamma \max_a Q(s_{k+1,a})\right)$$

Then, policy should be given bv:


$$\pi^*(s_k) = arg\max Q^*(s_k, a_k)$$



Image extracted from “Introduction to Q-learning with OpenAI Gym”, Gelana Tostaeva, Medium.

Example

Grid-world

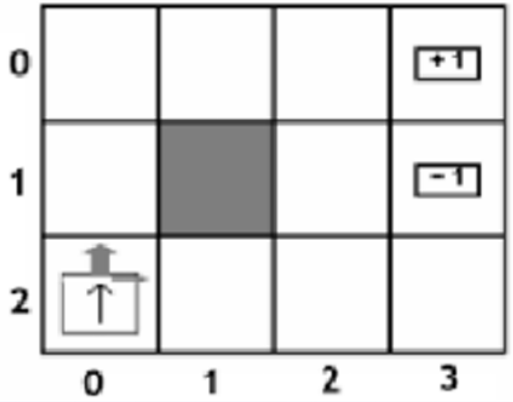

States: location on the grid.

Actions: up, down, left, right.

Rewards: +1 on the goal
-1 on prohibited zone
-0.1 otherwise

Basic (and tabular) methods: Value Iteration, Policy Iteration

Q-learning

- Visited (state,action) pairs are the only ones updated.


	0	1	2	3
0	der.	izq.		meta
1	arr.			prohib
2	arr.	izq.		


- Including exploration:

	0	1	2	3
0	der.	der.	der.	meta
1	arr.			prohib
2	arr.	Izq.		

Example

Taxi

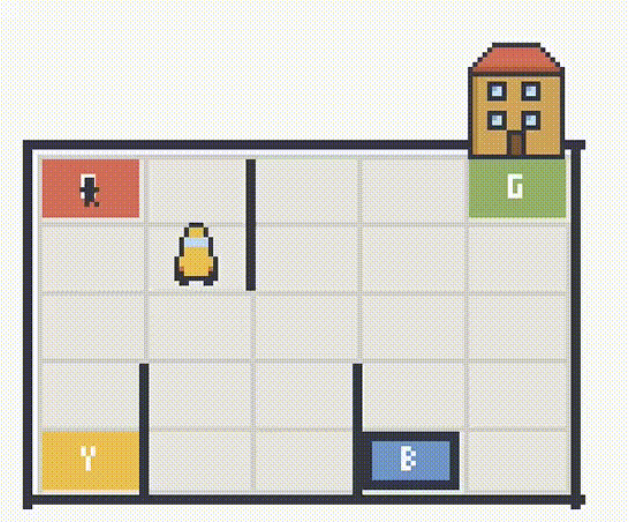


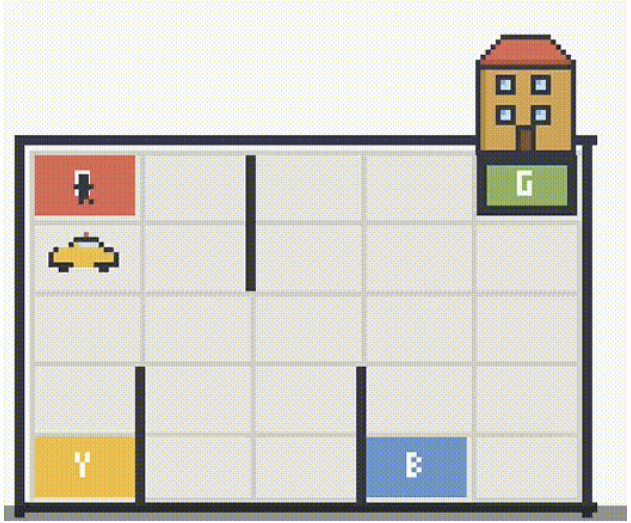


// CONTINUOUS OBSERVATIONS SPACE

Deep Reinforcement Learning

Need of function approximators (such as artificial neural networks)

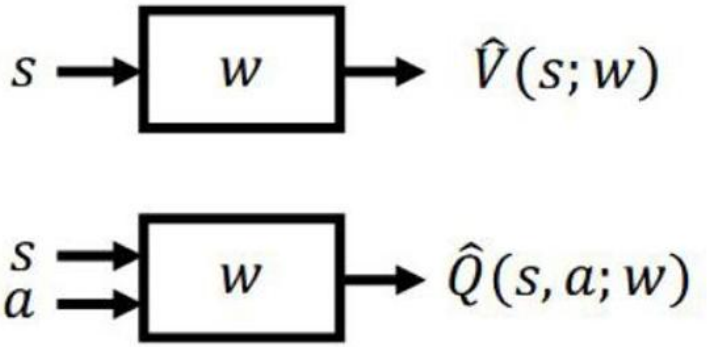


General scheme (pretty much the same)

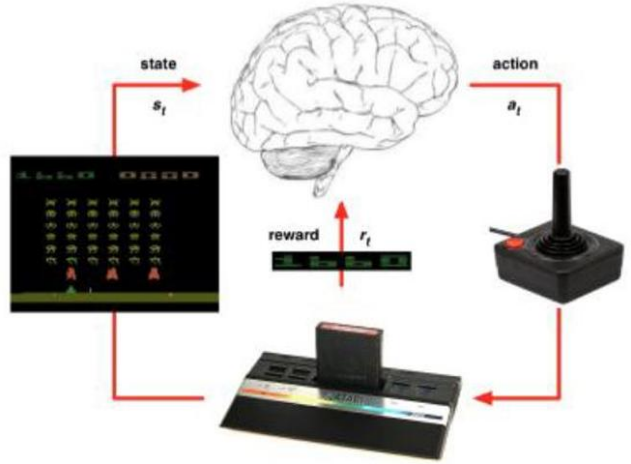

// CONTINUOUS OBSERVATIONS SPACE

Deep Reinforcement Learning

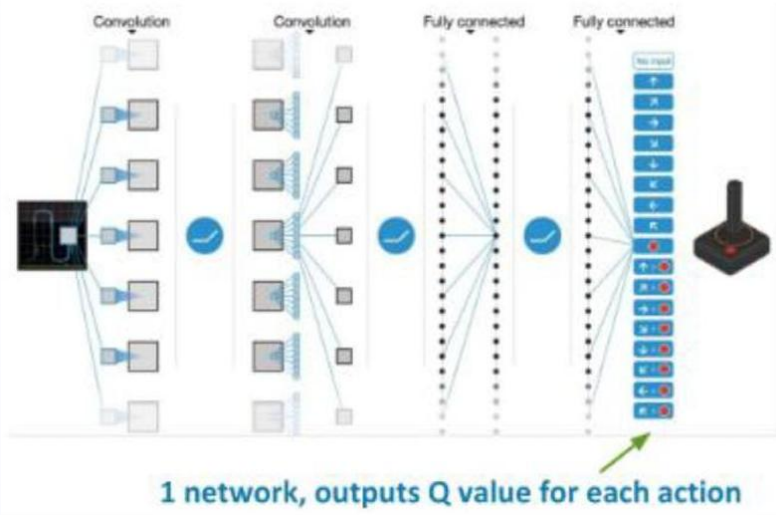

so... discrete action space

Replay buffer


s_1, a_1, r_2, s_2
s_2, a_2, r_3, s_3
s_3, a_3, r_4, s_4
...
$s_t, a_t, r_{t+1}, s_{t+1}$

$\rightarrow \quad s, a, r, s'$


// CONTINUOUS OBSERVATIONS SPACE

Deep Reinforcement Learning

Inverted pendulum

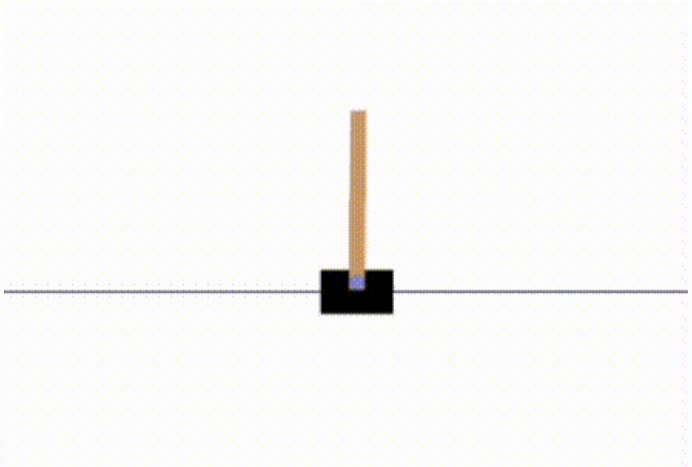

Random policies

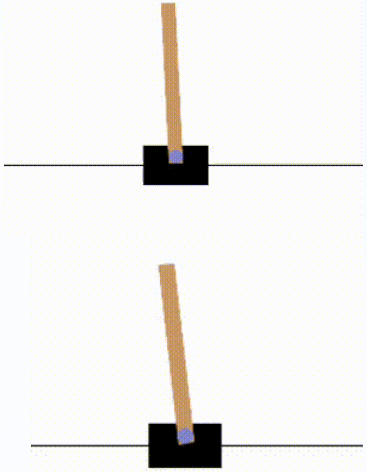

REINFORCE

Policy parametrization:

$$\Pi = \{\pi_\theta, \theta \in \mathbb{R}^m\}$$

for every policy we would have:

$$J(\theta) = \mathbb{E}\left[\sum_{t\geq 0} \gamma^t r_t | \pi_\theta\right]$$

we always are looking for optimal policy:


$$\theta^* = \arg\max_\theta J(\theta)$$

but now we have transition probability:


$$p(\tau;\theta) = \prod_{t>0} p(s_{t+1}|s_t, a_t)\pi_\theta(a_t|s_t)$$

REINFORCE


on the hands-on side:

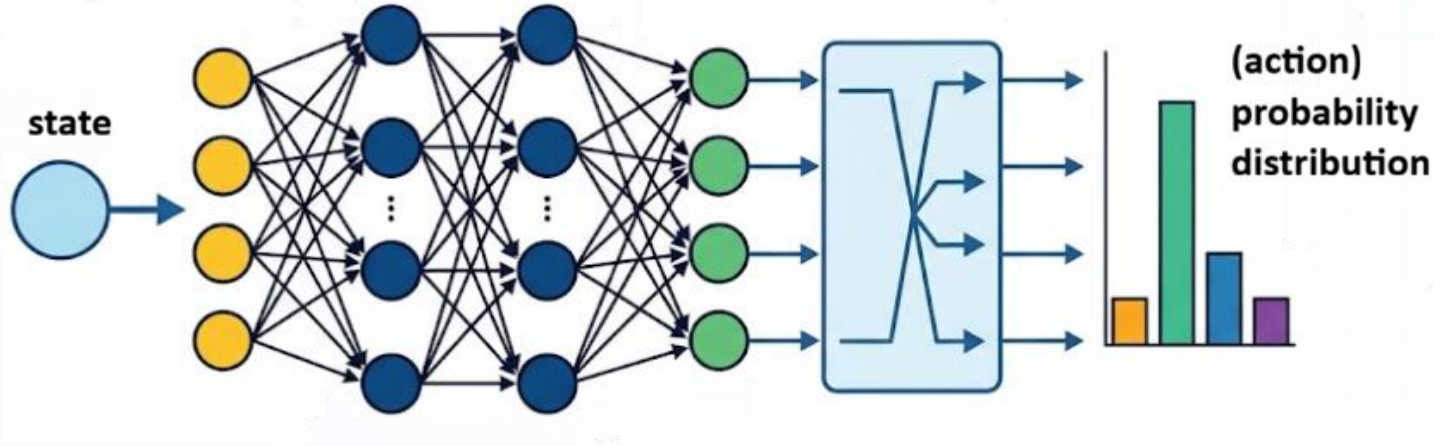

ACTOR-CRITIC

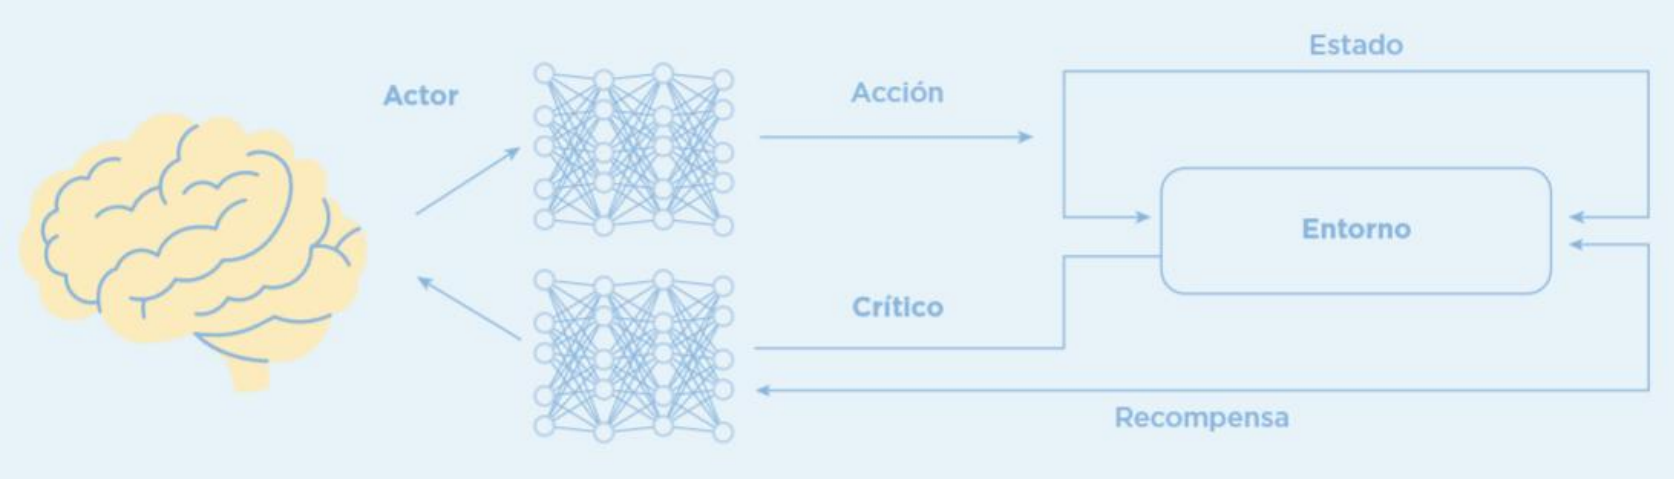


CONSERVATIVE APPROACHES

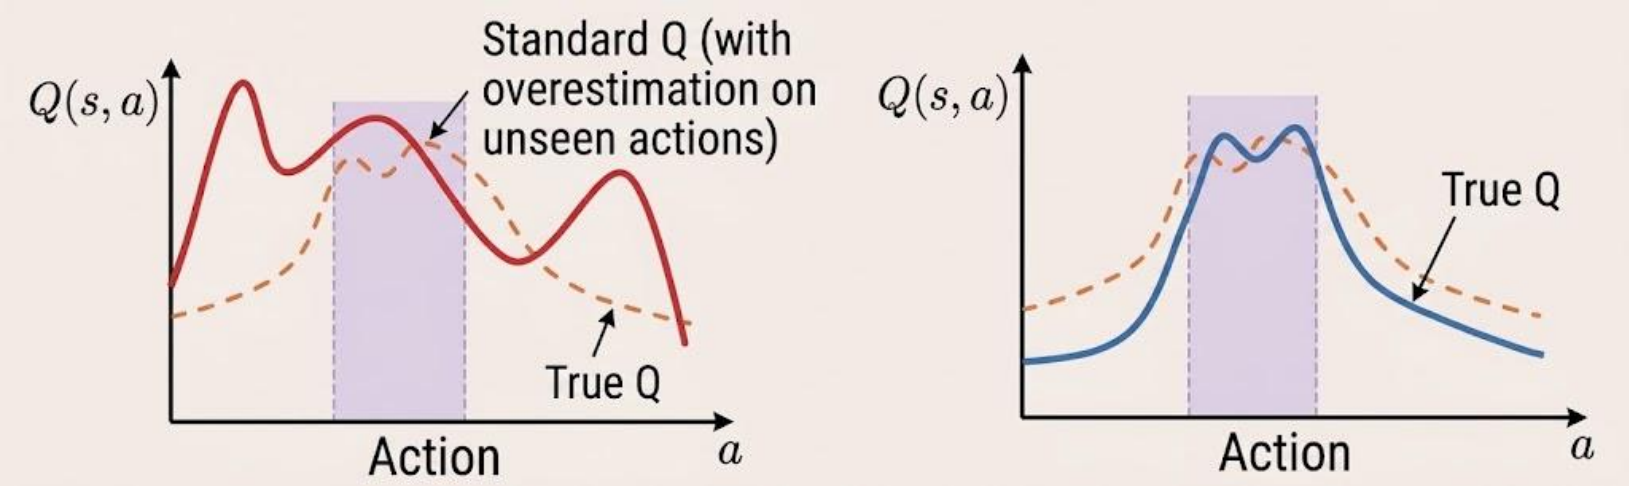

Demo time

- ANNs are the most popular function approximators for RL on continuous spaces, but there is room for other techniques (such as fuzzy logic).
- Specific RL algorithm to be applied would depend on the given problem.

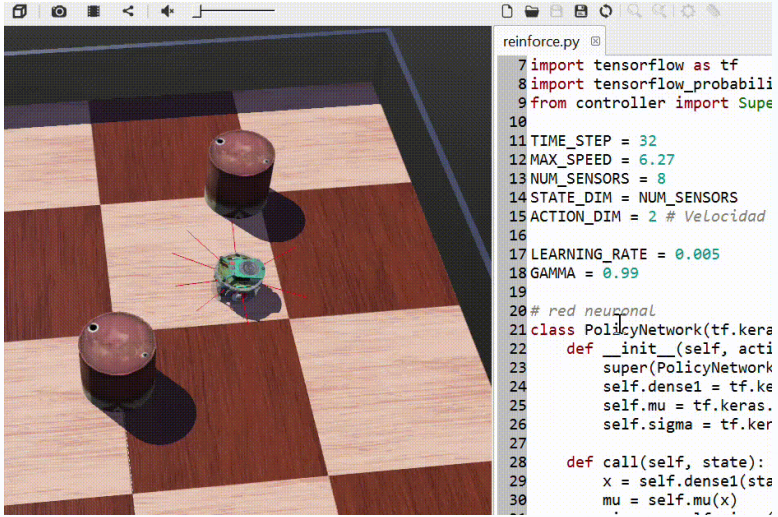

// Q&A

Thank you! Questions?

Miguel A. Solís

miguel.solis@unab.cl

www.miguelsolis.info → Invited Talks

References

- Sutton, R. S., & Barto, A. G. (2018). Reinforcement learning: An introduction. MIT press.
- Kober, J., Bagnell, J. A., & Peters, J. (2013). Reinforcement learning in robotics: A survey. The International Journal of Robotics Research, 32(11), 1238-1274.
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., ... & Hassabis, D. (2015). Human-level control through deep reinforcement learning. nature, 518(7540), 529-533.