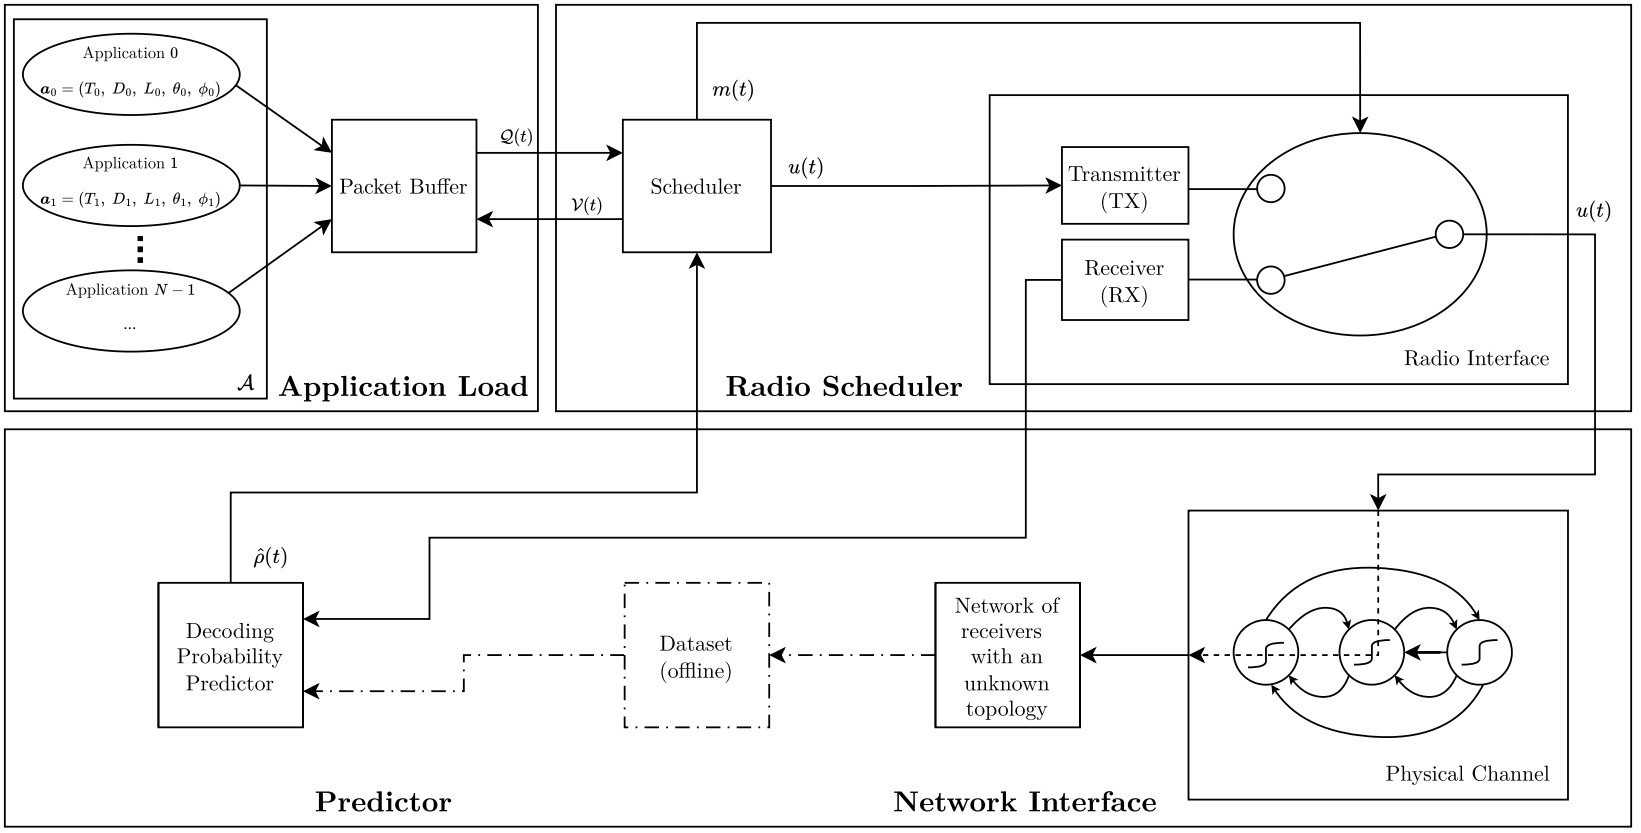
Application 0
$\boldsymbol{a}_0 = (T_0,\ D_0,\ L_0,\ \theta_0,\ \phi_0)$
Application 1
$\boldsymbol{a}_1 = (T_1,\ D_1,\ L_1,\ \theta_1,\ \phi_1)$
Application $N-1$
...
$\mathcal{A}$
Application Load
Packet Buffer
$\mathcal{Q}(t)$
$\mathcal{V}(t)$
$m(t)$
Scheduler
$u(t)$
Transmitter (TX)
Receiver (RX)
Radio Interface
$u(t)$
Radio Scheduler
$\hat{\rho}(t)$
Decoding Probability Predictor
Dataset (offline)
Network of receivers with an unknown topology
Physical Channel
Predictor
Network Interface