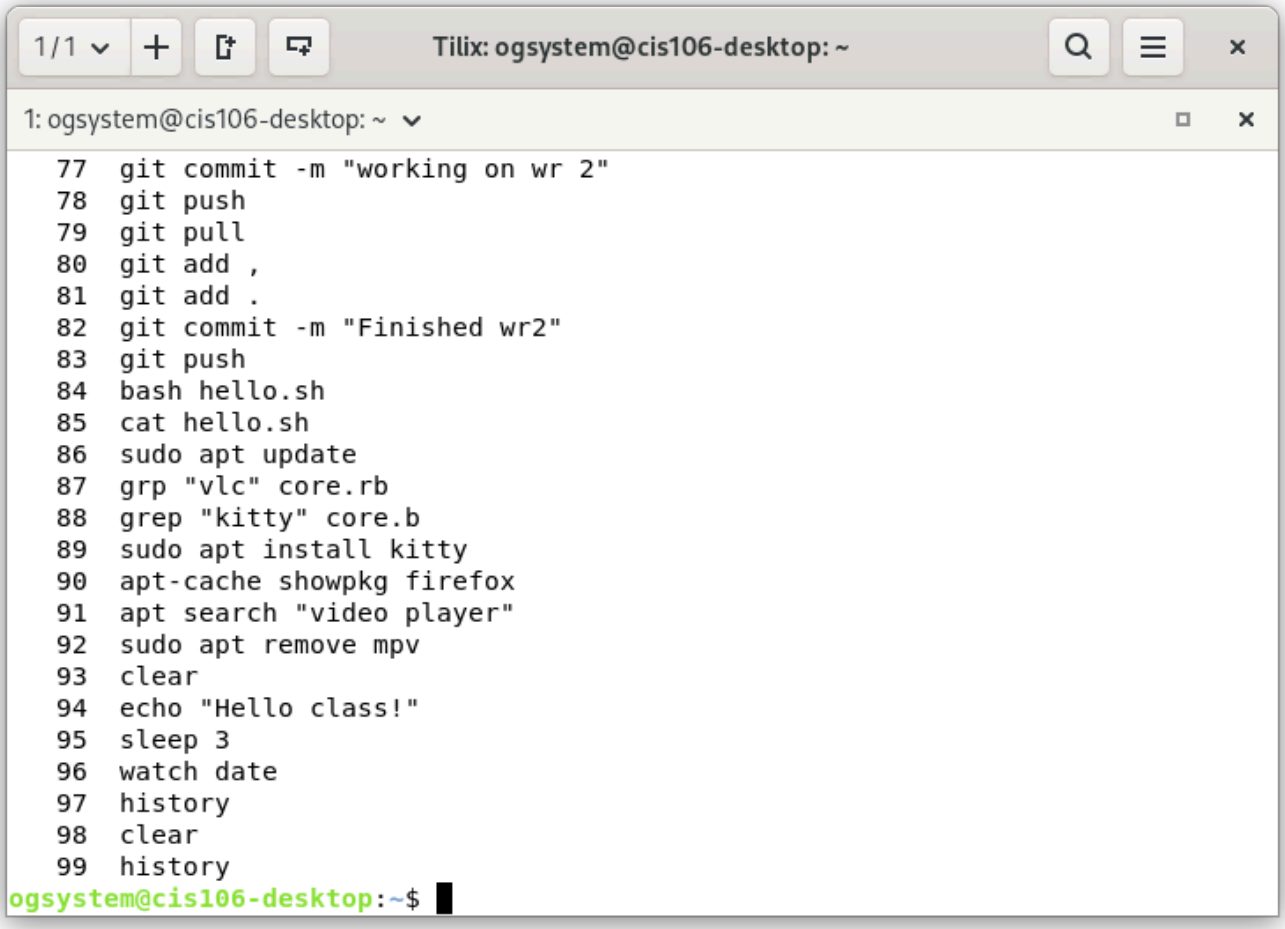
Week report 3

Completed work for week 3

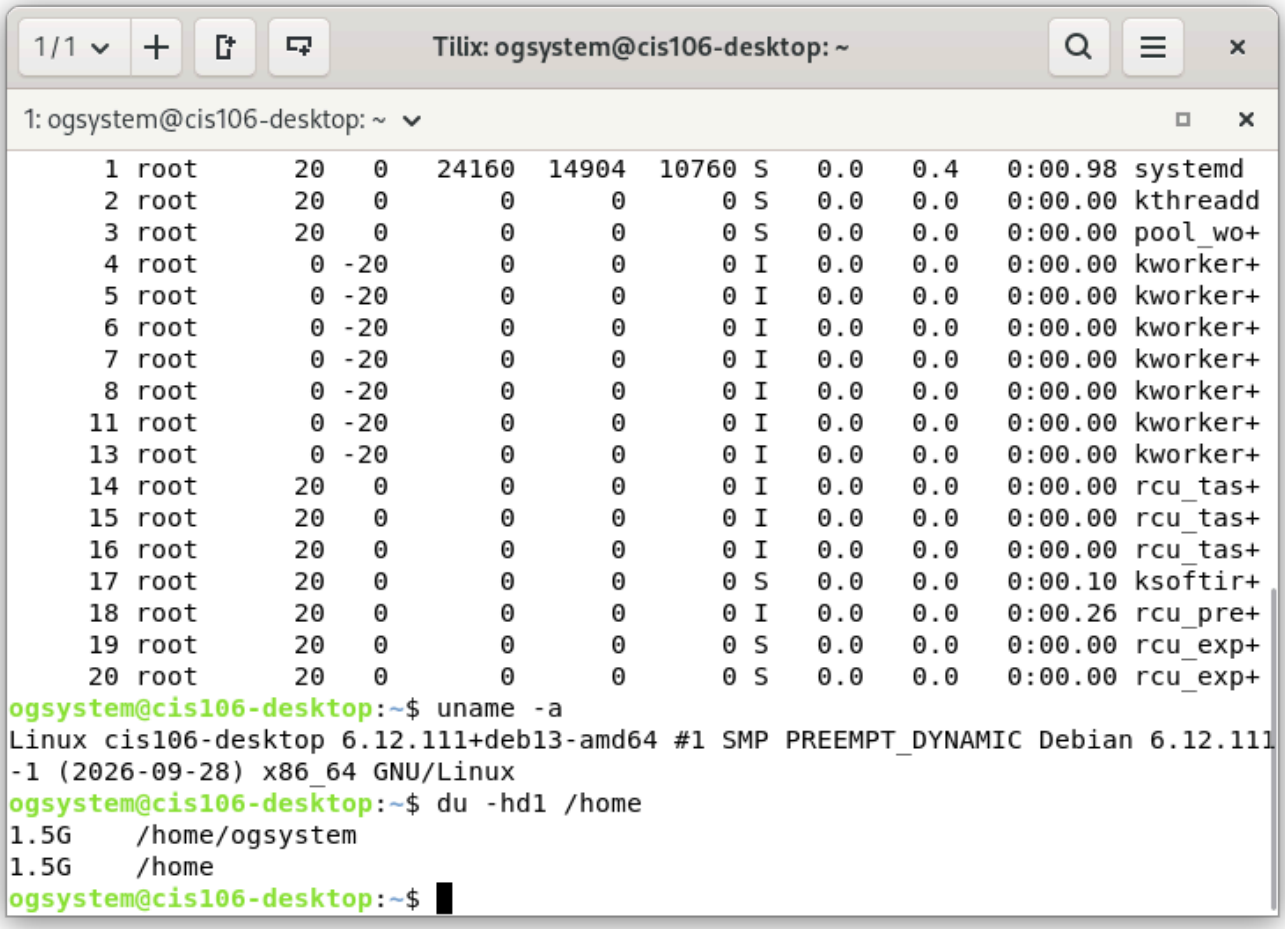
- lab 3
- Notes 3

Practice screenshots

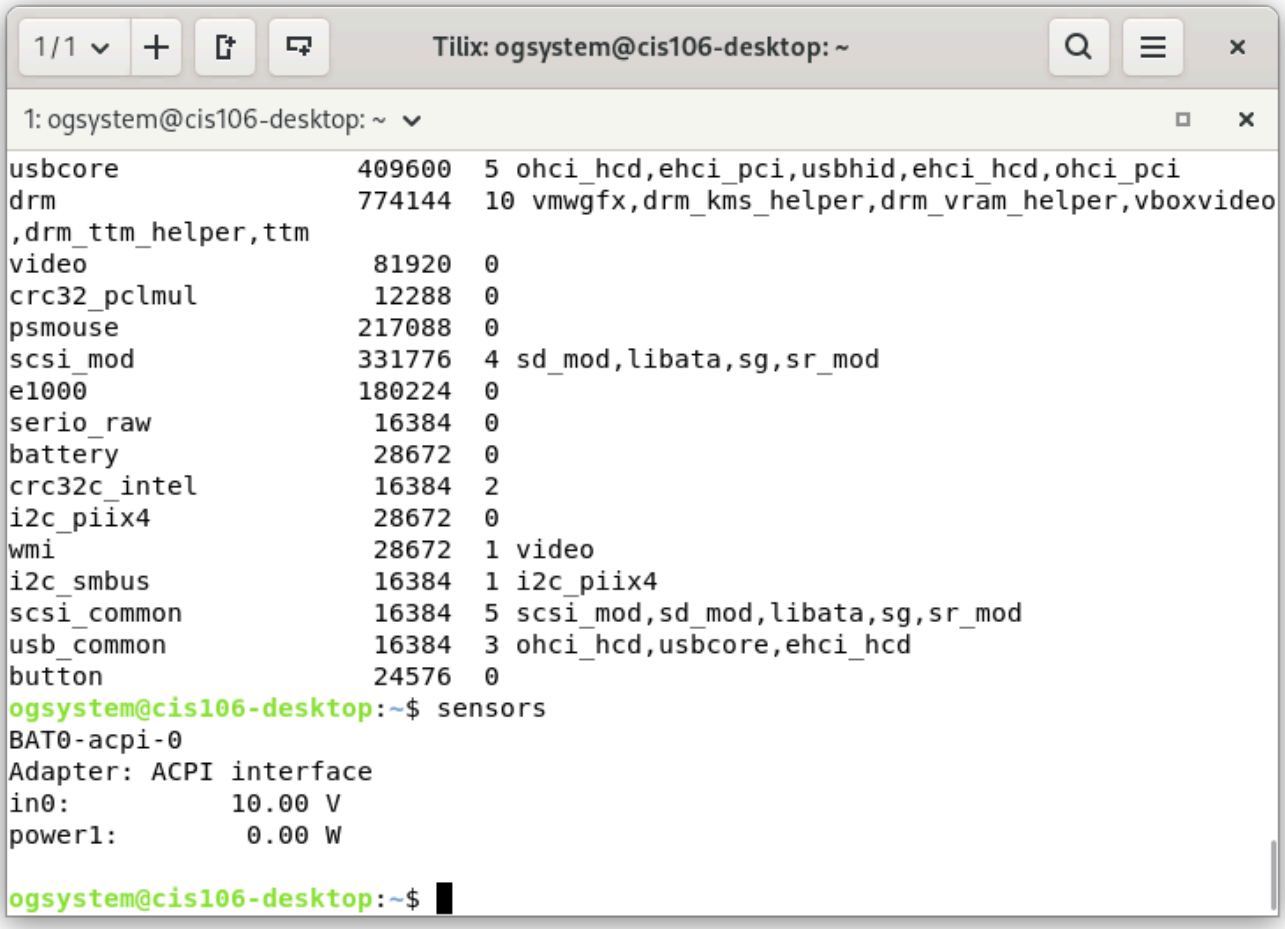
Practice 3



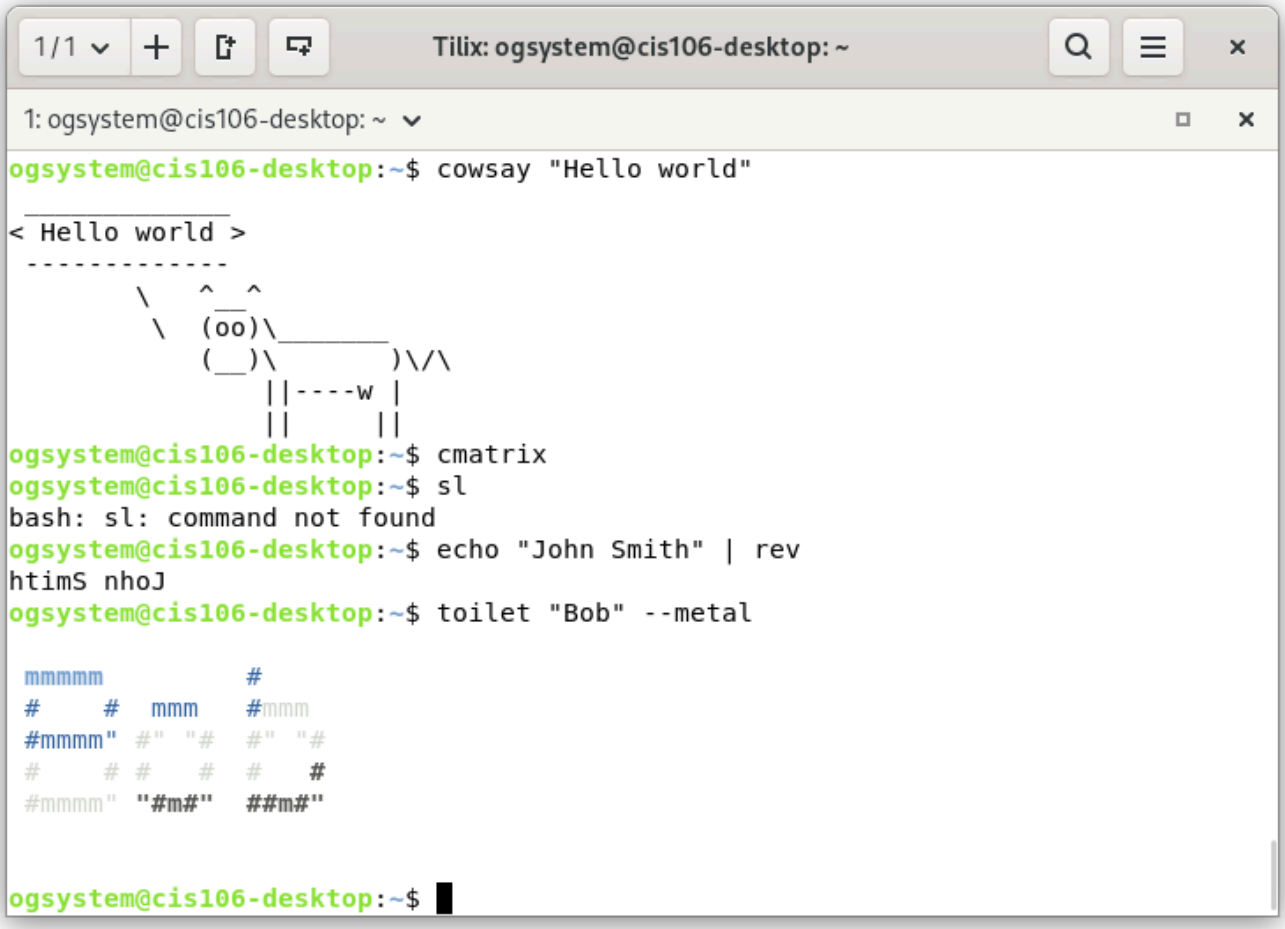
Practice 4


1/1
Tilix: ogsystem@cis106-desktop: ~
1: ogsystem@cis106-desktop: ~
1 root 20 0 24160 14904 10760 S 0.0 0.4 0:00.98 systemd
2 root 20 0 0 0 0 S 0.0 0.0 0:00.00 kthreadd
3 root 20 0 0 0 0 S 0.0 0.0 0:00.00 pool_wo+
4 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
5 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
6 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
7 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
8 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
11 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
13 root 0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker+
14 root 20 0 0 0 0 I 0.0 0.0 0:00.00 rcu_tas+
15 root 20 0 0 0 0 I 0.0 0.0 0:00.00 rcu_tas+
16 root 20 0 0 0 0 I 0.0 0.0 0:00.00 rcu_tas+
17 root 20 0 0 0 0 S 0.0 0.0 0:00.10 ksoftir+
18 root 20 0 0 0 0 I 0.0 0.0 0:00.26 rcu_pre+
19 root 20 0 0 0 0 S 0.0 0.0 0:00.00 rcu_exp+
20 root 20 0 0 0 0 S 0.0 0.0 0:00.00 rcu_exp+
ogsystem@cis106-desktop:~$ uname -a
Linux cis106-desktop 6.12.111+deb13-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.12.111
-1 (2026-09-28) x86_64 GNU/Linux
ogsystem@cis106-desktop:~$ du -hd1 /home
1.5G /home/ogsystem
1.5G /home
ogsystem@cis106-desktop:~$

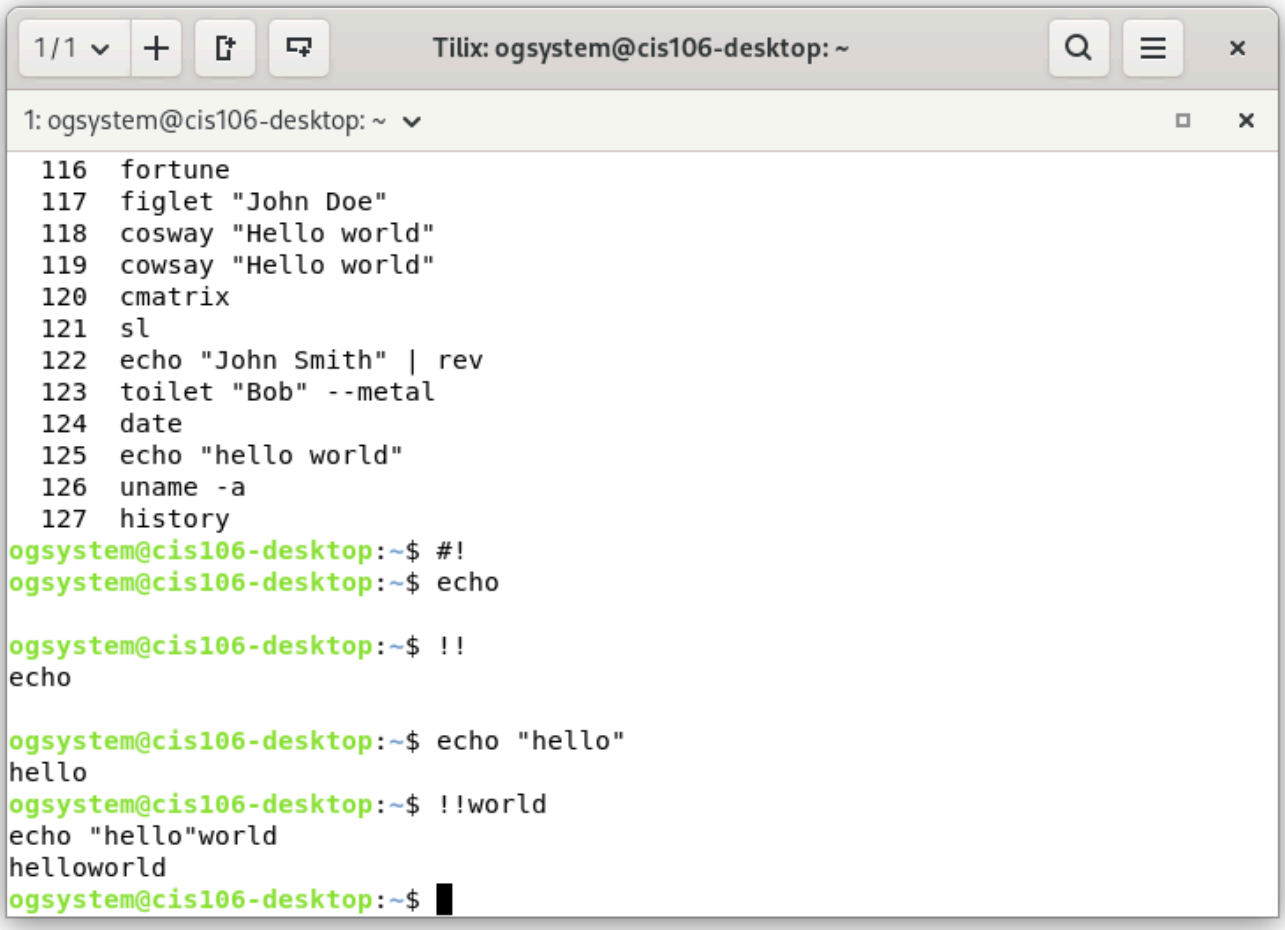
Practice 5


1/1
Tilix: ogsystem@cis106-desktop: ~
1: ogsystem@cis106-desktop: ~
usbcore 409600 5 ohci_hcd,ehci_pci,usbhid,ehci_hcd,ohci_pci
drm 774144 10 vmwgfx,drm_kms_helper,drm_vram_helper,vboxvideo
,drm_ttm_helper,ttm
video 81920 0
crc32_pclmul 12288 0
psmouse 217088 0
scsi_mod 331776 4 sd_mod,libata,sg,sr_mod
e1000 180224 0
serio_raw 16384 0
battery 28672 0
crc32c_intel 16384 2
i2c_piix4 28672 0
wmi 28672 1 video
i2c_smbus 16384 1 i2c_piix4
scsi_common 16384 5 scsi_mod,sd_mod,libata,sg,sr_mod
usb_common 16384 3 ohci_hcd,usbcore,ehci_hcd
button 24576 0
ogsystem@cis106-desktop:~$ sensors
BAT0-acpi-0
Adapter: ACPI interface
in0: 10.00 V
power1: 0.00 W
ogsystem@cis106-desktop:~$

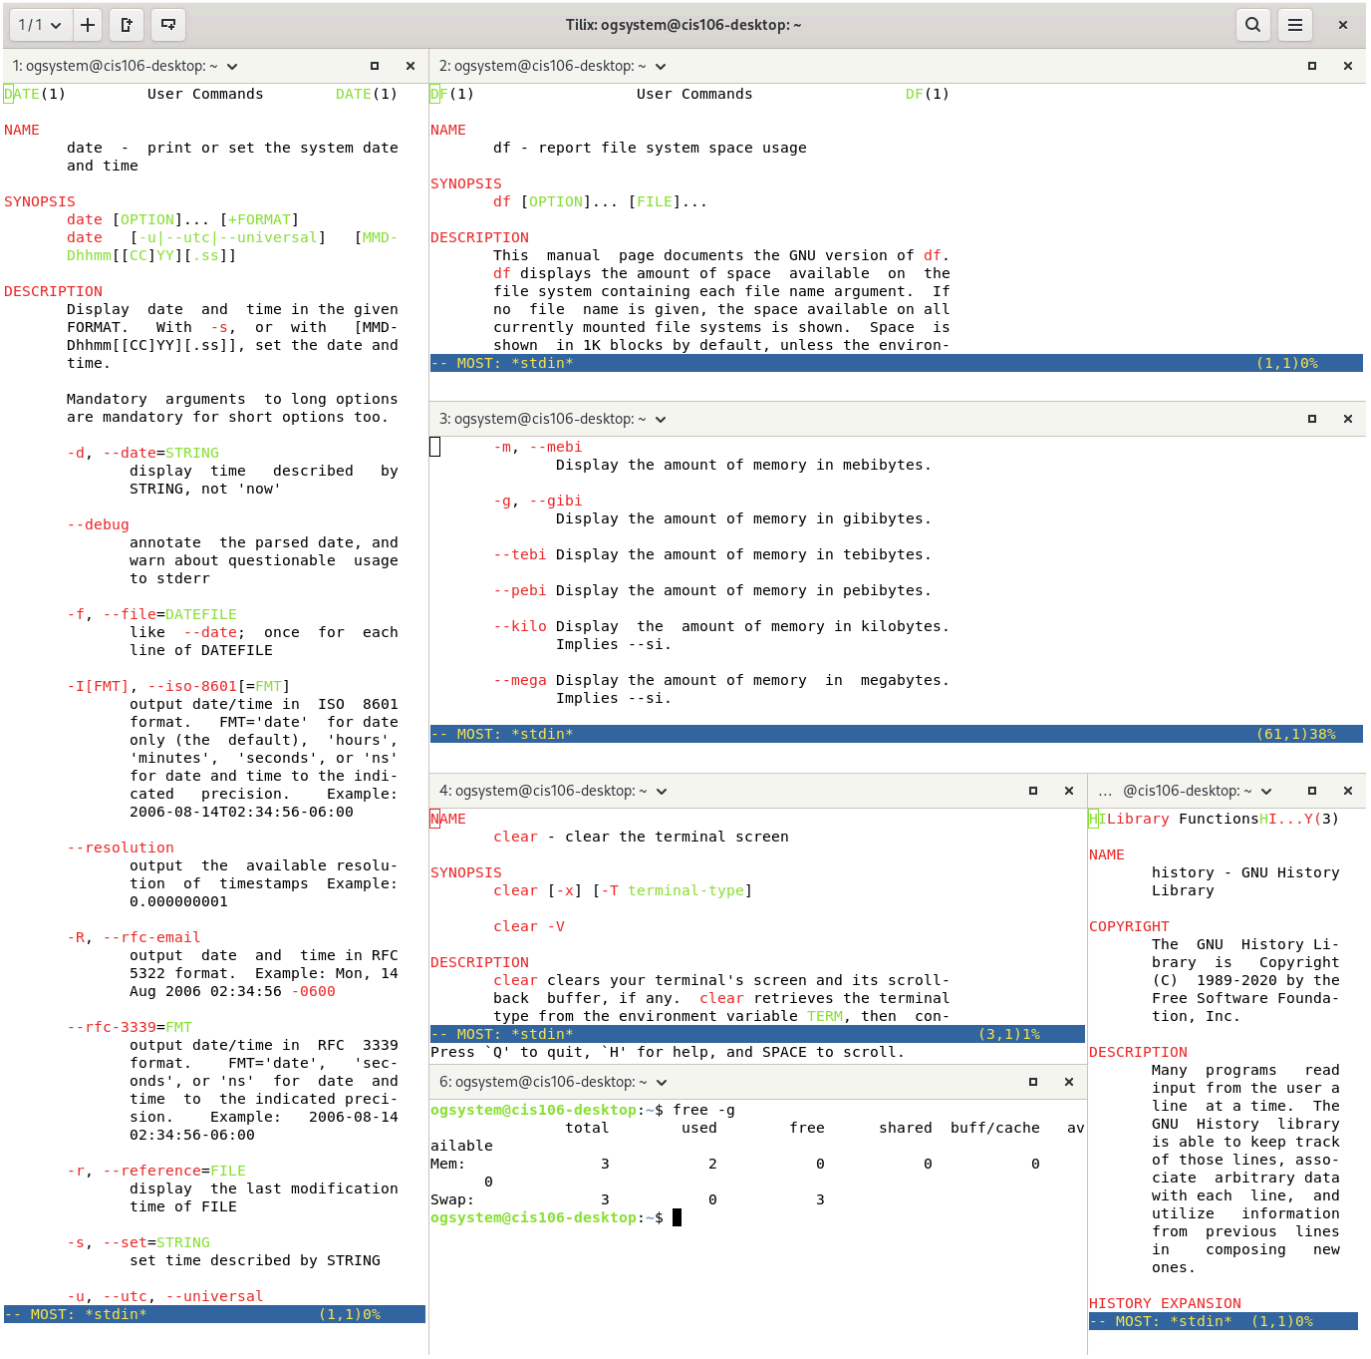
Practice 6


1/1
Tilix: ogsystem@cis106-desktop: ~
1: ogsystem@cis106-desktop: ~
ogsystem@cis106-desktop:~$ cowsay "Hello world"
< Hello world >
ogsystem@cis106-desktop:~$ cmatrix
ogsystem@cis106-desktop:~$ sl
bash: sl: command not found
ogsystem@cis106-desktop:~$ echo "John Smith" | rev
htimS nhoJ
ogsystem@cis106-desktop:~$ toilet "Bob" --metal
ogsystem@cis106-desktop:~$

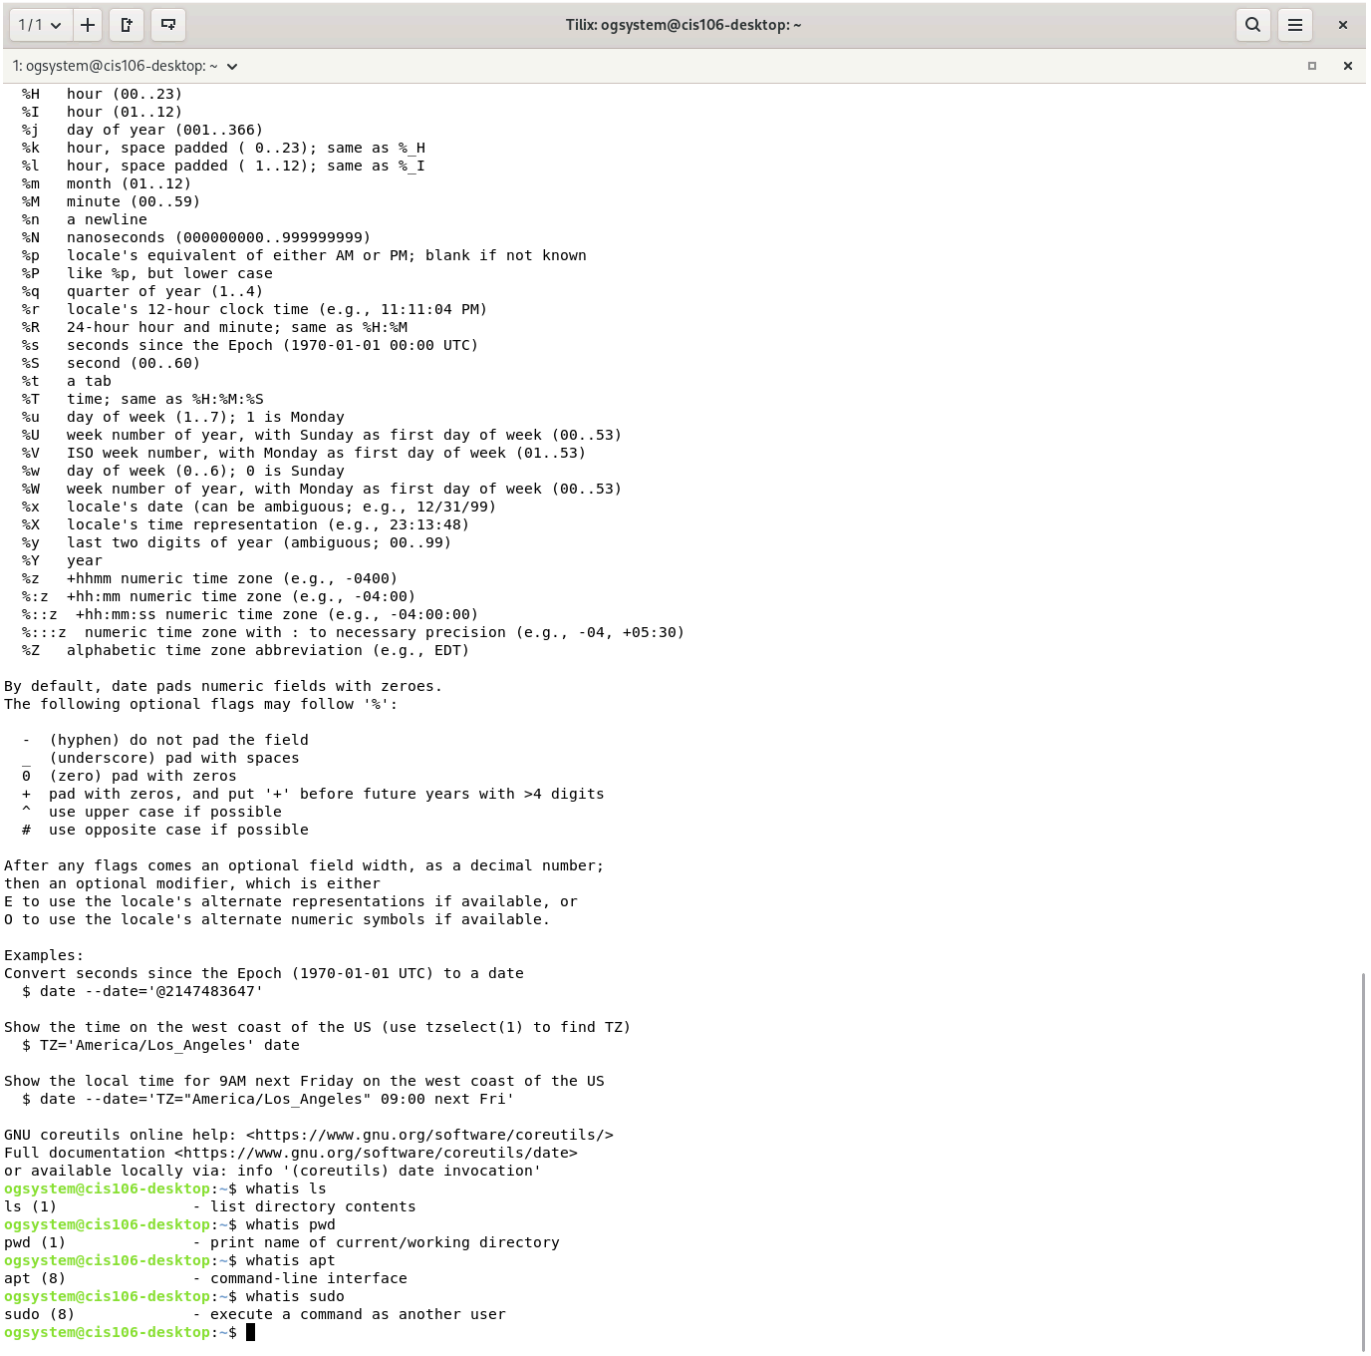
Practice 7


1/1
Tilix: ogsystem@cis106-desktop: ~
1: ogsystem@cis106-desktop: ~
116 fortune
117 figlet "John Doe"
118 cosway "Hello world"
119 cowsay "Hello world"
120 cmatrix
121 sl
122 echo "John Smith" | rev
123 toilet "Bob" --metal
124 date
125 echo "hello world"
126 uname -a
127 history
ogsystem@cis106-desktop:~$ #!
ogsystem@cis106-desktop:~$ echo
ogsystem@cis106-desktop:~$!!
echo
ogsystem@cis106-desktop:~$ echo "hello"
hello
ogsystem@cis106-desktop:~$!!world
echo "hello"world
helloworld
ogsystem@cis106-desktop:~$

Practice 8


Tilix: ogsystem@cis106-desktop: ~
1: ogsystem@cis106-desktop: ~
DATE(1) User Commands DATE(1)
NAME
date - print or set the system date and time
SYNOPSIS
date [OPTION]... [+FORMAT]
date [-u|--utc|--universal] [MMDDhhmm[[CC]YY][.ss]]
DESCRIPTION
Display date and time in the given FORMAT. With -s, or with [MMDDhhmm[[CC]YY][.ss]], set the date and time.
Mandatory arguments to long options are mandatory for short options too.
-d, --date=STRING
display time described by STRING, not 'now'
--debug
annotate the parsed date, and warn about questionable usage to stderr
-f, --file=DATEFILE
like --date; once for each line of DATEFILE
-I[FMT], --iso-8601[=FMT]
output date/time in ISO 8601 format. FMT='date' for date only (the default), 'hours', 'minutes', 'seconds', or 'ns' for date and time to the indicated precision. Example: 2006-08-14T02:34:56-06:00
--resolution
output the available resolution of timestamps Example: 0.000000001
-R, --rfc-email
output date and time in RFC 5322 format. Example: Mon, 14 Aug 2006 02:34:56 -0600
--rfc-3339=FMT
output date/time in RFC 3339 format. FMT='date', 'seconds', or 'ns' for date and time to the indicated precision. Example: 2006-08-14 02:34:56-06:00
-r, --reference=FILE
display the last modification time of FILE
-s, --set=STRING
set time described by STRING
-u, --utc, --universal
-- MOST: *stdin* (1,1)0%
2: ogsystem@cis106-desktop: ~
DF(1) User Commands DF(1)
NAME
df - report file system space usage
SYNOPSIS
df [OPTION]... [FILE]...
DESCRIPTION
This manual page documents the GNU version of df. df displays the amount of space available on the file system containing each file name argument. If no file name is given, the space available on all currently mounted file systems is shown. Space is shown in 1K blocks by default, unless the environ-
-- MOST: *stdin* (1,1)0%
3: ogsystem@cis106-desktop: ~
-m, --mebi
Display the amount of memory in mebibytes.
-g, --gibi
Display the amount of memory in gibibytes.
--tebi Display the amount of memory in tebibytes.
--pebi Display the amount of memory in pebibytes.
--kilo Display the amount of memory in kilobytes.
Implies --si.
--mega Display the amount of memory in megabytes.
Implies --si.
-- MOST: *stdin* (61,1)38%
4: ogsystem@cis106-desktop: ~
NAME
clear - clear the terminal screen
SYNOPSIS
clear [-x] [-T terminal-type]
clear -V
DESCRIPTION
clear clears your terminal's screen and its scrollback buffer, if any. clear retrieves the terminal type from the environment variable TERM, then con-
-- MOST: *stdin* (3,1)1%
Press `Q' to quit, `H' for help, and SPACE to scroll.
6: ogsystem@cis106-desktop: ~
ogsystem@cis106-desktop:~$ free -g
total used free shared buff/cache av
ailable
Mem: 3 2 0 0 0
0
Swap: 3 0 3
ogsystem@cis106-desktop:~$
... @cis106-desktop: ~
HILibrary FunctionsHI...Y(3)
NAME
history - GNU History Library
COPYRIGHT
The GNU History Library is Copyright (C) 1989-2020 by the Free Software Foundation, Inc.
DESCRIPTION
Many programs read input from the user a line at a time. The GNU History library is able to keep track of those lines, associate arbitrary data with each line, and utilize information from previous lines in composing new ones.
HISTORY EXPANSION
-- MOST: *stdin* (1,1)0%

Practice 9




```
  %H   hour (00..23)
  %I   hour (01..12)
  %j   day of year (001..366)
  %k   hour, space padded ( 0..23); same as %_H
  %l   hour, space padded ( 1..12); same as %_I
  %m   month (01..12)
  %M   minute (00..59)
  %n   a newline
  %N   nanoseconds (000000000..999999999)
  %p   locale's equivalent of either AM or PM; blank if not known
  %P   like %p, but lower case
  %q   quarter of year (1..4)
  %r   locale's 12-hour clock time (e.g., 11:11:04 PM)
  %R   24-hour hour and minute; same as %H:%M
  %s   seconds since the Epoch (1970-01-01 00:00 UTC)
  %S   second (00..60)
  %t   a tab
  %T   time; same as %H:%M:%S
  %u   day of week (1..7); 1 is Monday
  %U   week number of year, with Sunday as first day of week (00..53)
  %V   ISO week number, with Monday as first day of week (01..53)
  %w   day of week (0..6); 0 is Sunday
  %W   week number of year, with Monday as first day of week (00..53)
  %x   locale's date (can be ambiguous; e.g., 12/31/99)
  %X   locale's time representation (e.g., 23:13:48)
  %y   last two digits of year (ambiguous; 00..99)
  %Y   year
  %z   +hhmm numeric time zone (e.g., -0400)
  %:z  +hh:mm numeric time zone (e.g., -04:00)
  %::z  +hh:mm:ss numeric time zone (e.g., -04:00:00)
  %:::z  numeric time zone with : to necessary precision (e.g., -04, +05:30)
  %Z   alphabetic time zone abbreviation (e.g., EDT)

By default, date pads numeric fields with zeroes.
The following optional flags may follow '%':

  -  (hyphen) do not pad the field
  _  (underscore) pad with spaces
  0  (zero) pad with zeros
  +  pad with zeros, and put '+' before future years with >4 digits
  ^  use upper case if possible
  #  use opposite case if possible

After any flags comes an optional field width, as a decimal number;
then an optional modifier, which is either
E to use the locale's alternate representations if available, or
O to use the locale's alternate numeric symbols if available.

Examples:
Convert seconds since the Epoch (1970-01-01 UTC) to a date
  $ date --date='@2147483647'

Show the time on the west coast of the US (use tzselect(1) to find TZ)
  $ TZ='America/Los_Angeles' date

Show the local time for 9AM next Friday on the west coast of the US
  $ date --date='TZ="America/Los_Angeles" 09:00 next Fri'

GNU coreutils online help: <https://www.gnu.org/software/coreutils/>
Full documentation <https://www.gnu.org/software/coreutils/date>
or available locally via: info '(coreutils) date invocation'
ogsystem@cis106-desktop:~$ whatis ls
ls (1)               - list directory contents
ogsystem@cis106-desktop:~$ whatis pwd
pwd (1)              - print name of current/working directory
ogsystem@cis106-desktop:~$ whatis apt
apt (8)              - command-line interface
ogsystem@cis106-desktop:~$ whatis sudo
sudo (8)             - execute a command as another user
ogsystem@cis106-desktop:~$
```