

ANÁLISE DE SISTEMAS

# Integração contínua & Entrega contínua (CI/CD)

Ilídio Oliveira

v2023/06/06

universidade de aveiro  
departamento de eletrónica,  
telecomunicações e informática



deti

# Objetivos de aprendizagem

Identificar os passos de um ciclo de CI

Distinguir entre *C. Integration*, *C. Deployment* e *C. Delivery*

Relacionar o CI/CD com a natureza iterativa e incremental dos métodos ágeis de desenvolvimento

Explicar as tarefas englobadas numa “build”


Explicar as principais boas práticas na implementação de CI numa equipa

Relacionar o CI/CD e DevOps.

「\ (ツ) /」

**IT WORKS**  
*on my machine*

CI involves triggering a **(remote)** build when a change gets committed to the code repository, which includes: fetching the code from source code repository, compiling code, running automated tests and creating build out of it.

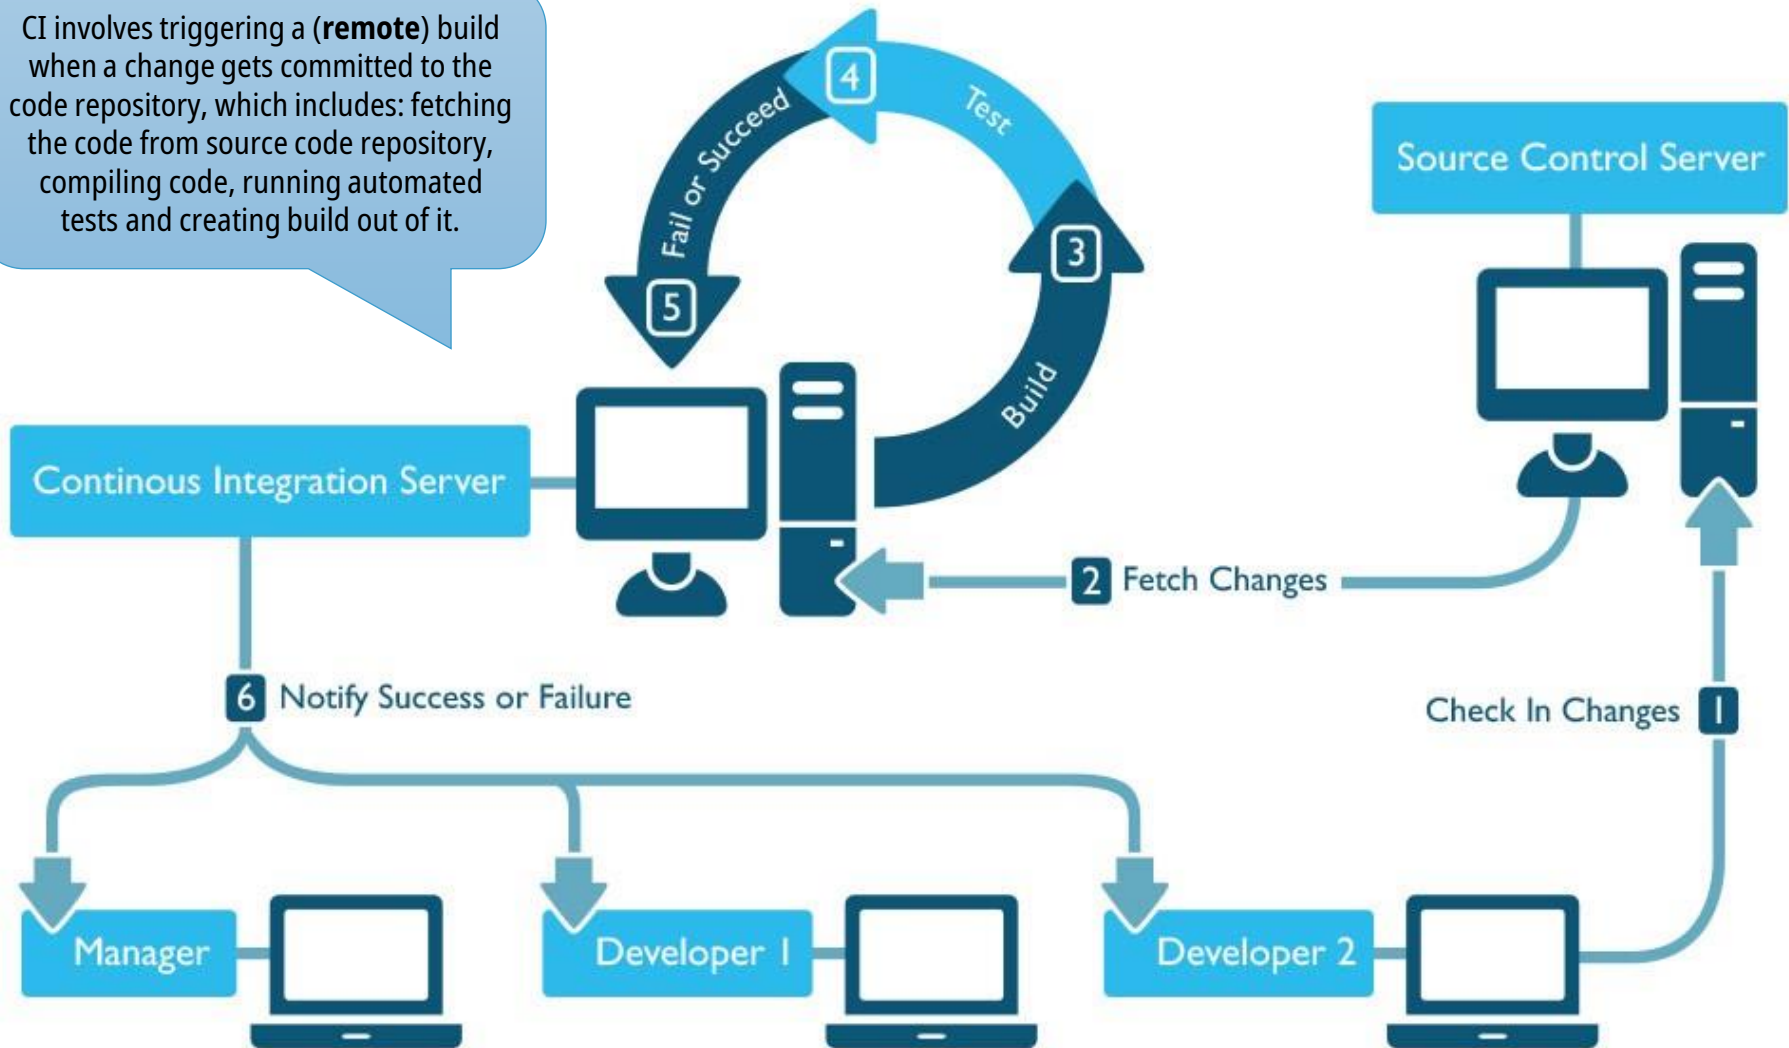

<https://insights.sei.cmu.edu/blog/continuous-integration-in-devops/>

# Continuously integrating the “units”

The essence of it lies in the simple practice of everyone on the team integrating frequently.

Feel comfortable and set up the tools to integrate at any time.

CI makes the development process smoother and less risky

↓ “it runs on my computer”

Early detection of failures (react quickly)

spot errors earlier  
shared code ownership  
everybody is co-responsible



big, unpredictable effort to integrate  
app state is not executable most of the time



integrate early and often

Integration hell

# Suggested development workflow

1- Update from shared SCM

2- Code a new feature (tests + code) in a dedicate feature branch

3- Run automated build on local machine

Repeat #2 and #3 till tests pass

4- Commit (integrate with "central")


[Pull requests](#) advised (with [peer code review](#))

5- Run a build on a clean machine

Update artifacts, update build status (feedback)

Immediately fix bugs and integration issues

**Not only tools: CI culture required!**

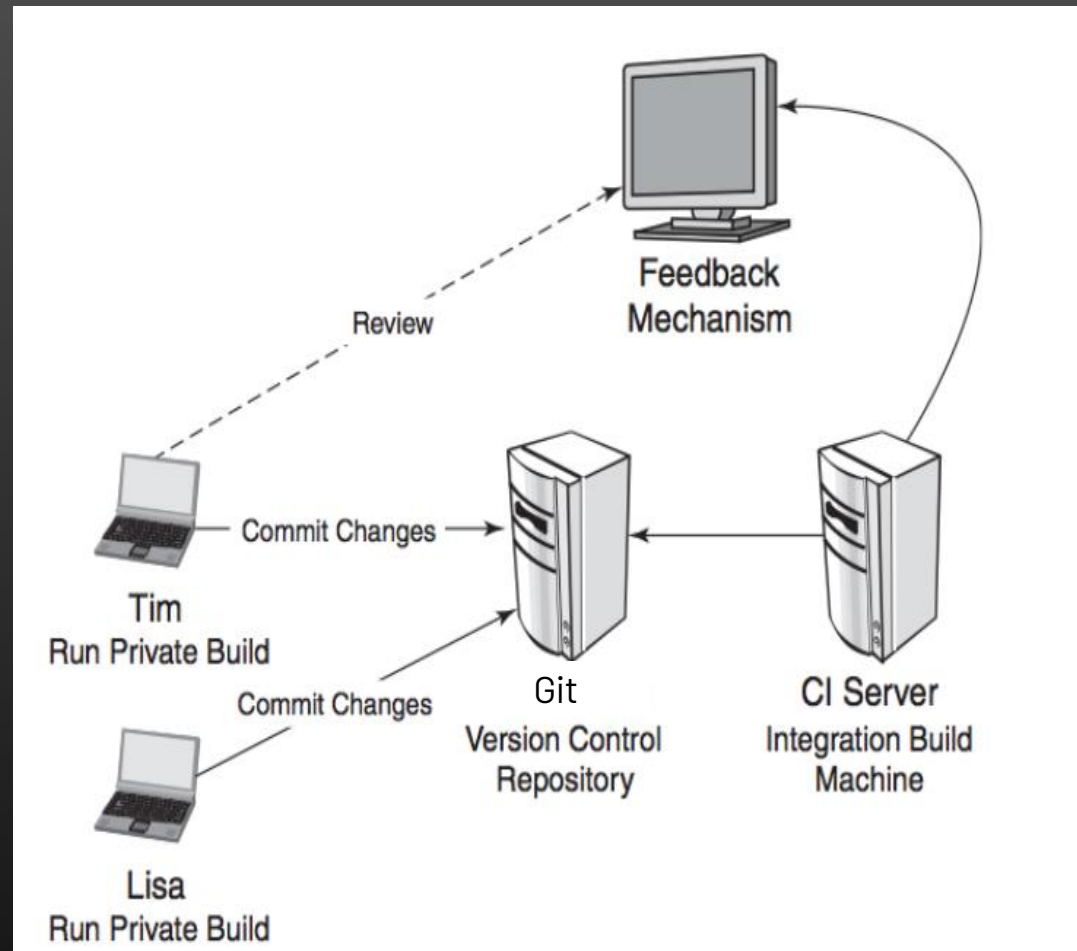


# The build process

A build has several stages.

A successful build implies success in code correctness and quality checks.

Automatic build tools run quality checks (e.g.: unit testing, code inspections)

Not just compiling...

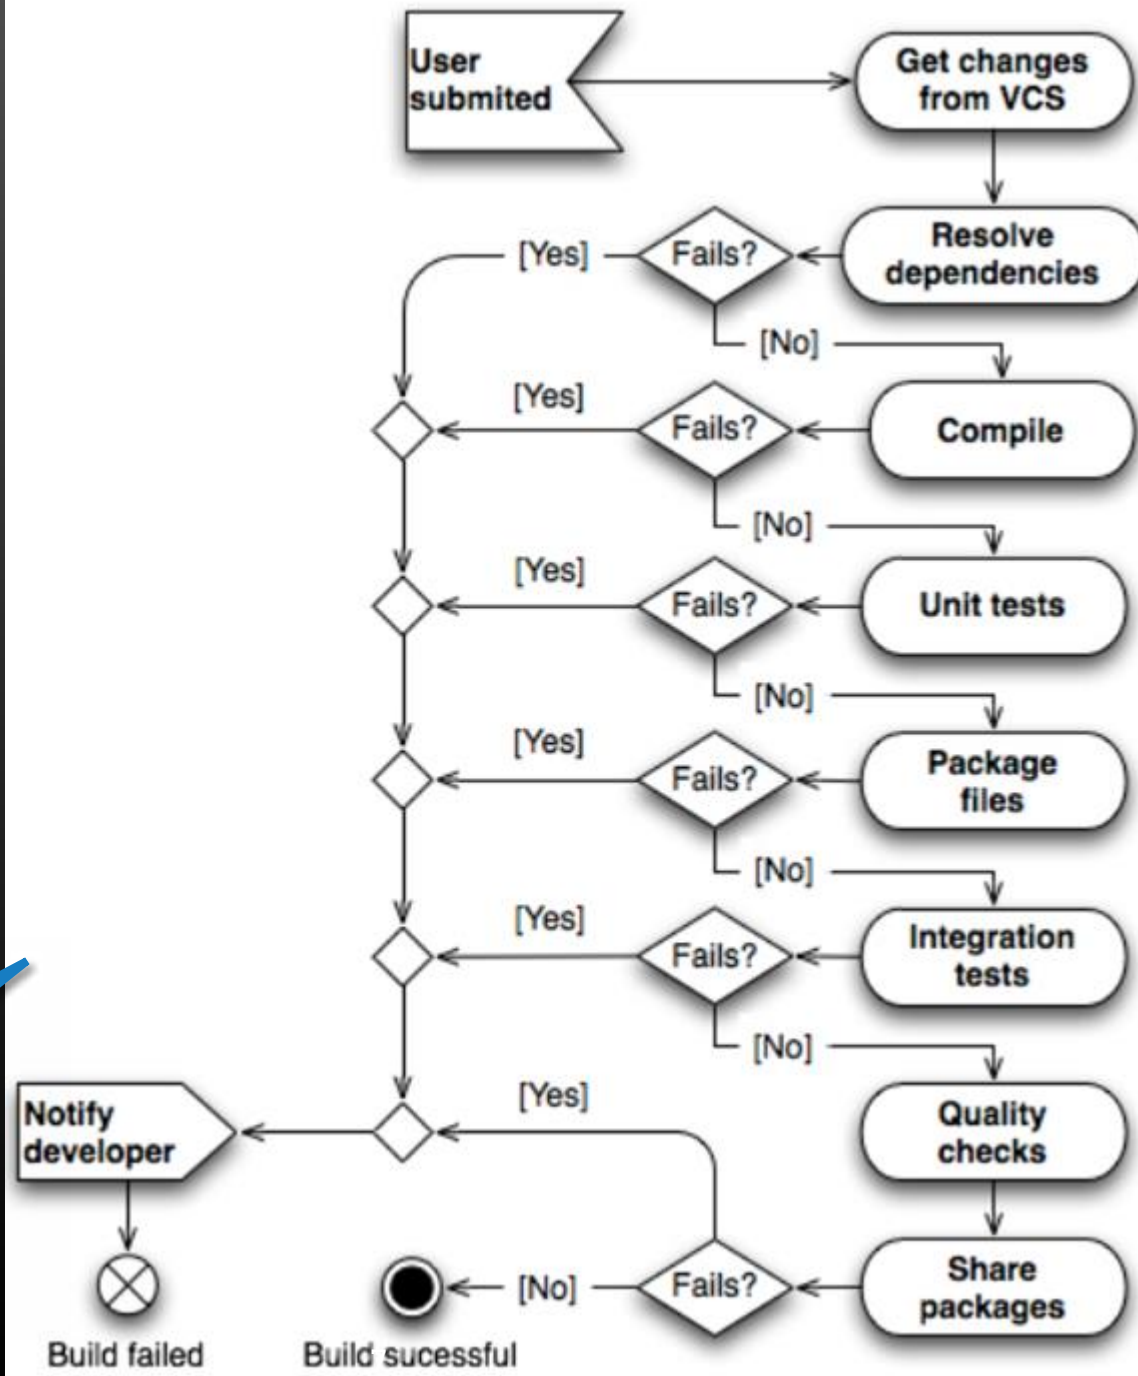

# Quality checks → análise estática do código

## Analisar a qualidade do Código sem o executar


- vulnerabilidades conhecidas
- potenciais erros (e.g.: *null pointers*,...)
- construções desaconselhadas

<https://www.sonarqube.org/>

```
246 if (Provider.class == roleTypeClass) {
247     Type providedType = ReflectionUtils.getLastTypeGenericArgument(dependencyD
248     2 Class providedClass = 1 ReflectionUtils.getTypeClass(providedType);
249
250     if (this.componentManager.hasComponent(providedType, dependencyDescriptor.)
251         || 3 providedClass.isAssignableFrom(List.class) || providedClass.isA
252
253     continue;
254 }
```


A "NullPointerException" could be thrown; "providedClass" is nullable here.

Bug Major cert, cwe

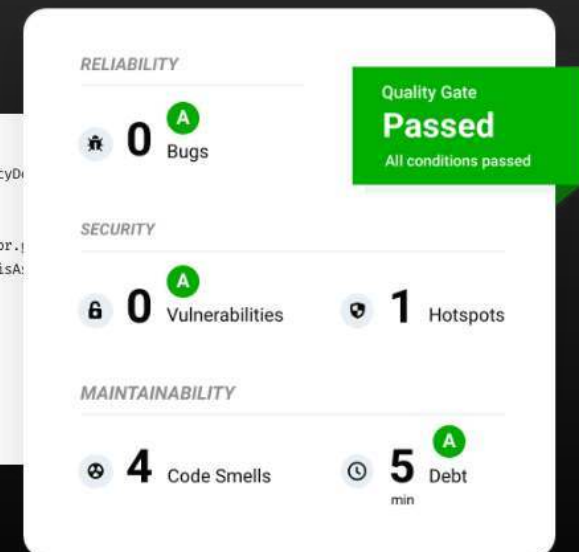



# A *build*é mais que compilar...

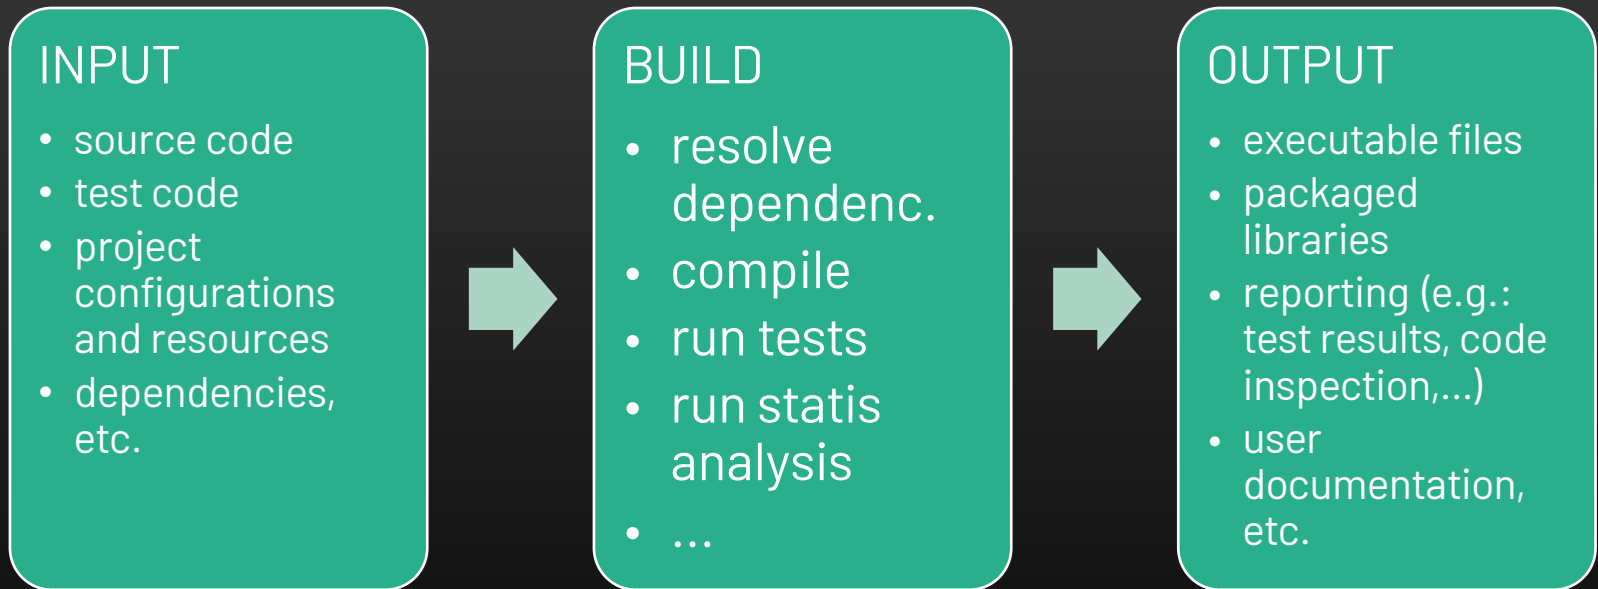

# Práticas da integração contínua

- Os *developers* gravam para o repositório partilhado com regularidade (*commit*)
- As alterações no SCM são monitorizadas e acionam automaticamente o ciclo de CI
- Feedback imediato sobre falhas nas *builds* (as *builds* falhadas têm alta prioridade)
- Opcional: instalação de artefactos num repositório de referência
- Opcional: acionamento de testes de integração/aceitação

Quanto mais frequente for o processo de integração, menos penoso será


“Continuous” → *mindset* e ferramentas preparados para a integração a qualquer altura

# Fowler's 10 CI practices


- Maintain a Single Source Repository.
- Automate the Build
- Make Your Build Self-Testing
- Everyone Commits To the Mainline Every Day
- Every Commit Should Build the Mainline on an Integration Machine
- Keep the Build Fast
- Test in a Clone of the Production Environment
- Make it Easy for Anyone to Get the Latest Executable
- Everyone can see what's happening
- Automate Deployment

<http://martinfowler.com/articles/continuousIntegration.html>

# Termos relacionados

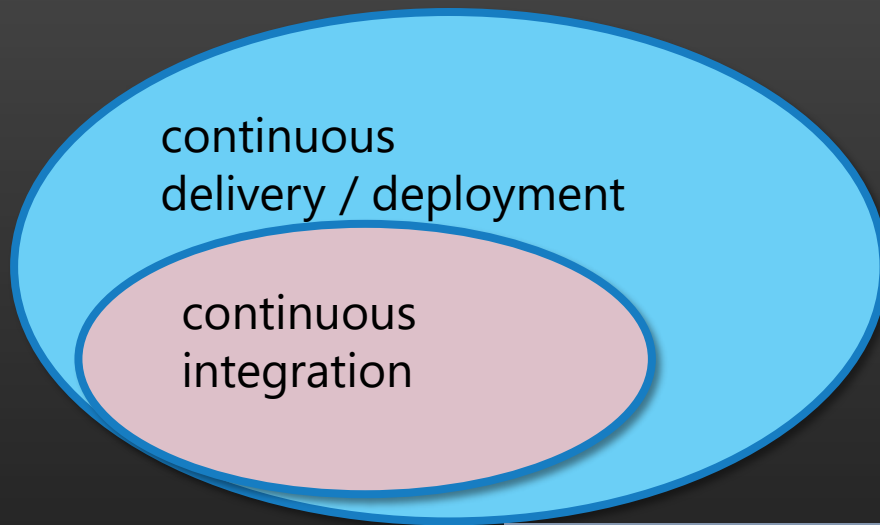

É possível fazer instalações frequentes, mas pode-se optar por não o fazer (geralmente relacionadas com a estratégia empresarial)

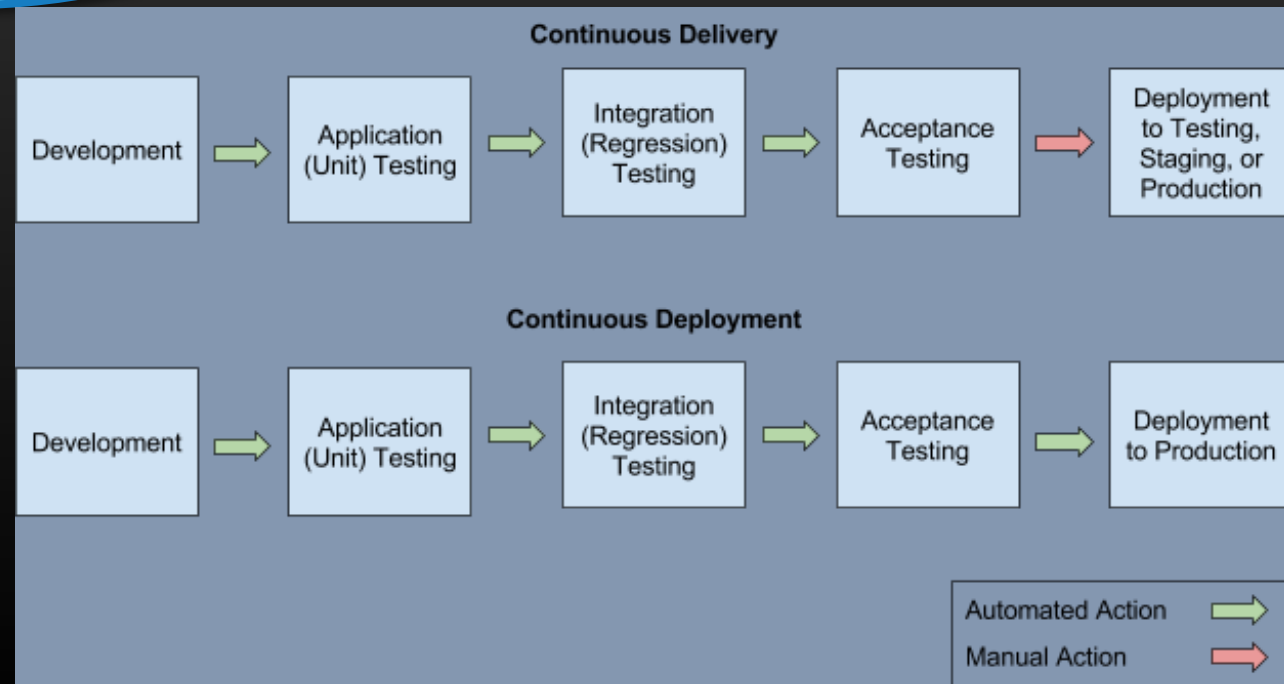

# Continuous...

## Continuous Delivery

sw development practice in which you build software in such a way that it **can be released** to production at any time.

You're doing continuous delivery when:

Focus on quality of working software

Your software is deployable throughout its lifecycle

Your **team prioritizes keeping the software deployable over working on new features**

Anybody can get fast, automated feedback on the production readiness

## Continuous Deployment/release

every change goes through the pipeline and **automatically gets put** into production.

Focus on speed and agility to deploy to production



## Continuous Integration

Automatically integrating, building, and testing code within the development **environment.**

Pre-delivery steps.

# Entrega continua

<https://about.gitlab.com>

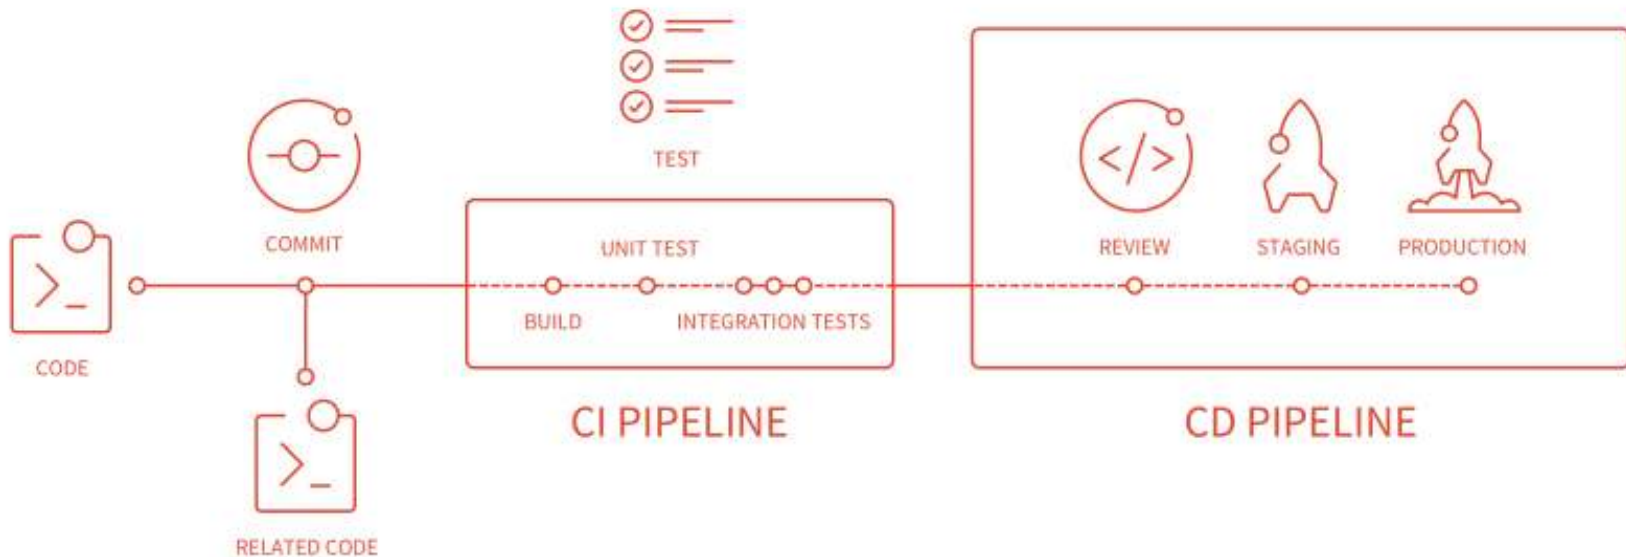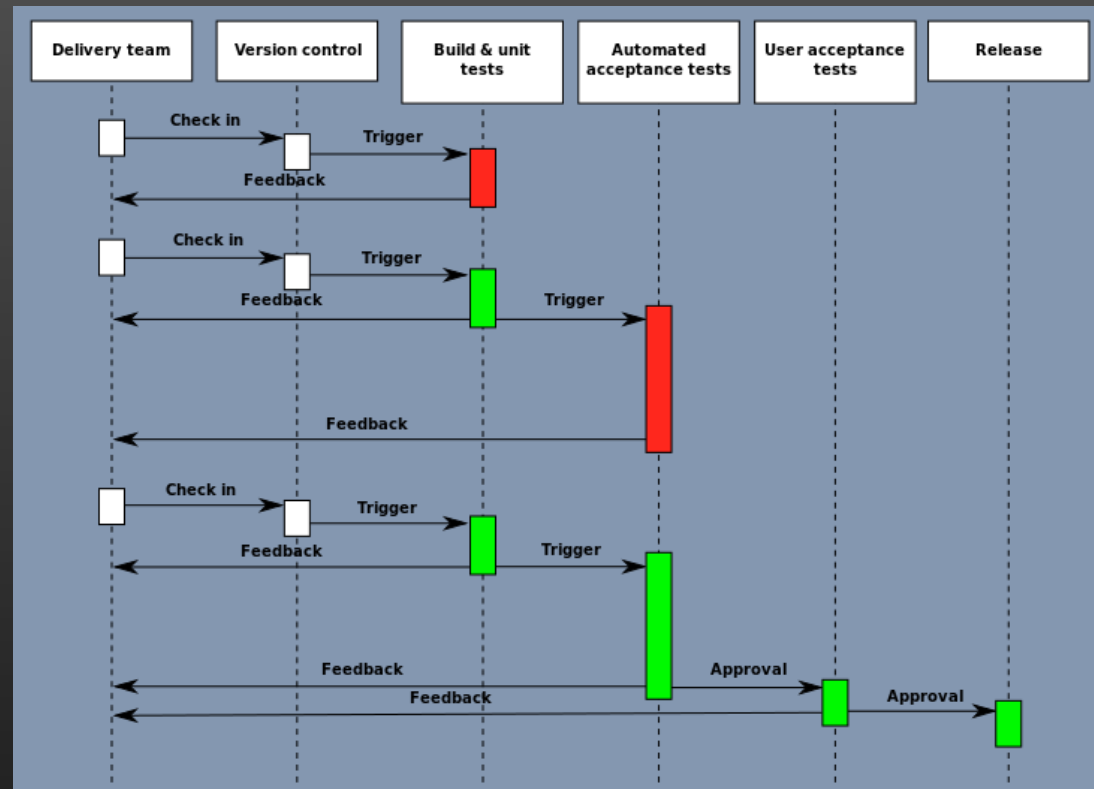



smartcode Search Services [Jenkins]

localhost:8080/jenkins/view/Search%20Services/

# Search Services

## Librarian

Claimed by Alice Jenkins: There's a bunch of flaky tests that keep breaking. Fixing it now.

1.5.0+build.18.sha.7d22a8 19s | 25s

## Librarian Acceptance

v1.5.0, run #3

## Performance Benchmark

#1 1m 13s

## Promote to PROD

#2 1m 2s

## Promote to UAT

Identified Problems: Invalid credentials

#12 22s | 2m 7s

## Search API Contract Tests (PROD)

#1 17s

## Search API Contract Tests (UAT)

#2 37s

Settings

Font Size 0.5 1.0 2.0

Columns 1 2

☒ Colour blind mode?

Add/Remove Jobs

Done

Brought to you by Jan Molak

# Continuous feedback

**Errors are easier to detect in an earlier stage, near the point where they have been introduced:**

The detection mechanism of such bugs becomes simpler because the natural step in diagnosing the problem is to check what was the latest submitted change.

problems followed by atomic commits are easiest to correct than to fix several problems at once, after bulk commits

**There must be an effective mechanism that automatically informs programmers, testers, database administrators and managers about the status of the build**

**Feedback → generate reaction in a more accurate and prompter way**





# Continuous testing

Quality checks at all system levels  
and involve all individuals, not just the  
elements of the QA team

Most of the tests can be automated  
and should be run in the CI pipeline to  
be carried out repeatedly:

unit testing, integration testing,  
regression testing, system testing, load  
and performance testing, etc.

Build tools can take a crucial role on  
automating tests

# Pipeline as Code with Jenkins



The default interaction model with Jenkins, historically, has been very web UI driven, requiring users to manually create jobs, then manually fill in the details through a web browser. This requires additional effort to create and manage jobs to test and build multiple projects, it also keeps the configuration of a job to build/test/deploy separate from the actual code being built/tested/deployed. This prevents users from applying their existing CI/CD best practices to the job configurations themselves.

## Jenkins ♥ Continuous Delivery Articles

[Multibranch Workflows in Jenkins](#)  
[jenkins-ci.org](#)

## Continuous Delivery


## Pipeline

With the introduction of the Pipeline plugin, you can define a build/test/deploy pipeline in a `Jenkinsfile` and store that as another piece of code checked into source control.

A *continuous delivery (CD) pipeline* is an automated expression of your process for getting software from version control right through to your users and customers. Every change to your software (committed in source control) goes through a complex process on its way to being released.

Pipeline provides an extensible set of tools for modeling simple-to-complex delivery pipelines "as code" via the Pipeline domain-specific language (DSL) syntax.

# Jenkins pipelines

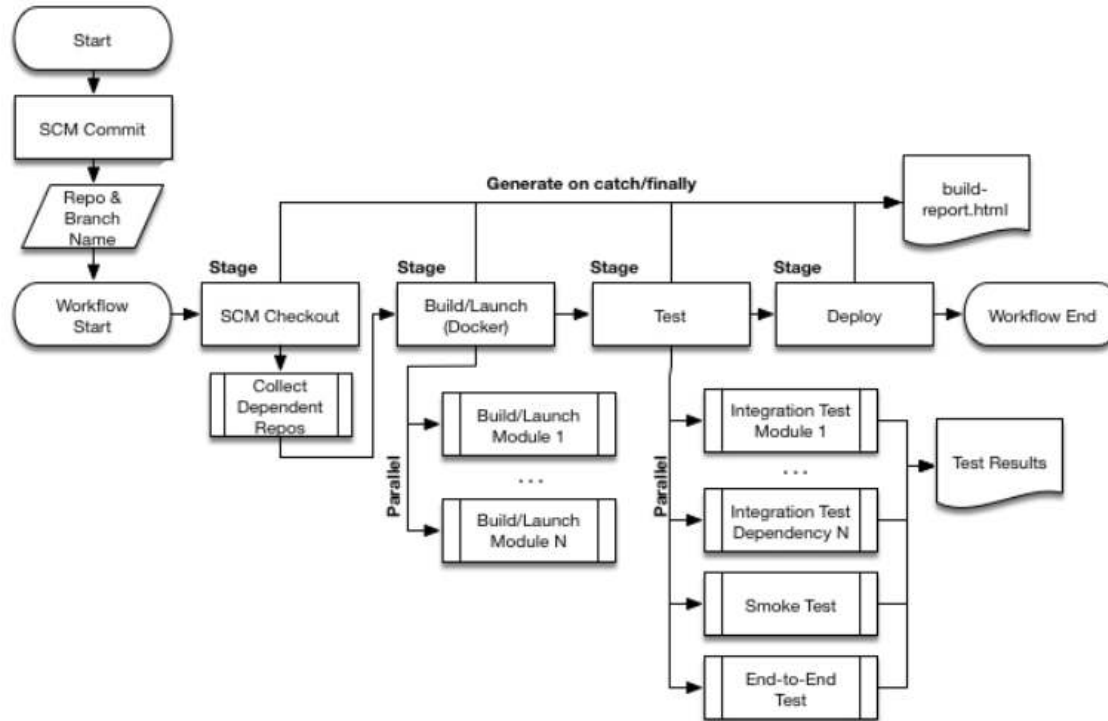

```

pipeline {
    agent {
        docker {
            image 'maven:3-alpine'
            args '-v /root/.m2:/root/.m2'
        }
    }
    options {
        skipStagesAfterUnstable()
    }
    stages {
        stage('Build') {
            steps {
                sh 'mvn -B -DskipTests clean package'
            }
        }
        stage('Test') {
            steps {
                sh 'mvn test'
            }
            post {
                always {
                    junit 'target/surefire-reports/*.xml'
                }
            }
        }
        stage('Deliver') { ❶
            steps {
                sh './jenkins/scripts/deliver.sh' ❷
            }
        }
    }
}

```

```

pipeline {
    agent any
    stages{
        stage('Build'){
            steps {
                sh 'mvn clean package'
            }
            post {
                success {
                    echo 'Now Archiving...'
                    archiveArtifacts artifacts: '**/target/*.war'
                }
            }
        }
        stage ('Deploy to Staging'){
            steps {
                build job: 'Deploy-to-staging'
            }
        }
        stage ('Deploy to Production'){
            steps{
                timeout(time:5, unit:'DAYS'){
                    input message:'Approve PRODUCTION Deployment?'
                }

                build job: 'Deploy-to-Prod'
            }
            post {
                success {
                    echo 'Code deployed to Production.'
                }
                failure {
                    echo ' Deployment failed.'
                }
            }
        }
    }
}

```

# GitHub Actions


```
name: Node CI

on: [push]


jobs:
  build_and_test:
    runs-on: ubuntu-latest
    steps:
      - name: Checkout repository
        uses: actions/checkout@v3
      - name: npm install, build, and test
        run: |
          npm install
          npm run build --if-present
          npm test
      - name: Archive production artifacts
        uses: actions/upload-artifact@v3
        with:
          name: dist-without-markdown
          path: |
            dist
            !dist/**/*.md
      - name: Archive code coverage results
        uses: actions/upload-artifact@v3
        with:
          name: code-coverage-report
          path: output/test/code-coverage.html
```

# GitLab CI/CD

<https://docs.gitlab.com/ee/ci/introduction/>  
→ Includes video demos

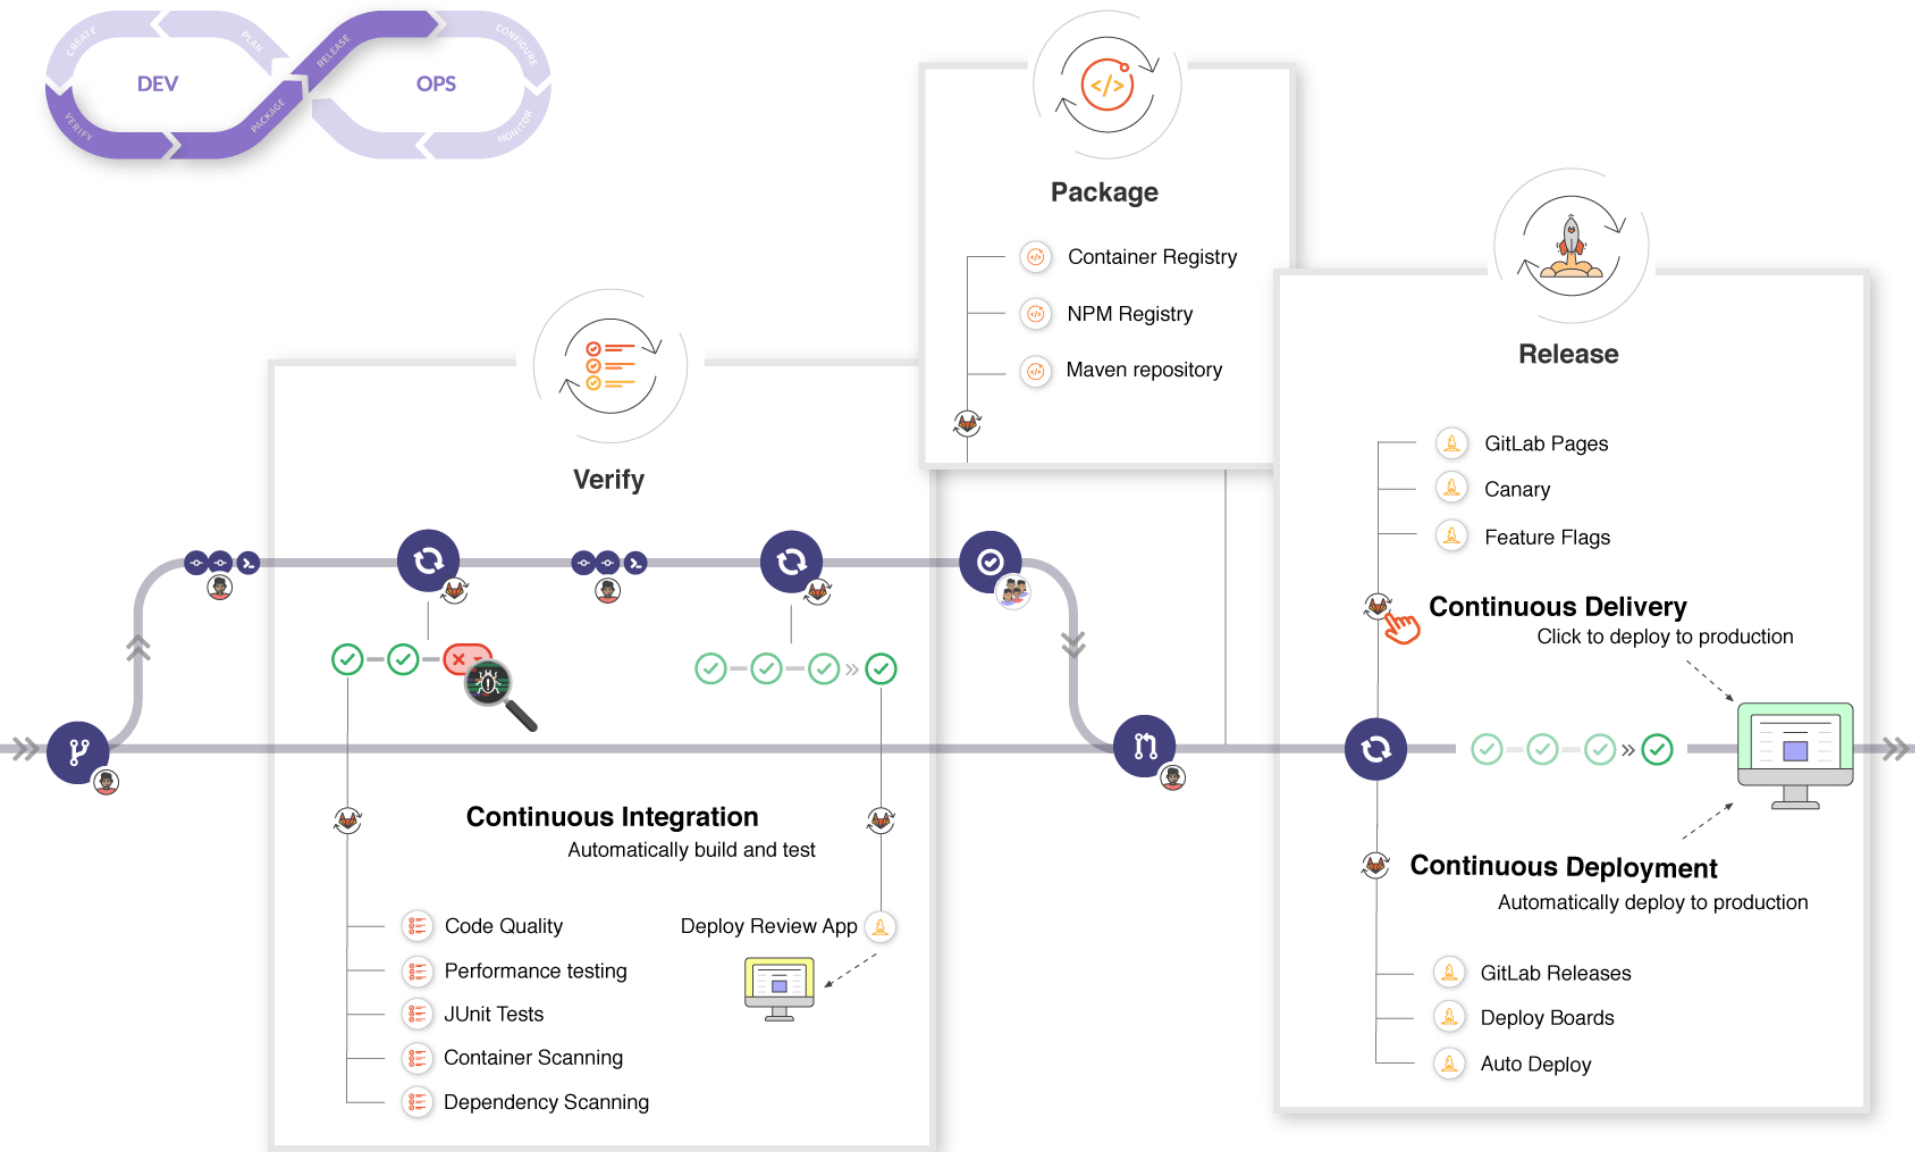


DevOps is a set of practices, tools, and a cultural philosophy that automate and integrate the processes between software development and IT teams. It emphasizes team empowerment, communication and collaboration, and technology automation.

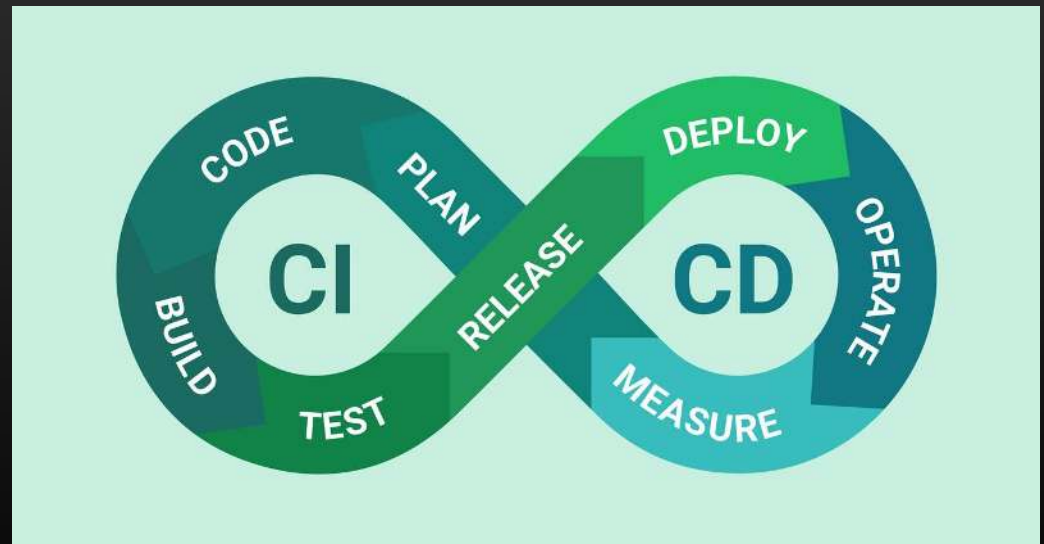

<https://www.atlassian.com/devops/what-is-devops>



# Automação e tecnologias...

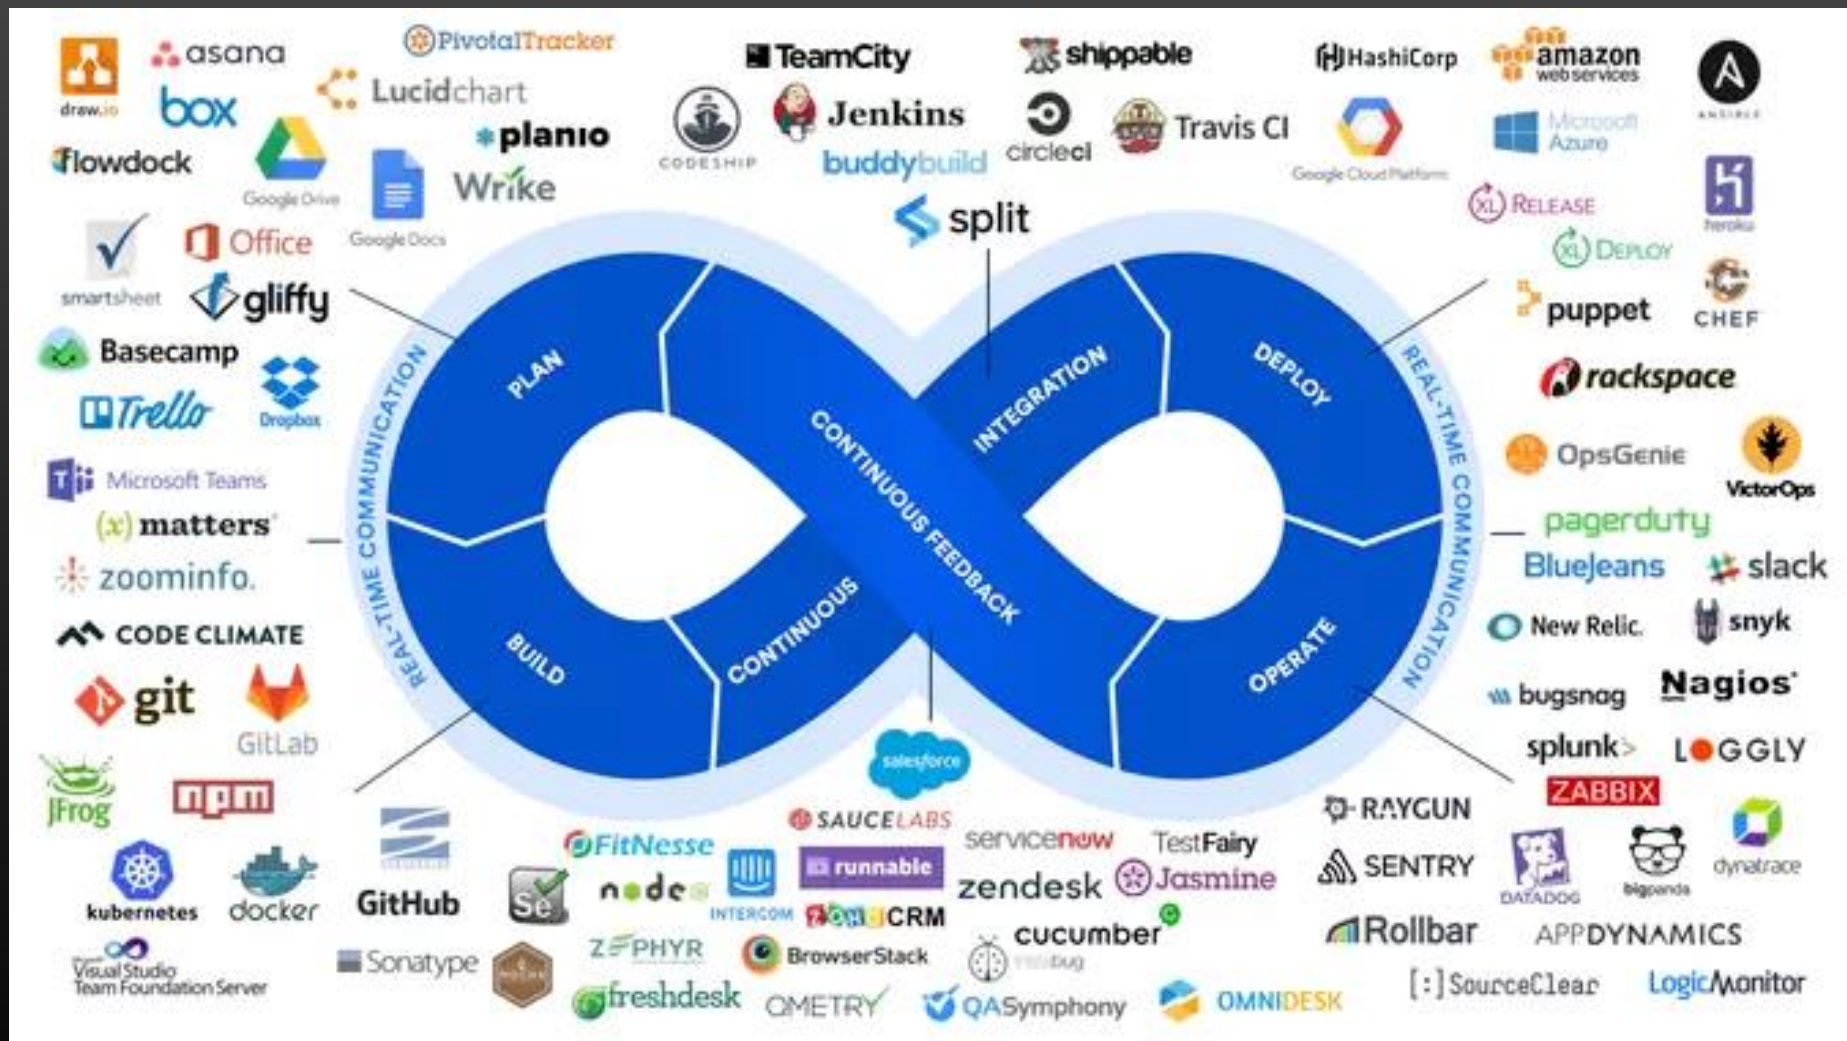



# More to explore

## Books on Continuous integration:

Duvall's Continuous Integration: <http://www.amazon.com/Continuous-Integration-Improving-Software-Reducing/dp/0321336380>

Humble's "Continuous Delivery": <http://www.amazon.com/Continuous-Delivery-Deployment-Automation-Addison-Wesley/dp/0321601912>

## Maven:

Free ebook: <http://www.sonatype.com/books/mvnref-book/reference/public-book.html>