


[Visual Intelligence](#) / Integrating your app with visual intelligence

Article

# Integrating your app with visual intelligence

Enable people to find app content that matches their surroundings or objects onscreen with visual intelligence.

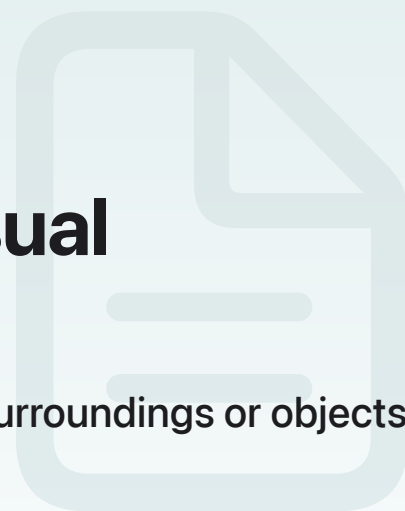

## Overview

With visual intelligence, people can visually search for information and content that matches their surroundings, or an onscreen object. Integrating your app with visual intelligence allows people to view your matching content quickly and launch your app for more detailed information or additional search results, giving it additional visibility.

## Explore the role of the App Intents framework

To integrate your app with visual intelligence, the Visual Intelligence framework provides information about objects it detects in the visual intelligence camera or a screenshot. To exchange information with your app, the system uses the [App Intents](#) framework and its concepts of app intents and app entities.

When a person performs visual search on the visual intelligence camera or a screenshot, the system forwards the information captured to an App Intents query you implement. In your query code, search your app's content for matching items, and return them to visual intelligence as app entities. Visual intelligence then uses the app entities to display your content in the search results view, right where a person needs it.

To learn more about a displayed item, someone can tap it to open the item in your app and view information and functionality. For example, an app that allows people to view information about landmarks might show detailed information like hours, a map, or community reviews for the item a person taps in visual search.

# Provide a display representation

Visual Intelligence uses the [DisplayRepresentation](#) of your [AppEntity](#) to organize and present your content in the visual intelligence search experience. Make sure to provide localized, concise, and high-quality display representations that consist of a title, subtitle, and an image. The following example shows a version of the display representation of an [AppEntity](#) for a landmark. It uses strings from the model object for simplicity. In your code, make sure to provide a localized display representation.

```
struct LandmarkEntity: IndexedEntity {
    static var typeDisplayRepresentation: TypeDisplayRepresentation {
        return TypeDisplayRepresentation(
            name: LocalizedStringResource("Landmark", table: "AppIntents", comment:
            numericFormat: "\(placeholder: .int) landmarks"
        )
    }

    var displayRepresentation: DisplayRepresentation {
        DisplayRepresentation(
            title: "\(name)",
            subtitle: "\(continent)",
            image: .init(named: landmark.thumbnailImageName)
        )
    }

    // ...
}
```

For additional information about display representations, refer to [Integrating custom data types into your intents](#).

## Provide search results

To integrate your app with visual search, create the query that provides visual intelligence with content that matches a person's surroundings or selection:

1. In your Xcode project, adopt the [IntentValueQuery](#) protocol and implement its [values\(for:\)](#) requirement.
2. Change the [values\(for:\)](#) function to receive a [SemanticContentDescriptor](#) as its input. The [SemanticContentDescriptor](#) makes visual intelligence information available to your app.

3. Use the descriptor's labels to access a list of labels that visual intelligence creates or the pixelBuffer of the camera capture.
4. Search your app's content using the labels and perform an image search with an image you create from the pixelBuffer.
5. Describe your search results as AppEntity objects and return them as the result of the query.

The following example demonstrates how an app that enables people to view information about points-of-interest and landmarks might access the pixelBuffer for its search:

```
struct LandmarkIntentValueQuery: IntentValueQuery {  
  
    @Dependency var modelData: ModelData  
  
    func values(for input: SemanticContentDescriptor) async throws -> [VisualSearchResult]  
  
        guard let pixelBuffer: CVReadOnlyPixelBuffer = input.pixelBuffer else {  
            return []  
        }  
  
        let landmarks = try await modelData.search(matching: pixelBuffer)  
  
        return landmarks  
    }  
}
```

The `searchLandmarks(matching:)` function asynchronously returns a list of app entities that represent landmarks. Returning results quickly makes for a good search experience; limit the list of returned items, if needed. Limiting the items also prevents visual search from showing a long list of results that a person might have to scroll through. If your app finds a large number of matches — for example, several hundred items — you might return the first hundred results, and give people the opportunity to view the full list in your app as described in [Link to additional results in your app](#).

## Open an item in your app

To allow someone to open your app and view additional information or access additional actions for a visual search, create an OpenIntent. In the intent's `perform()` method, open your app to match the app entity that visual intelligence passes to the method.

Continuing the example that shows information about points of interest or landmarks, the `OpenIntent` might look like this:

```

struct OpenLandmarkIntent: OpenIntent {
    static let title: LocalizedStringResource = "Open Landmark"

    @Parameter(title: "Landmark", requestValueDialog: "Which landmark?")
    var target: LandmarkEntity
}

```

### Note

If your query returns more than one app entity type using `@UnionValue`, create an `Open Intent` for each app entity type that's part of the union value.

Adopting the `OpenIntent` protocol isn't specific to integrating your app with visual intelligence. Adopting App Intents, including one or more `OpenIntent` implementations, is a best practice for modern apps that offer additional integration with system experiences. If you've already adopted App Intents, you might be able to reuse existing code to open an item in your app with an `Open Intent`.

For more information about adopting App Intents in your app, refer to [App Intents](#) and [Making actions and content discoverable and widely available](#).

## Return different values in one query

Your app can't contain more than one `IntentValueQuery` that takes a `SemanticContentDescriptor`. To return more than one `AppEntity` type from a single intent value query, use the `UnionValue()` Swift macro to return multiple app entity types. The following example uses a union value for its result — indicated by the `@UnionValue` annotation — to return a list of individual landmarks and collections of landmarks:

```

@UnionValue
enum VisualSearchResult {
    case landmark(LandmarkEntity)
    case collection(CollectionEntity)
}

struct LandmarkIntentValueQuery: IntentValueQuery {
    func values(for input: SemanticContentDescriptor) async throws -> [LandmarkEntity] {
        // ...

        // Returned search results are either landmarks or a collection.
        let landmarks = try await modelData.searchLandmarks(matching: pixelBuffer)
    }
}

```

```
        return landmarks
    }
}
```

## Link to additional results in your app

Returning visual search results quickly and limiting the number of items ensures a quick and enjoyable experience for people using your app. However, your app might offer a lot — possibly hundreds — of results, or browsing long lists of items might be part of your app’s core experience. If you need to provide many results, display a limited amount and allow people to open your app from the “More results” button to view more visual search results.

First, create a new app intent that conforms to the [semanticContentSearch](#) schema. With App Intents domains and schemas, you can quickly create app intents that follow a predefined form to enable specific functionality, such as opening a content search experience or list of results.

### Tip

Type `visualintelligence_`, choose the suggested semantic content search schema, and let Xcode code completion create the conforming app intent for you.

In the semantic content search intent’s `perform()` method, navigate to your app’s search experience and pass information that the [SemanticContentDescriptor](#) object provides to perform a search and show the full list of results.

---

## See Also

### Essentials

`struct SemanticContentDescriptor`

A type that represents a scene that visual intelligence captures, like a screenshot, photo, or photo and video stream.