

grav\_project

## Computational Science II

---

Denzel, Philipp and Vossoughi, Sara

---

Email:

[phdenzel@hispeed.ch](mailto:phdenzel@hispeed.ch); [sara.vossoughi@gmail.com](mailto:sara.vossoughi@gmail.com)

# Main assignment

- test of a new algorithm
- gravitational force/acceleration

$$\vec{a}_G(r, \theta) = \int_{r'} \int_{\theta'} \frac{-\sigma(r', \theta') r' dr' d\theta'}{(r^2 + r'^2 - 2rr' \cos(\theta - \theta'))^{\frac{3}{2}}} \begin{pmatrix} r - r' \cos(\theta - \theta') \\ r' \sin(\theta - \theta') \end{pmatrix}$$

- things to be learned:
  - ▶ Fortran
  - ▶ general programming experience
  - ▶ code optimization
- issues:
  - ▶ time
  - ▶ boundary conditions

# First Program

- most accurate calculation on level 0 as a reference
  - ▶ Open files
  - ▶ Read data into arrays
  - ▶ Loop through all grid points ( $i,j$ ) (force)
  - ▶ Nested loop through all grid centres ( $i',j'$ ) (density)
  - ▶ Calculate formula inside inner loop
  - ▶ Write force into new file
- other versions (higher levels) have similar structure

# Simple Implementation


```
! write force components for every corner in grid
do i = 1, N_r
    r_i = r(i)-.5*dr(i) ! shift r to the corners
    do j = 1, N_theta
        theta_j = theta(j)-.5*dtheta(j) ! shift theta to the corners
        ! sum up the forces onto the point (i, j)
        do iprime = 1, N_r
            do jprime = 1, N_theta
                force_point = -sigma(iprime,jprime)*r(iprime)*dr(iprime)*dtheta(jprime)/(r_i**2+r(iprime)**2-2.*r_i*r(iprime)*cos(theta_j-theta(jprime)))**1.5
                f_r = f_r + force_point * (r_i-r(iprime))*cos(theta_j-theta(jprime))
                f_theta = f_theta + force_point * r(iprime)*sin(theta_j-theta(jprime))
            end do
        end do
        write(11, '(e20.10)') f_r
        write(12, '(e20.10)') f_theta
        f_r = 0.
        f_theta = 0.
    end do
end do
```

# Optimization Strategies



- Fortran loops are column-major
- minimizing loop overhead:
  - ▶ avoid subroutine calls in inner loops
  - ▶ shift operations to outer loops
- loop unrolling
- better programming syntax, e.g.  $a*a$  instead of  $a**2$  (multiplications instead of exponentials and logarithms)
- idea: find faster methods, e.g. `invsqrt` using bit shifts and Newton iterations (additions and multiplications instead of divisions)
- precalculations of lookup tables for grid given parameters ( $\cos$ ,  $\sin$ ,  $r\_prime$ ,  $theta\_prime$  etc.)
- using symmetries

→ time optimization from 255.950150 to 9.865764 seconds

# Density map

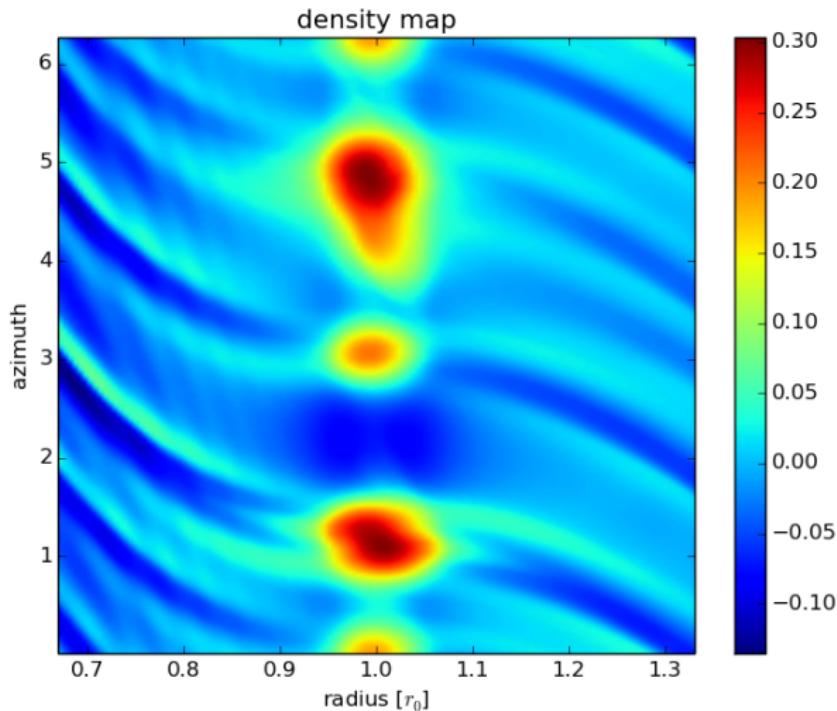

# Level 0

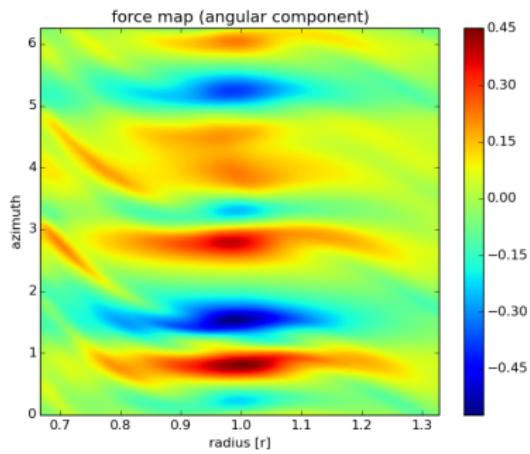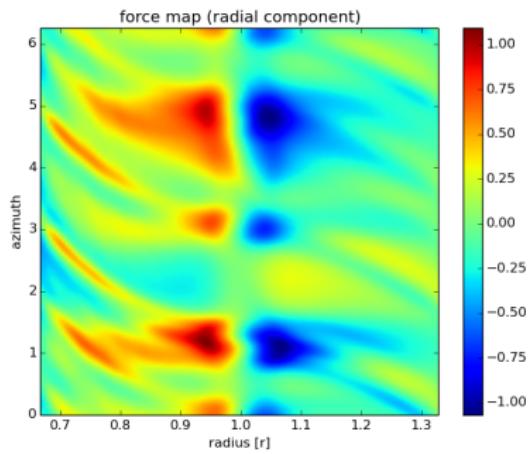

## Higher levels

- reducing operations by using less mass points
- 4<sup>LEVEL</sup> cells into 1
- problem: oscillations
- cause: calculation not anymore only at corners of the grid cells
- solution: shift to corner, interpolate the masses and introduce ghost cells


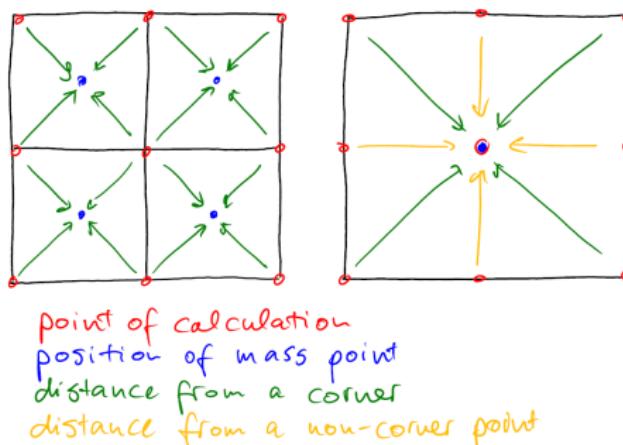


Figure : sketch by Philipp Denzel

# Oscillation pattern

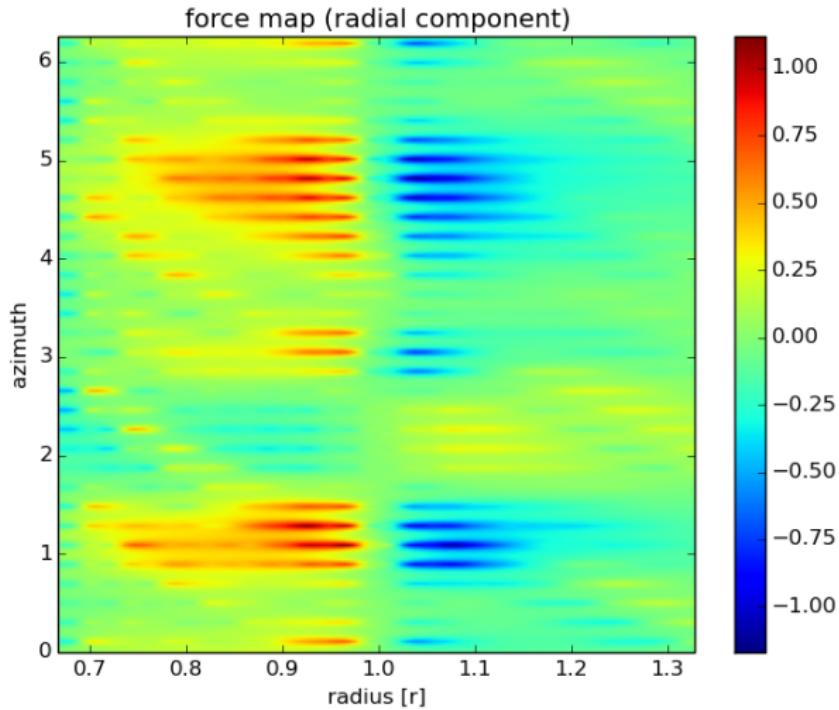

## Bilinear interpolation

for unit square:

$$f(x, y) \approx f(0, 0)(1-x)(1-y) + f(1, 0)x(1-y) + f(0, 1)(1-x)y + f(1, 1)xy$$


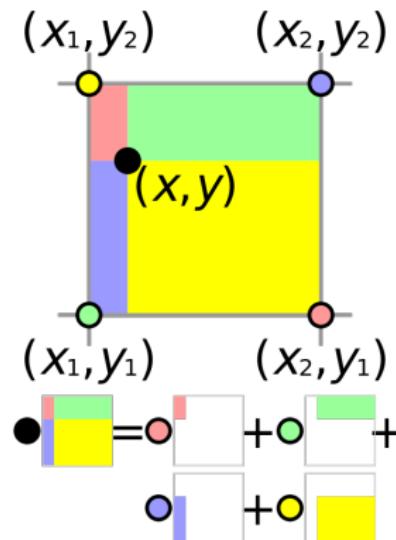


Figure : [http://upload.wikimedia.org/wikipedia/commons/9/91/7\\_Bilinear\\_interpolation\\_visualisation.svg](http://upload.wikimedia.org/wikipedia/commons/9/91/7_Bilinear_interpolation_visualisation.svg)

# Pure Levels 1, 2 and 3

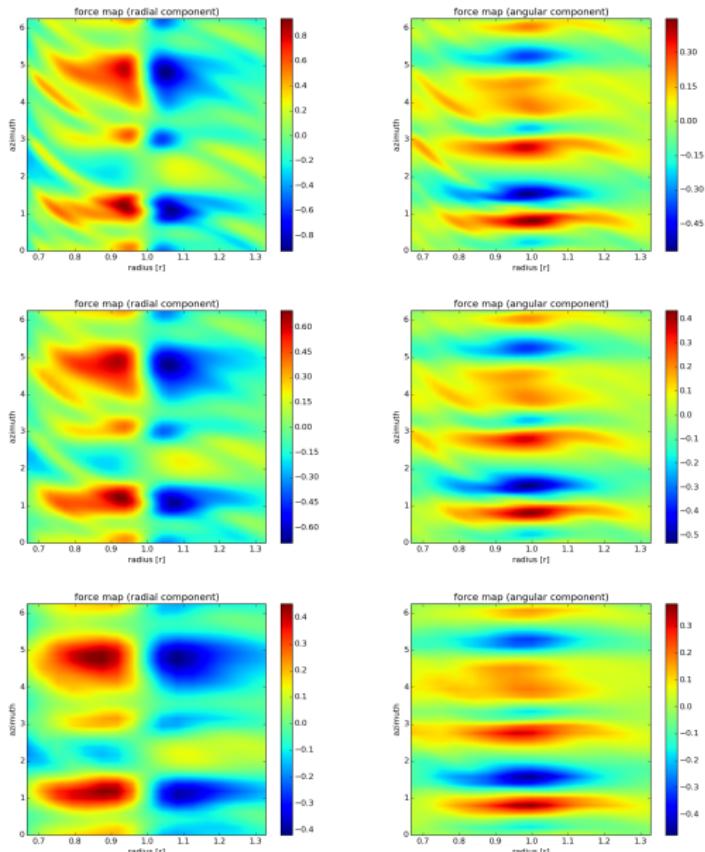

# Refinement with a single level

- task: calculate level 3 grid with refinement from level 2
- closest 4 by 4 cells calculated with one level below
- problem: periodic boundary conditions

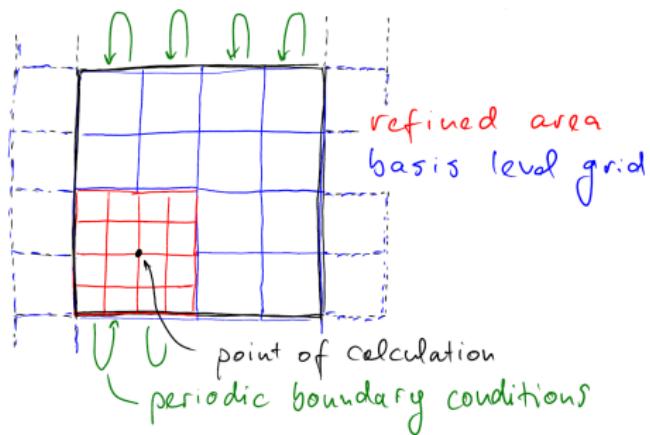


Figure : sketch by Philipp Denzel

# Code

```
do i = 1, N_r0
    r_corner = r0(i)-.5*dr0(i)
    do j = 1, N_theta0
        theta_corner = theta0(j)-.5*dtheta0(j)
        call shift_param ! gives shifts: ishift(ref), jshift(ref), dr_shift(ref), dtheta_shift(ref)
        call ref_area ! gives refined area boundaries: iref_low/up, ix_low/up, periodic_low/up
        call intrpltn_coeff ! gives coefficients: c1, c2, c3, c4, ciref, c2ref, c3ref, c4ref
        do iprime = iref_low, iref_up
            do jprime = jref_low, jref_up
                ...end do
            end do
        do iprime = 0, ix_low-1
            do jprime = 1, N_thetax
                ...end do
            end do
        do iprime = ix_up+1, N_rx
            do jprime = 1, N_thetax
                ...end do
            end do
        do iprime = ix_low, ix_up
            do jprime = 1+periodic_up, jx_low-1
                ...end do
            end do
        do iprime = ix_low, ix_up
            do jprime = jx_up+1, N_thetax-periodic_low
                ...end do
            end do
        end do
    end do
end do
```


# Inner loop calculation

```
vmass = ( c1 * masssx(iprime, jprime) + c2 * masssx(iprime+1, jprime) +&
          &c3 * masssx(iprime, jprime+1)+ c4 * masssx(iprime+1, jprime+1))&
          & * inv_factor2
! calculate shifted values
rprime = rx(iprime)+dr_shift
ratio = r_corner/rprime
delta_theta = theta_corner-thetax(jprime)-dtheta_shift
cosine = cos(delta_theta)
denom_point = 1.+ratio*ratio-2.*ratio*cosine
denom_point = sqrt(denom_point)*denom_point*rprime*rprime
force_point = vmass/denom_point
force_r(i,j) = force_r(i,j)+force_point*(ratio-cosine)
force_theta(i,j) = force_theta(i,j)+force_point*sin(delta_theta)
```

or for the refined area...


```
vmass = ( c1ref * massxref(iprime, jprime) + c2ref * massxref(iprime+1, jprime) +&
          &c3ref * massx(iprime, jprime+1) + c4ref * massxref(iprime+1, jprime+1))&
          & * inv_factor2ref
! calculate shifted values
rprime = rxref(iprime)+dr_shiftref
ratio = r_corner/rprime
delta_theta = theta_corner-thetaxref(jprime)-dtheta_shiftrref
cosine = cos(delta_theta)
denom_point = 1.+ratio*ratio-2.*ratio*cosine
denom_point = sqrt(denom_point)*denom_point*rprime*rprime
force_point = vmass/denom_point
force_r(i,j) = force_r(i,j)+force_point*(ratio-cosine)
force_theta(i,j) = force_theta(i,j)+force_point*sin(delta_theta)
```

# Schematics

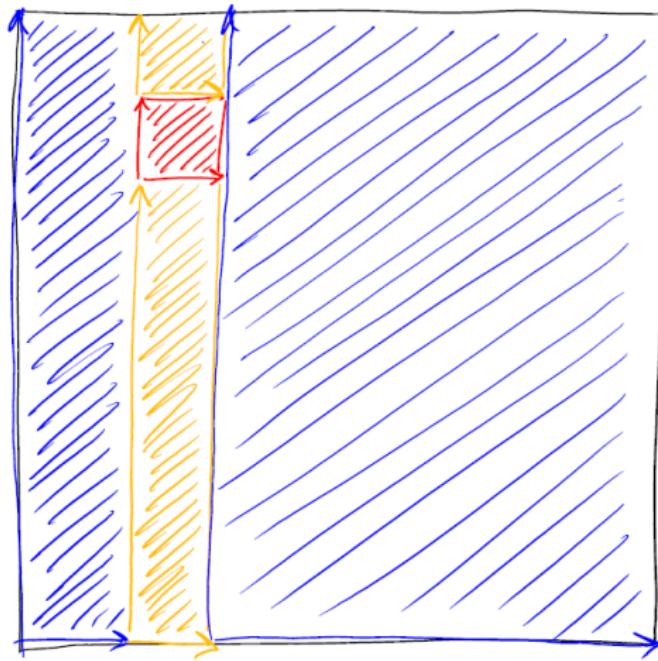


refined area  
areas left  
and right  
areas below  
and above


# Results - Level 3 with refinement

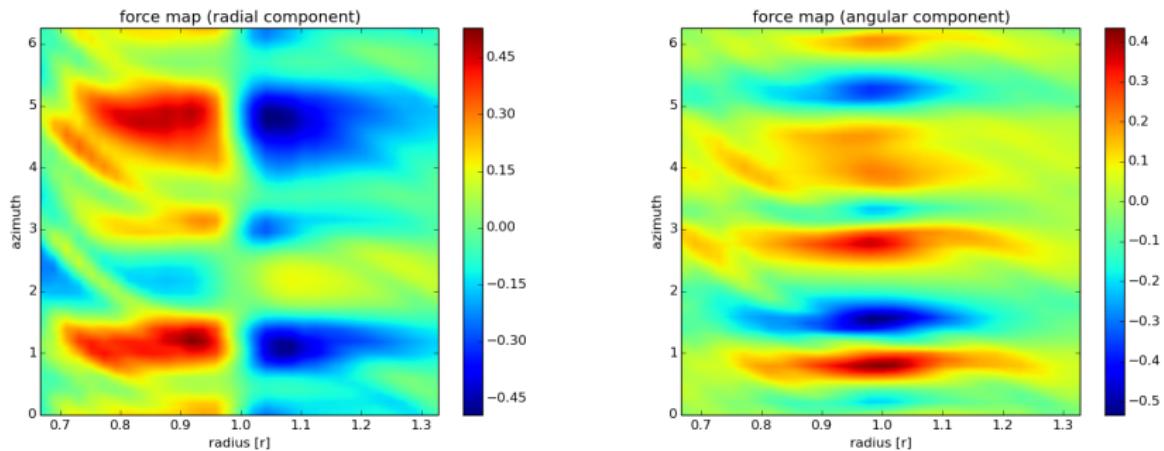





# Differences to Level 0 - radial component

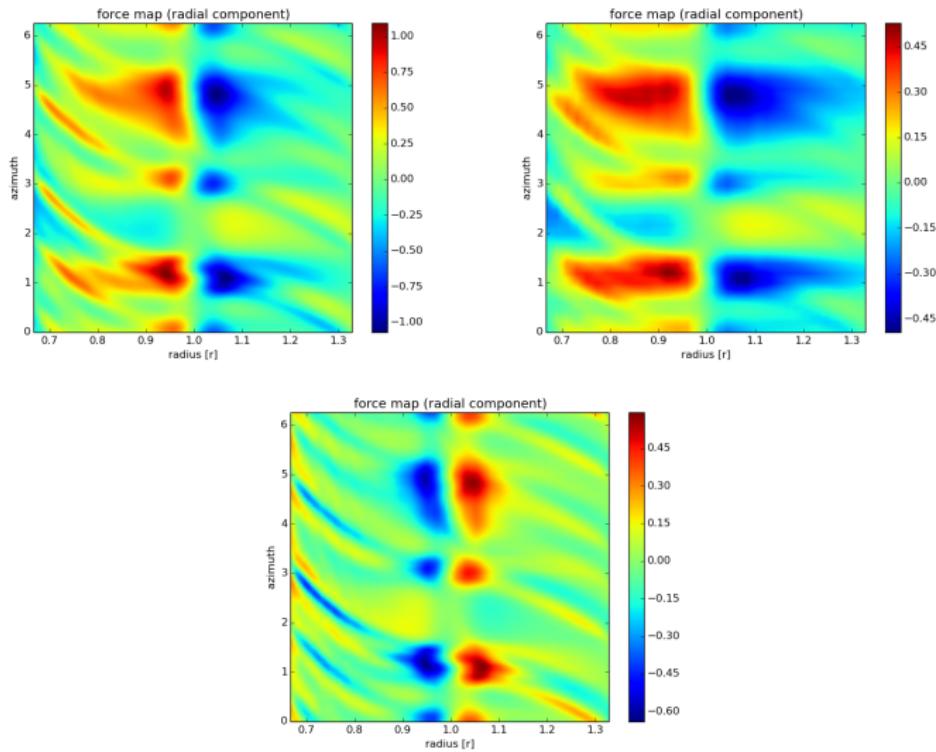


# Differences to Level 0 - angular component

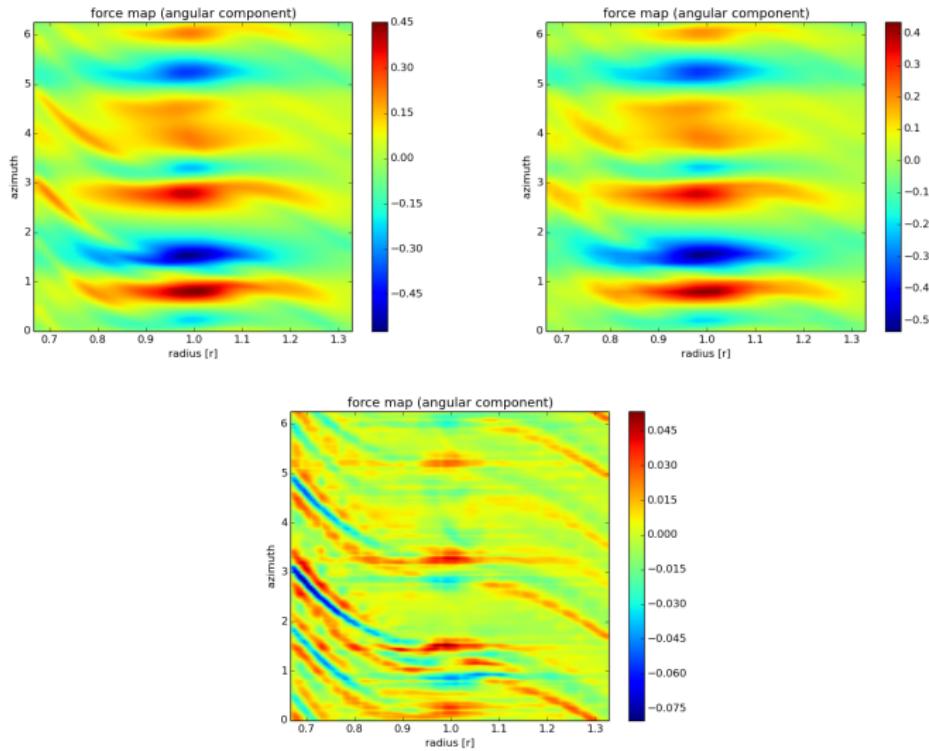


# Maximal difference in a row

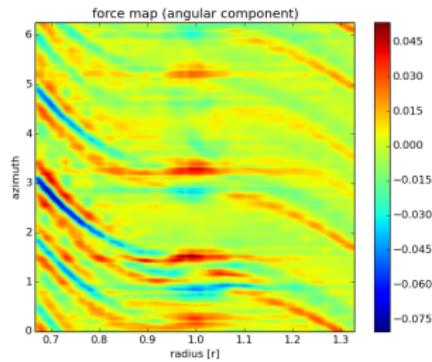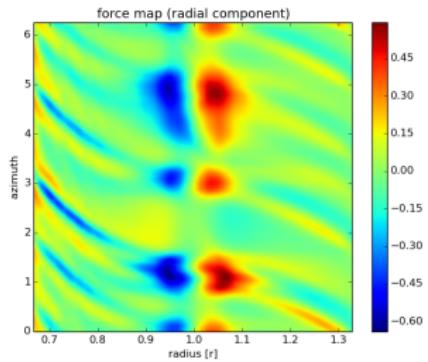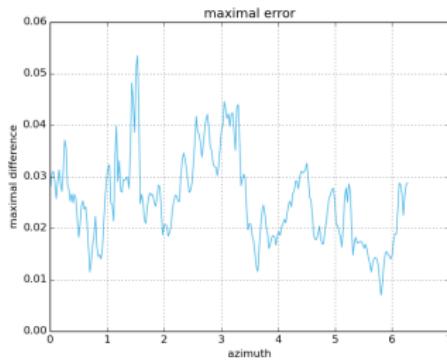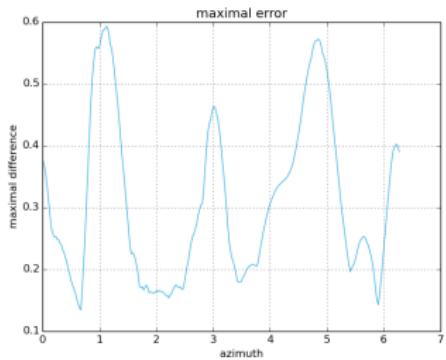

# Improvement by refinement - radial component

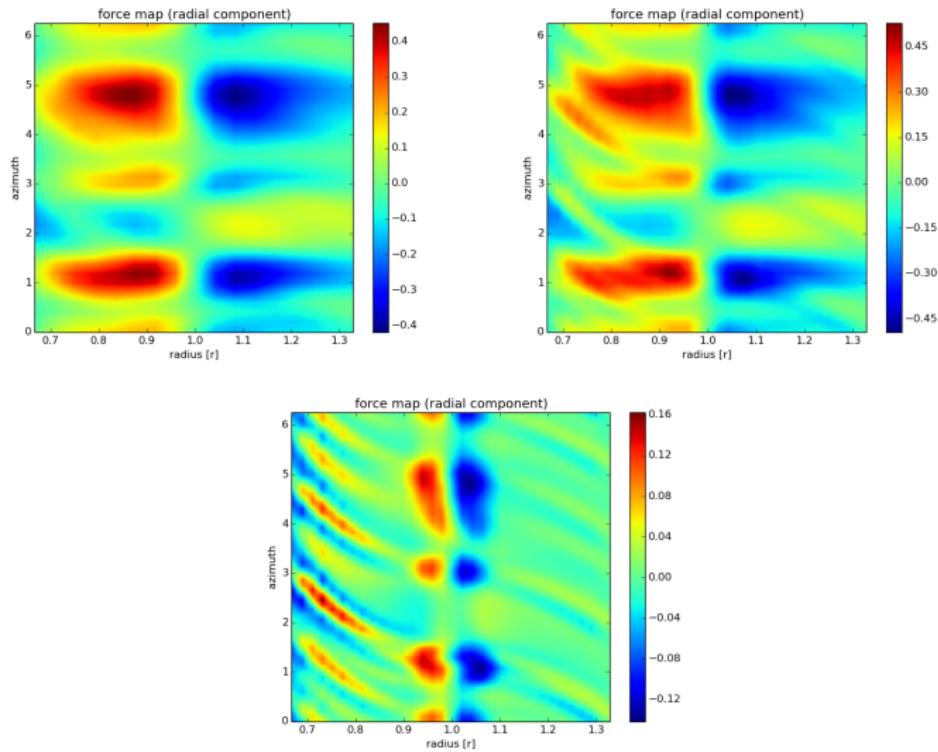


# Comparison to Level 2 - angular component

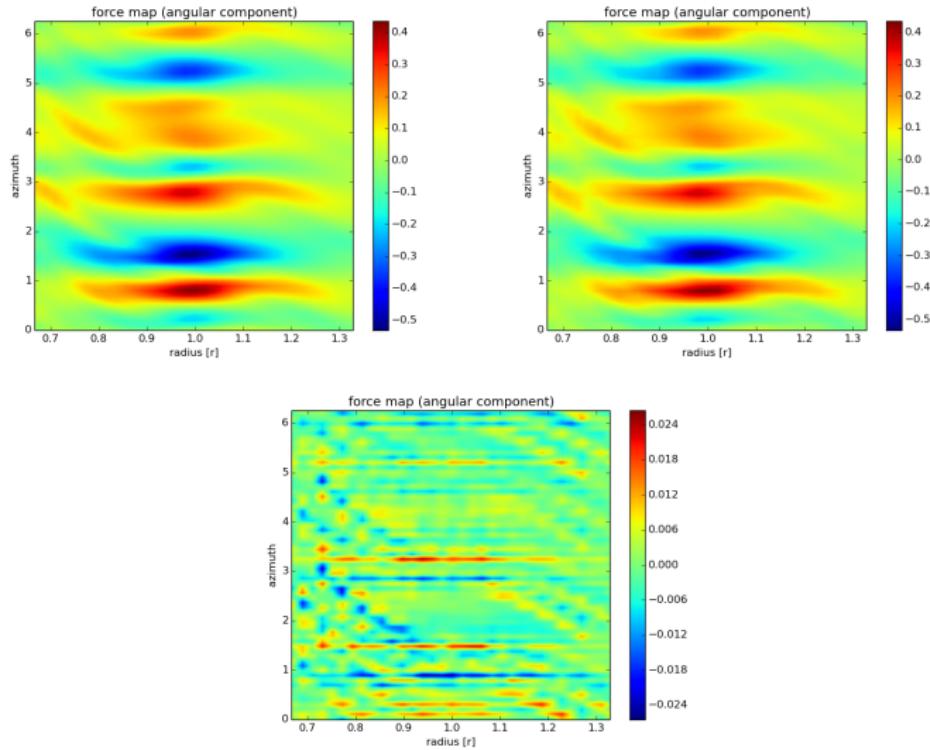

Thanks for listening!

Questions?

# Results for Level 1 with refinement

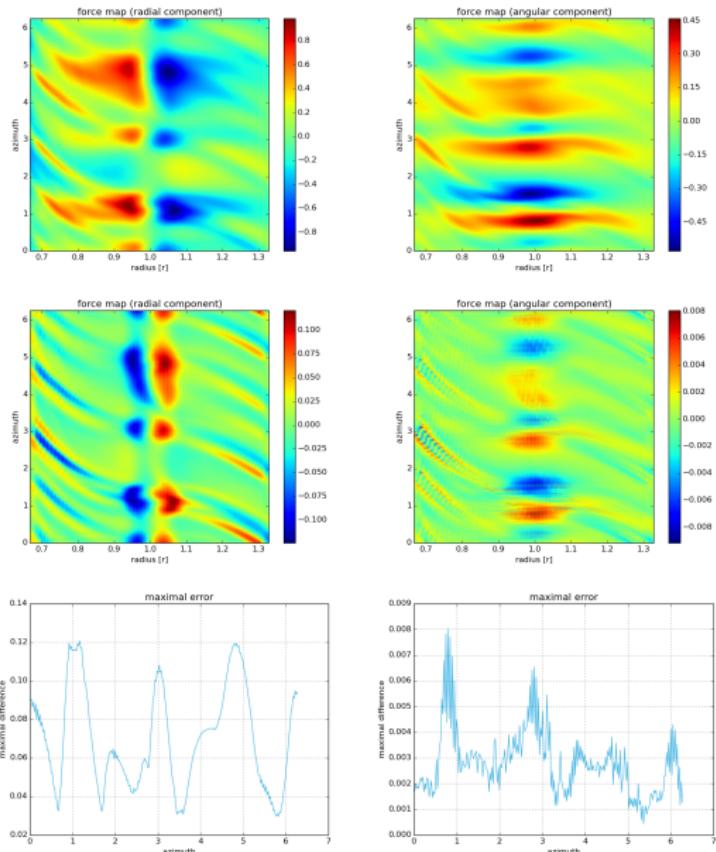

# InvSqrt

[http://en.wikipedia.org/wiki/Fast\\_inverse\\_square\\_root](http://en.wikipedia.org/wiki/Fast_inverse_square_root)

# Custom InvSqrt

```
REAL(8) FUNCTION InvSqrt (x)
IMPLICIT NONE
TYPE casting
    REAL(8) :: x
END TYPE casting
REAL(8), INTENT(in) :: x
! casting
TYPE(casting), TARGET :: pointerTo
! Encode data as an array of integers
INTEGER(8), DIMENSION(:), ALLOCATABLE :: enc
INTEGER(8) :: length
INTEGER(8) :: magic_number = 6910469410427058089
REAL(8) :: xhalf
xhalf = .5*x
! transfer to heap
pointerTo%x = x
! encode a memory section from a type to other
length = size(transfer(pointerTo, enc))
allocate(enc(length))
! encoded to integer
enc = transfer(pointerTo, enc) ! evil floating point bit level hacking
enc(1) = magic_number - rshift(enc(1),1) ! wtf! (for int64: 0x5fe6eb50c7b537a9 = 6910469410427058089)
! decode
pointerTo = transfer(enc, pointerTo)
! dealloc
deallocate(enc)

InvSqrt = pointerTo%x*(1.5 - xhalf*pointerTo%x*pointerTo%x)
END FUNCTION InvSqrt
```