



M2 — Coded-exposure pixel (per-pixel integration gating)

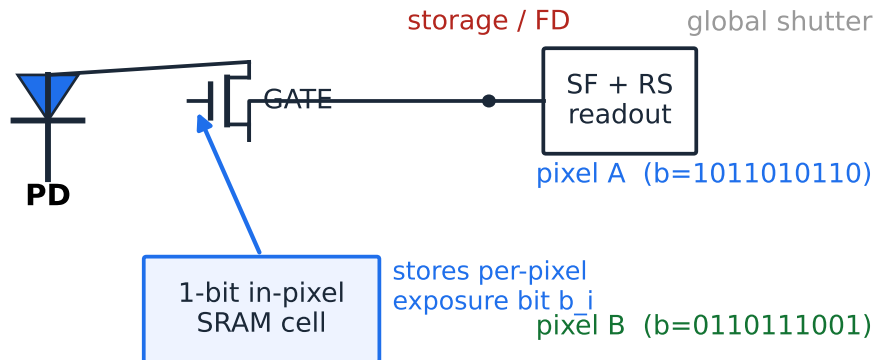

GATE conducts only while $b_i = 1$, so each pixel integrates for a keyed sub-window → a per-pixel effective-gain chip, independent of its neighbours.

Per-pixel coded exposure (timing)

exposure window

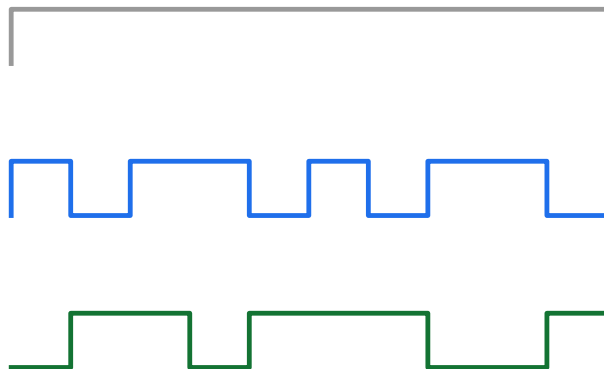

Each pixel's keyed on/off code sets its integration time → per-pixel gain.