



M2 — Coded-exposure pixel (per-pixel integration gating)

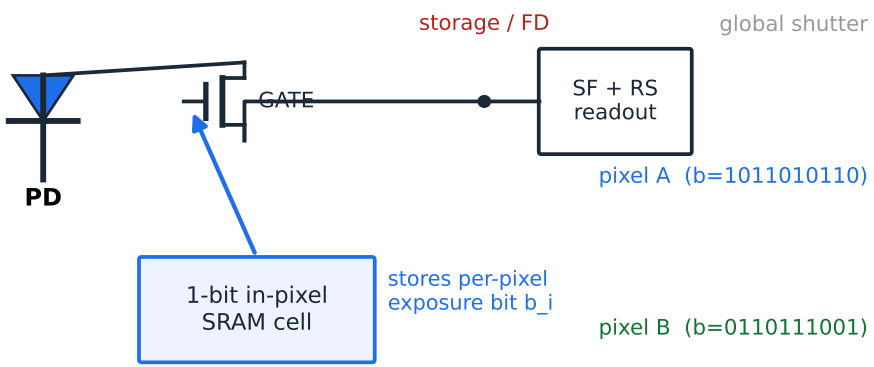

GATE conducts only while $b_i = 1 \rightarrow$ each pixel integrates for a keyed sub-window, imprinting a per-pixel effective-gain chip independent of its neighbours.

Per-pixel coded exposure (timing)

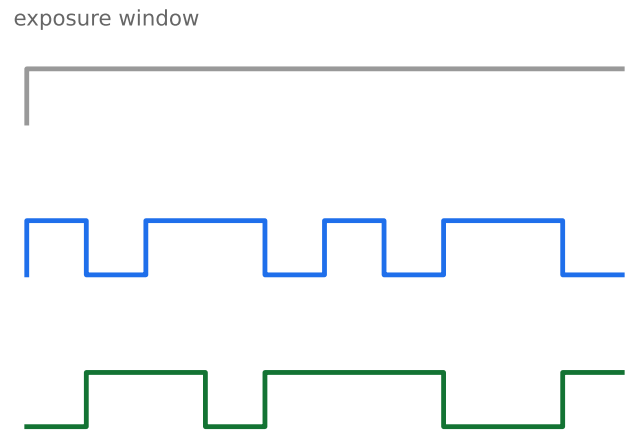

Each pixel's keyed on/off code sets its integration time $\rightarrow$ per-pixel gain.