


LAB: NAT/MASQUERADE

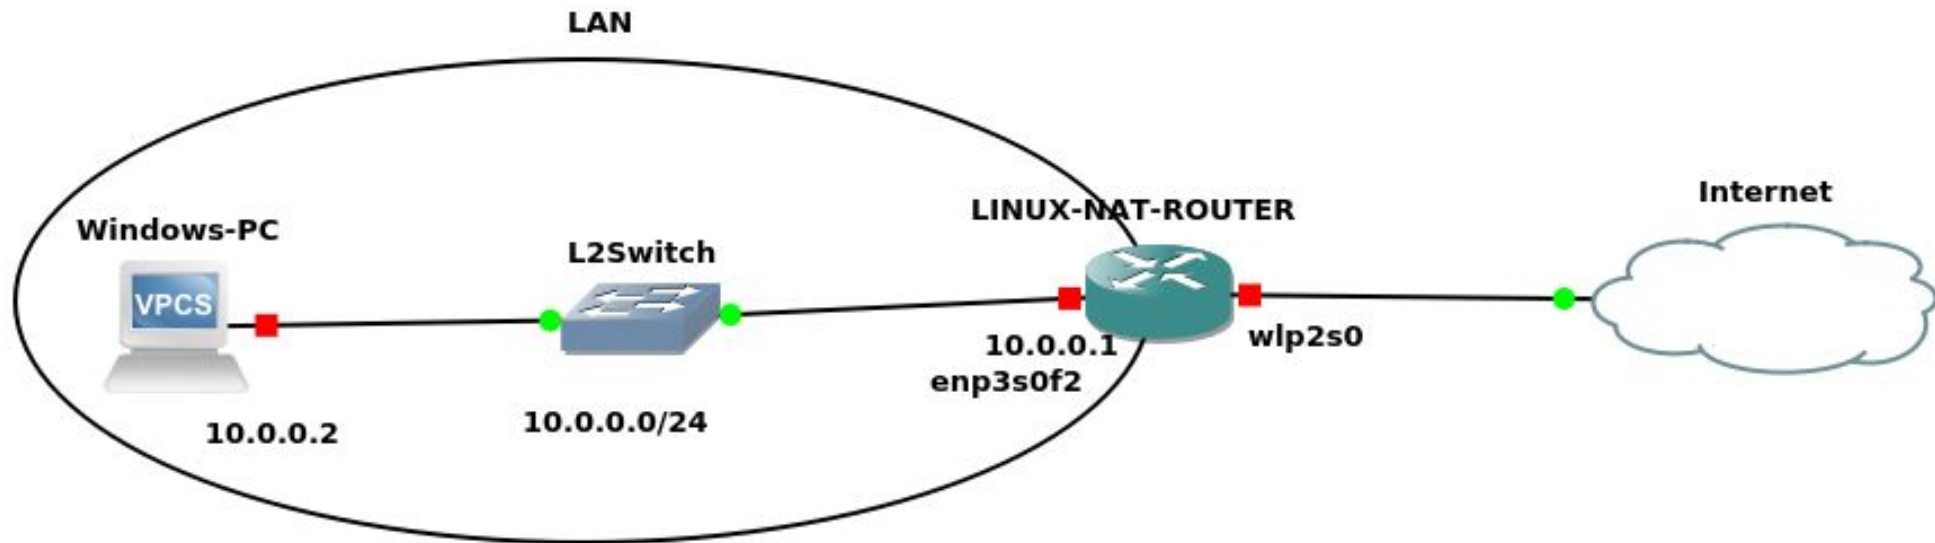

Configuration:

1. **Enable routing** on Linux NAT Router
2. Define iptables rules that match NAT traffic and use **-j SNAT --to-source IP** or **-j MASQUERADE** targets