

A system organized around the task

The product/system Figma file is the authoritative source for the new design components. This guide explains how foundations, actions, source identity, outcomes, navigation and player controls work together. The baseline preserves current terminology and disabled creation. The preferred result receipt is a proposal. Screens and prototypes use the same Signal Range fixture so a component change can be checked against a concrete task.

Foundations

Semantic color roles
Roboto working styles
Spacing + radii

Shared values support
repeatable hierarchy.

Task components

Source field + selector
Game card + attribution
Outcome + actions

Identity survives each state.

Journey patterns

Create → private result
Discover → play → return
Failure → recover

Test with Signal Range.

design system scope

Bind purpose to shared values

Primitive colors describe values; semantic aliases describe their purpose. Bind surface fills, text, borders and state accents to the appropriate shared role so a change remains coherent across instances. Keep play, source and Refold distinct, and pair status color with explicit words. The Figma roles map to the adaptive CSS names. Existing creator slate/cyan styling is documented as a baseline variation rather than silently described as unified.

Primitive value

#2AA7FF

Playfold / primitives / play

A concrete color value.

Semantic role

color/play

Alias → primitives/play

Purpose stays independent of the raw value.

Bound instance

Primary action fill

Code: var(--pf-play)

Preserve label and focus treatment when the color changes.

source-backed mapping

Make spacing and type do the work

Use the shared text roles and spacing scale to build hierarchy before adding decoration. The Figma working face is Roboto; production retains its system stack. Spacing values are 4, 8, 12, 16, 20, 24 and 32; component radii are 8, 12 and 16. Let text wrap and containers grow. Keep long explanations readable instead of shrinking text to preserve a fixed box.

24 px padding

Signal Range

Clear the signal targets.

This card uses 24 px padding, 16 px gaps and 12 px corner radius.

Spacing scale

4 / 8 / 12 / 16
20 / 24 / 32

Use shared values for sibling relationships, not manual positioning.

Text reflows


Labels stay visible.
Body text wraps.
Containers can grow.

Keep 44 px minimum targets as a proposed control requirement.

design layout specification

Actions expose state and consequence


An action’s label states what happens. Primary, secondary and disabled states preserve that meaning. The source field keeps a visible label and explanatory text; the selected-image control makes the chosen image explicit. The disabled baseline explains why creation is unavailable while keeping saved work discoverable. The prototype’s waiting state says Interpreting and offers Cancel remaining creation. Cancellation requested then waits for the in-flight outcome and disables repeated cancellation, while retaining source identity.

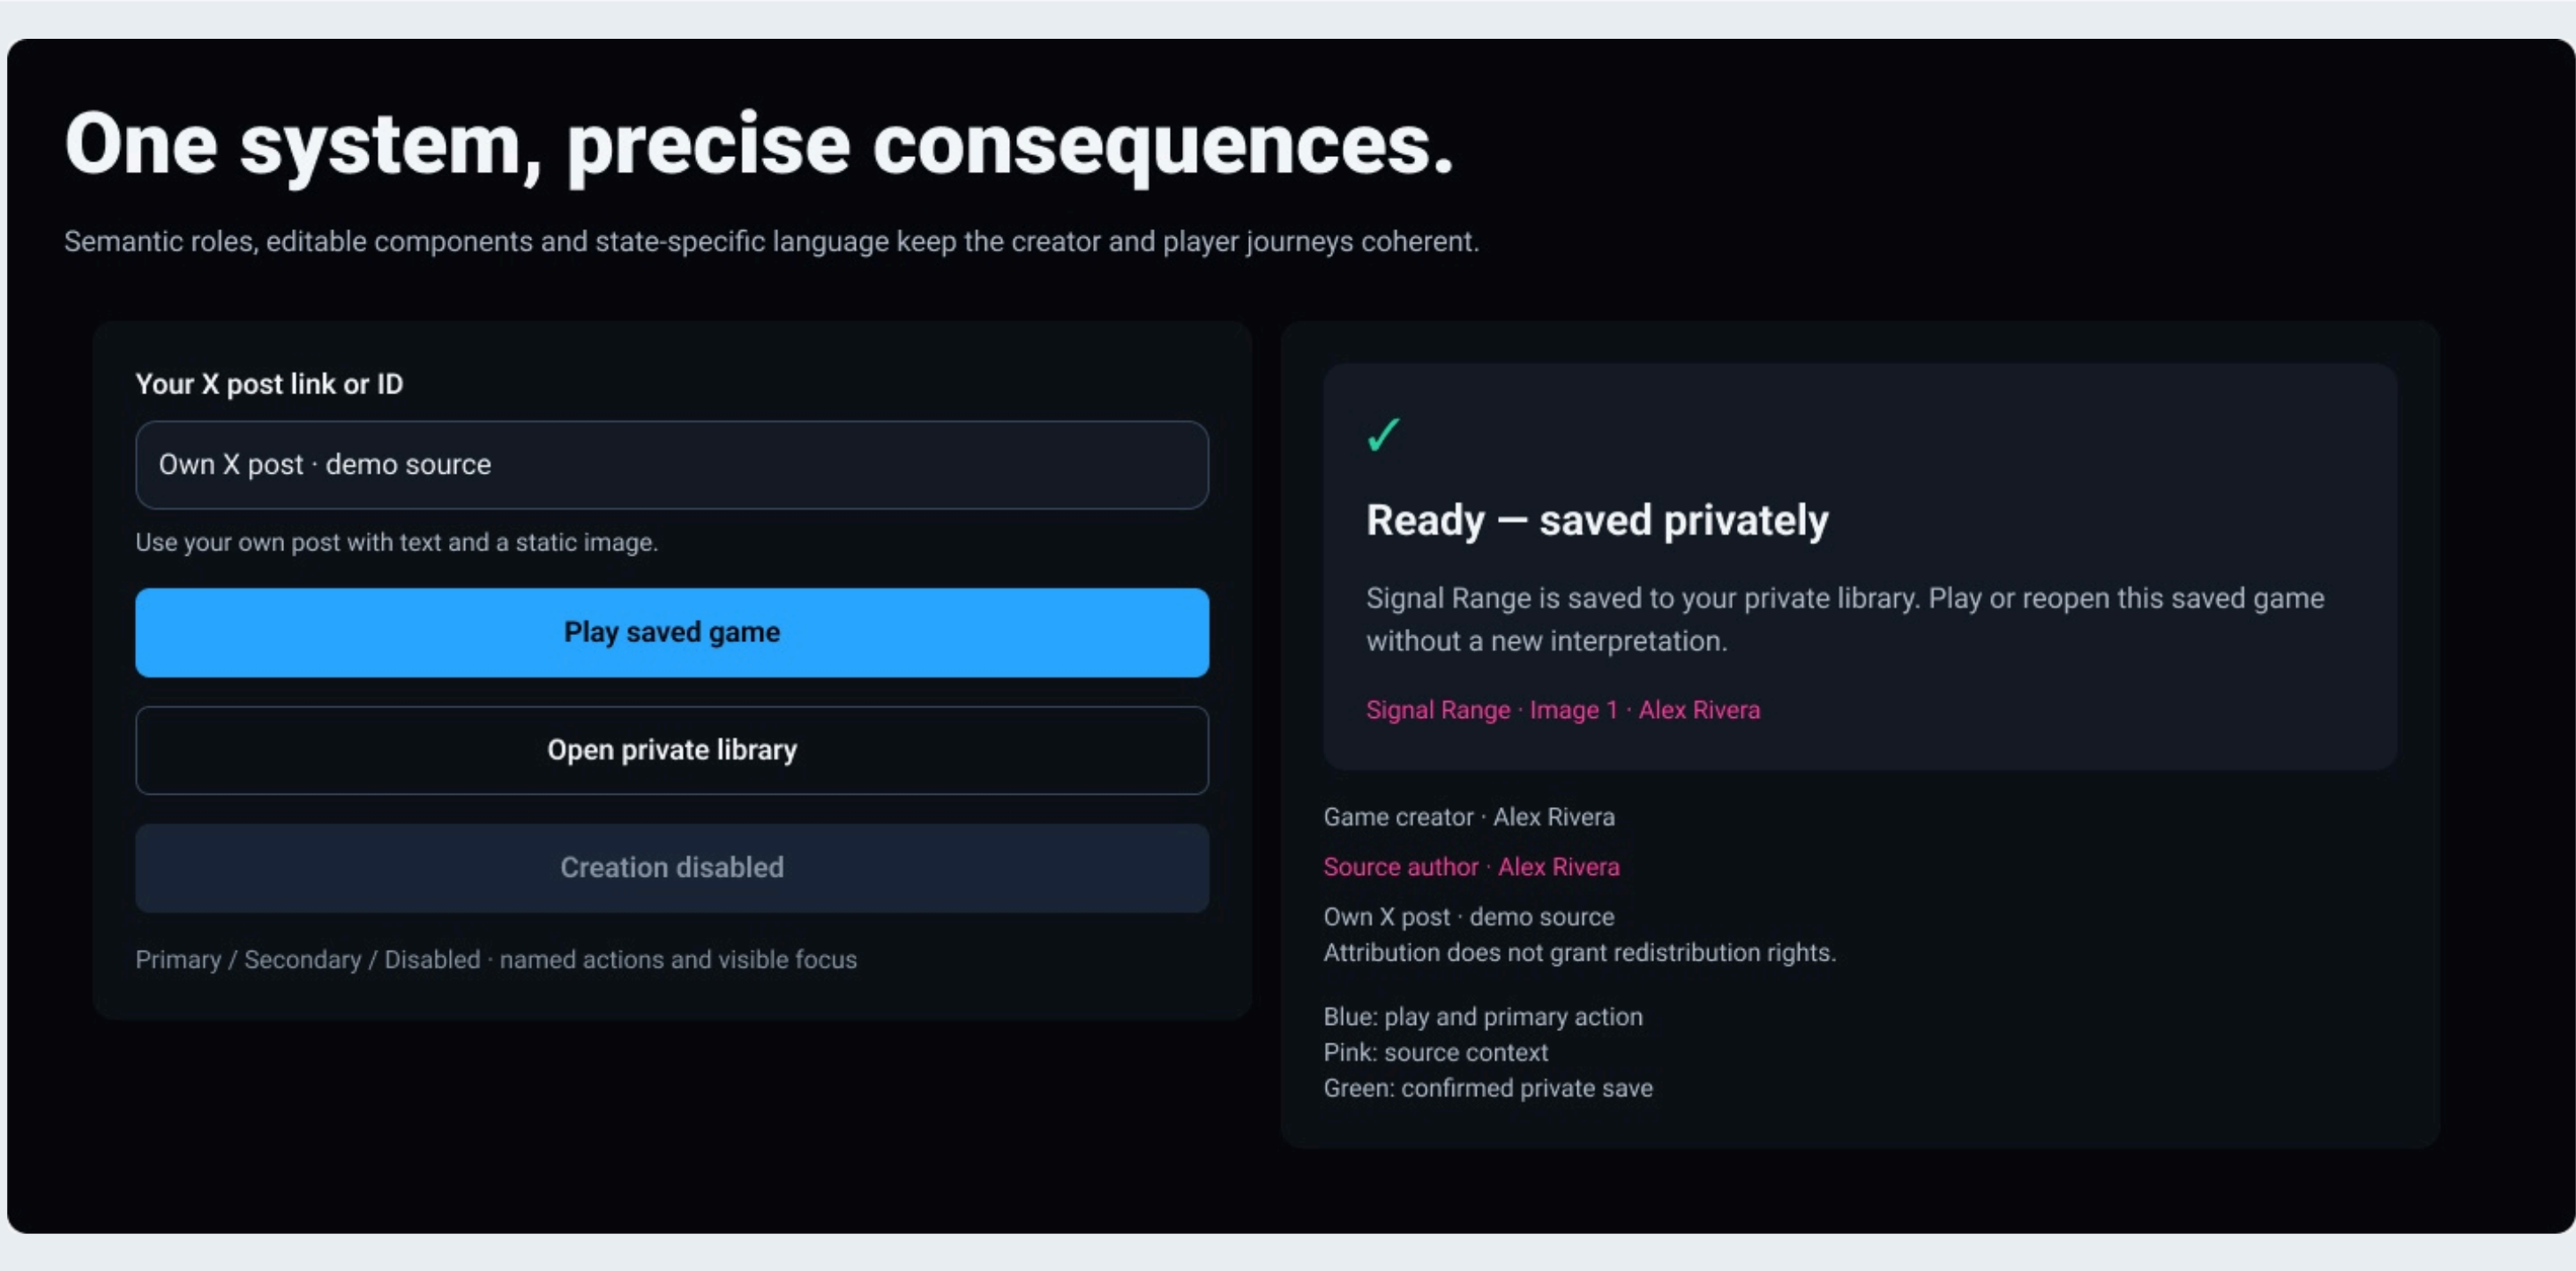

baseline controls and component specification

Attribution is structured content


A source card carries source identity, text and selected image. A game card carries game identity and a separate creator relationship. Alex Rivera fills both roles in this own-post scenario, but the labels remain explicit. Missing imagery and long names must keep the context understandable. Source attribution alone must never be used as a visibility or permission indicator.

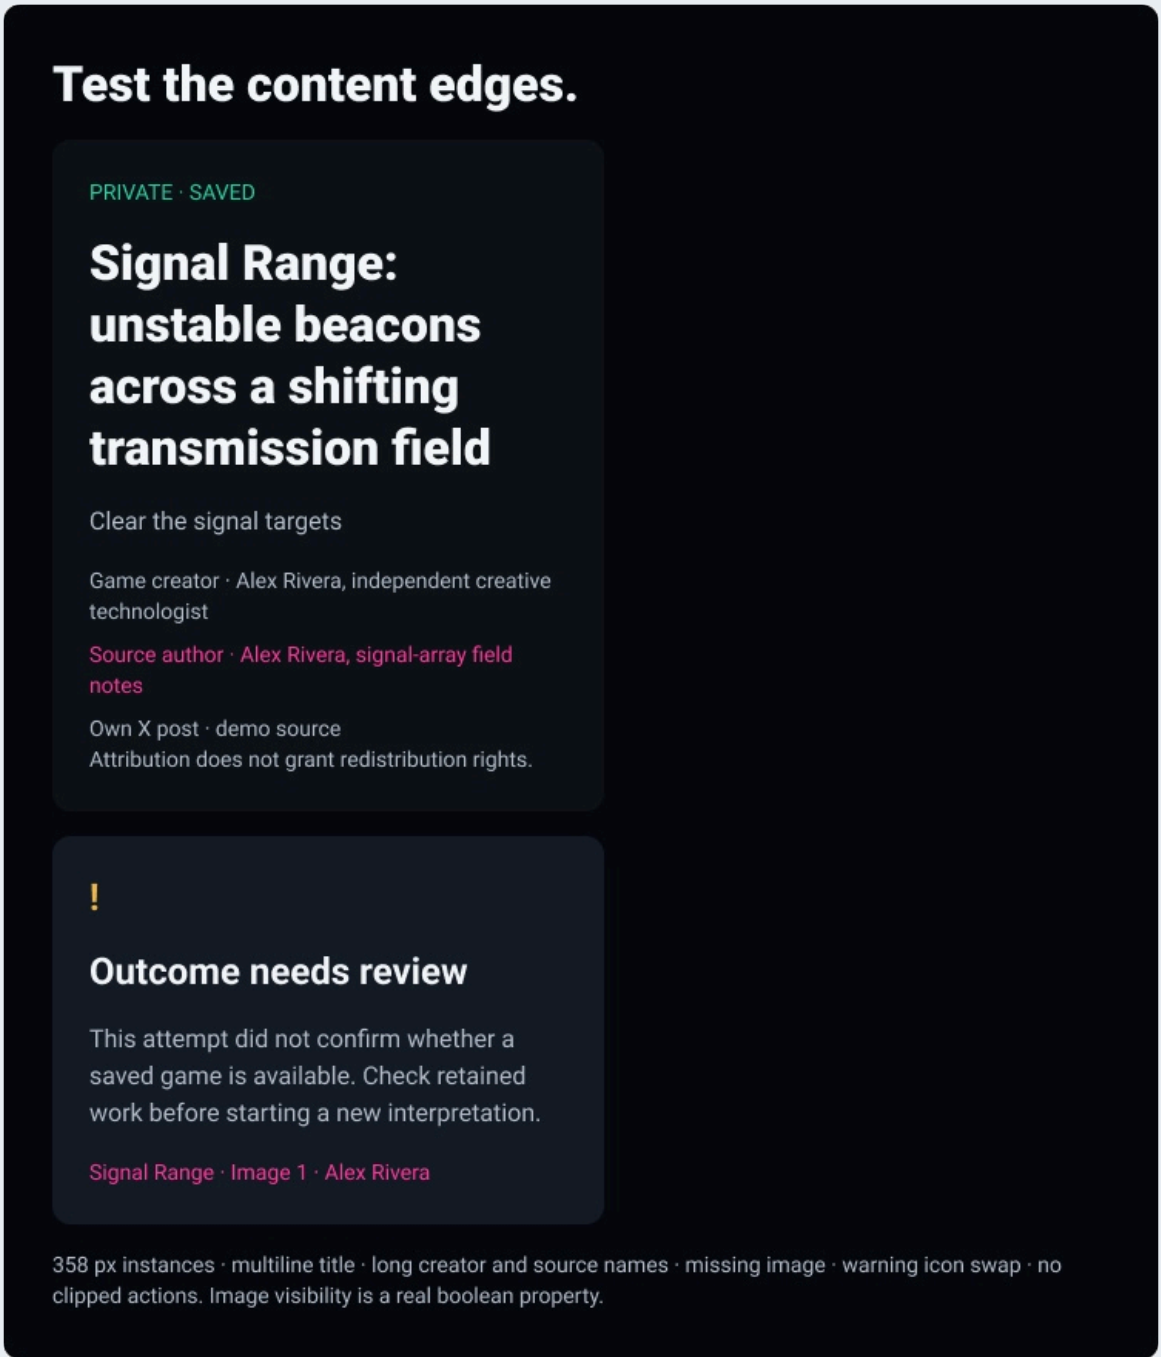

source-backed identity structure

Outcome states retain the work


The outcome family ties status, game identity, visibility consequence and next action together. Ready, failure, review-needed and cancellation-pending states require distinct content. The preferred inline receipt adds explicit Private status and a proposed Play saved game entry. Recovery remains tied to the saved attempt and does not create a new interpretation. An unavailable recovery explains that a valid saved specification may not exist.

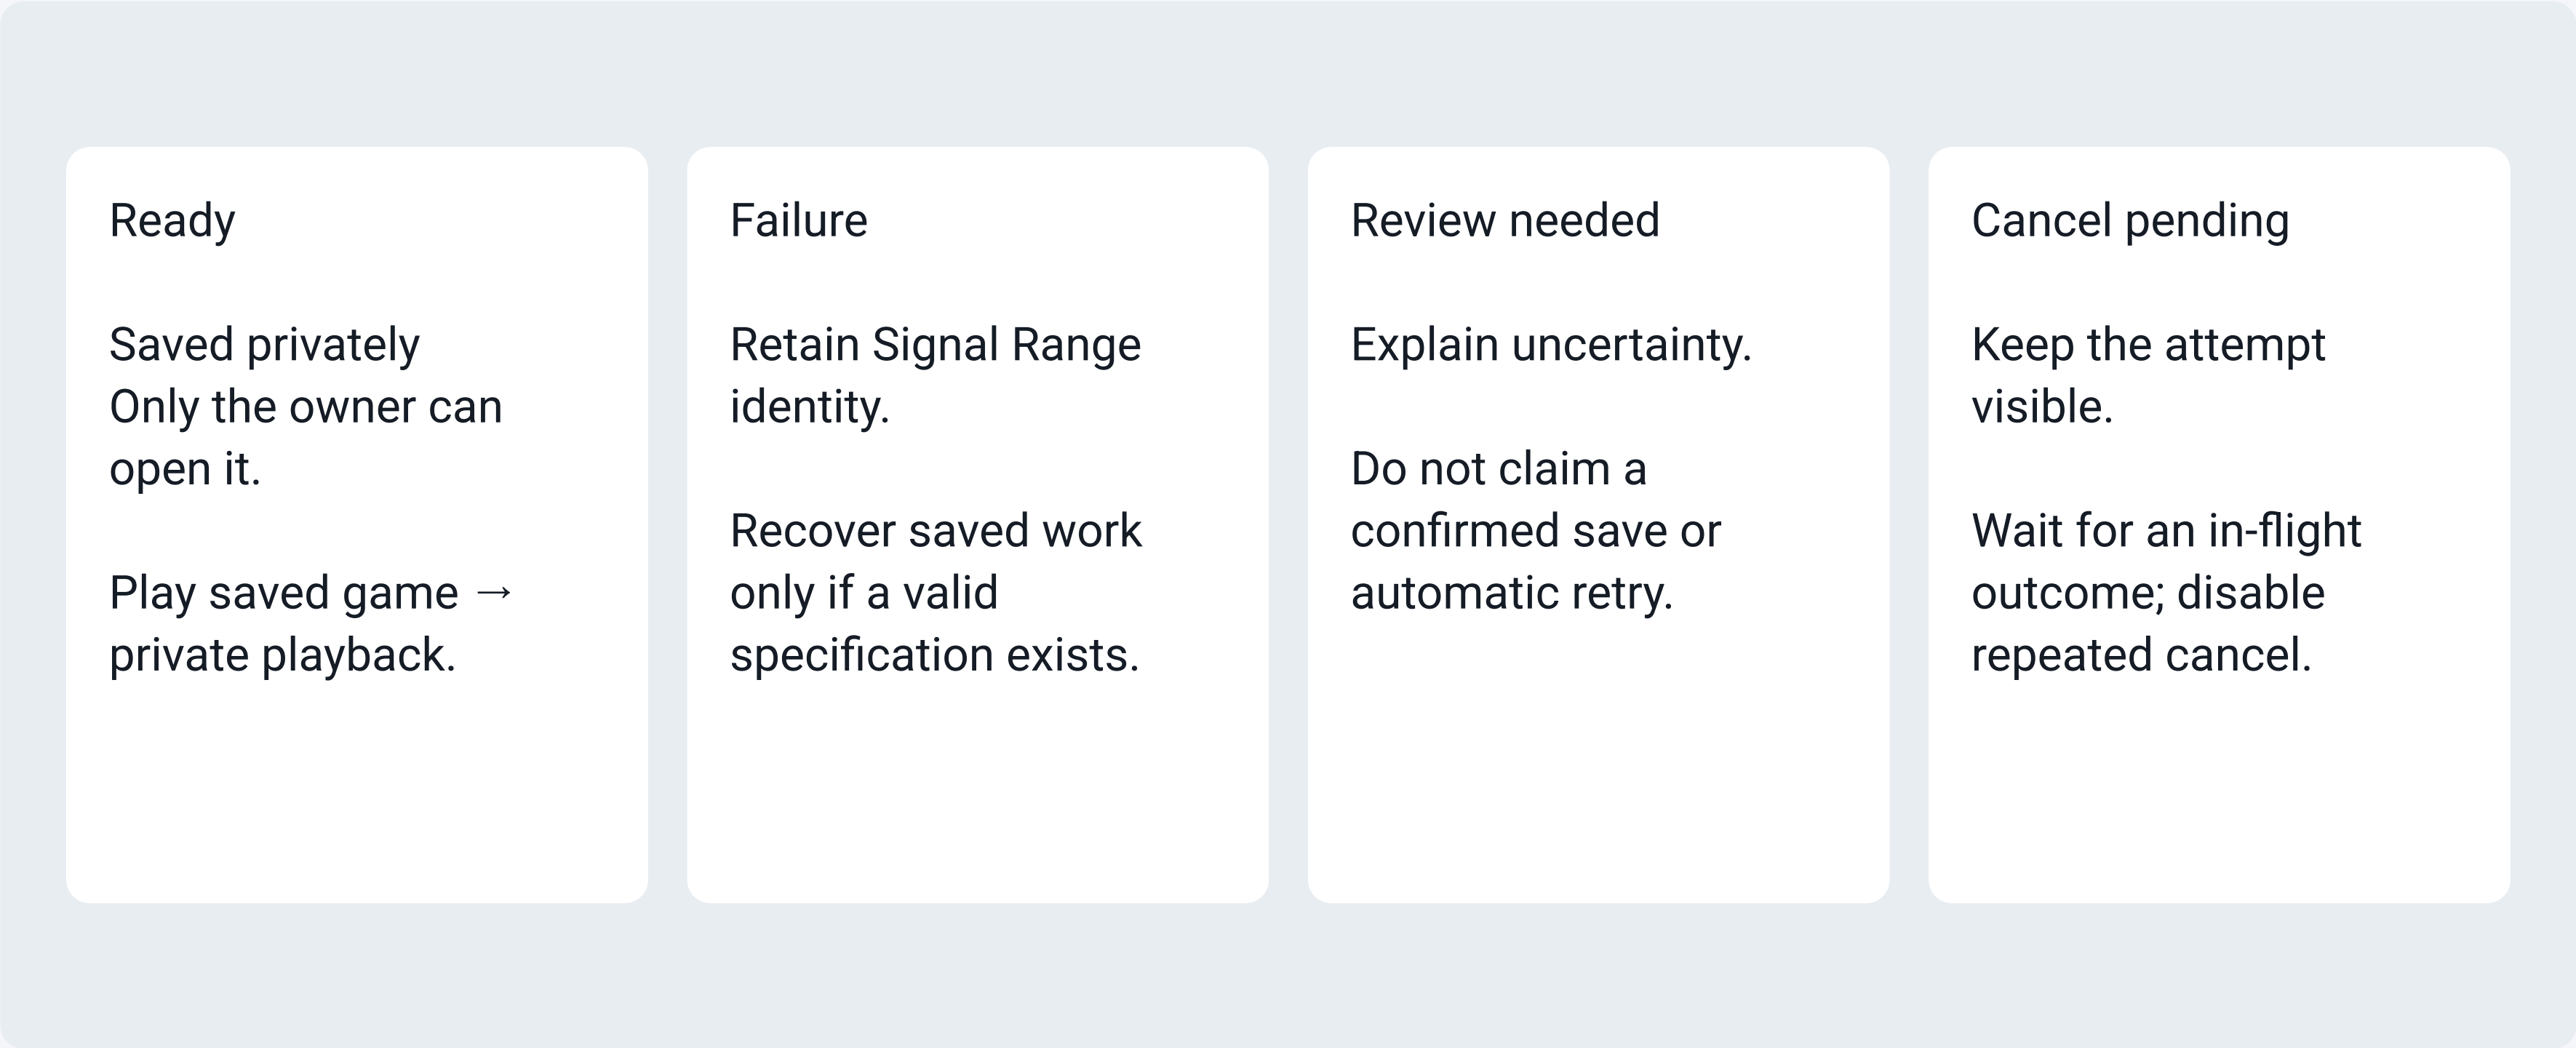

preferred proposal plus baseline state meanings

Cards and navigation make return predictable

Discovery cards introduce a game; private-history items reopen an owned result. Those actions have different visibility meanings. The inspected app shell uses bottom navigation on small screens and a rail on wide screens; its focused player omits that rail. The selected prototype uses simplified navigation to demonstrate this scenario’s entry and return paths. It does not claim complete production-shell parity. Preserve the selected game across return, outcome and edit/back transitions.

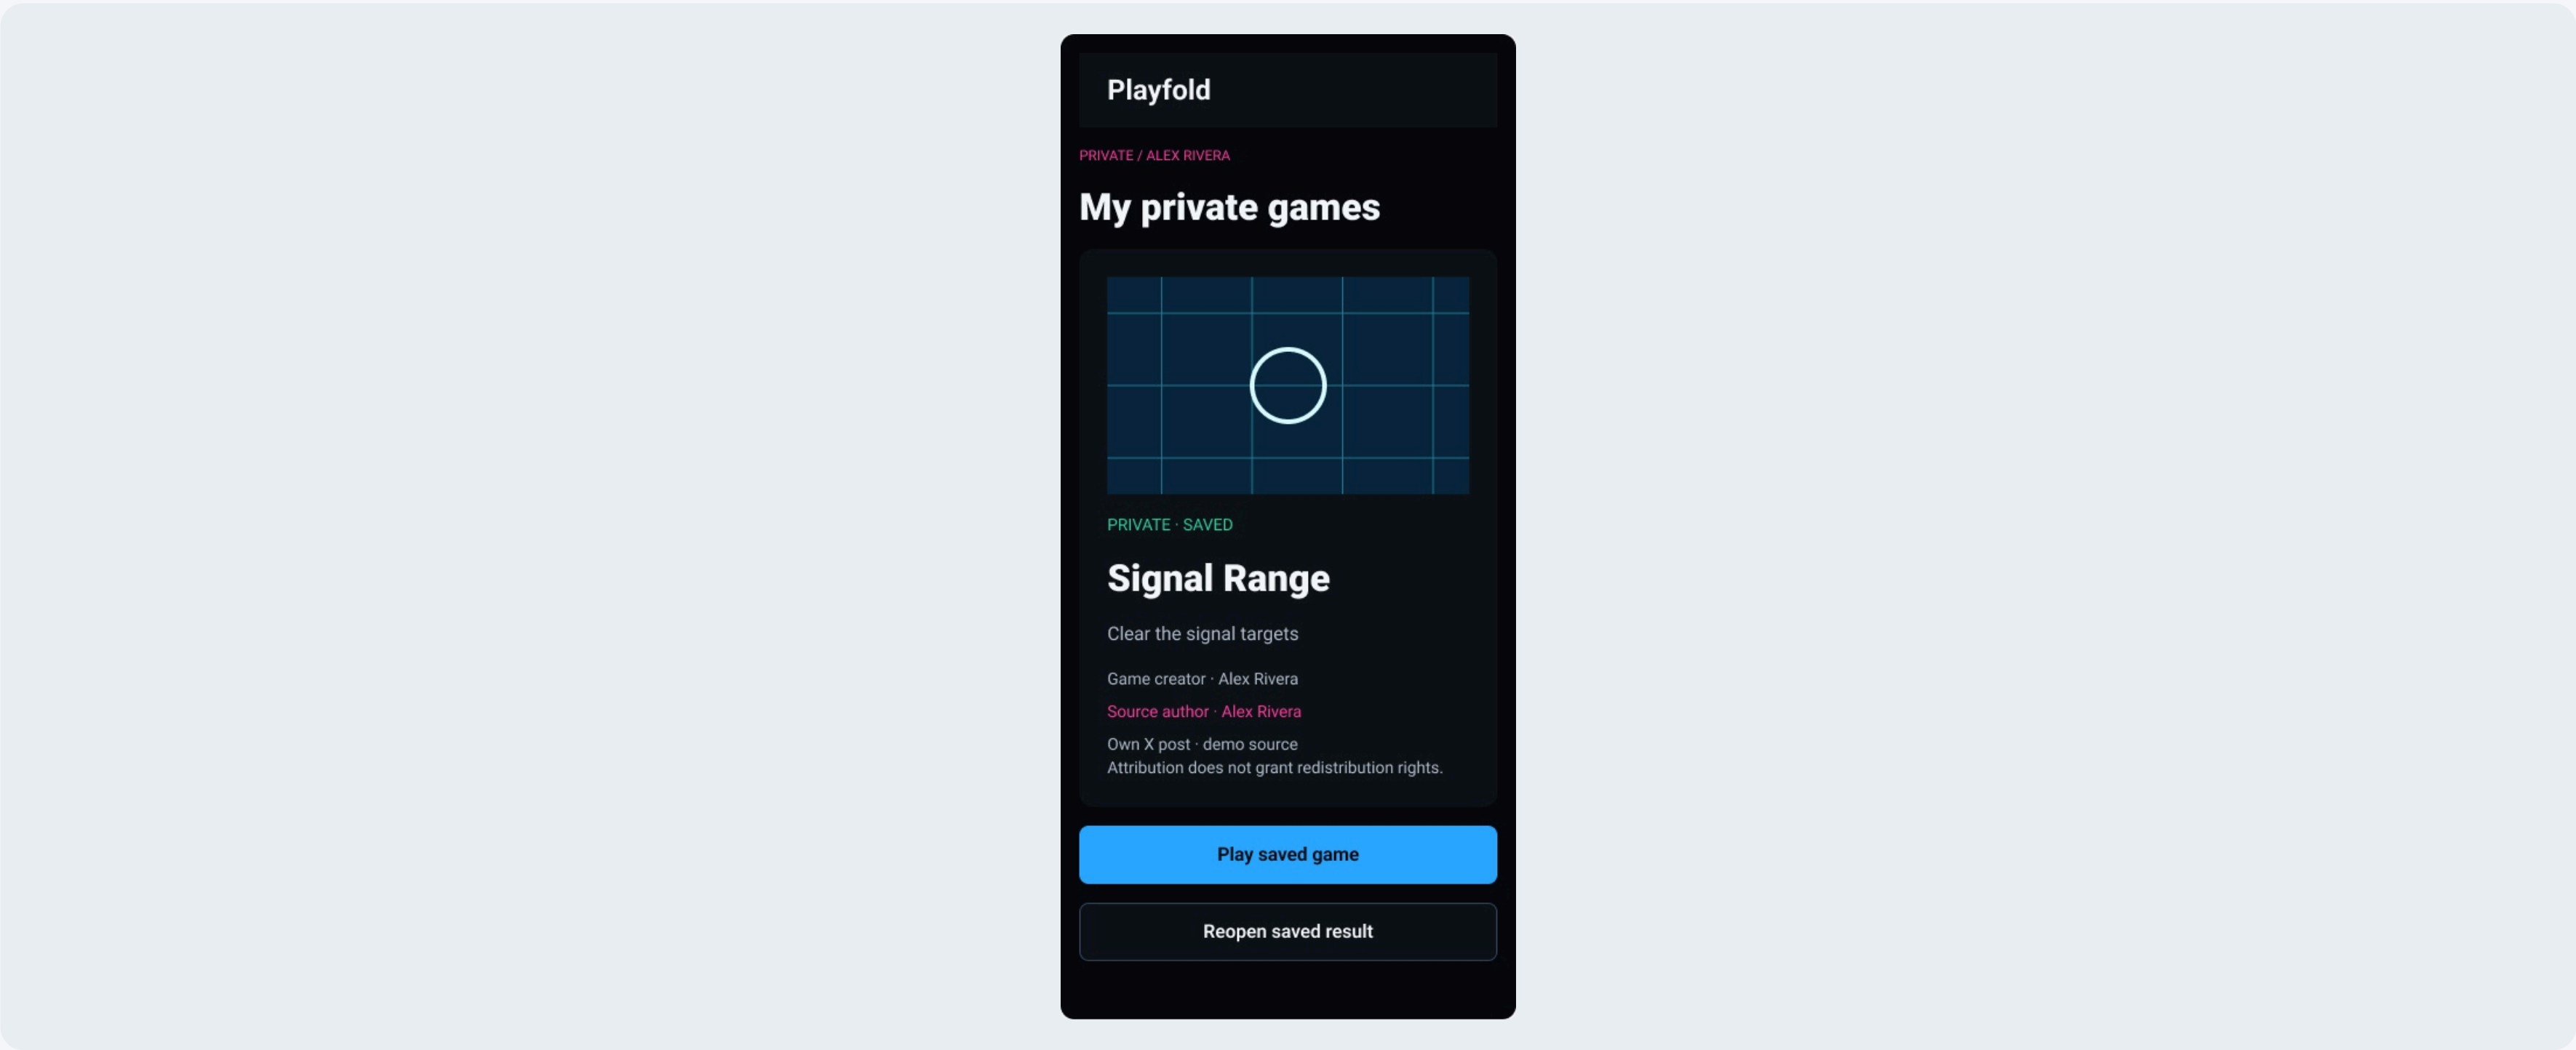

source-backed navigation pattern

Capabilities decide which controls appear

The surrounding interface must reflect the resolved game’s capabilities. Signal Range’s retained creator runtime supports movement, Fire and Restart, with its own objective and Hits HUD. The inspected app also supports fullscreen. The selected prototype demonstrates a subset: instructions, simulated play, outcomes and return, without fullscreen behavior or an operating WebGL engine. Keep Tune, Refold, challenge, score sharing, sound and haptic settings absent from this retained-runtime example.

Runtime supports

Move: WASD / arrows
Fire: Space / Enter
Touch movement + Fire
Restart

Platform: fullscreen

Game-specific HUD

Signal Range
Clear the signal targets

Targets 0 / 3
Hits 0 / 3

Illustrative fixture values.

Absent for this runtime


Tune / Refold
Challenge / score sharing
Sound / haptic settings

Capability checks determine
which controls appear.

source-backed capability constraints

Stress the component where it can fail

Test long content, narrow widths, missing images, disabled actions, focus and errors in the components that the journeys actually use. This guide recommends 44-pixel touch targets for new controls; some baseline controls are smaller. Preserve visible labels, a clear focus outline and status text in addition to color. A phone demonstration must show the actual scrolled action region. Specifications support evaluation; they are not a claim of completed accessibility certification.

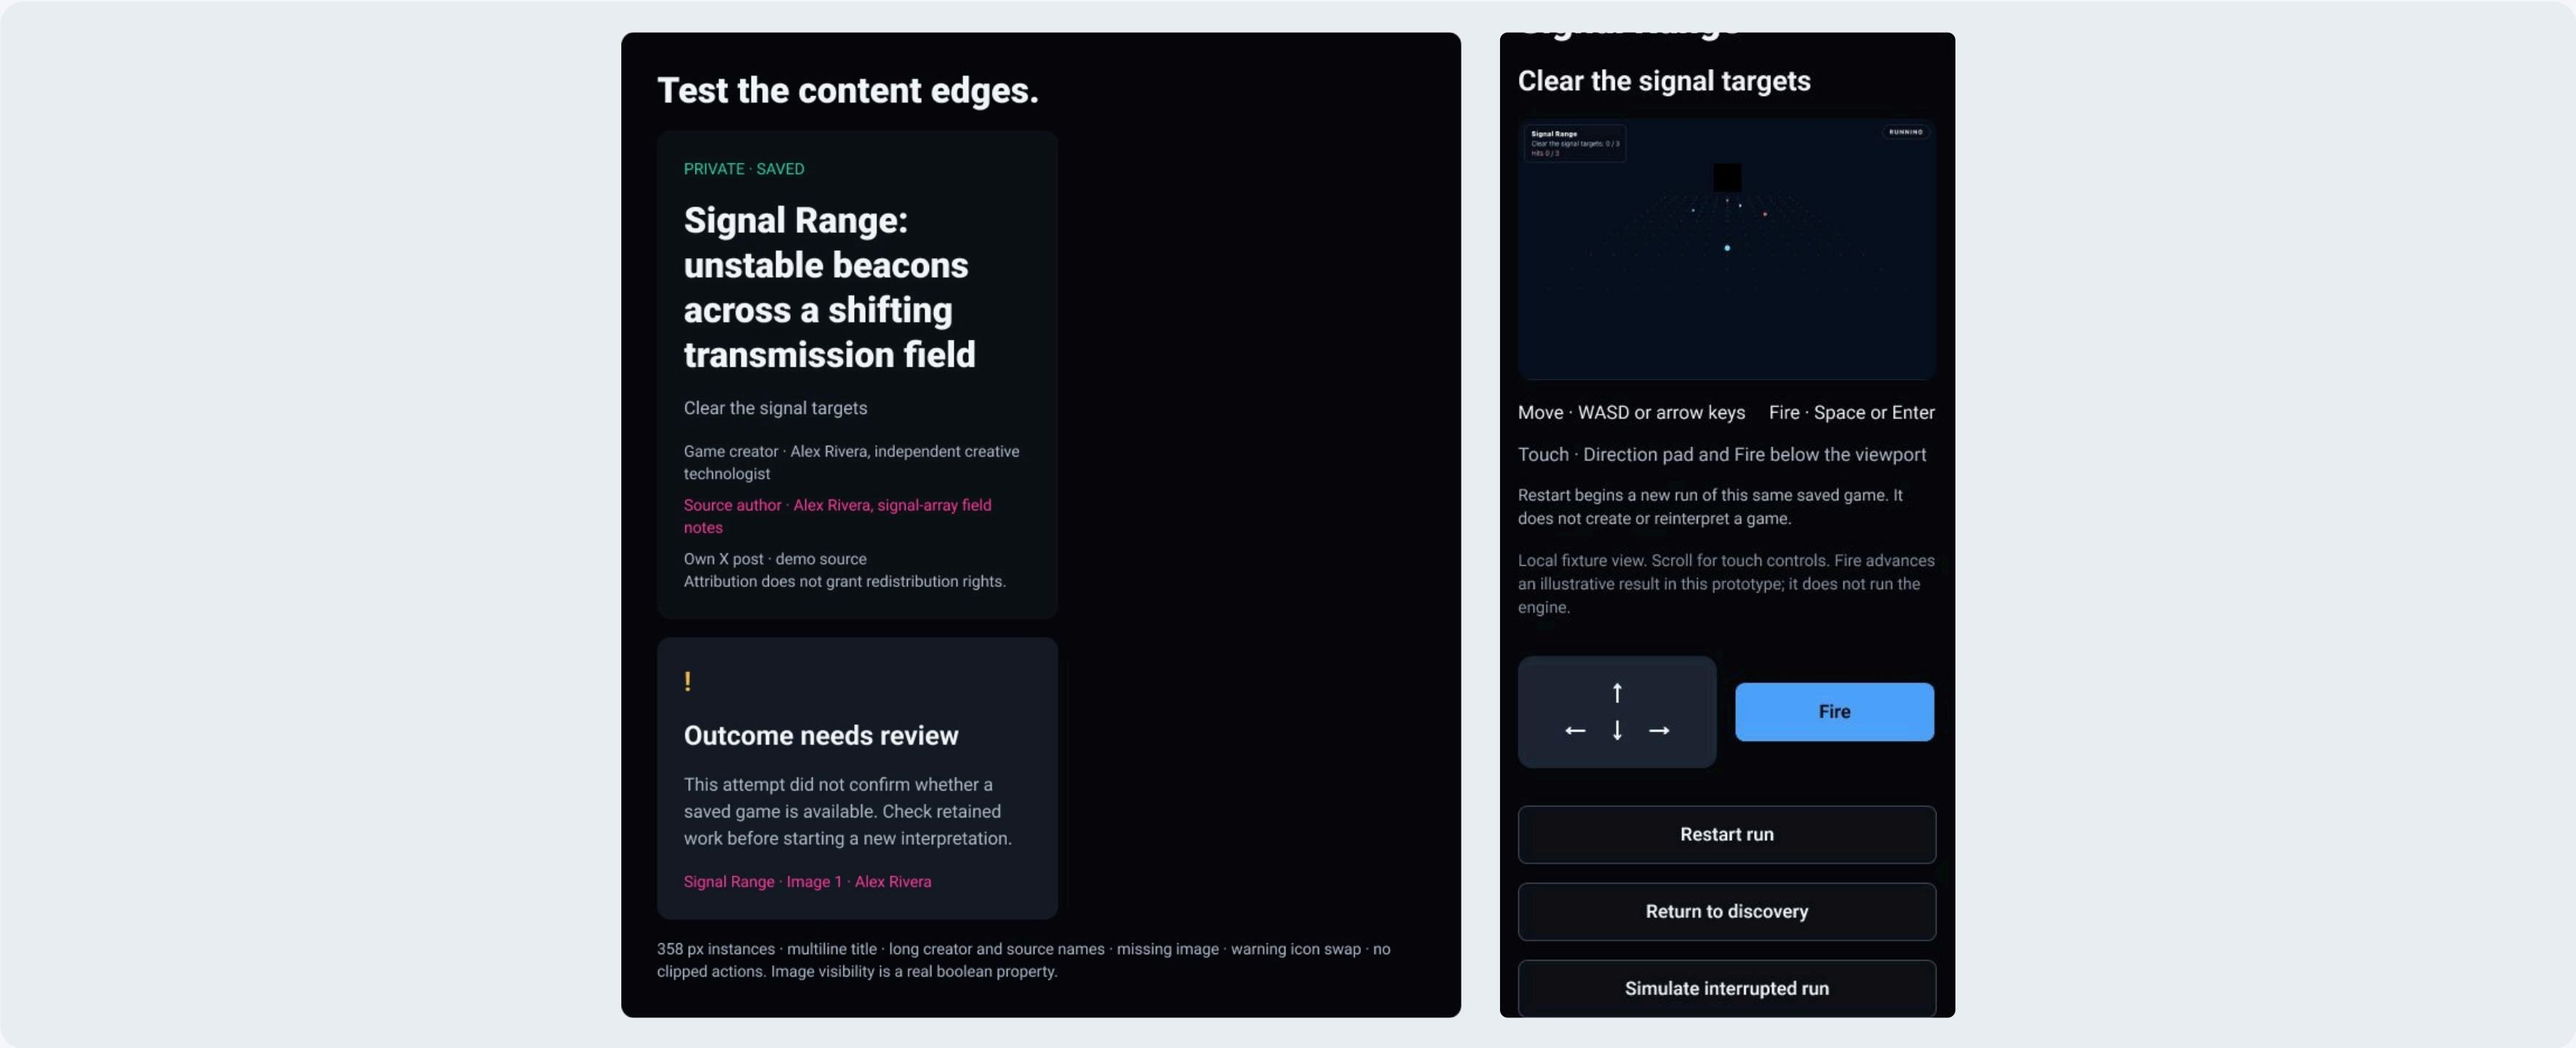

accessibility specification; not certification

Maintain the links between decisions and screens

Creator, player, recovery, exploration and mobile entries need independent checks. Preserve source selection and game identity through edit/back, cancellation, recovery and reset. Map each component to its current code source and each proposal to its decision. When a scenario changes, update the register and related journeys before exporting documentation. Native source links belong beside the relevant section. A successful prototype check does not approve implementation or change product access.

Creator + recovery

CreatorIntegrationClient.tsx

Input, waiting, cancellation and retained-work recovery.

Proposal: PF-DEC-01

Player + input

creator-v1 / Runtime.tsx

Movement, Fire, Restart and baseline fullscreen.

Test same-game return.

Foundations + cards

globals.css
GameCardV2.tsx

Color roles, font stack, card imagery and attribution.

Update shared instances.