

A system organized around the task

The product/system file connects Playfold’s existing public UI with the focused Signal Range exploration. Shared foundations, navigation, catalog cards, ranking patterns, source identity and outcome components make the relationships explicit. Baseline screens preserve the inspected product and disabled creation; the proposed private-result receipt remains separate.

Foundations

Semantic color roles
Roboto working styles
Spacing + radii

Shared values support
repeatable hierarchy.

Task components

Source field + selector
Game card + attribution
Outcome + actions

Identity survives each state.

Journey patterns

Create → private result
Discover → play → return
Failure → recover

Test with Signal Range.

design system scope

Bind purpose to shared values

Primitive colors describe values; semantic aliases describe their purpose. Bind surface fills, text, borders and state accents to the appropriate shared role so a change remains coherent across instances. Keep play, source and Refold distinct, and pair status color with explicit words. The Figma roles map to the adaptive CSS names. Existing creator slate/cyan styling is documented as a baseline variation rather than silently described as unified.

Primitive value

#2AA7FF

Playfold / primitives / play

A concrete color value.

Semantic role

color/play

Alias → primitives/play

Purpose stays independent of the raw value.

Bound instance

Primary action fill

Code: var(--pf-play)


Preserve label and focus treatment when the color changes.

source-backed mapping

Make spacing and type do the work

Use the shared text roles and spacing scale to build hierarchy before adding decoration. The Figma working face is Roboto; production retains its system stack. Spacing values are 4, 8, 12, 16, 20, 24 and 32; component radii are 8, 12 and 16. Let text wrap and containers grow. Keep long explanations readable instead of shrinking text to preserve a fixed box.

24 px padding

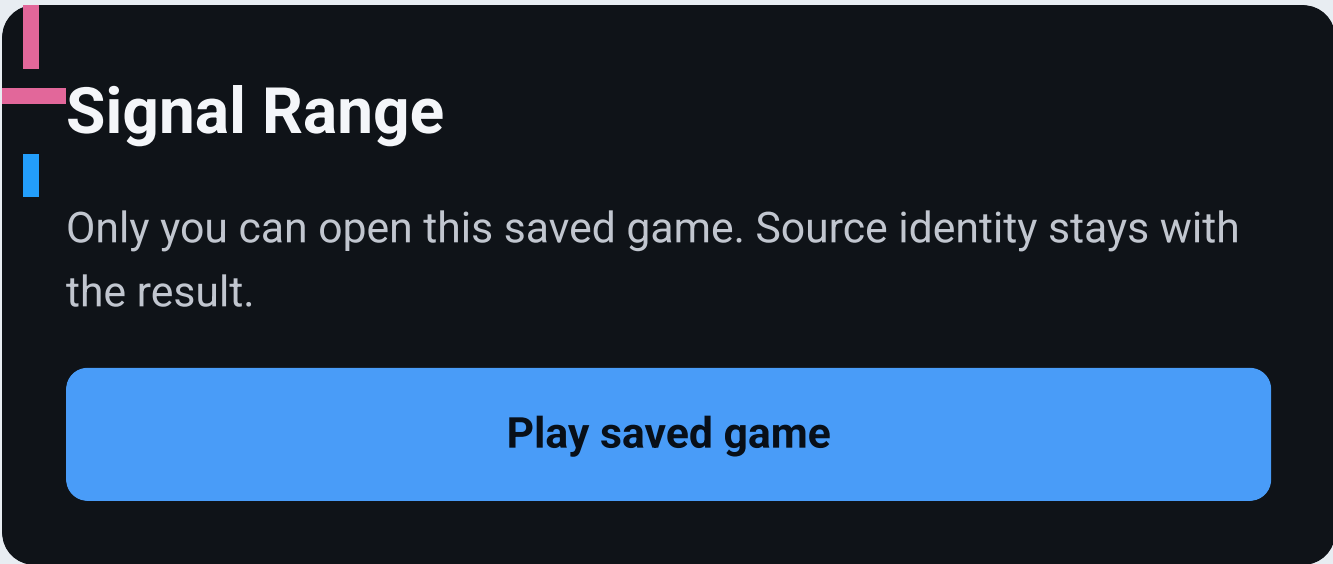

12 px card radius
8 px action radius

24 / 32 · Heading

16 / 24 · Body

Spacing: 4 · 8 · 12 · 16 · 20 · 24 · 32

16 px between content blocks

The colored marks measure real padding.
Text wraps inside the padded content area.

design layout specification

Actions expose state and consequence

Hierarchy and interaction state are separate Action properties. Primary and Secondary both support focus and disabled treatment; all used variants keep a 50-pixel outer height. Label overrides retain the action’s meaning. The source field keeps its label and helper text visible, while selected-image controls identify Image 1 explicitly.

PRIMARY

Default

Play saved game

Hover

Play saved game

Focus

Play saved game

Disabled

Play saved game

SECONDARY

Default

Play saved game

Focus

Play saved game

Disabled

Play saved game

SOURCE FIELD

Your X post link or ID

Selected own post · Image 1

Use your own post with a static image.
The label stays visible after entry.

Hierarchy = Primary / Secondary
State = Default / Hover / Disabled / Focus
Label = stable text override

Every shown Action keeps a 50 px box.
The focus ring does not change layout.


baseline controls and component specification

PLAYFOLD / Design system / 04 · Editable page

[Inspect Action properties →](#)

Attribution is structured content

A source card carries source identity, text and selected image. A game card carries game identity and a separate creator relationship. Alex Rivera fills both roles in this own-post scenario, but the labels remain explicit. Missing imagery and long names must keep the context understandable. Source attribution alone must never be used as a visibility or permission indicator.

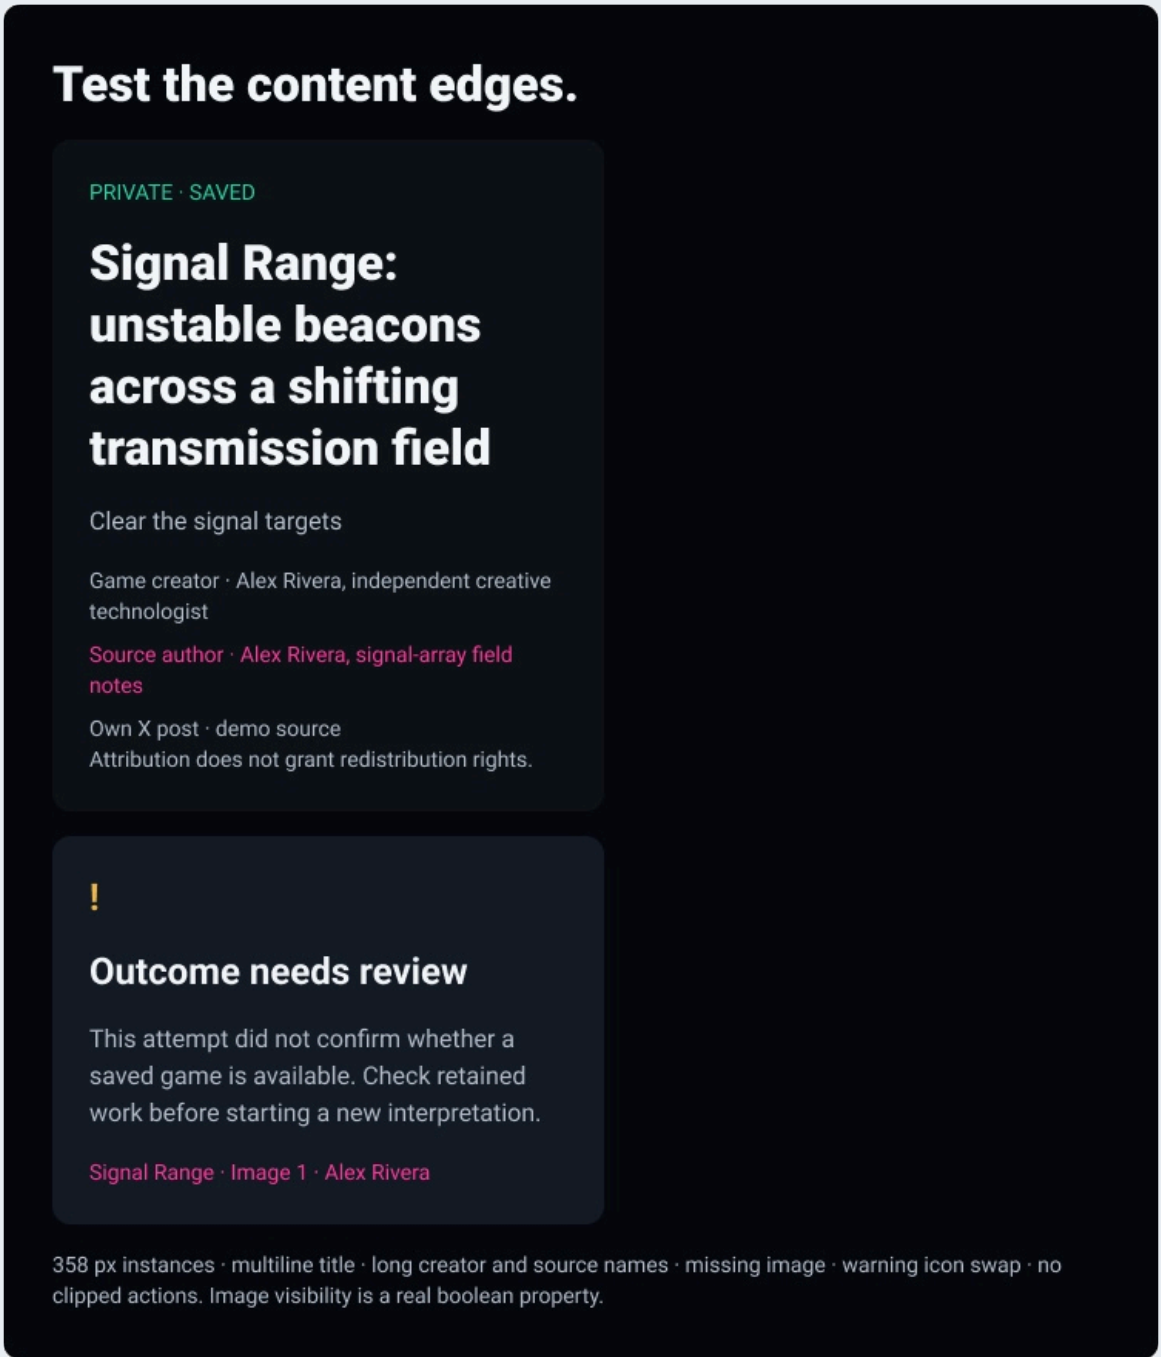

source-backed identity structure

Outcome states retain the work

The outcome component retains status, explanation and the same game/source identity. Ready, creation failure, cancellation pending and unavailable recovery need different content. These examples use the actual prototype copy. Recovery may use retained work without a new interpretation; absence of a valid specification needs an explicit fallback.



Ready — saved privately

Signal Range is saved to your private library. Play or reopen this saved game without a new interpretation.

Signal Range · Image 1 · Alex Rivera



Creation failed

The attempt did not confirm a saved result. If a retained specification exists, recover that work without a new interpretation. Check the outcome before starting again.

Signal Range · Image 1 · Alex Rivera



Cancellation requested

Waiting for the in-flight outcome. Cancel remaining creation stops later work; it does not guarantee that the current request or save can be undone.

Signal Range · Image 1 · Alex Rivera



No retained specification


There is no retained work to rebuild for this attempt. Return to the source or view your existing private games. New creation remains subject to availability.

Signal Range · Image 1 · Alex Rivera

preferred proposal plus baseline state meanings

Cards and navigation make return predictable

Public catalog cards, saved bookmarks and creator-private history carry different visibility meanings. The native desktop rail and mobile navigation now represent the principal product routes. Focused play omits the rail and keeps its own return control. The public AETHERSEED route stays separate from Signal Range’s private-result comparison.

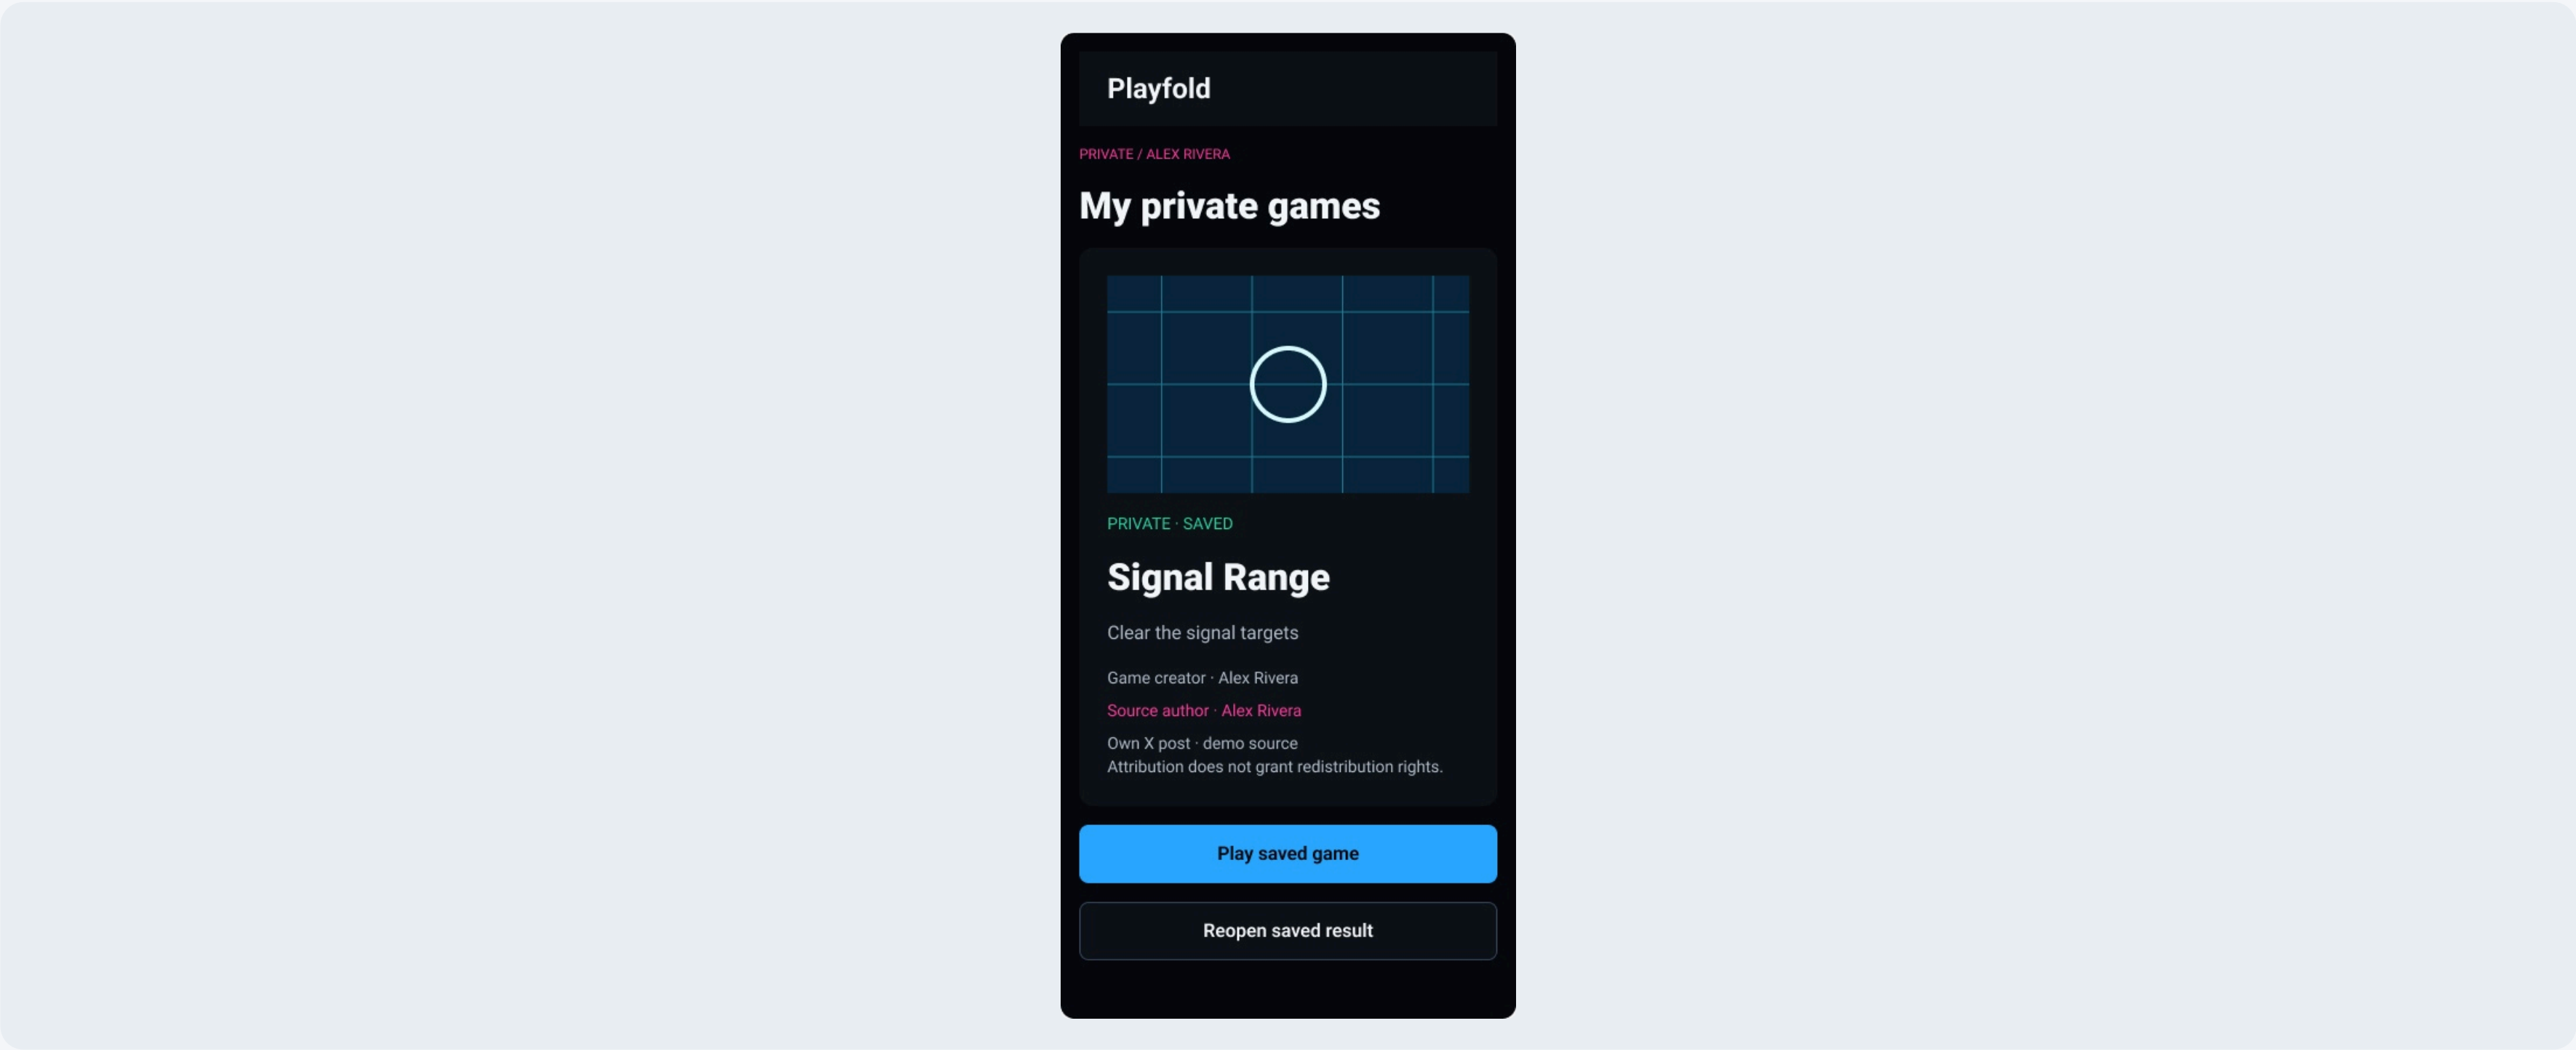

source-backed navigation pattern

Capabilities decide which controls appear

The surrounding interface must reflect the resolved game’s capabilities. Signal Range’s retained creator runtime supports movement, Fire and Restart, with its own objective and Hits HUD. The inspected app also supports fullscreen. The selected prototype demonstrates a subset: instructions, simulated play, outcomes and return, without fullscreen behavior or an operating WebGL engine. Keep Tune, Refold, challenge, score sharing, sound and haptic settings absent from this retained-runtime example.

Runtime supports

Move: WASD / arrows
Fire: Space / Enter
Touch movement + Fire
Restart

Platform: fullscreen

Game-specific HUD

Signal Range
Clear the signal targets

Targets 0 / 3
Hits 0 / 3

Illustrative fixture values.

Absent for this runtime


Tune / Refold
Challenge / score sharing
Sound / haptic settings

Capability checks determine
which controls appear.

source-backed capability constraints

Stress the component where it can fail

Test long content, narrow widths, missing images, disabled actions, focus and errors in the components that the journeys actually use. This guide recommends 44-pixel touch targets for new controls; some baseline controls are smaller. Preserve visible labels, a clear focus outline and status text in addition to color. A phone demonstration must show the actual scrolled action region. Specifications support evaluation; they are not a claim of completed accessibility certification.

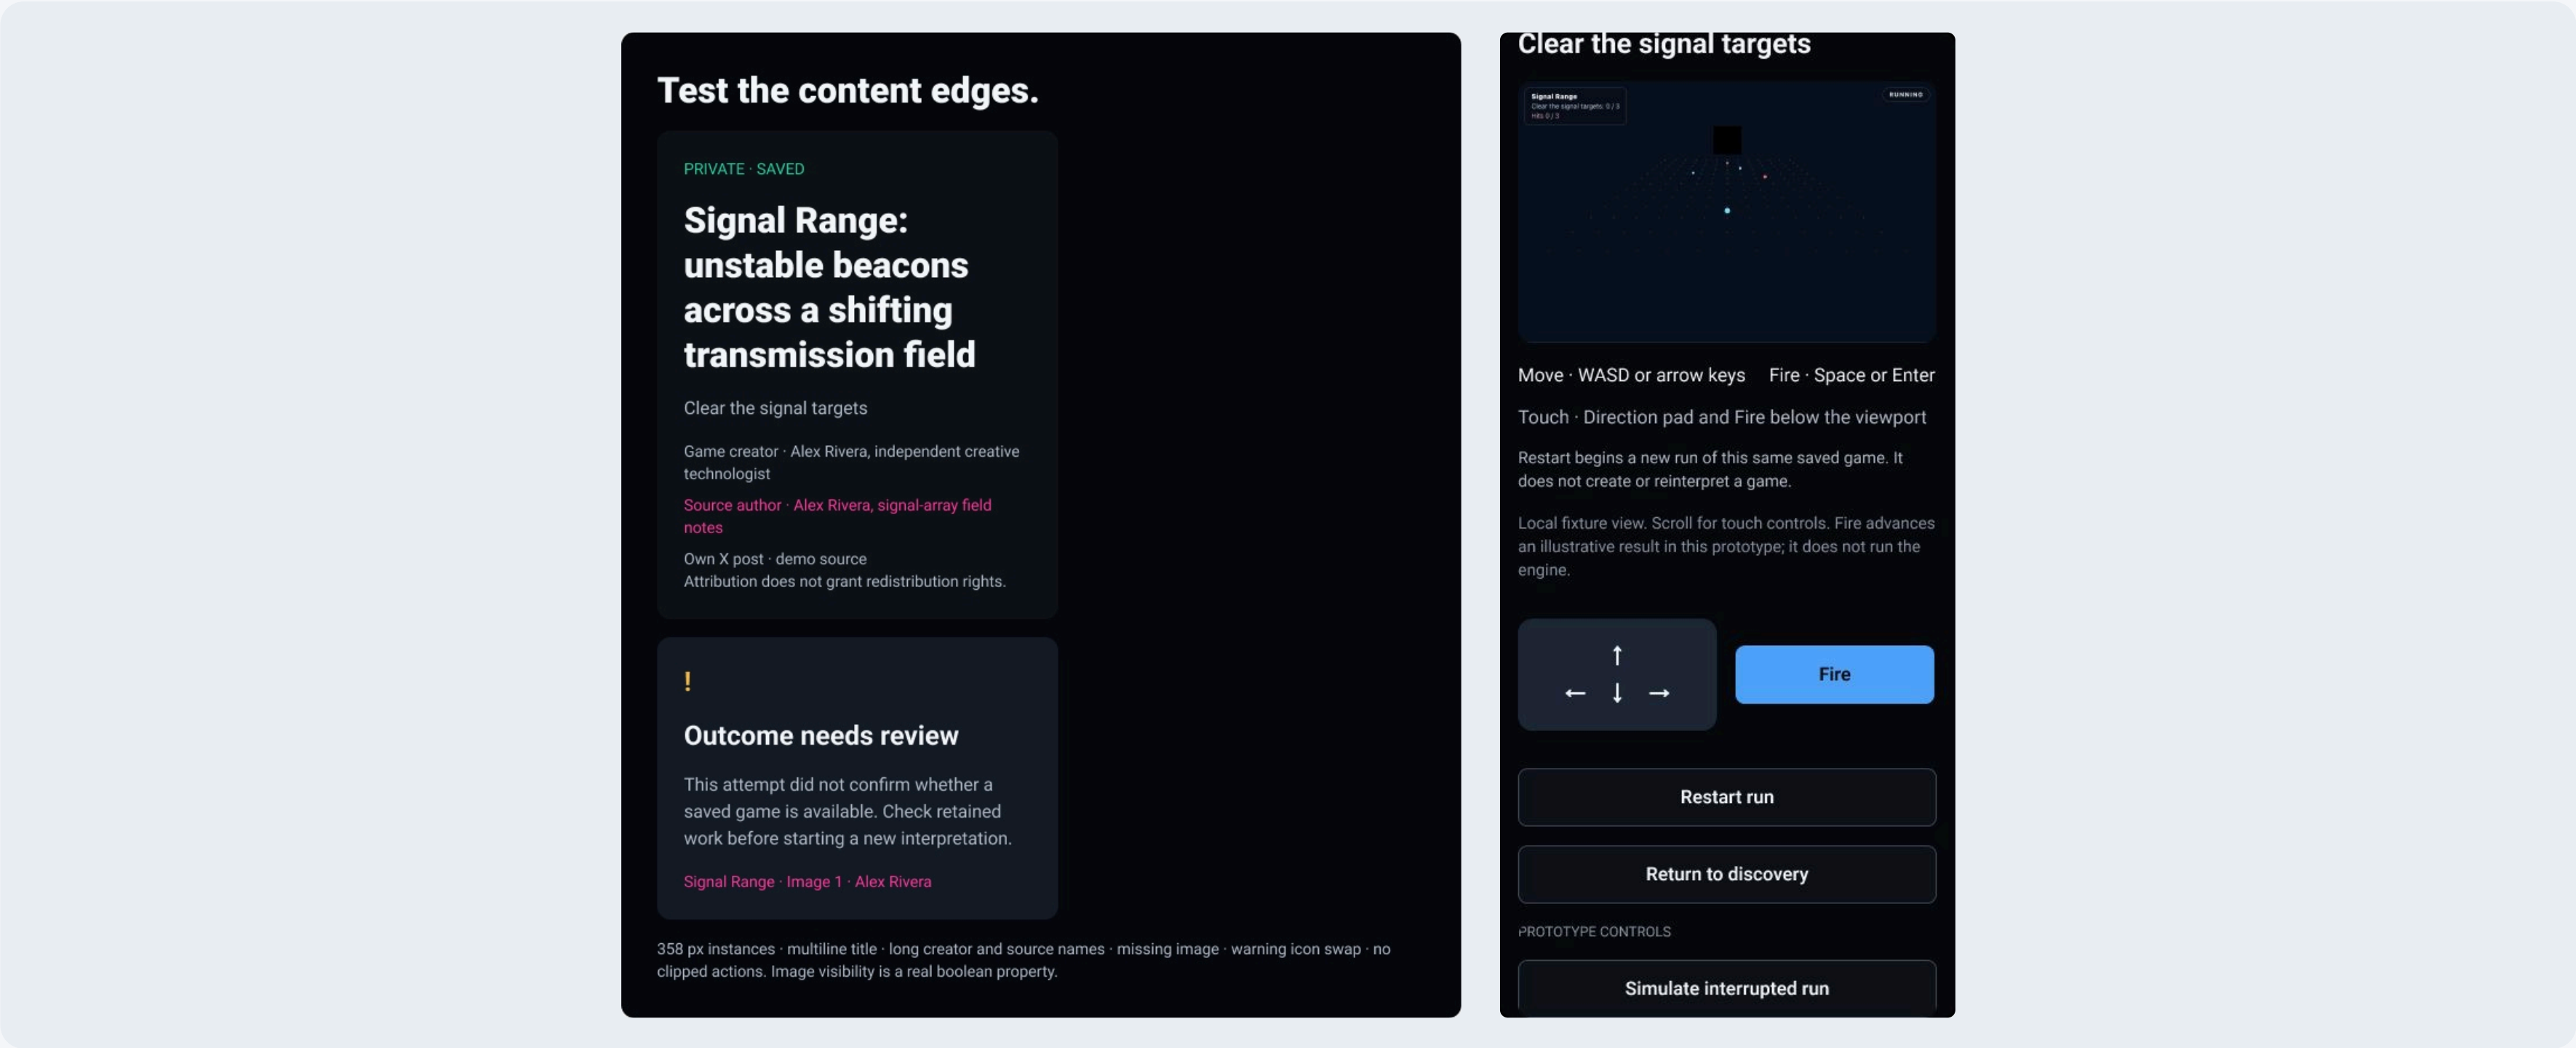

accessibility specification; not certification

Navigation reflects the current task

The desktop app rail, mobile bottom navigation and marketing header serve different contexts. Active items pair icon and label with a clear surface change. Focused play uses its own header and omits the app rail.

Playfold

Discover

Feed

Open 3D creator

Library

Leaderboard

Generation

Generation

Profile

Settings & help

Support Playfold

Sign in with X

Search games, creators, sources...

Discover

Feed

Create

Leaderboard

Library

Playfold

Discover

How it works

Leaderboard

About

Open 3D creator

FOCUSSED PLAY / its own back control; no app rail or bottom navigation

Reusable navigation families. Preserve actual destinations and offsets; do not substitute the marketing header for the app shell.

One identity, several card densities


The catalog uses wide latest-refold cards, a popular shelf and a browse grid. Shared properties keep title, genre, creator, source and imagery consistent. Missing artwork retains the card surface and label instead of inventing a scene.



The native game-card family carries the same content across treatments. The public examples preserve observed game identities.

Keep game context and controls together

Game introduction, instructions and platform utility groups frame the focused player. Desktop separates the game and context into columns; mobile stacks them and keeps lower actions scroll-accessible. The chosen runtime determines its instructions.

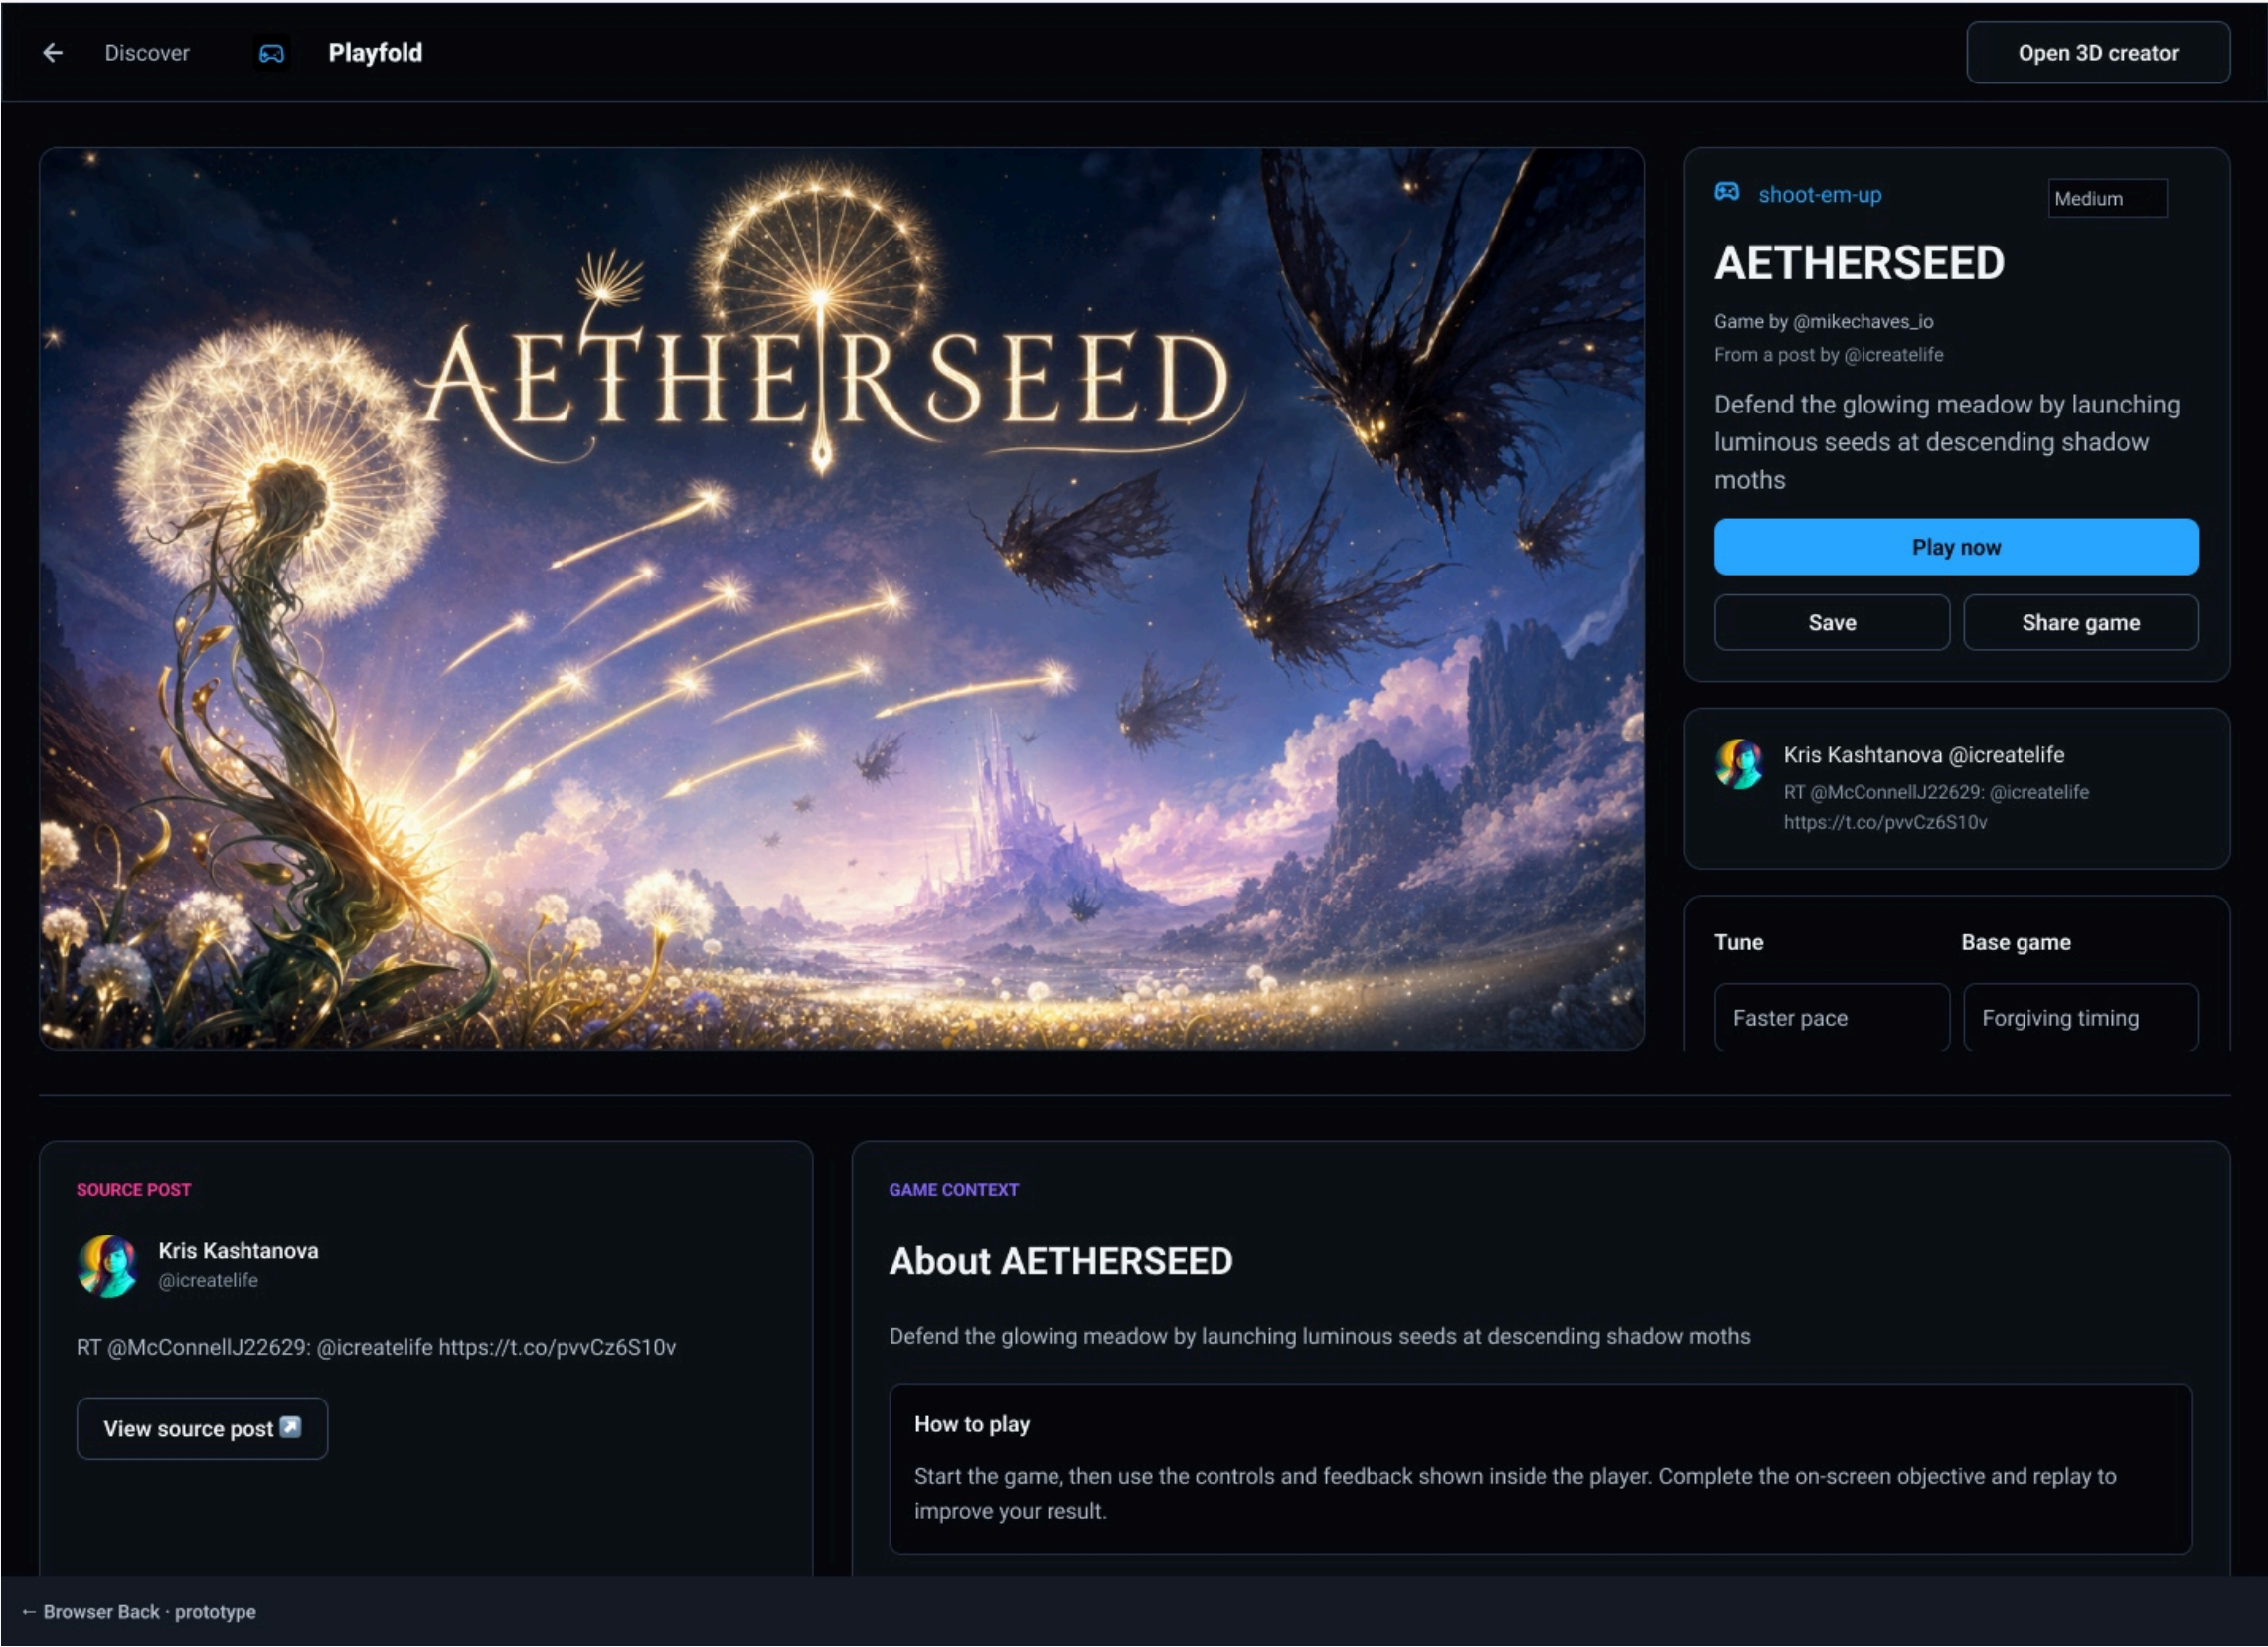

AETHERSEED public-page pattern. Share, statistics, Library and report groups describe existing UI; this walkthrough does not submit those actions.

Keep ranking models explicit

Season ranks games by total verified score, then best run and scored plays. All time ranks by shares, then plays. Podium cards and compact rows retain game identity; unavailable data keeps the mode and recovery message visible.

#1

LEADER



AETHERSEED

From a post by @icreatelife

TOTAL SCORE	SCORED PLAYS	BEST RUN	PLAYERS
0	2	0	1

4



Nox Sirens

From @DukeZer0 · arena-survival

64

0
SHARES



RANKED GAMES

- Season: total verified score per game.
 - Ties: best run, then scored plays.
 - All time: shares; plays resolve ties.
 - The ranked entity is the game.
- Desktop uses podium positions and rows.
- Mobile stacks season cards and keeps compact all-time leaders.
- Unavailable data retains the selected mode and an explanatory recovery message.

Season and All time are game-activity models. The system includes mobile arrangements and unavailable states alongside the populated example.

Maintain the links between decisions and screens

Check homepage, catalog, public play, ranking and Library paths alongside creator, recovery, comparison and mobile entries. Preserve game identity and distinguish app navigation from browser return. Record actual state resets rather than silently improving the baseline. Update related journeys, source links and document figures together before exporting. Prototype verification does not approve implementation.

Creator + recovery

CreatorIntegrationClient.tsx

Input, waiting, cancellation and retained-work recovery.

Proposal: PF-DEC-01

Player + input

creator-v1 / Runtime.tsx

Movement, Fire, Restart and baseline fullscreen.

Test same-game return.

Foundations + cards

globals.css
GameCardV2.tsx

Color roles, font stack, card imagery and attribution.

Update shared instances.

maintenance guidance