


Shared intent, editable parts.

Components, semantic roles and implementation guidance / 2026

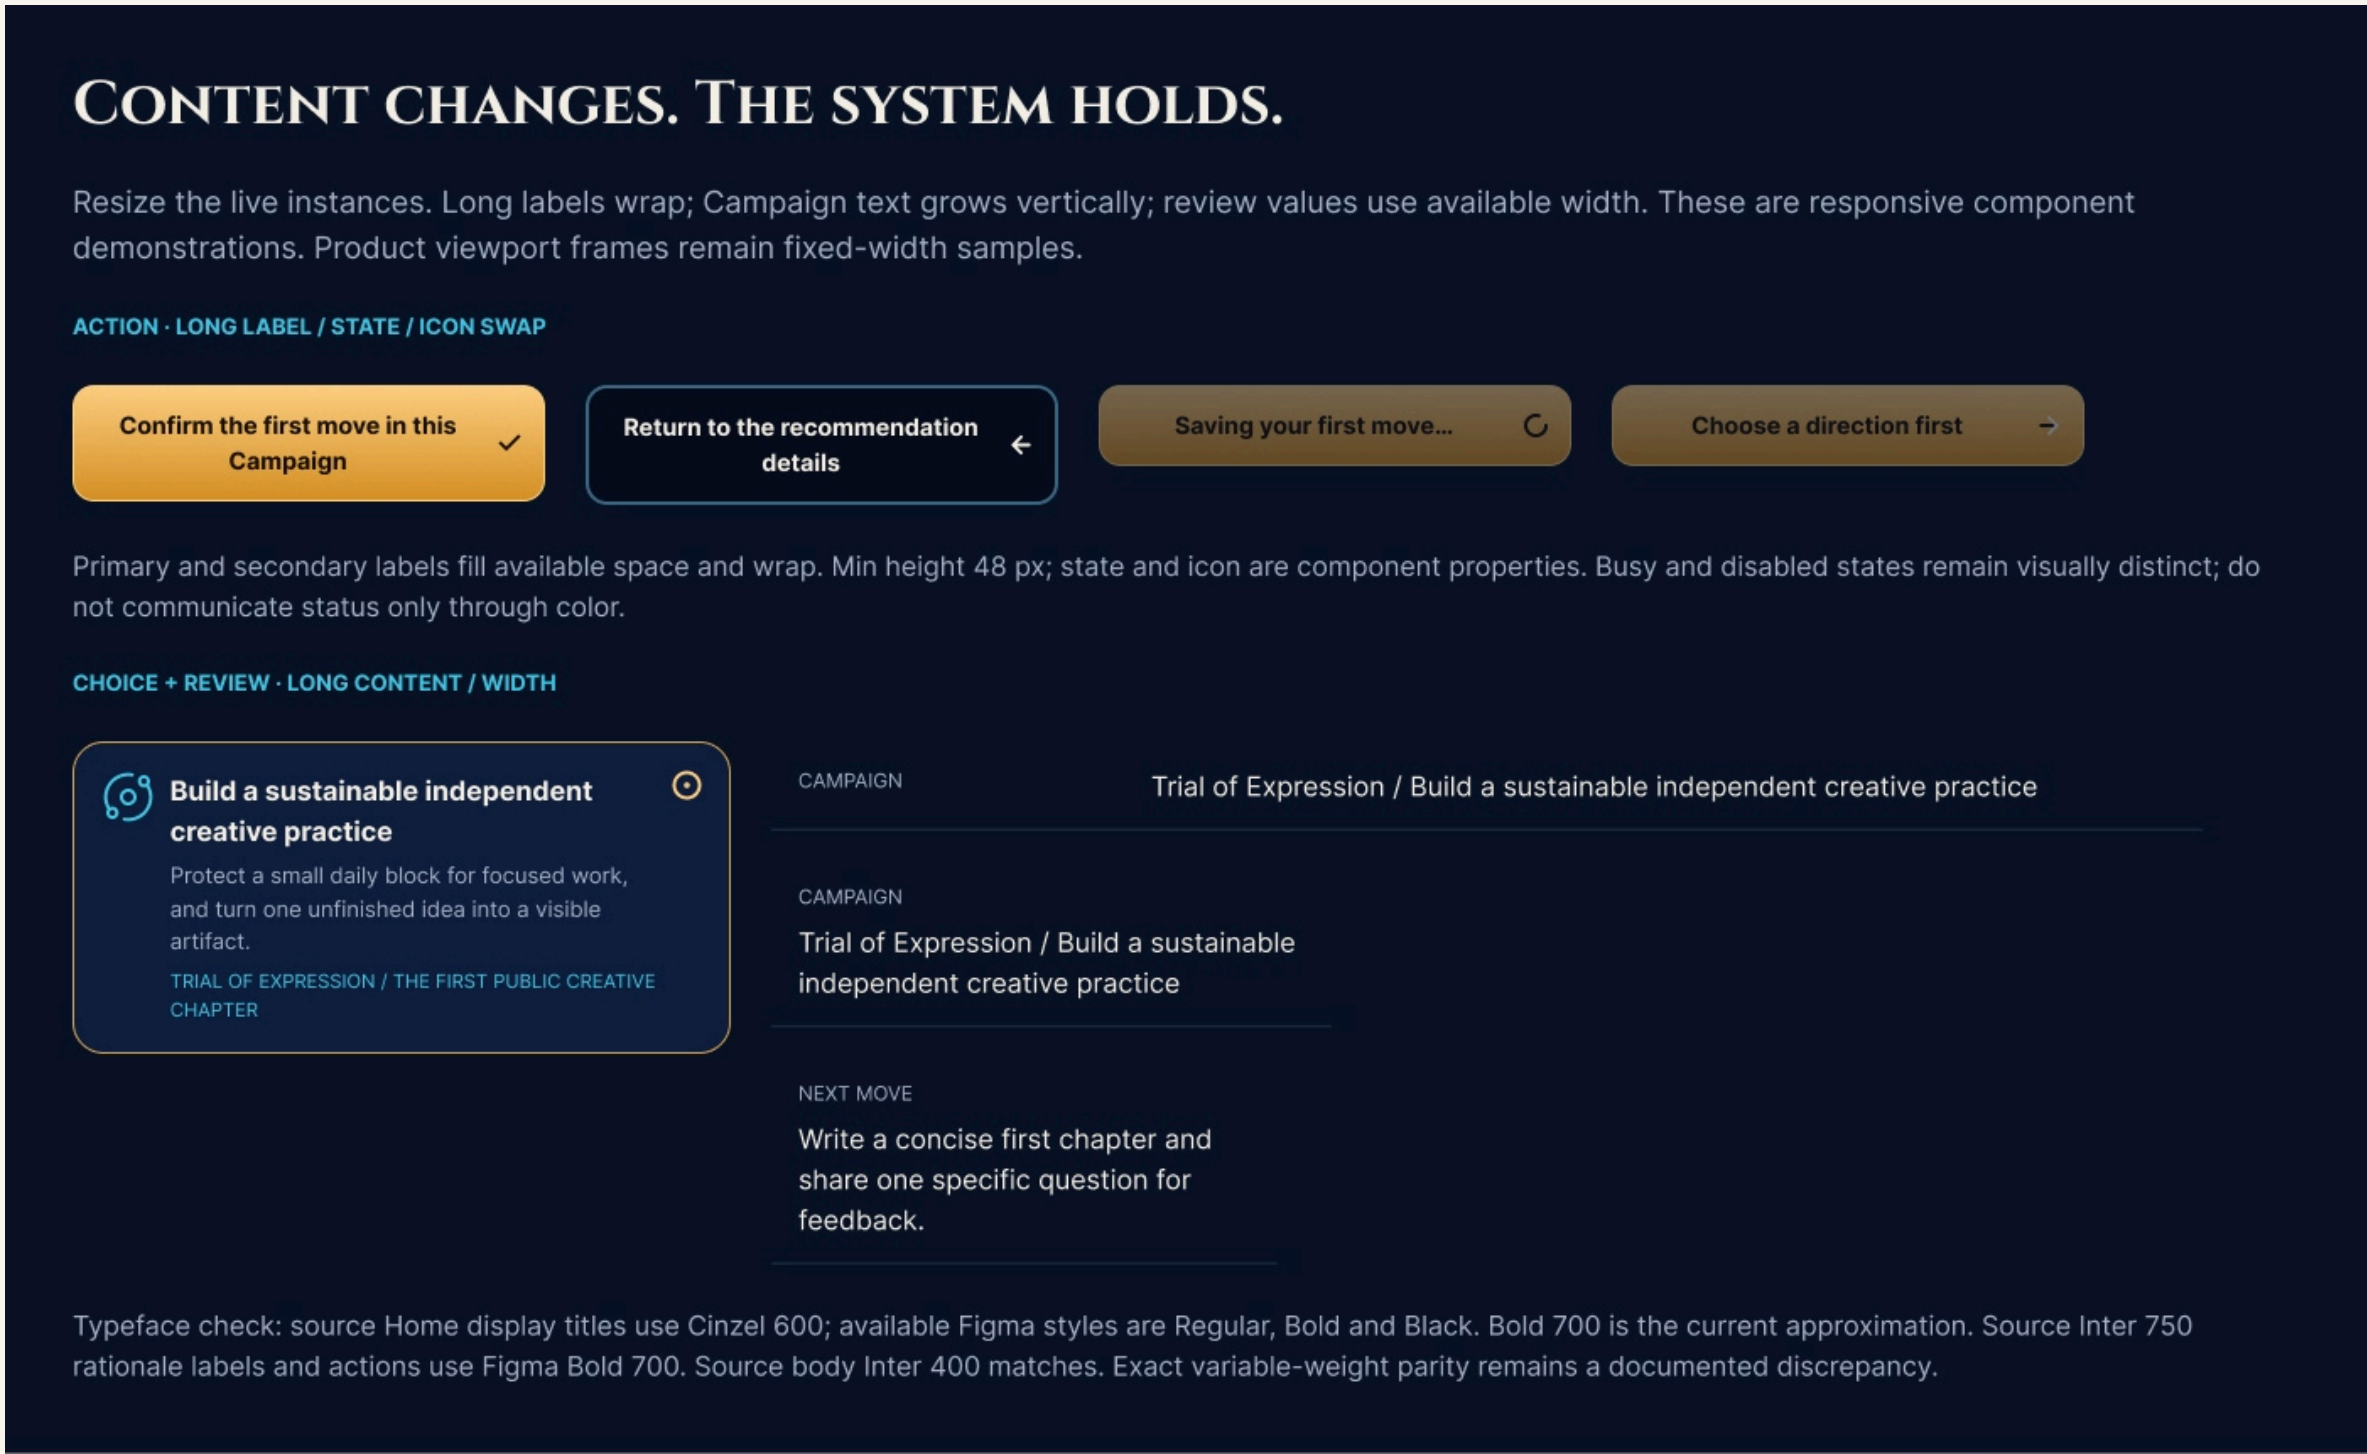

The Wizzo system connects native Figma components to the existing Observatory patterns. It carries hierarchy, content behavior, interaction states and visual identity across Home, onboarding, review, recovery and Focus.

Use instances

Select a family, set its properties, and preserve the shared structure.

Use roles

Bind to semantic text, surface, border, action and status roles.

Verify behavior

Inspect content extremes, responsive components and prototype continuity separately.

Roles explain why a value exists.

Palette aliases and semantic bindings.

The existing primitive and palette variables remain intact. Semantic interface roles reference those variables, so the role layer adds meaning without silently replacing the source palette.



Canvas
#050816




Panel
#091326




Elevated
#111c38



Action
#f0ae42

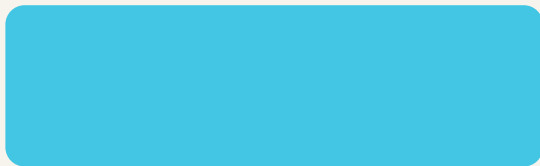

Context
#42c7e5



Primary text
#f5f0e6

Text

text/primary, text/secondary, text/on-action and text/context.

Surface + control


surface/canvas, surface/panel, surface/elevated; border/default and border/focus; action/primary-start and action/primary-end.

Feedback

status/success, status/error, status/error-text, status/information and brand/companion.

A small control carries many decisions.

Primary and secondary action variants.

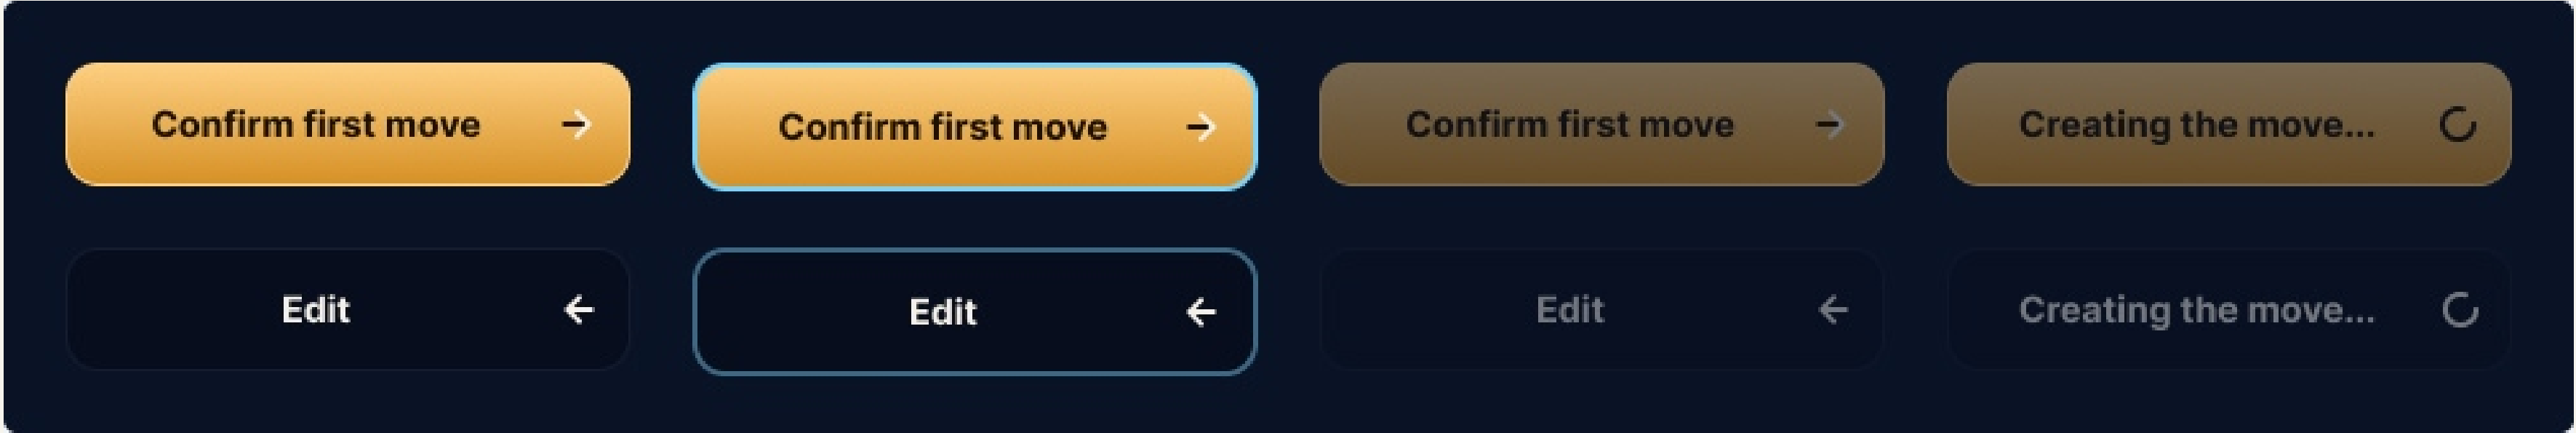

The Action family has a label, optional instance-swapped icon, consistent insets, a rounded boundary and explicit states. Labels fill the available width and wrap; the control grows while retaining a 48 px minimum height.

Properties

Style, State, primary/secondary/busy text, icon and icon visibility.

State behavior


Default, focus, disabled and busy. Busy text explains the operation; disabled treatment does not remove meaning.

Source mapping

living-observatory.module.css: primary-action, secondary-action, tertiary-action. Source min-height 2.9rem and weight 750 differ slightly from Figma 48 px and 700.

Make selection visible and editing predictable.

Choice, input and textarea patterns.

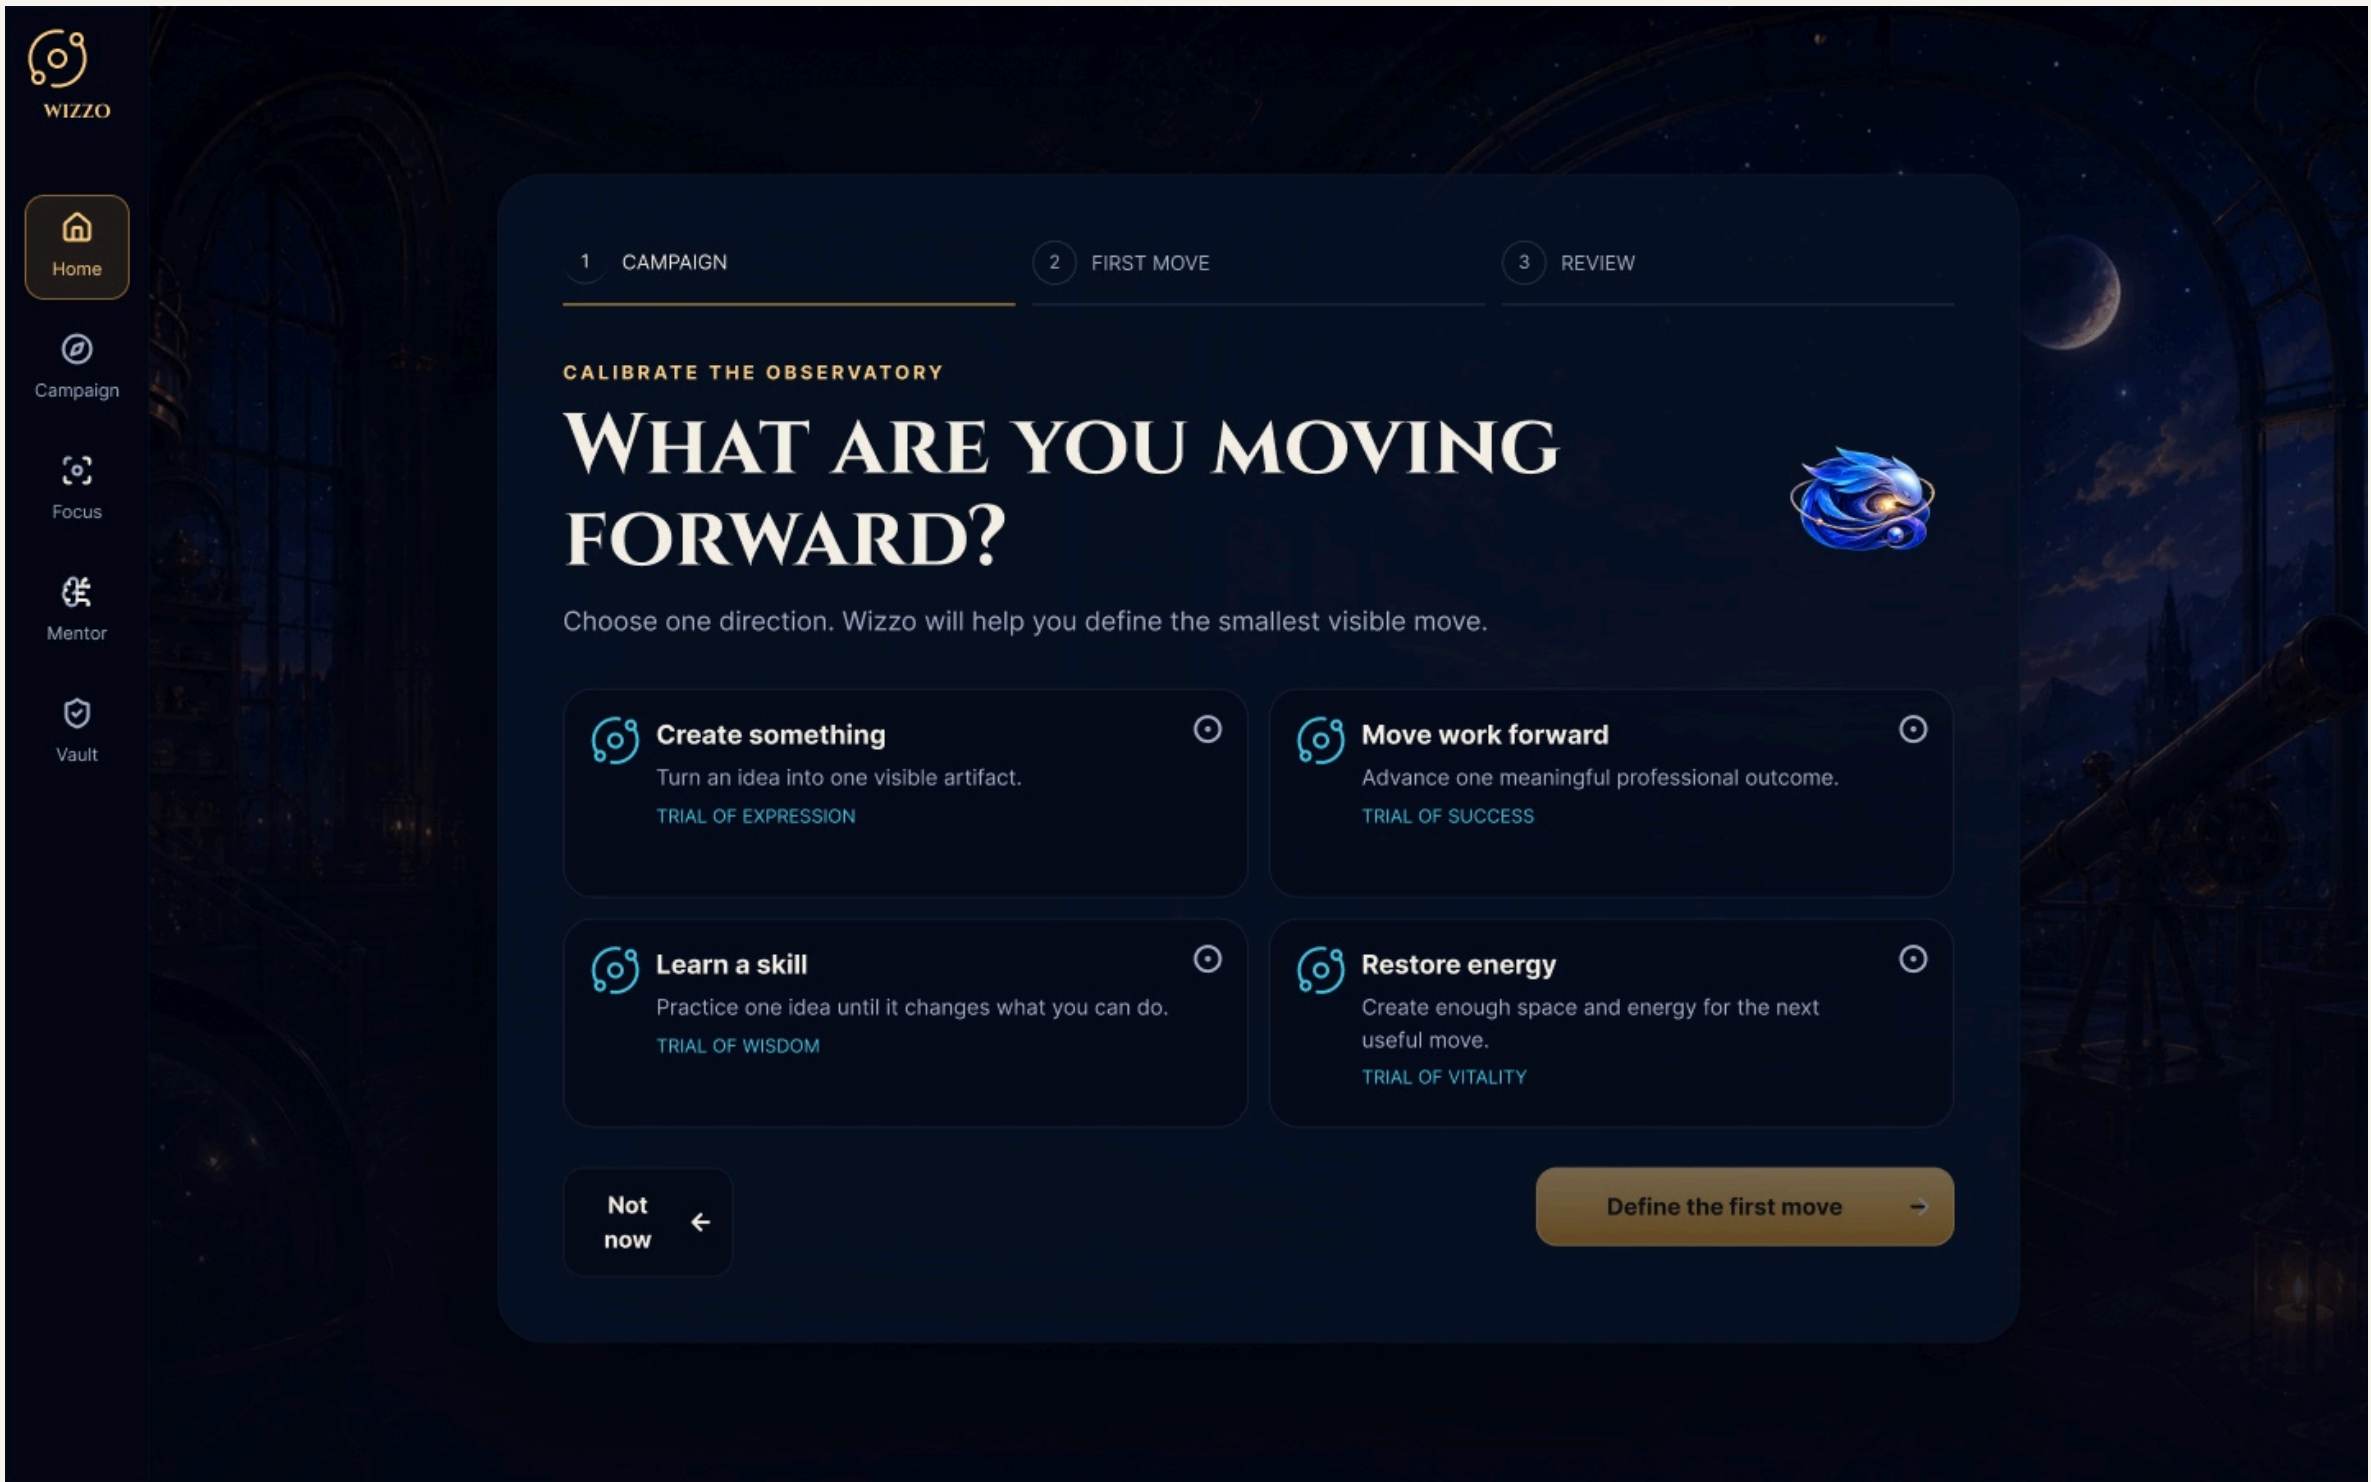

Choice combines an icon, title, supporting description, Campaign context and selection indicator. Field distinguishes input and textarea, with default and focus treatments. The visible label remains separate from placeholder content.

Choice

Selected state uses border, indicator and content hierarchy. Long text expands vertically.

Field


Use a visible label, preserve user input and pair validation with an actionable message.

Keyboard

Selection and activation need semantic controls in code. Figma visuals alone do not establish keyboard or screen-reader behavior.

Small controls make commitment legible.

Time selection and progression.

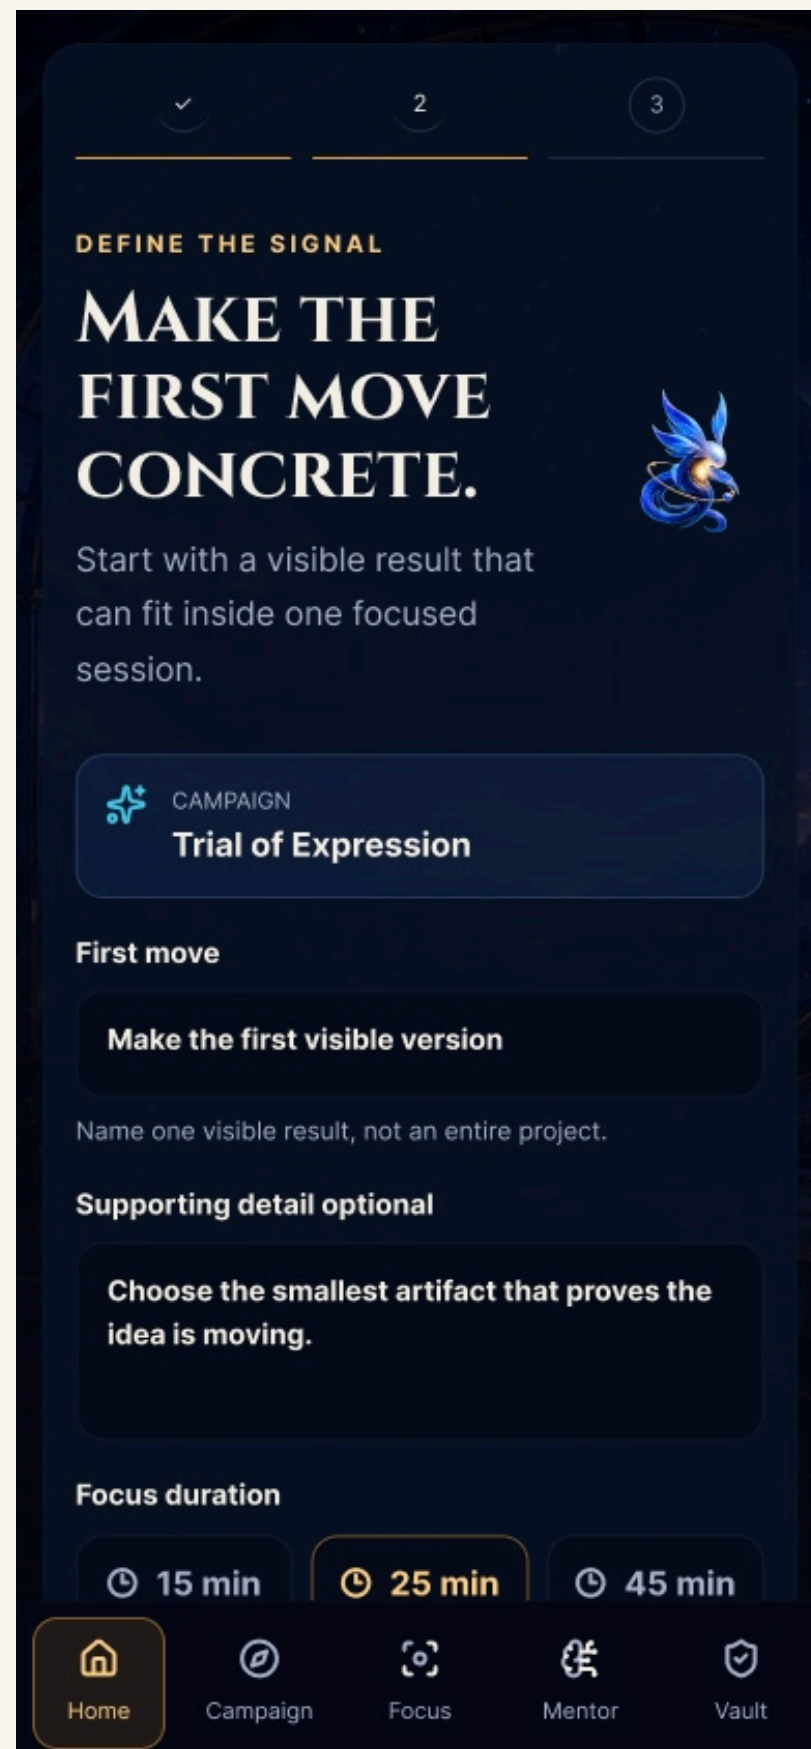

Duration uses selected and unselected states for 15, 25 and 45 minute choices. Step communicates pending, active and complete stages. Neither should become decorative chrome without a clear relationship to the task.

Duration

Carry the chosen value into review and Focus.

Step


Name the current stage and keep completed context understandable.

Back

Returning to edit retains the choice, so navigation does not behave like a reset.

Read the commitment. Recover without rebuilding it.

Responsive rows and contextual messages.

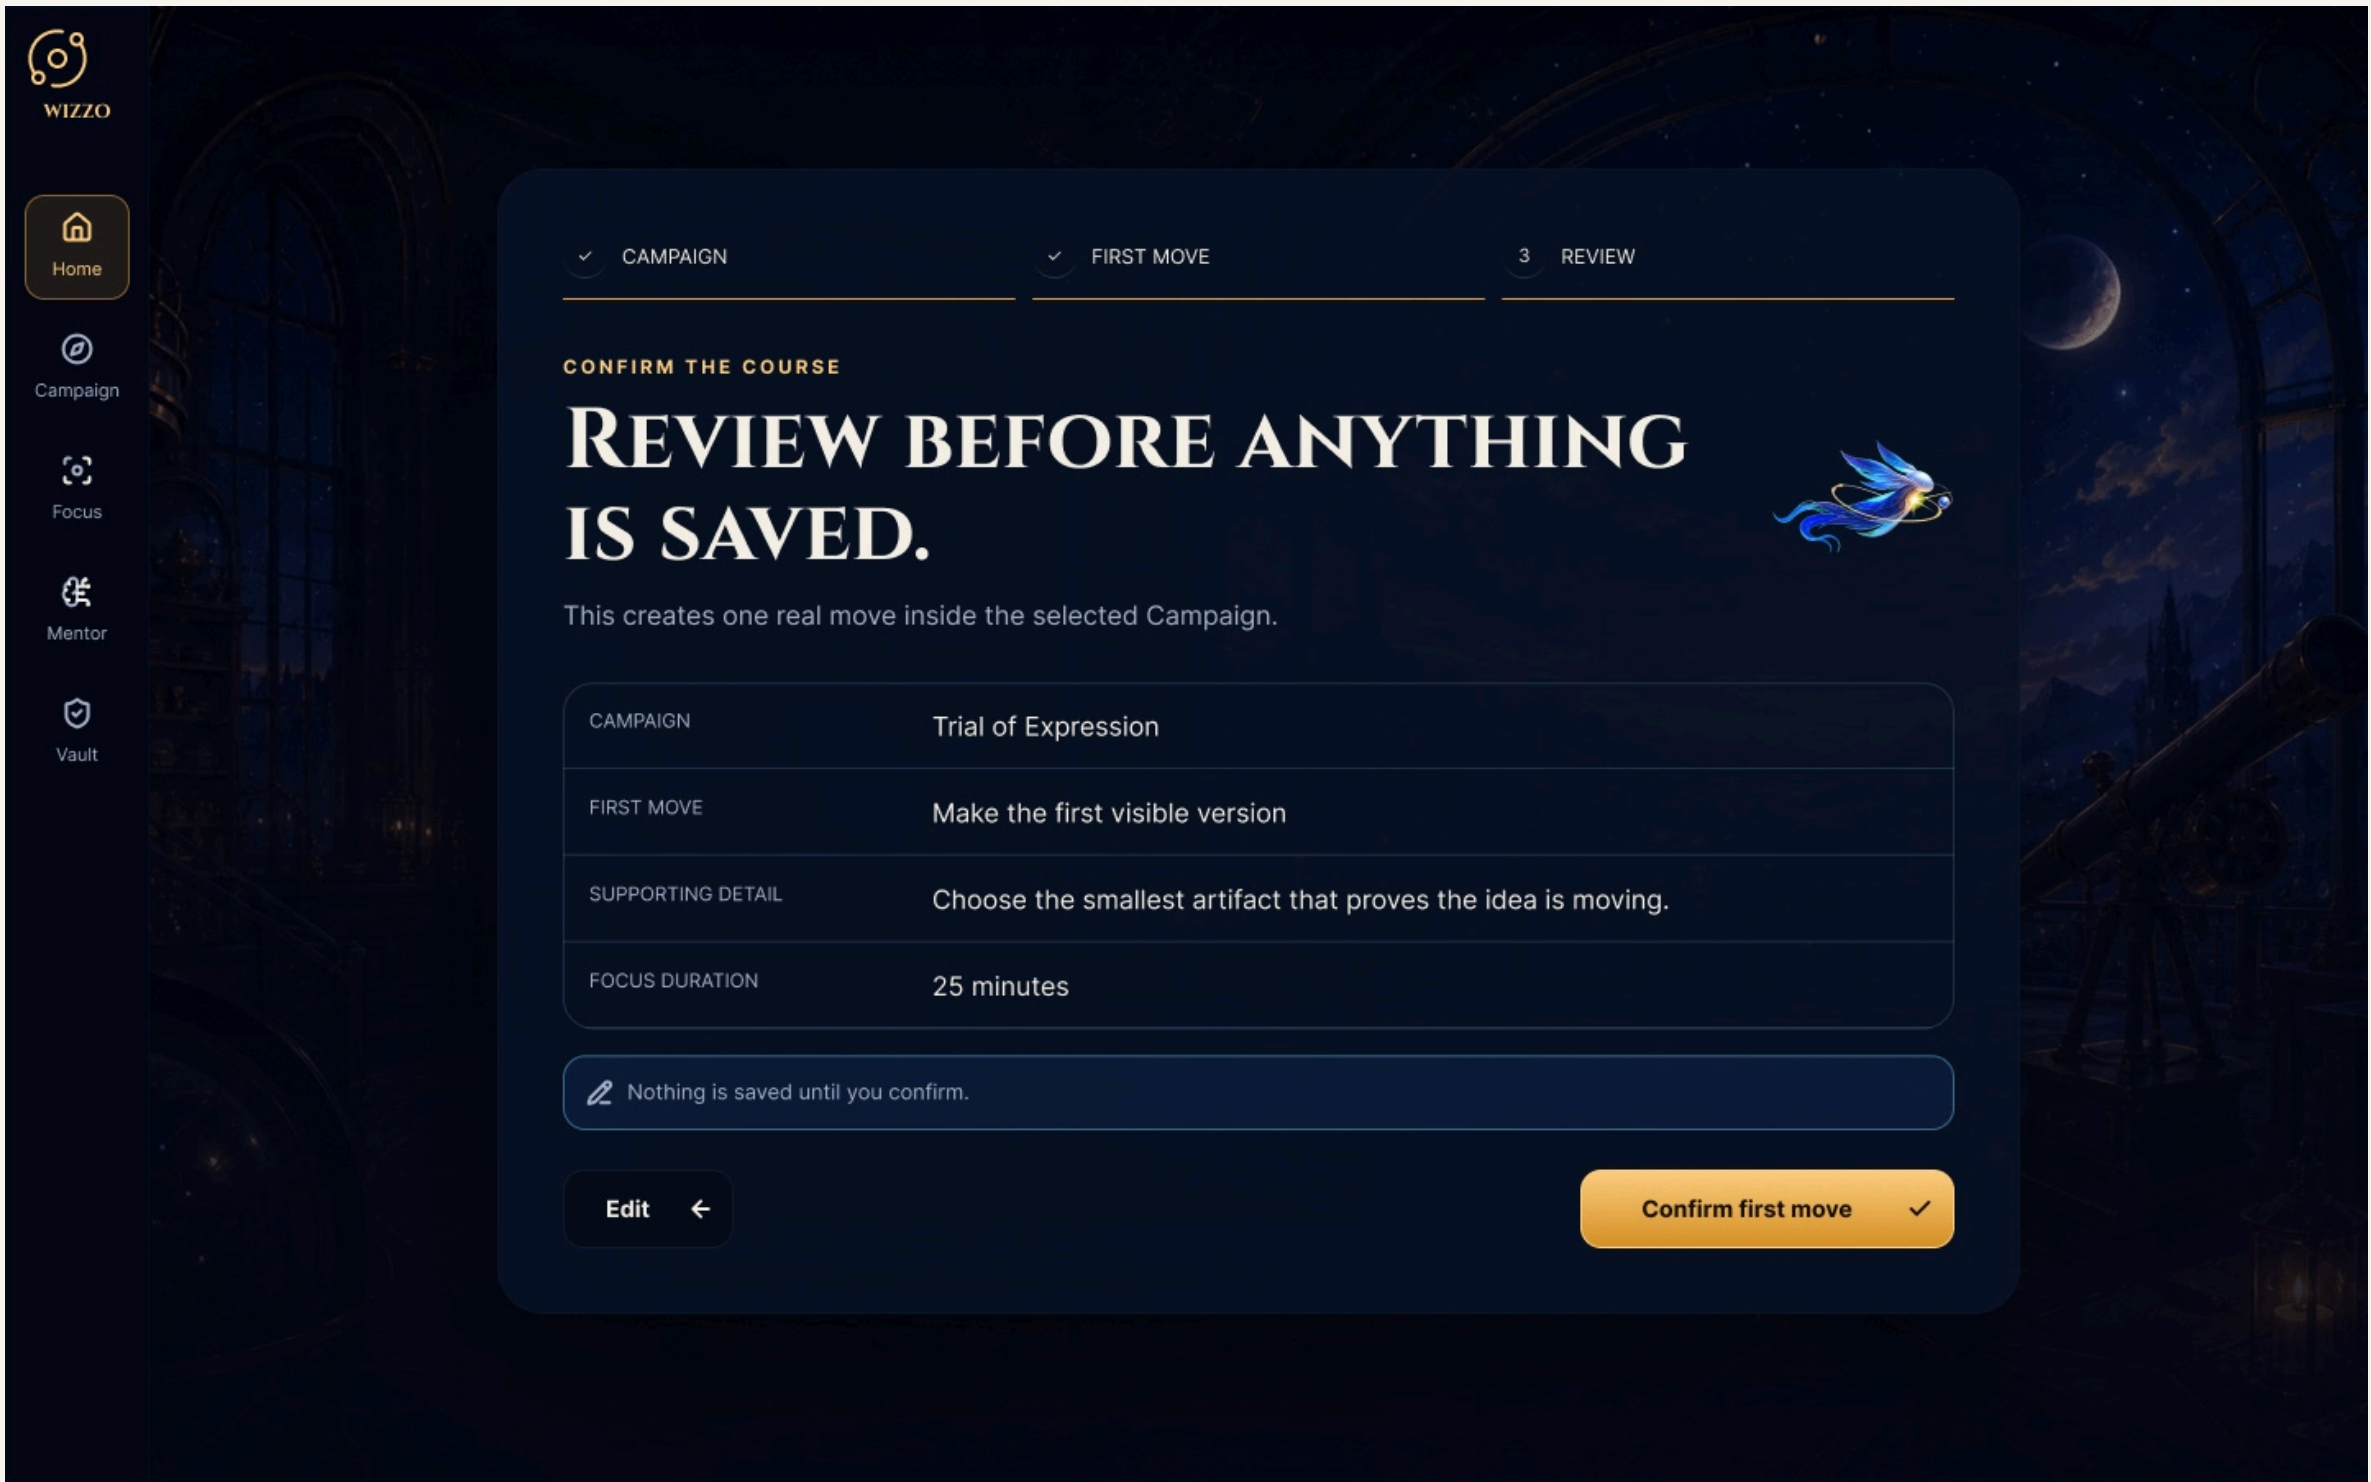

Desktop review rows align labels and values; mobile rows stack them. Long values wrap in the available width. Notice and error messages use separate semantic treatment and explicit copy.

ReviewRow

Device=Desktop or Mobile; editable label and value.

Feedback



Notice and Error variants with separate message properties.

Source mapping

Onboarding review and save-error behavior; component source in living-observatory. Product code owns persistence and request handling.

Reflow the content, then test the viewport.

Component responsiveness and fixed screen samples are different evidence.

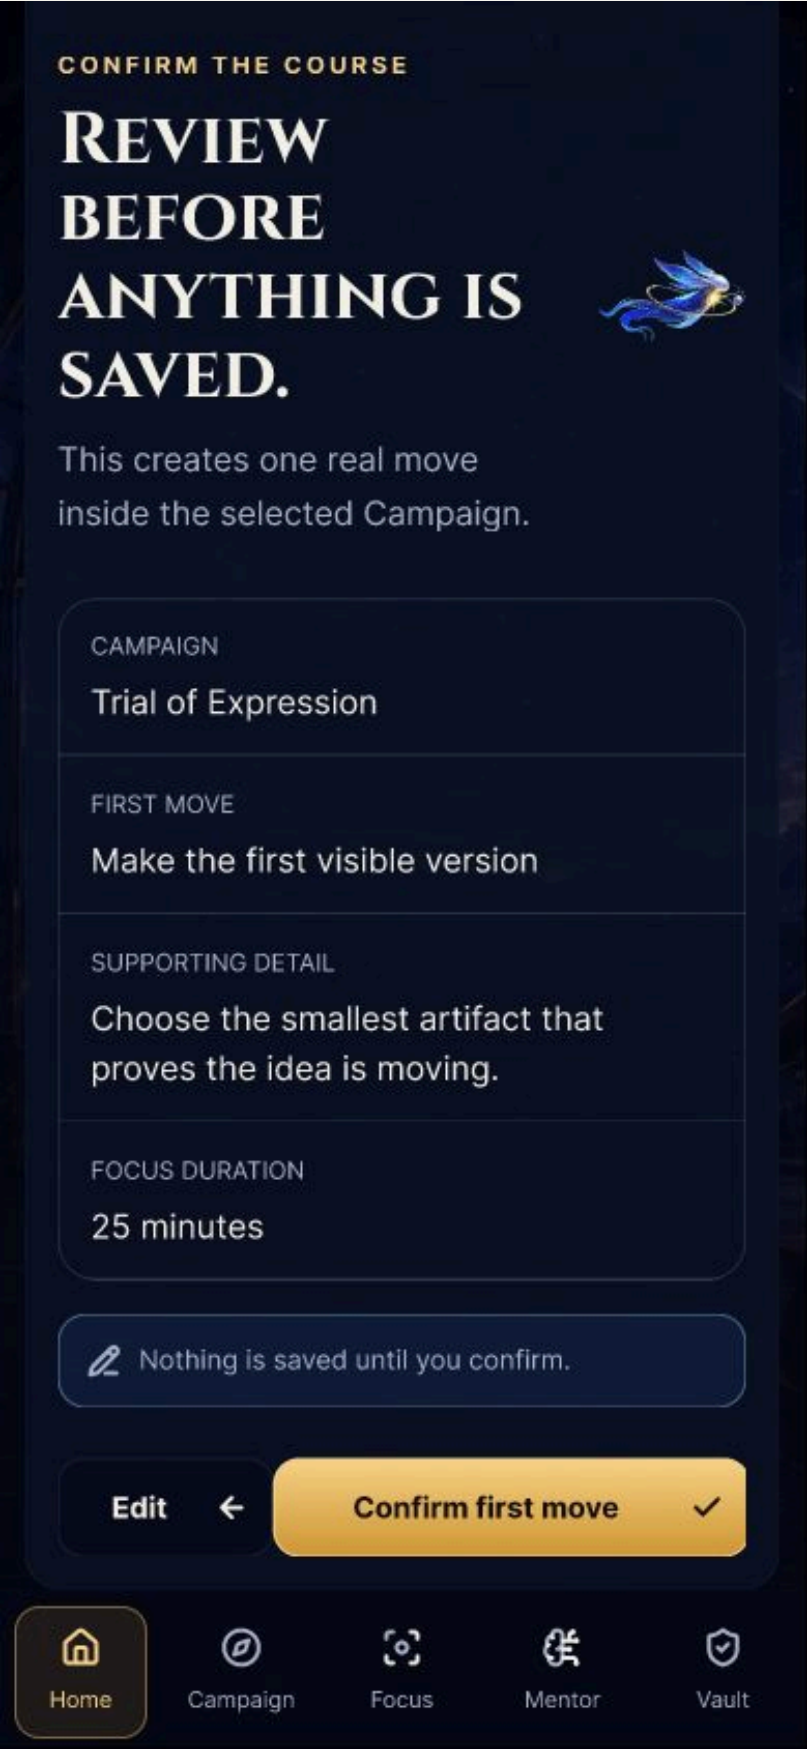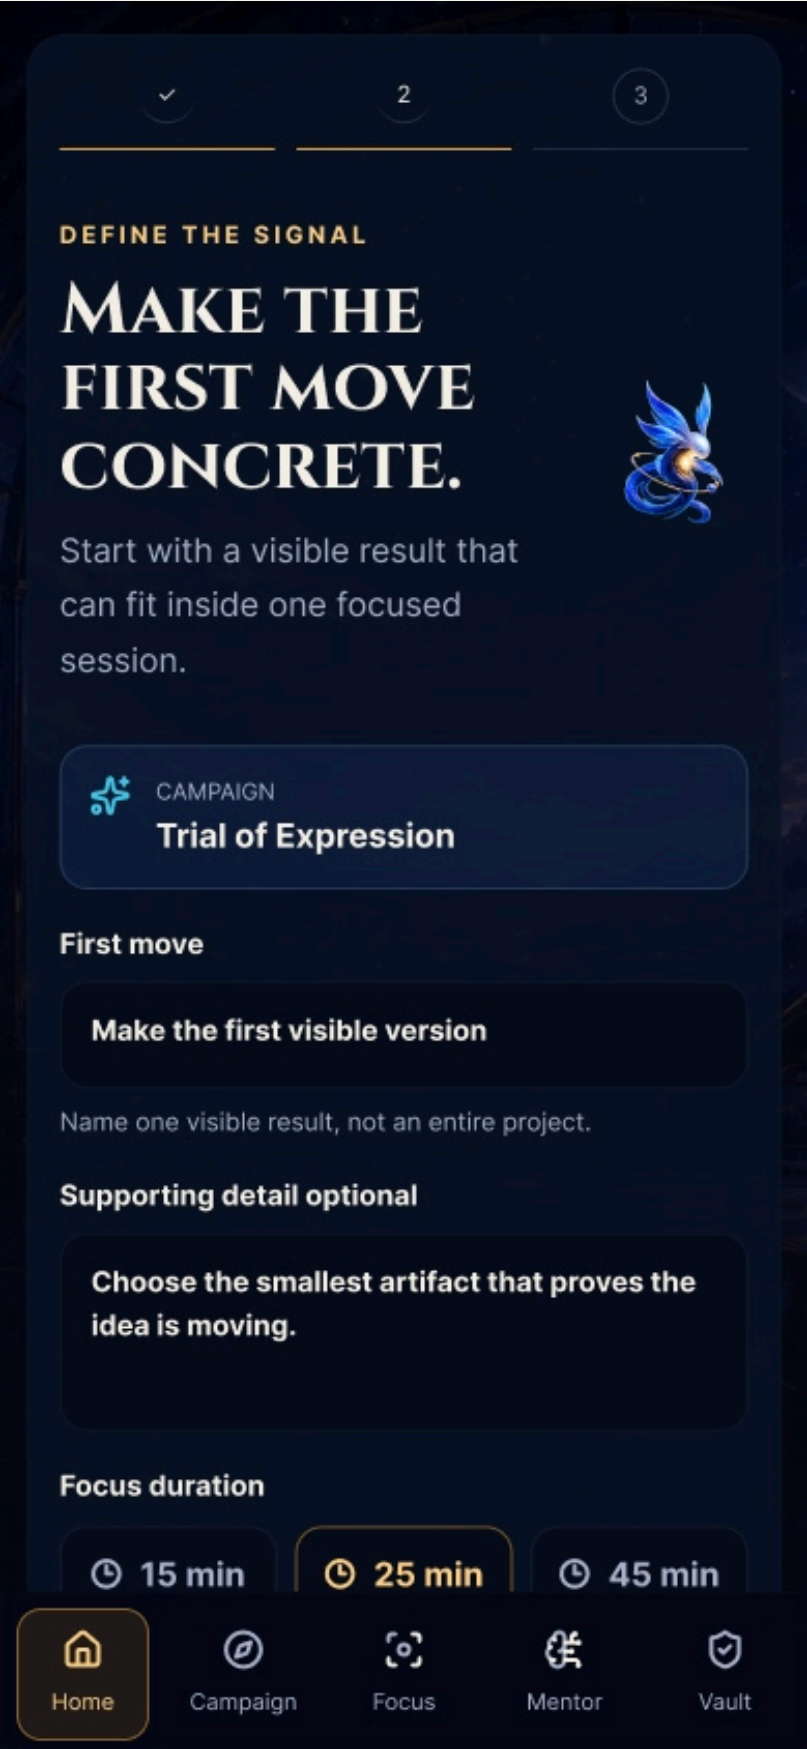

Auto-layout components use available width, wrapping text and content-driven height. The full 1440, 390 and 360 px prototype frames are review samples. They do not prove every width between them.

Source breakpoints

The Observatory stylesheet contains 1024, 720 and 370 px media queries. Inspect the actual surface at those boundaries.

Mobile scroll


The right-hand capture shows the real review prototype scrolled to Confirm first move, clear of the fixed 76 px navigation.

Verification

Reach the continuation action, check long Campaign names and make sure the navigation does not cover the final control.

Make extreme content visible.

Editable examples expose the rules.

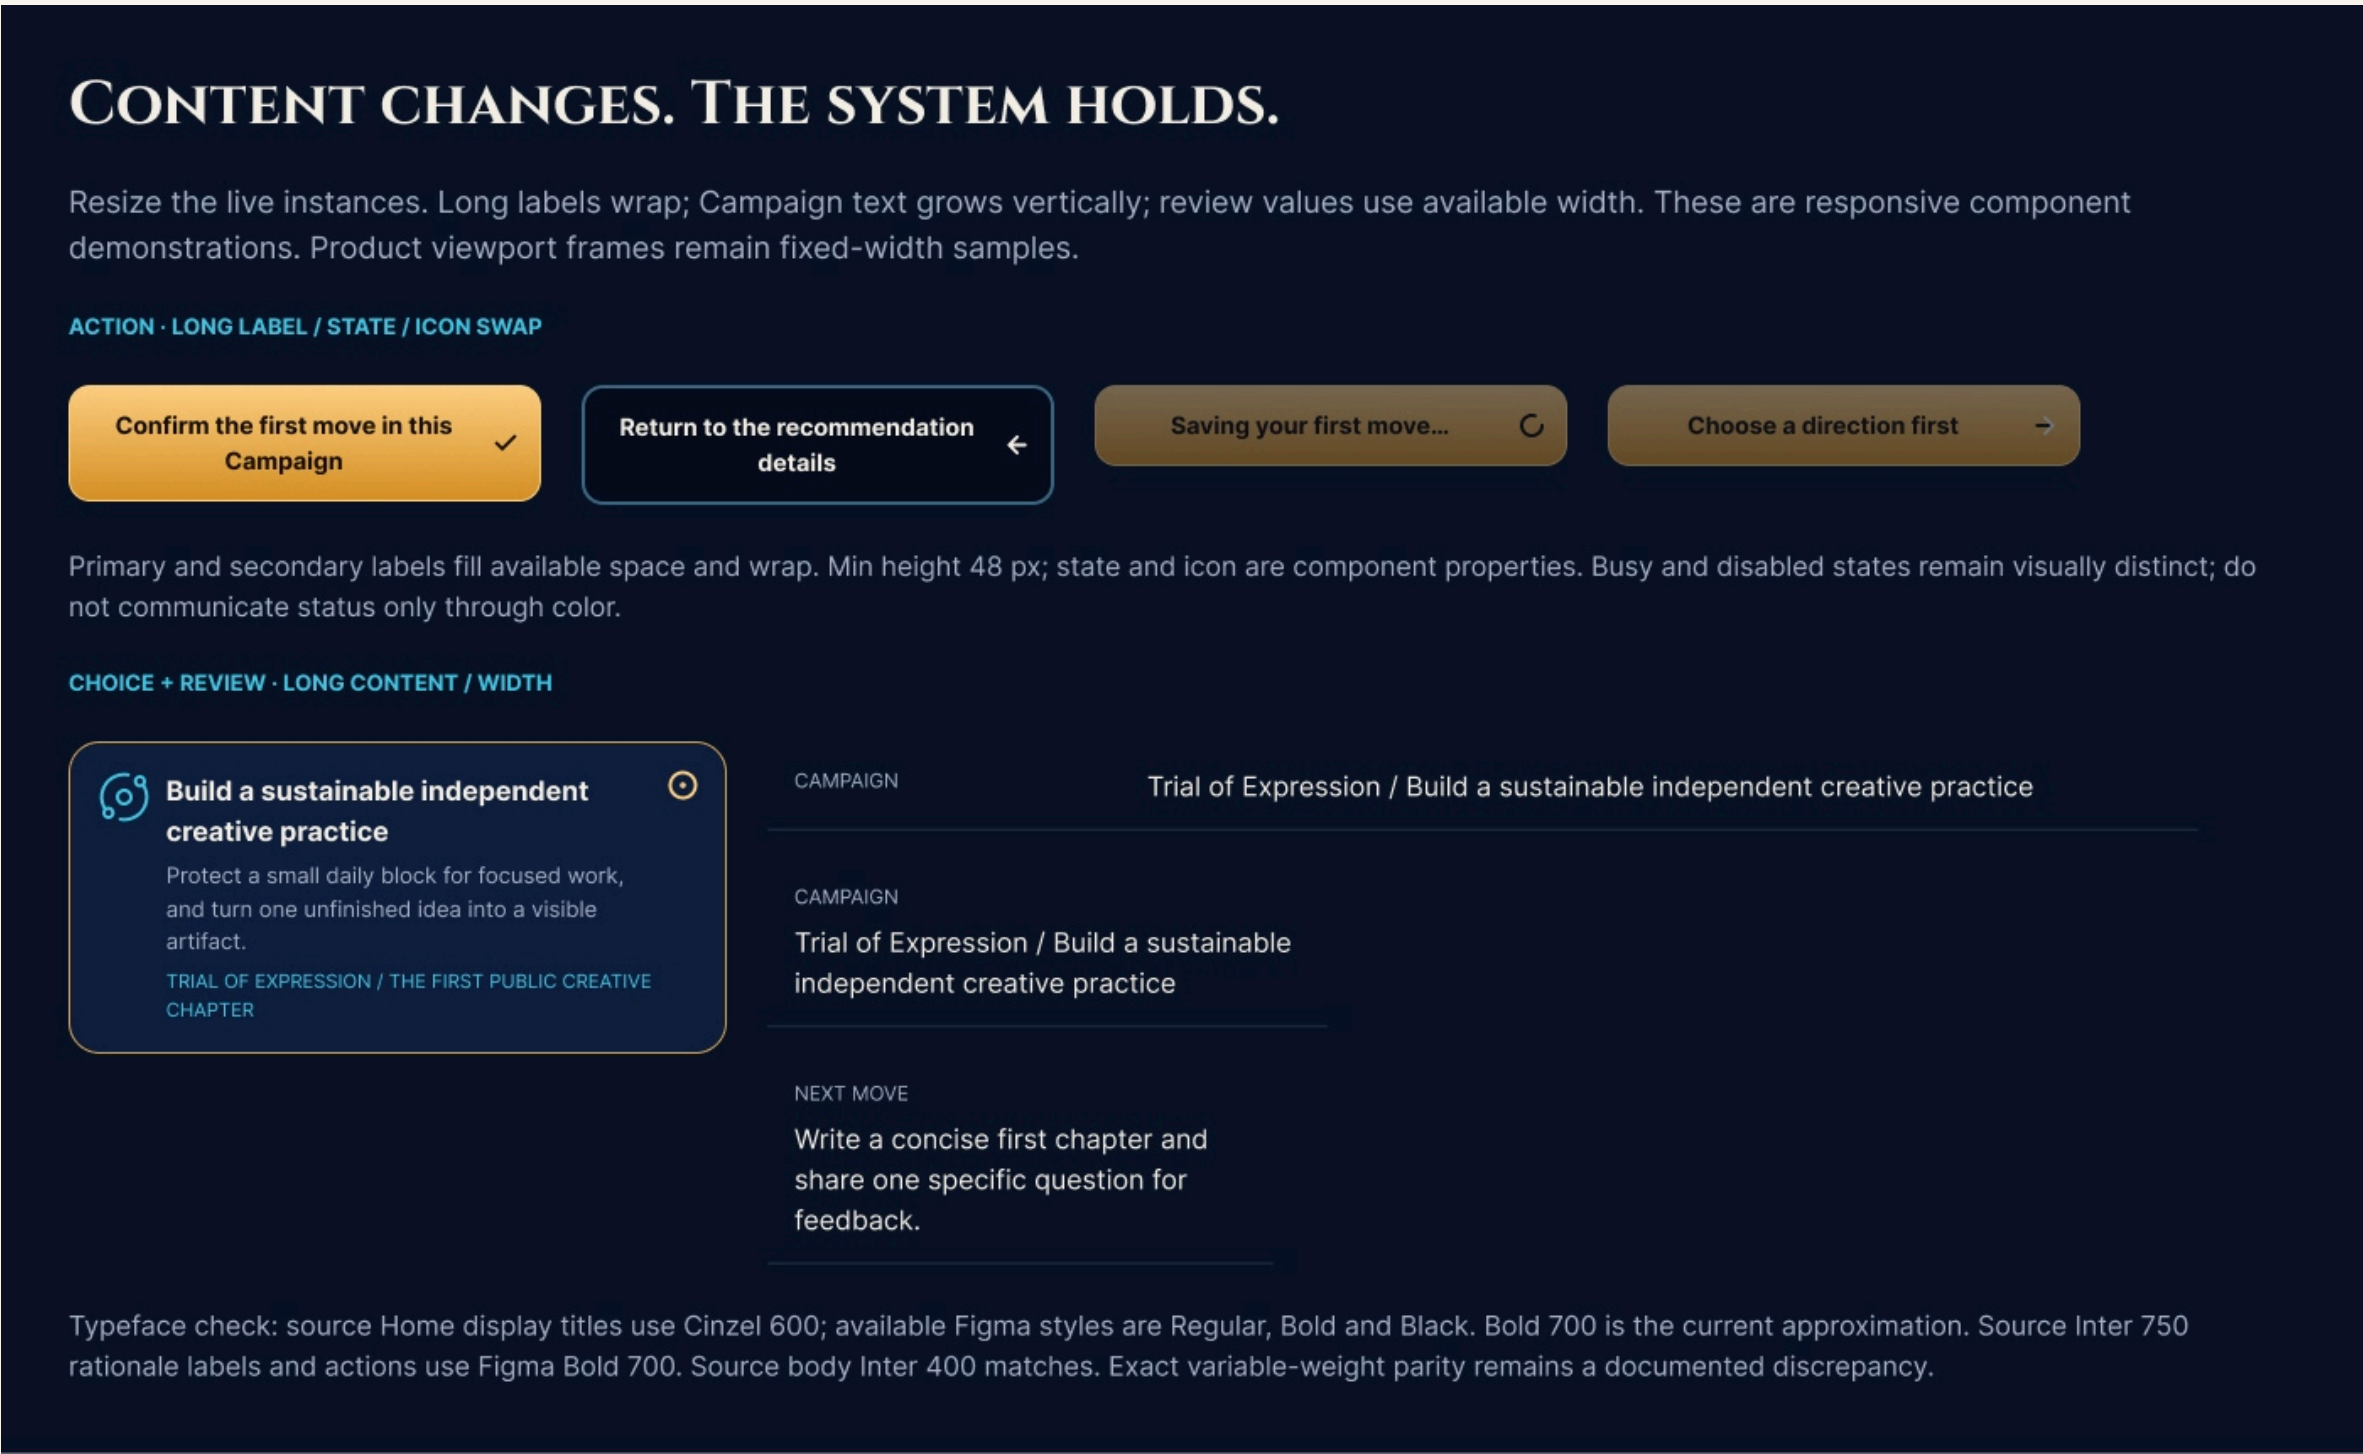

The stress area contains long action labels, busy and disabled states, swapped icons, a long selected Campaign, multiline descriptions and desktop/mobile review rows. These are living component instances.

Resize

Review row examples at 848, 332 and 300 px.

Edit

Replace the Campaign name and description without detaching the instance.

Accept

Check wrapping, control height, icon placement and the space required by the full form.

One facade, a bounded visual vocabulary.

Eight states, four sizes, static fallback.



WispCompanion receives named state and size values. Surface resolvers translate explicit interface state into the shared vocabulary. The component selects the runtime or a state-aware fallback while preserving geometry.

States

Dormant, ambient, attentive, listening, thinking, guiding, celebrating, blocked.

Sizes

180, 112, 72 and 48 px.

Source mapping

WispCompanion.tsx, wisp-companion-v2.ts, stories, tests and WISP_COMPANION_V2.md.

Meaning must survive the visual treatment.

Implementation requirements and review checks.

Color, imagery and motion support meaning; they do not carry it alone. Use visible labels, semantic controls, clear focus, text feedback and deliberate reading order.

Contrast

Target WCAG AA: 4.5:1 for normal text, 3:1 for large text and meaningful control boundaries. Check composited backgrounds, not only token pairs.

Control

Aim for 44 px touch targets; retain keyboard focus and meaningful names. Announce saving outcomes and errors appropriately in code.

Motion

Respect reduced motion. Use state-aware static Wisp assets and keep essential status in text.

Accessibility specifications. Figma prototype checks are not a conformance audit.

Be precise about the remaining gaps.

Source values and available Figma fonts.

Source Home display headings use Cinzel 600. Figma exposes Cinzel Regular, Bold and Black; the affected headings currently use Bold 700. Source rationale labels and actions include Inter 750; Figma uses Bold 700 there.

CINZEL / DISPLAY CHARACTER

Inter / Working clarity in labels, controls and body copy.

Matches

Inter Regular 400 for working body text and the real product families and palette.

Other differences

Figma action minimum 48 px versus source 2.9rem, and fixed viewport examples versus CSS breakpoints.

Next parity pass

Use a supported 600/750 font setup if available, review resulting wraps, then rerun viewport and contrast checks. Do not silently change production typography.

Change the shared rule, then inspect the surfaces.

Source mapping, review and reuse.

The local Figma families are the editable component source for this package. No separate competing library was created in the documentation file. Documentation examples link back to these families and the source implementation.

Source contract

docs/design/
WIZZO_LIVING_OBSERVATORY_V1.md;
apps/web/src/components/living-
observatory;
WispCompanion and its state/size contract.

Change process

Inspect existing bindings, update the
relevant component, review stress cases
and verify affected screens and
interactions.

Prototype boundary

Review state persistence and navigation in
Figma. Verify keyboard behavior, request
handling, persistence, animation and
telemetry in the application.