

# CSC 211: Computer Programming

## Introducing loops (for)

Dr. Michael Conti

Department of Computer Science and Statistics  
University of Rhode Island

Summer 2026



Original design and development by Dr. Marco Alvarez

## Administrative Announcements

• Exam#01 ~ Tuesday 06/09

✓ Same time / place as lecture


✓ One 11x8 notes sheet

✓ Calculator allowed

•

2

## Basic building blocks

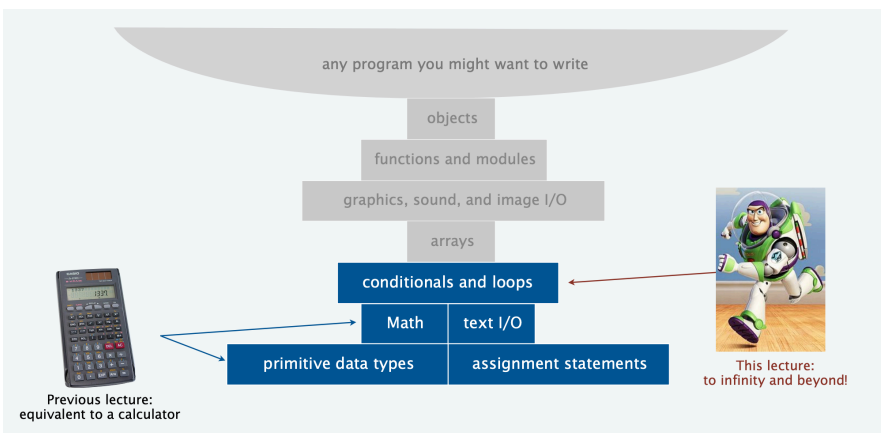

<https://introcs.cs.princeton.edu/java/lectures/>

3

## Flowchart of if statements

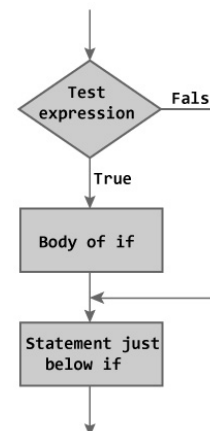


Figure: Flowchart of if Statement

```
// ...  
// statements above  
// ...  
  
if (test_expression) {  
    // body of if  
}  
  
// ...  
// statements below  
// ...
```

<https://www.programiz.com/cpp-programming/if-else>

4

## Flowchart of if statements

```
// ...  
// statements above  
// ...  
  
if (test_expression) {  
    // body of if  
} else {  
    // body of else  
}  
  
// ...  
// statements below  
// ...
```

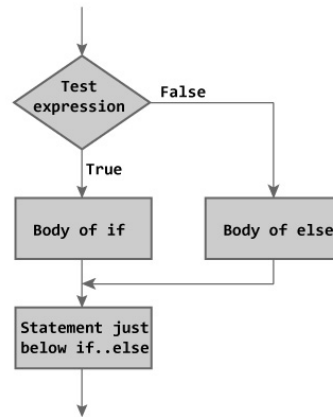



Figure: Flowchart of if...else Statement

<https://www.programiz.com/cpp-programming/if-else>

5

## if statement examples

Example: `if (x < 0) x = -x;`

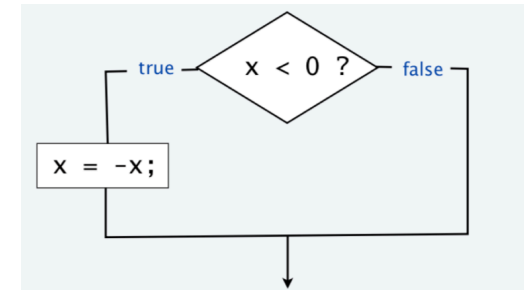


Replaces x with the absolute value of x

<https://introcs.cs.princeton.edu/java/lectures/>

6

## if statement examples

Example: `if (x > y) max = x;  
else max = y;`

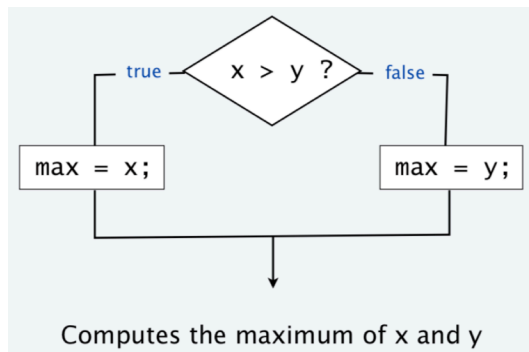

Computes the maximum of x and y

<https://introcs.cs.princeton.edu/java/lectures/>

7

## The increment/decrement operators

- Increment (**++**) and decrement (**--**) are **unary** operators that add or subtract one, to or from their operand, respectively
  - ✓ **pre-increment** and **pre-decrement** operators increment (or decrement) their operand by 1, and the value of the expression is the resulting incremented (or decremented) value
  - ✓ **post-increment** and **post-decrement** operators increase (or decrease) the value of their operand by 1, but the value of the expression is the operand's original value prior to the increment (or decrement) operation

from: wikipedia

8

## The increment/decrement operators

• Example:

```
int a = 5;
```

```
std::cout << 5 + ++a
```

v.s

```
int a = 5;
```

```
std::cout << 5 + a++;
```

9

## Trace the code

```
int x;  
int y;  
  
x = 1;  
y = ++x;  
  
// Checkpoint a (status of x and y?)  
  
y = x++;  
  
// Checkpoint b (status of x and y?)  
  
x = 5;  
y = x--;  
  
// Checkpoint c (status of x and y?)  
  
y = --x;  
  
// Checkpoint d (status of x and y?)
```

from: wikipedia

10

the for loop

## Flowchart of for statement

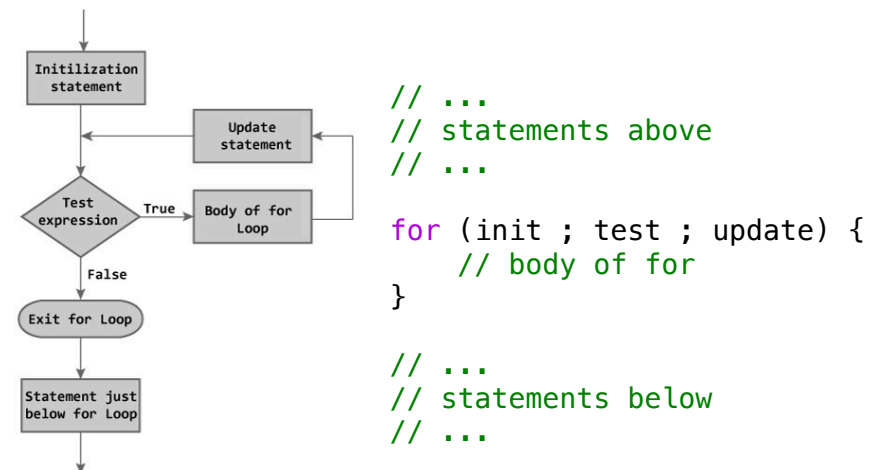


Figure: Flowchart of for Loop

<https://www.programiz.com/cpp-programming/for-loop>

12

1. initialization

4. update

2. boolean

```
for (int i = 0 ; i < 3 ; i++) {  
    std::cout << i << ' ' ;  
}
```

3. statement

then go back to step 2

13

#### A for Statement

//Illustrates a for loop.

```
#include <iostream>  
using namespace std;
```

```
int main()  
{  
    int sum = 0;  
    for (int n = 1; n <= 10; n++)  
        sum = sum + n;  
  
    cout << "The sum of the numbers 1 to 10 is "  
        << sum << endl;  
    return 0;  
}
```

*Initializing action* (points to `n = 1`)  
*Repeat the loop as long as this is true.* (points to `n <= 10`)  
*Done after each loop body iteration* (points to `n++`)  
//Note that the variable n is a local variable of the body of the for loop!

#### Output

The sum of the numbers 1 to 10 is 55

from: Problem Solving with C++, 10th Edition, Walter Savitch

14

## What is the output?

```
int value = 0;
```

```
for (int i = 0 ; i < 5 ; i++) {  
    value += (i * 10);  
}
```

```
std::cout << value << std::endl;
```

15

#### for Loop with a Multistatement Body

##### Syntax

```
for (Initialization_Action; Boolean_Expression; Update_Action)  
{  
    Statement_1  
    Statement_2  
    :  
    :  
    Statement_Last  
}
```

*Body* (points to the statements inside the loop body)

##### Example

```
for (int number = 100; number >= 0; number--)  
{  
    cout << number  
        << " bottles of beer on the shelf.\n";  
    if (number > 0)  
        cout << "Take one down and pass it around.\n";  
}
```

from: Problem Solving with C++, 10th Edition, Walter Savitch

16

## Examples

```
int n = 1;
```

```
for ( ; n <= 10 ; n = n + 2)
    std::cout << n << std::endl;
```

```
for (n = 10 ; n > 0 ; n -= 2) std::cout << n << std::endl;
```

```
for (n = 0 ; n > -30 ; n = n - 7) {
    std::cout << n << std::endl;
}
```

```
for (double x = 16.0 ; x >= 2.0 ; x = sqrt(x)) {
    std::cout << x;
    std::cout << std::endl;
}
```

17

## What is the output?

```
for (int count = 1 ; count <= 10 ; count++){
    std::cout << "Hello\n";
}
```

18

## Careful with the semi-colon

- Semi-colon is used to end statements
- Placing it after the parenthesis of a `for` loop creates an **empty statement**

19

## Different output?

```
for (int count = 1 ; count <= 10 ; count++){
    std::cout << count << std::endl;
}
```

V.S

```
for (int count = 1 ; count <= 10 ; ++count){
    std::cout << count << std::endl;
}
```

20

## Question

---

- Write a single for loop to print the first 50 even numbers

21

## Question

---

- Write a single for loop to print the average of the first 25 multiples of 3

22