

Maverick Payments

Our **API** is organized around **REST**. It has predictable resource-oriented URLs, accepts form-encoded request bodies, returns **JSON**-encoded responses, and uses standard HTTP response codes, authentication, and verbs.

General Information

Authentication

Our API uses **Access Token** to authenticate requests. You can view and manage your **Access Token** in the Dashboard.

The method we use for authentication is Bearer Authentication

All API requests must be made over **HTTPS**. Calls made over plain HTTP will fail. API requests without authentication will also fail.

Warning Don't share your Access Token with anybody.

Bearer Authentication

Bearer Authentication is an HTTP authentication scheme that involves security tokens called bearer tokens. The client must send this token in the Authorization header when making requests to protected resources.

```
Authorization: Bearer
```

Errors

We use conventional HTTP response codes to indicate the success or failure of an API request.

The **2XX** range indicates success.

The **4XX** range indicates an error that failed given the information provided (e.g., a required parameter was omitted, etc.).

The **5XX** range indicates an error with our servers (these are rare).

In addition, `name`, `message`, `code`, and `status` will be applied to the error response.

Example Response

json

```
{
  "name": "Unprocessable entity",
  "message": "Amount cannot be blank.",
  "code": 422,
  "status": 422
}
```

Responses

Our response will be divided into 3 sections:

`items` - contains the actual result of your request

`_meta` - contains meta information of your request like total results, number of pages, etc.

`_links` - contains links to the next page, last page, etc.

json

```
{
  "items": [
    // Results goes here
  ],
  "_links": {
    "self": {
      "href": "/path?page=1&per-page=10"
    },
    "next": {
      "href": "/path?page=2&per-page=10"
    }
  }
}
```

Filters

Filters will help you find what you search.

Parameters	Description
lt	Stands for the less-than sign <
gt	Stands for the greater-than sign >

lte	Stands for the less-than or equals sign <=
gte	Stands for the greater-than or equals sign >=
eq	Stands for the equals sign =
neq	Stands for the not equals sign !=
in	IN
nin	NOT IN
like	LIKE
or	OR
and	AND
not	Exclude specified values

Use `NULL` as a value if you want to select empty values.

Only fields marked with `Filterable` can be used for filtering the results.

AUTHORIZATION Bearer Token

Token

GET Example - gte



`https://example.maverickpayments.com/path?filter[createdOn][gte]=2023-01-01 00:00:00`

Find all records created after `2023-01-01 00:00:00`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder `Filters`

PARAMS

<code>filter[createdOn][gte]</code>	<code>2023-01-01 00:00:00</code>
-------------------------------------	----------------------------------

GET Example - between



https://example.maverickpayments.com/path?filter[and][0][createdOn][gte]=2019-01-01 00:00:00&filter[and][0][createdOn][lte]=2019-01-01 23:59:59

Find all records created between `2019-01-01 00:00:00` and `2019-01-01 23:59:59`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Filters](#)

PARAMS

`filter[and][0][createdOn][gte]` 2019-01-01 00:00:00

`filter[and][0][createdOn][lte]` 2019-01-01 23:59:59

GET Example - like



https://example.maverickpayments.com/path?filter[customer.email][like]=example.com

Find all records whose email contains `example.com`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Filters](#)

PARAMS

`filter[customer.email][like]` example.com

GET Example - in



https://example.maverickpayments.com/path?filter[id][in][]=1&filter[id][in][]=2

Find all records with IDs `1` or `2`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Filters](#)

PARAMS

filter[id][in][]	1
filter[id][in][]	2

GET Example - non-empty



`https://example.maverickpayments.com/path?filter[not][id]=NULL`

Find all records with ID with non-empty values (ie. NOT NULL)

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Filters](#)

PARAMS

filter[not][id]	NULL
-----------------	------

Pagination

If there are too many results of your request, we will enable pagination of the results.

Two parameters can control pagination `page` and `per-page`.

`page` - The page number you want to get. By default is `1`.

`per-page` - Items per page. The value can be between `1` and `50`. By default is `30`.

AUTHORIZATION Bearer Token

Token

GET 10 results per page



`https://example.maverickpayments.com/<path>?page=1&per-page=10`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Pagination](#)

PARAMS

page	1
per-page	10

Data Types

Type	Description
Boolean	☐ Yes or ☐ No
Integer	A number which is not a fraction; a whole number. 1 , 2 , 3 ...
Number	Floating point numbers. 1.5 , 2.9 , 3.59 ...
String	A string is a collection of characters, can contain alphanumeric characters.
ENUM	Enumeration type or ENUM for short, is a data type to categorize named values.
Date	Date is in the following format YYYY-MM-DD (Example: 2019-02-17) Always in UTC time zone
Datetime	Date and time is in the following format YYYY-MM-DD HH:MM:SS (Example: 2019-02-17 20:05:34) Always in UTC time zone.

Merchants

AUTHORIZATION Bearer Token

Token

Sandbox

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET Sandbox Payment Gateway



<https://sandbox-gateway.maverickpayments.com/>

For testing purposes, please use our sandbox endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Card Payments

In the payment gateway, your requests need to always include the system `terminal.id`. Within itself the system `terminal.id` contains DBA, MID, and terminal TID information, this way we always ensure that you are using the correct MID and TID if you have more than one.

AUTHORIZATION Bearer Token

Token
.....

Card Payment Webhooks

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Card Payments](#)

Payment Transaction Created

Notification upon the creation of a payment transaction.

```
json
```

```
{  
  ...
```

```
"module": "transaction",
"action": "create",
...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Card Payments](#)

Refund Transaction Created

Notification upon refund creation.

```
json

{
  ...
  "module": "transaction",
  "action": "refund",
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Card Payments](#)

Recurring Transaction Created

Notification upon recurring creation.

```
json

{
  ...
  "module": "transaction",
  "action": "recurring",
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Card Payments](#)

High Risk Authorization Warning

High risk authorization events that you can subscribe to.

Please note: the high risk authorization features must be enabled for your gateway's terminal. If utilizing the internal dashboard gateway, navigate to terminal settings and enable high risk validation.

High risk authorization objects.

Fields	Description	Type
id	The unique ID assigned by our system to every event.	Integer
module	Event source or domain. For this payload: transaction.	String
action	Triggering action name. For this payload: <code>highRiskAuthorizationWarning</code> .	String
date	Timestamp when the event occurred (UTC).	String
data.merchant.dba	Merchant's doing-business-as name.	String
data.merchant.mid	The Merchant Identification Number (MID)	Integer
data.previousAuthorization.amount	The amount of the authorization	Number

Example

```
json
{
  "id": 999,
  "module": "transaction",
  "action": "highRiskAuthorizationWarning",
  "date": "2026-02-03 23:39:42",
  "data": {
    "merchant": {
      "dba": "Acme Corp",
      "mid": 123456789
    },
    "previousAuthorization": {
      "amount": 68.
    }
  }
}
```

POST Authorization



`https://gateway.maverickpayments.com/payment/auth`

The Auth method initializes an authorization-only transaction. Authorization-only transactions are not included in the batch for settlement.

A separate capture request must be submitted in order for the transaction to be settled.

The suggested authorization period is **10 days**. You need to capture a payment within the authorization period to collect the funds of the transaction. Note, the authorization period can vary by issuer and/or card brand, it is your responsibility to ensure whatever window period is appropriate for your use case.

It is important to note that these requests need to always include the system `terminal.id` for which you are making a payment.

Object

Fields	Description	Type	Filterable	Required	Readonly	
id	Unique ID of the payment record	Integer	Yes	No	Yes	
terminal	Terminal Object	Object	No	Yes	No	
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	No	
amount	Payment amount	Number	No	Yes	No	
source	Transaction source <code>Internet</code> , <code>Phone</code> and <code>Mail</code>	ENUM	Yes	Yes	No	
origin	Origin of the transaction (i.e. Website, CRM, etc)	String	Yes	No	No	
level	Desired level	ENUM	Yes	Yes	No	

If you pass the `level` parameter in your request, we will validate the field requirements of the level you have requested. In the event of an incomplete validation we will return an error with the missing fields.

If a transaction has a `batch` information in the response, this means that this transaction has batched.

Products Object

Fields	Description	Type	Filterable	Required	Readonly	
id	Product ID	String	No	No	No	
name	Product Name	String	No	No	No	
price	Product Price	Number	No	No	No	
quantity	Product Quantity	Integer	No	No	No	
measurementUnit	Product Measurement Unit	String	No	No	No	
commodityCode	Product commodity code. It should contain a maximum of 12 characters. Only letters, numbers and spaces are	String	No	No	No	

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "1.99",
  "source": "Internet",
  "level": 1,
  "card": {
    "name": "John Wick",
    "number": 5309572686772257,
    "exp": "12/20"
```



The Sale method creates a new authorization and a capture request by default.

It is important to note that these requests need to always include the system `terminal.id` for which you are making a payment.

Sale transactions are settled automatically while auth-only transactions are not included in the batch for settlement.

Keep in mind the required fields in order to initiate a sale transaction. If you want to perform level 2 or level 3 the required fields are outlined below.

Fields	Level 2	Level 3	Visa	Mastercard	AMEX (Level 2 Only)
order.id	No	Yes	Yes	Yes	No
order.date	No	Yes	Yes	No	No
order.invoice	No	Yes	Yes	No	No
order.summaryCommodity Code	No	Yes	Yes	No	No
order.description	No	No	No	No	Yes
order.supplierRefNo	No	No	No	No	Yes
order.customer.id	No	No	No	No	Yes
order.customer.vat	No	Yes	Yes	No	No
order.shipping.fromZip	No	Yes	Yes	Yes	No
order.shippin	No	Yes	Yes	Yes	Yes

Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the payment record	Integer	Yes	No	Yes
terminal	Terminal Object	Object	No	Yes	No
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	No
amount	Payment amount	Number	No	Yes	No

source	Transaction source Internet , Phone and Mail	ENUM	Yes	Yes	No
origin	Origin of the transaction (i.e. Website, CRM, etc)	String	Yes	No	No
level	Desired level	ENUM	Yes	Yes	No

If you pass the `level` parameter in your request, we will validate the field requirements of the level you have requested. In the event of an incomplete validation we will return an error with the missing fields.

If a transaction has a `batch` information in the response, this means that this transaction has batched.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "2.10",
  "source": "Internet",
  "level": 1,
  "card": {
    "name": "John Wick",
    "number": 5309572686772257,
    "exp": "12/30"
```

POST Capture



<https://gateway.maverickpayments.com/payment/<id>/capture>

The capture method marks an Auth transaction for settlement, therefore the transaction ID is needed. This method also allows adjustments of the transaction amount.

If your request does not include the `amount`, our system will settle the full transaction with no changes in the `amount` field and vice versa.

You can perform **multiple capture requests** for a specific auth transaction until you reach the authorized amount.

After that, you must submit a new authorization request to capture additional amounts.

Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the capture record	Integer	Yes	No	Yes
terminal	Terminal Object	Object	No	Yes	No
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	No
amount	Amount of the capture	Number	No	No	No
partial	Partial Object	Object	No	No	No
partial.total	Total payments	Integer	No	No	No
partial.sequence	Current payment sequence number	Integer	No	No	No
sendReceipt	Send receipt	Integer	No	No	No

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "amount": "1.99",
  "partial": {
    "total": null,
    "sequence": null
  }
}
```

POST Partial Capture



<https://gateway.maverickpayments.com/payment/<id>/capture>

We provide the functionality to create partial captures.

If `partial` is included in the request the gateway marks the specified transaction amount for settlement.

When performing partial capture it is required to pass the `sequence` and `total` to indicate how many partial captures will be performed.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": 0.90,
  "partial": {
    "sequence": "1",
    "total": "2"
  }
}
```

POST Refund



<https://gateway.maverickpayments.com/payment/<id>/refund>

The refund method is used to refund/void an authorized or settled transaction. This method will void or reverse the transaction based on the card network.

Important: We do not allow refunds without `transaction.id` and an `amount` that exceeds the captured of the original transaction.

We support additional data for a refund request. If no amount is specified in the request, the system will return the full amount of the original transaction. You need to provide any discount and tax amount that was in the original transaction to perform a partial refund.

Important: In a refund request if the `amount` is present but the `order.tax` and `order.discounts` amounts are not present, the `amount` must be less than or equal to the subtotal amount of the original order.

The system will create a new transaction id for all refund transactions.

- If the original transaction has been settled, the new transaction id created by the return will be processed offline and will not generate an auth code.

and will not generate an auth code.

- If the original transaction has not been settled, we link the original transaction to the return transaction. The gateway automatically reverses the transaction and an auth code will be generated.

Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the refund record	Integer	Yes	No	Yes
terminal	Terminal Object	Object	No	Yes	No
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	No
amount	Amount of the refund	Number	No	No	No

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "id": 883,
  "amount": "1.99",
  "origin": "API",
  "type": "Return",
  "level": 1,
  "authCode": null,
  "parent": {
    "id": 882
  },
  "terminal": 5
```

POST Partial Refund



<https://gateway.maverickpayments.com/payment/<id>/refund>

You are allowed to perform a partial refund by providing a lower `amount` than the original captured transaction if no `amount` is provided the transaction will be fully refunded. You need to provide any discount and tax amount that was in the original transaction to perform a partial refund.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "1.10",
  "source": "Internet",
  "level": 1,
  "card": {
    "name": "John Wick",
    "number": 5146312200000035,
    "exp": "12/20"
```

POST Soft/Dynamic Descriptor



<https://gateway.maverickpayments.com/payment/sale>

Soft Descriptor or Dynamic Descriptor functionality gives you the ability to modify the statement descriptor on a per-transaction basis. Using this feature, you gain the ability to change this information according to your discretion and needs.

In order to use this functionality always include `order.description` in your **Sale** or **Auth** requests.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "9.99",
  "source": "Internet",
  "level": 1,
```

```
"card": {  
  "name": "John Wick",  
  "number": 5146312200000035,  
  "exp": "12/20"
```

POST Card Authentication



<https://gateway.maverickpayments.com/payment/card-authentication>

The Card authentication method supports a zero-dollar authorization. This way you can check that the credit card is valid, and if needed that the card has enough funds on it for the transaction. This type of authorization does not hold any funds on the cardholder account.

A **zero dollar** authorization cannot be submitted for settlement or for return.

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the payment record	Integer	Yes	No	Yes
terminal	Terminal Object	Object	No	Yes	No
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	No
amount	Amount of the payment	Number	No	Yes	No
source	Where the card details come from Internet or MOTO	ENUM	Yes	Yes	No
card	Card details	Object	No	Yes	No
card.name	Cardholder name	String	No	Yes	No
card.number	Card number	Integer	No	Yes	No

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "0.00",
  "source": "Internet",
  "level": 1,
  "card": {
    "name": "John Wick",
    "number": 5146312200000035,
    "exp": "12/20"
```

POST Card Tokenization



<https://gateway.maverickpayments.com/payment/generate-token>

Tokenization is the process of exchanging sensitive card data with a unique token without compromising its security when you desire to use this card for **future payments**. A token is up to 64-digit characters.

Keep in mind that when you are using a token for a transaction we also automatically include the `networkTransactionId` in the request.

Tokenization can be performed during a **sale**, **auth** and **cardAuthentication** request when the value of `card.save` parameter is passed as `Yes`. We will generate a secure token for that card. The response will include the first six and the last four digits of the card number in the `card.number` field and a token in the `card.token` field, which can be used in the future in place of a card number.

Although you can tokenize a card in any **sale**, **auth**, and **cardAuthentication** request, as mentioned above, this endpoint can be utilized to generate a token-only request for your convenience.

Fields	Description	Type	Filterable	Required	Readonly
terminal	Terminal Object	Object	No	Yes	No
terminal.id	Terminal ID	Integer	No	Yes	No
source	Where the card details come from <code>Internet</code> or <code>MOTO</code>	ENUM	No	Yes	No
card	Card details	Object	No	Yes	No
card.name	Cardholder name	String	No	Yes	No
card.number	Card number	Integer	No	Yes	No
card.exp	Card expiration date <code>mm/yy</code>	String	No	Yes	No

card.cvv	Card security code	Integer	No	Conditional	No
----------	--------------------	---------	----	-------------	----

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "source": "Internet",
  "card": {
    "name": "John Wick",
    "number": 5146312200000035,
    "exp": "12/30",
    "cvv": "998"
  }
}
```

POST Card Tokenization with Global Token



<https://gateway.maverickpayments.com/payment/token-exchange>

Currently we support two types of card tokens. Regular tokens and `Global Tokens`. The difference between the regular and the global token is that the regular token **can only be used on the terminal on which the card was tokenized** whereas the Global Token can be used across all of your terminals.

By default a card is tokenized with a regular token specifically issued for the terminal on which the payment was made. In order to receive `Global Tokens` instead of regular tokens the setting must be explicitly enabled in your terminal settings.

If you have regular token/s which you want to exchange for global tokens (or vice versa) you can use the **token-exchange** endpoint.

To exchange a regular token for a global token, your terminal **MUST** have the Global Tokens Functionality Enabled.

IMPORTANT The token exchange functionality is not a tokenization endpoint. If you have a regular token issued while the Global Token functionality was disabled for your terminal, then you will not receive a global token for it. In order to do so, you have to tokenize the card again.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 1
  },
  "token": "XXXiuS1XiX9w44XX"
}
```

POST Sale with a Fee Terminal



<https://gateway.maverickpayments.com/payment/sale>

In some cases, there can be 2 terminals involved in one transaction. We call this functionality a Fee Terminal.

You can utilize this endpoint if your merchant account is setup to have a separate fee terminal. The transaction will be divided into two separate authorizations and captures.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Card Payments](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "20.99",
  "source": "Internet",
  "level": 1,
  "card": {
    "name": "John Wick",
    "number": 5309572686772257,
    "exp": "12/30"
```

Hosted Form

With our Gateway embedded hosted form functionality, you can achieve quick, efficient, and secure online transactions, without the worry of PCI compliance.

The overall process to generate and prepare a hosted gateway payment form is as follows.

1. Create a POST request with the required parameters for your needs
2. We will return the code of the hosted form and the URL in the response

Hosted Form Object

Fields	Description	Type	Required
dba	Db Object	Object	Yes
dba.id	DBA ID	Integer	Yes
terminal	Terminal Object	Object	Yes
terminal.id	Terminal ID	Integer	Yes
threeds	Activate 3D Secure <code>Required</code> , <code>Disabled</code> or <code>RequiredIfAvailable</code>	ENUM	No
amount	Payment Amount	Number	No
feeType	The type of sales tax applied <code>amount</code> or <code>percent</code>	ENUM	No
fee	The sales tax value	Number	No

The Amount and External ID are dynamic parameters that can still be provided after the form is generated.

If you want to dynamically provide Amount and External ID you can do so at the end of the URL using `&amount=&externalId=` or you can provide them in the corresponding javascript parameters. Keep in mind that if the amount is not provided the client will be prompted to enter it.

The return URL also gives you the option to change the mapping of specific parameters (, , and) based on your needs.

The parameters that we have are as follows: Success, Failed, and Cancelled.

IMPORTANT If you have set `sendReceipt` to "Yes" `requestContactInfo` needs to be also "Yes" as well or no receipt will be generated.

Dynamic Contact and Billing Information

Option 1

Option 1

We give you the ability to provide the contact and billing information in the request to generate the form. This will return you the form with those fields pre-filled. Example requests and responses are provided.

Option 2

We also give you the ability to dynamically set Contact and Billing information in your environment without the need to constantly generate new forms this is how:

If you set `requestContactInfo` and/or `requestBillingInfo` to Yes, you can dynamically fill in the 'contactInfo' and/or 'billingInfo' objects which are present in the options of the response code of the generated form.

json

```
"data": "eyJkYmFJZCI6MTEyLCJ0ZXJtaW5hbElkIjoxMDksInRocmVlZHMlOiJEaXNhYmxlZCI6ImV4dGVybmFsS",
"amount": 2,
"fee": 2,
"feeType": "amount",
"contactInfo": {
  "name": "John Doe",
  "email": "john.doe@example.com",
  "phone": "+1 800 555 111"
},
"billingInfo": {
  "country": "United States".
```

Or you can add the base64 encoded version of 'contactInfo' and/or 'billingInfo' JSON.stringified objects in the URL. Like in the following JS example:

javascript

```
let url = "https://dashboard.maverickpayments.com/gateway/public/form?data=eyJkYmFJZCI6MTEyLCJ0ZXJtaW5hbElkIjoxMDksInRocmVlZHMlOiJEaXNhYmxlZCI6ImV4dGVybmFsS";
let contactInfoObject = {
  "name": "John Doe",
  "email": "john.doe@example.com",
  "phone": "+1 800 555 111"
};
let contactInfoHash = btoa(JSON.stringify(contactInfoObject));
let billingInfoObject = {
  "country": "United States",
  "address": "Example address 1",
  "address2": "Example address 2".
```

AUTHORIZATION Bearer Token

Token

.....

POST Generate



https://dashboard.maverickpayments.com/api/gateway/hosted-form

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Hosted Form](#)

Body raw (json)

json

```
{
  "dba": {
    "id": 9
  },
  "terminal": {
    "id": 24
  },
  "threads": "Disabled",
  "amount": 2,
  "feeType": "amount",
  "fee": 2
```

POST Generate with Billing and Contact Information



https://dashboard.maverickpayments.com/api/gateway/hosted-form

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Hosted Form](#)

Body raw (json)

json

```
{
  "dba": {
    "id": 9
  },
  "terminal": {
    "id": 24
  },
  "threads": "Disabled",
  "amount": 2
```



```
"amount": 2,  
"feeType": "amount",  
"fee": 2
```

Hosted Fields

Hosted Fields allows you to create a highly customized payment page for your website or application. All fields are completely customizable to fit your web page design and branding. In order to use this functionality you need to have an API token with permission `Credit/Debit Card Payments Read and Write` assigned to it.

AUTHORIZATION Bearer Token

Token

How it Works

Everytime when a payment should be made, you must include our `HostedFields.js` asset into your website, then issue an `Hosted Fields Token` with which a payment can be processed. You then initialize a payment form (with the `Hosted Fields Token`) by providing the required configuration and styling for it. We will render the payment form the way you requested it and process the payment when the customer submits the form with all required data (card number, cvv, etc.). In order to make it fully functional you will need to handle all payment form events that occur on your end. We're going to notify you of these events (validation failure, validation success, 3DS started, processing start and so on), but you will need to handle them accordingly (e.g., updating the UI when required) to make the payment experience user friendly. Hosted Fields Asset URL:

`https://dashboard.maverickpayments.com/js/HostedFields.js`

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder `Hosted Fields`

Hosted Fields Token

A `Hosted Fields Token` is required to process a hosted fields payment without exposing your API Token.

Only a single payment can be made with one Hosted Fields Token. This means that for every payment you need to get fresh Hosted Fields Token

After the payment is complete, you can use the `Hosted Fields Token` to get the tokenized card

if card saving was allowed during the payment process.

To get an `Hosted Fields Token` , you need to make a call to this endpoint:

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

POST Hosted Fields Token



<https://dashboard.maverickpayments.com/api/hosted-fields/token>

Supported Parameters:

Fields	Description	Type	Default	Required
expiration	Token expiration in minutes. The maximum allowed value is 30	Integer	30	No
terminal	The ID of your terminal on which the payment will be processed. Must be an active terminal using our Gateway	Integer	N/A	Yes
domain	The Website domain on which the token will be used. Please use full URL Name. E.g. https://my.website.com	String	N/A	Yes
saveCard	Whether you want to retrieve the tokenized	String	disabled	No

`expiration` Parameter

Controls the expiration time of the token. Defaults to 15 minutes if not provided. The maximum allowed value is 30. If card saving (card tokenization) was allowed by the user during the payment process (or if you made it a requirement), you must retrieve the tokenized card while the `Hosted Fields Token` is still active.

For example if you issue an `Hosted Fields Token` with an expiration time of 10 minutes, then the payment and card token retrieval must occur within this time limit. Otherwise, you will need to issue a new `Hosted Fields Token` . **If the payment is made within the time limit but the card token is not retrieved within the same period, it will be lost and will not be available to you**

terminal Parameter

Specifies the terminal ID on which the payment will be processed. The terminal must be in **Active** status and must be an internal terminal, pointing to our gateway.

domain Parameter

Specifies the URL on which the **Hosted Fields Token** will be used and the payment form will be rendered. You need to specify the full URL. E.g: **https://my.website.com** . If your website is accessed with a port number, you need to provide it too. E.g: **https://my.website.com:3000**

saveCard Parameter

Specifies whether you want to save the tokenized card after the payment is made. Accepted values: **required** , **optional** , **disabled** .

required

The card will be tokenized and available for you to fetch after the payment is processed. A message will be rendered above the payment form submit button informing the user that their card will be saved. You are responsible for requesting the tokenized card after the payment.

optional

Card tokenization will be optional. The user will be presented with a checkbox to explicitly confirm that they want their card to be saved for future payments. If unchecked the card token will not be available for you.

disabled

This is the default value of the **saveCard** parameter. Card tokenization will not be performed and the card token will not be available to you.

3ds Parameter

Enables or disables the 3DS Verification when it is set as optional on the terminal. If the terminal you specified requires 3DS Verification, then the 3DS will be enabled by default and you wont be able to disable it in your hosted fields form. If 3DS verification is disabled on your terminal, then the 3DS will also be disabled. If you still request 3DS verification for the **Hosted Fields Token** when 3DS is disabled, an exception will be thrown.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder **Hosted Fields**

Body raw (json)

json

```
{
  "expiration": 15,
  "terminal": 3,
  "domain": "https://my.website.com"
```

```
domain : https://my.website.com ,  
"saveCard": "required",  
"3ds": false  
}
```

Integration Guide

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

Step 1: Include the JavaScript Library

After you have your AccessToken you can start integrating the hosted fields form into your website. First, add the `HostedFields` asset script tag to access the JavaScript Library:

javascript

```
<script src="https://dashboard.maverickpayments.com/js/HostedFields.js"></script>
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

Step 2: Add HTML Elements for all payment fields

You need some HTML elements that will act as containers in which the separate hosted fields will be rendered. Here's an example structure:

html

```
<div id="card-number"></div>  
<div id="card-expiration"></div>  
<div id="card-cvv"></div>  
<div id="card-holder-name"></div>  
<div id="submit-button"></div>
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

Step 3: Set the AccessToken and Configure the rest of the form

Main Configuration

Now you are ready to render the hosted fields form on your website. Start by setting the `Hosted Fields Token`, which you've obtained from your backend together with the payment amount. After that, you must specify all hosted fields containers together with the payment amount.

javascript

```
<script>
  const form = HostedFields.create({
    token: AccessToken,
    amount: 25, // Provide the payment amount
    externalId: null, // Max length: 64 characters
    fields: {
      "cardNumber": {
        target: "#card-number" // This is the ID of the div element that we created above
      },
      "cardExpiration": {
        target: "#card-expiration"
      }
    }
  });
```

Keep in mind that the `fields` object property names must be exactly as shown above:

`cardNumber`, `cardExpiration`, `cardCvv`, `cardHolderName`, `submit`

`externalId` field is optional. If you want to provide it, make sure it does not exceed the 64 characters limit. Make sure you provide unique IDs for every transaction.

Setting Shipping data

In case your `Hosted Fields Token` is issued with **3DS Param** set to `true` and your customer provides an AMEX (American Express) Card you will be required to provide shipping data. You will also be informed for this via an event called **hostedFields.shippingRequired** which will occur when the customer enters his card. You can provide the shipping data in two ways:

1. During initial form creation via the `shipping` property of the configuration object, see the example above.
2. Using the `setShippingInfo` method on the form instance:

json

```
form.setShippingInfo({
  address1: 'Example Address Line #1',
  country: 'US',
  city: 'Chicago',
  state: 'Illinois',
  zip: '60639'
})
```

You can use this method together with the **hostedFields.shippingRequired** event. When receiving this event you might want to explicitly check if the `shippingRequired` flag is set to `true` on the

event object. In case the user provides an AmEx card you will receive the event with flag equal to `true`, but if he changes the card to a non-AmEx card you will receive the event with flag equal to `false`.

```
json

form.addEventListener('hostedFields.shippingRequired', e => {
  if(e.detail.shippingRequired) {
    form.setShippingInfo({
      address1: 'Hello world',
      country: 'US',
      city: 'Hello city',
      state: 'Illinois',
      zip: '40005'
    })
  }
})
```

The shipping object has the following structure:

Field	Data	Type	Required
shipping.address1	Shipping Address	string	Yes
shipping.country	Shipping Country. You can use full country name or ISO2/ISO3 Code	string	Yes
shipping.city	City	string	Yes
shipping.state	State. Required when country is US	string	Mixed
shipping.zip	ZIP	string	Yes

For the 3DS Integration the `shipping` data is synonymous to the billing data. In case you collect and represent it as `billing` information in your app, it's still the same for your hosted fields integration. Just provide that billing data as `shipping` using the `setShippingInfo` or during the initialization with the correct object structure

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

Step 4: Add styling

Manually Providing CSS

The object you pass to the `create` function of the `HostedFields` library supports a second property called `styles`. There, you can provide all the CSS styles needed to render the forms in your design. E.g:

```
html

<script>
  const form = HostedFields.create({
    token: 'YOUR-ACCESS-TOKEN',
    fields: {
    },
    styles: {
      "input[type=text]": {
        'width': '100%',
        'padding': '10px',
        'border-radius': '7px',
        'border': '1px solid gray'
      }
    }
  });
```

At this point your form should be rendered and visible on your webpage.

Whenever an input is considered invalid we will add `invalid` className to the class attribute of the input. If the input is considered valid we will add `valid` className to the class attribute.

Automatically Detecting your CSS

If you don't want to provide the CSS Manually, we can detect it automatically for you. In order for this to work you need to provide us the input's HTML with already applied styles/classes and use `useTargetStyle` flag inside the field config. E.g:

```
html

<div id="card-number">
  <input type="text" class="form-control my-input-class" id="card-number-input">
</div>
<div id="card-expiration"></div>
<div id="card-cvv"></div>
<div id="card-holder-name"></div>
<div id="submit-button"></div>
<script>
  HostedFields.setToken(AccessToken);
  const form = HostedFields.create({
    token: 'YOUR-ACCESS-TOKEN',
    useTargetStyle: true,
    fields: {
      "card-number-input": {
        // ...
      }
    }
  });
```

In the above example we create an input with our own styles (provided by the classes `form-control` and `my-input-class`) and an id `card-number-input`, then we inform the config that this element (`#card-number-input`) will be the target element for the iframe providing the card number input and that it needs to use its styles to render the input. And you are ready to go, the iframe will copy your styles and apply them for you.

Keep in mind that your original `input` element will be removed and the iframe will be inserted inside its parent. In the example above the parent is `div#card-number`.

This folder is using Bearer Token from folder [Hosted Fields](#)

Step 5: Listen for Events

The `form` variable returned by our JavaScript library is an instance of **EventTarget** object. This means that you can **addEventListener** to all of the various events it emits while the user interacts with it or while the payment is processed. All of the emitted events are **CustomEvents** and they might have payload containing event related data under `event.detail` Object. Here's a full list:

Event Name	Description	Detail
hostedFields.ready	The form is initialized and rendered	N/A
hostedFields.error	Configuration or Initialization Error. E.g. <code>Invalid Hosted Fields Token</code> , <code>Invalid Domain</code> , <code>Server Error</code> etc.	<code>{message: string}</code>
hostedFields.validation	Validation result for a given field. Occurs while user is typing and after a payment form is submitted.	<code>{valid: bool, field: string, message: string}</code>
hostedFields.shippingRequired	Whether or not the shipping data is required. Occurs when provided card is AmEx and 3DS is enabled	<code>{shippingRequired: bool}</code>
card.type	Brand of the credit/debit card provided used by the user	string
submit processing	Payment processing has	N/A

Example event handlers:

javascript

```
const formMessage = document.getElementById('#formMessage'); // Assume this is you notification message container

// We initialized the form variable in Step 4.
form.addEventListener('3ds.start', () => formMessage.innerHTML = '3DS Verification Started')

// Form submitted event
form.addEventListener('submit.processing', () => formMessage.innerHTML = 'Your payment is being processed')
```



```
// Payment Result Event
form.addEventListener('submit.result', e => {
  const success = e.detail.result:
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

Step 6: Get the tokenized card

When a payment is completed and you did set **saveCard** parameter to `required` or `optional` (and the user gave the permission) the card token will be available for you to fetch. To do so you need make a POST request to following endpoint:

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

POST Get the tokenized card



<https://dashboard.maverickpayments.com/api/hosted-fields/card-token>

You need to perform this call before your `Hosted Fields Token` expires.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Hosted Fields](#)

Body raw (json)

```
json

{
  "accessToken": "ACCESS-TOKEN-USED-FOR-PAYMENT"
}
```

Add Payment Method Page

If you want to use the hosted fields functionality to create an `Add Payment Method` page to your

website the process is the same as described above. Just make sure you set the `amount` parameter to `0`. And when issuing the `Hosted Fields Token` pass the `saveCard` parameter as `required`. We will make sure to render the correct submit button text so the users know they aren't paying anything.

javascript

```
<script>
  const form = HostedFields.create({
    token: 'YOUR-ACCESS-TOKEN',
    amount: 0, // Provide 0 as payment amount
    fields: {...},
    styles: {...}
  });
</script>
```

After the user submits the form the **tokenized card will be available**

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

Testing your integration

You can use our sandbox environment to test your integration.

<https://sandbox-dashboard.maverickpayments.com/>

Create your API Token there with permission `api-creditcard-payment-read-write` and use it to issue `Hosted Fields Token` and render a hosted fields form on your website. You can use our **test cards** to make payments and fetch tokenized cards.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Hosted Fields](#)

CustomerVault

Customer Vault securely stores sensitive customer billing information, allowing subsequent transactions to be processed without the need for you to recollect the information or store it on your own system. This makes for a quick and simple billing process.

The Customer Vault API offers the following capabilities:

- Create and modify customer profiles

- Create and modify customer profiles.
- Securely store customer payment information, such as card numbers, in the Customer Cards, and link it to the customer profile.
- Store multiple payment cards for each customer.
- Use tokens to process transactions.

You can **create**, **update**, and **delete** customer information from the customer vault.

Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the customer	Integer	Yes	No	Yes
dba	DBA Object	Object	No	Yes	No
dba.id	ID	Integer	Yes	Yes	No
firstName	First name	String	Yes	No	No
lastName	Last name	String	Yes	No	No
company	Company	String	Yes	No	No
email	Email	String	Yes	Yes	No
website	Website	String	No	No	No
phone	Phone	String	Yes	Yes	No
altPhone	Alt phone	String	No	No	No
identificator	Internal customer ID	String	Yes	Yes	No

AUTHORIZATION Bearer Token

Token

Sandbox

IMPORTANT Please be aware the CustomerVault URL is different than what is referenced above in the merchant section of this documentation. Please ensure to use the correct URL endpoint for CustomerVault as shown below.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [CustomerVault](#)

`https://sandbox-dashboard.maverickpayments.com/<path>`

For testing purposes, please use our sandbox endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Hosted Card Form

With our Customer Vault embedded hosted form functionality, you can achieve quick, efficient, and secure customer card tokenization without the worry of PCI compliance.

The overall process to generate and prepare a hosted customer vault card form is as follows.

1. Create a POST request with the required parameters for your needs
2. We will return the code of the hosted form and the URL in the response
3. You can embed this form to collect customer card data in your vault securely.

Hosted Form Object

Fields	Description	Type	Required
dba	Db Object	Object	Yes
dba.id	DBA ID	Integer	Yes
terminal	Terminal Object	Object	Yes
terminal.id	Terminal ID	Integer	Yes
customerVault	Customer Vault Object	Object	No
customerVault.id	The id of the Customer in the Customer Vault	Integer	No
returnUrl	The return URL after payment completion (i.e success/error page)	String	No
returnUrlNavigation	How to redirect the URL (Inside/Outside	ENUM	No

URL (inside/outside
of frame) token or

IMPORTANT If you do not supply `customerVault.id`, the generated code that we supply will include two additional parameters `customerVaultId` and `customerVaultToken` which you will need to dynamically provide when you are embedding the code. This information is needed to identify the correct customer in your Customer Vault.

In the return URL we will pass the Customer ID and Card ID as well as the status. The parameters that we have are: **Success** and **Cancelled**

AUTHORIZATION Bearer Token

Token

POST Generate



<https://dashboard.maverickpayments.com/api/customer-vault-card/form>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Hosted Card Form](#)

Body raw (json)

json

```
{
  "dba": {
    "id": 3
  },
  "terminal": {
    "id": 2
  },
  "customerVault": {
    "id": 1
  },
  "returnUrl": ""
}
```

Customers

Use this endpoint to manage all of your customers in the Customer Vault.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [CustomerVault](#)

GET List



<https://dashboard.maverickpayments.com/api/customer-vault>

List all of your customers

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

GET View



<https://dashboard.maverickpayments.com/api/customer-vault/<customerId>>

Use this endpoint to view information for a specific customer.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

POST Create



<https://dashboard.maverickpayments.com/api/customer-vault>

Creating a Customer can be achieved using this endpoint

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "dba": {
    "id": "1"
```

```
{,
  "firstName": "John",
  "lastName": "Wick",
  "email": "johnwick@email.com",
  "phone": "+18187740010",
  "description": "Description to help me identify the customer"
}
```

PUT Update



<https://dashboard.maverickpayments.com/api/customer-vault/<customerId>>

The update endpoint is used to modify the customer's information in the Customer Vault. You can modify personal details and company information of the customer in the vault.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "phone": "+18187267744"
}
```

DELETE Archive



<https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/archive>

When a specific customer in the vault has transactional history, that customer cannot be deleted. In this case, the customer needs to be archived.

NOTE We allow a customer to be returned to active status from archived.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

DELETE Delete



<https://dashboard.maverickpayments.com/api/customer-vault/<customerId>>

If a specific customer in the vault has no transactional history you can delete the customer using this endpoint.

IMPORTANT You cannot restore a deleted customer. If you are unsure of future use we suggest archiving the customer.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Cards

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [CustomerVault](#)

GET List Cards



<https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/cards>

List all stored payment information for a customer. This will return an object of all the stored payment card records on file for a specific customer in the vault.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

GET View



<https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card/<id>>

To view a single card record for a specific customer use the following:

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

POST Add Card



https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "billing": {
    "id": 34
  },
  "terminal": {
    "id": 1593
  },
  "cvv": "996",
  "exp": "12/31",
  "holderName": "John Wick",
  "number": "6011421812165456"
```

PUT Update Exp Date



https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card/<cardId>/change-exp-date

You can utilize this endpoint to update/change the expiration date of a stored and tokenized card in the Customer vault

IMPORTANT Exp.Date Format [MM/YY]. 12/30

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "exp": "12/30"
}
```

PUT Update Status



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card/<cardId>/change-status`

By utilizing this endpoint Card Status can be changed to `Active` or `Inactive`.

You cannot change status of an expired card.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder `CustomerVault`

Body raw (json)

json

```
{  
  "status": "Active"  
}
```

DELETE Archive



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card/<id>/archive`

If a specific payment card record is present in the transactional history of a customer we do not allow for it to be deleted. In this case, you can archive the payment card information record.

NOTE We allow a customer's payment card record to be returned to active status from archived - use our `Unarchive` endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder `CustomerVault`

PUT Unarchive



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card/<id>/unarchive`

If you want to return an archived card to an active status use the following:

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

DELETE Delete



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/card/<id>`

If a specific payment card is not present in the transactional history of a customer you can delete it.

IMPORTANT You cannot restore a deleted payment card record.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Billing Information

You can use this endpoint for customer billing-related operations in the customer vault. You can create, update, delete, or archive customer billing information.

Billing Information Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID	Integer	Yes	No	Yes
firstName	First name	String	Yes	Yes	No
lastName	Last name	String	Yes	Yes	No
address	Address	String	Yes	Yes	No
state	State Example: CA, NY, etc...	String	Yes	No	No
country	Country Example: US, UK, etc...	String	Yes	Yes	No
city	City	String	Yes	Yes	No
zip	ZIP code	String	Yes	Yes	No

archived

Yes or No

ENUM

Yes

No

Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [CustomerVault](#)

GET List



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/billing-information`

This will return an object of all the billing information records on file for a specific customer in the vault.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

GET View



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/billing-information/<id>`

Use this endpoint to view a single billing record for a specific customer

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

PUT Update



`https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/billing-information/<id>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{  
  "firstName": "Emmett",
```

```
{
  "lastName": "Brown",
  "state": "CA"
}
```

POST Create



https://dashboard.maverickpayments.com/api/customer-vault/<customerId>/billing-information

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "firstName": "John",
  "lastName": "Wick",
  "address": "123 Street Name",
  "city": "Los Angeles",
  "zip": "91206",
  "state": "CA",
  "country": "US"
}
```

Shipping Information

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [CustomerVault](#)

GET List



https://dashboard.maverickpayments.com/api/customer-vault/<customerID> /shipping-information

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

GET View



https://dashboard.maverickpayments.com/api/customer-vault/<customerID>/shipping-information/<id>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

PUT Update



https://dashboard.maverickpayments.com/api/customer-vault/<customerID>/shipping-information/<id>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "firstName": "John",
  "lastName": "Wick",
  "state": "CA"
}
```

POST Create



https://dashboard.maverickpayments.com/api/customer-vault/<customerID>/shipping-information

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{
  "firstName": "John",
```

```
"lastName": "Wick",
"address": "123 Street Name",
"city": "Los Angeles",
"zip": "91206",
"state": "CA",
"country": "US"
```

```
}
```

Recurring Payment

Recurring Payments

Easily and securely set up billing that occurs at specific intervals. If you have a customer that decides to opt for recurring billing, the system can set up an order that recurs at the decided period and automatically uses the customer's payment details to process subsequent payments.

The recurring transaction can be set with its own start and end date and time, billing frequency (complete freedom with cron expressions) and total number of payments. When recurring is configured for a customer in the system, a new transaction is sent on the set date for every billing cycle for the requested duration, without any customer or merchant intervention.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [CustomerVault](#)

GET List



<https://dashboard.maverickpayments.com/api/customer-vault/38/recurring-payments>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

GET View



<https://dashboard.maverickpayments.com/api/customer-vault/38/recurring-payment/1>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

PUT Update



https://dashboard.maverickpayments.com/api/customer-vault/38/recurring-payment/1

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{  
  
  "name": "Monthly subscription",  
  "description": "Cinema Membership",  
  "amount": "3.11"  
}
```

POST Create



https://dashboard.maverickpayments.com/api/customer-vault/38/recurring-payment

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [CustomerVault](#)

Body raw (json)

json

```
{  
  "name": "Monthly subscription",  
  "description": "Cinema Membership",  
  "amount": 3,  
  "execute": {  
    "frequency": 1,  
    "period": "month"  
  },  
  "valid": {  
    "from": "2020-01-01",  
    "to": "2020-12-31"  
  }  
}
```


Transaction Reporting

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET List



<https://gateway.maverickpayments.com/payments>

Transaction Reporting Object

Fields	Description	Type	Filterable	Required	Readonly
externalId	Unique record identifiers from a system outside of Payment Gateway	String	Yes	No	No
terminal	Terminal Object	Object	No	Yes	Yes
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	Yes
parent	Parent Object	Object	No	No	Yes
parent.id	Parent ID of a Payment Request	Integer	Yes	No	Yes
type	Request type	String	Yes	Yes	Yes
card	Card Object	Object	No	No	Yes
card.name	Cardholder	String	Yes	No	No

Use this endpoint to list all transactions for all of your `terminal.id`.

Here as an exception you do not need to include the `terminal.id` in your request. Using this endpoint we will return all your transactions with their corresponding `terminal.id`.

Filter Example:

[https://gateway.maverickpayments.com/payment/?filter\[terminal.id\]\[eq\]=1](https://gateway.maverickpayments.com/payment/?filter[terminal.id][eq]=1)

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)



https://gateway.maverickpayments.com/payment/<id>

Use this endpoint to view information for a specific transaction record.

You need to provide the `transaction.id` in your request.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Response Codes

Responses to any request clearly indicate if the request is processed successfully. We have integrated the following logic and groups in our response codes.

Status Object

Fields	Description	Type	Filterable	Required	Readonly	Level 1	
status	Status Object	Object	No	No	Yes		
status.status	Approved, Declined, Error	String	Yes	No	Yes	No	
status.reason	Status reason	String	No	No	Yes	No	

Approval Response

This is the only response that we will return only a status for it. Do not expect a status.reason here

Example:

json

```
"status": {
  "status": "Approved",
  "reason": null
}
```

Decline Response

The decline response will include a status.reason giving you more details on the type of decline.

Example:

```
json

"status": {
  "status": "Declined",
  "reason": Insufficient Funds
}
```

Here is a list of all possible decline codes:

Status Reason Message	Details
Duplicate Request (Approved previously)	The transaction was already performed and approved. Verify if the request was submitted twice for the same transaction ID or external reference number.
Reversal Not Allowed	The transaction is not authorized for reversal. This error may occur because the transaction was settled, declined, or already reversed.
Return Not Allowed	The transaction is not authorized for return. This error may occur because the transaction was not settled, was declined, or was already reversed.
Supervisor Override Required	
Modify Transaction Not Allowed	The transaction is not authorized for modification. This error may occur because the transaction was already settled, or was declined.
Possible Duplicate Request	This is a duplicate request. The credentials for this transaction (i.e. amount, card number, or

Error Response

These are rare and are usually returned due to incorrect request formatting or general system errors.

Status Reason Message	Details
Format Error field details	Check the formatting of your request parameters
Customer requested stop of all recurring	

Customer requested stop of all recurring payments from specific merchant	
Transaction is in process. Please try again after some time.	Simultaneous actions cannot be performed on the same customer record. The application is unable to perform edits on a customer record while the record is in use.
An error has occurred. Your request couldn't be processed because of a technical issue. Please try again later. We apologize for the inconvenience. Our technical team has been notified	This is a system general error and you can contact us if you are experiencing these errors for more information.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Verification Response Codes

In addition to our status response codes, we have verification codes within the transaction response.

Card Verification Object

Fields	Description	Type	Filterable	Required	Readonly	Level 1	
card.verification	Verification object	Object	No	No	Yes		
card.verification.cvv	The card security code verification response.	String	No	No	Yes	No	
card.verification.address	The Address Verification System response.	String	No	No	Yes	No	

CVV Verification Response

Response Code	Response Description
M	CVV2 verification successful
D	CVV2 verification not performed

F	CVV2 verification not performed
U	CVV2 verification not available
N	CVV2 verification fail/mismatch
S	CVV2 code not present on card

Address Verification Response

Address Verification Code is a one-character field that contains the address verification result code. This code defines the result of the address verification performed by the issuer on the address submitted in a transaction request.

Response Code	Response Definition
0	Address verification was not requested.
A	The street address submitted matches what is on file.
B	The street address submitted matches what is on file. The ZIP code does not match what was on file.
C	This service is not supported.
D	The street address submitted matches what is on file.
F	The street address and ZIP code submitted match what is on file. This applies to UK transactions.
G	The issuer does not participate in this service. This applies to non-US issuers.
I	The AVS information was not verified.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

3DSecure

3DSecure (3DS) is a fraud prevention security protocol that allows consumers to shop online more securely. It works by verifying that the consumer entering the credit card information on an e-commerce site is the owner or person authorized to use that credit card. How this works depends on which version of the 3DS protocol is being used. Using 3DS can provide you with chargeback

on which version of the 3DS protocol is being used. Using 3DS can provide you with chargeback protection and lower interchange rates.

3DS will be enabled at the merchant level. If you want to utilize this protocol contact us. Some merchants may be required to use 3DS by default for all transactions.

Integration

The following JavaScript needs to be embedded on your checkout page to collect browser data information. You will need to pass the collected data from the JavaScript in the `browserData` field in the **Create** method when creating 3DS authentication. This information is needed to increase the level of security and accuracy of the 3DS authentication.

javascript

```
<script src="/js/main.js"></script>
<script>
  ((function() {document.querySelector("#browserData").value = getBrowserData();}))( );
</script>
```

#browserData is just an example field you need to change it according to your HTML form.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Version

StartFragment


There are 2 versions of 3DS that we support. Based on what version of 3DS is offered by the issuing bank the authentication of the transaction goes through a different flow.

- **v1.0** - the original version that relies on redirects to iFrame and popup to complete consumer authentication. The authentication process verifies the consumer via a challenge in a window.
- **v2.1** - this is the newest version of the protocol. It's faster, less consumer obtrusive, and offers multiple ways to authenticate including passive, biometric, and two-factor authentication methods.

Verification process

The overall process can be summarized as follows. You initiate a **Create** that will return a unique `id` and an iframe that needs to be presented in the browser. The iframe can be either hidden or visible based on the 3DS version. After that, you initiate **Check** with the provided `id`. The result will either return a `status` which will indicate the outcome of the 3DS authentication. If the status is successful you will proceed in creating a Sale or an Auth using the provided `id` in `threeds.id`.

<p>The version will be included in the response to the Create command. </p>

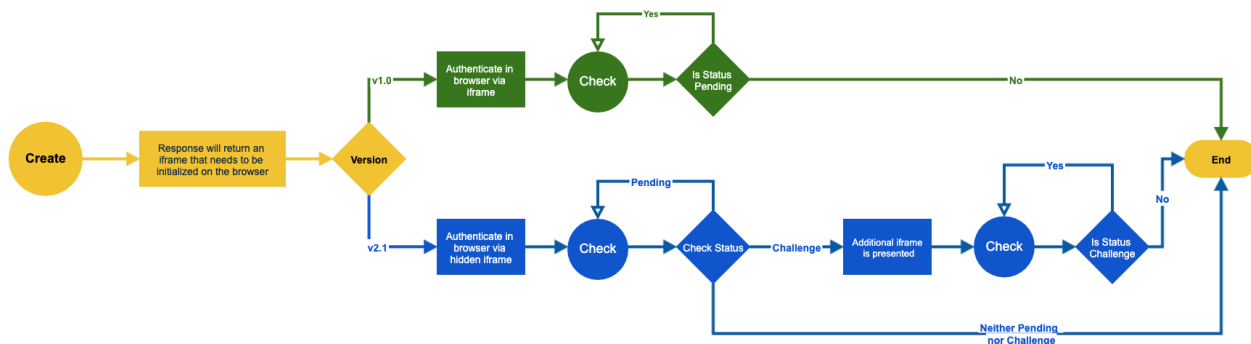

StartFragment

v1.0 Flow

- **Create** a 3DS authentication request using card data
- We send the 3DS authentication request via form submission in an iframe in the browser
- If a challenge is required, it appears in the browser in the same iframe
- Utilizing the **Check** command will return `status` for that 3DS authentication
- Proceed by creating a **Sale** or an **Auth** for this 3DS authentication

v2.2 Flow

- Create a 3DS authentication request using card data
- We send the 3DS authentication request via form submission in a hidden iframe in the browser
- Utilize the **Check** command to verify if authentication is successful or additional challenge is required
- If an additional challenge is required we present it in a new iframe that needs to be shown in the browser
- Utilizing the **Check** command will return `status` for that 3DS authentication
- Proceed by creating a **Sale** or an **Auth** for this 3DS authentication

Always initiate Check for a specific `id` to verify the `status` before proceeding to a Sale or an Auth. Once a status changes from the initial **Pending** it will never change again. The acceptable statuses for proceeding to an **Auth** or **Sale** are **Success**, **Attempted**, and **Not Enrolled**.

EndFragment

EndFragmenten

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Create

This will initiate the 3DS process and `id`, `version` and `iframe` will be presented in the response.

Keep in mind that in very few cases a **406 - Not Acceptable** error can be returned. This happens when certain cards cannot be verified at the moment. If you are not required to use 3DS authentication as a merchant you can still proceed in processing the payment without Utilizing 3DS authentication and with no liability shift.

Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the capture record	Integer	Yes	No	Yes
terminal	Terminal Object	Object	No	Yes	No
terminal.id	Dashboard Terminal ID	Integer	Yes	Yes	No
amount	Amount of the sale/auth	Number	No	Yes	No
card	Card Object	Object	No	Yes	No
card.number	Card number	Integer	No	Yes	No
card.exp	Card expiration date	Date	No	Yes	No
card.holderName	First name + Last Name	String	No	Discover Only	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

POST Create



<https://gateway.maverickpayments.com/3ds/create>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "45.00",
  "card": {
    "number": 5555555555554444,
    "exp": "12/25"
  },
  "browserData": {
    "acceptHeader": "application/json"
```

Check

For 3DS v1.0 this will return the `status` for the specific `id`.

For 3DS v2.2 if the additional challenge is needed this will return a new `iframe` along with the `status` for the specific `id`.

Always initiate **Check** for a specific `id` to verify the `status` before proceeding to an **Auth** or **Sale**. Once a status changes from the initial **Pending** it will never change again. The acceptable statuses for proceeding to an **Auth** or **Sale** are **Success**, **Attempted**, and **Not Enrolled**.

When the request is made it uses the **long polling technique that keeps the request open for up to 15 seconds**. During that time if a response hasn't been returned, it is strongly advised to not repeatedly poll until then. To prevent from an excess amount of polling, a polling rate limit has been put in place.

Below are the possible `status` values:

Code	Description	Liability Shift
Y	Authentication Successful by issuer	Yes
A	Network stepped in for the authentication because the issuer was not participating	Yes
I	Data Share - Informational only; 3DS requestor challenge preference acknowledged	No
N	Not Authenticated /Account	No

	Not Verified; Transaction denied	
U	Authentication/ Account Verification Could Not Be Performed; Technical or other problems.	No
C	Challenge Required; Additional authentication is still required from the user	Depends on if the client completes the challenge and leaves successfully

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET Check



<https://gateway.maverickpayments.com/3ds/22/check>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "45.00",
  "card": {
    "number": 5555555555554444,
    "exp": "12/25"
  },
  "browserData": {
    "acceptHeader": "application/json"
```

Test Cards

We offer you test cards for the sandbox environment so you can confirm your integration works before using real card data.

Credit Cards / Pans	Networks	Type of Transaction	Status/Success
4005519200000004 4124939999999990 4444333322221111	Visa	Frictionless	Y
4009348888881881 4485660000000007	Visa	Frictionless	N
4012000033330026 4485666666666668	Visa	Challenge/Prompt	? - Depends on the challenge completion
4012000077777777 4124930001898619	Visa	-	Error: Card Not Enrolled
4166676667666746	Visa	Frictionless	R - Issuer rejected authentication and requested authorization not to be attempted
4917300800000000	Visa Electron	Frictionless	Y
5555341244441115 5406004444444442	MasterCard	Frictionless	Y

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Account Updater

Account Updater is a feature that automatically requests updates for tokenized cards on file in the event that a customer's card expires or is replaced. This will help you avoid or reduce billing issues.

Account updater is not enabled on your account by default. Contact us so that we can set it up and ensure that this feature is configured in a way that best suits your business.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Card Compatibility

Whether a card can be updated using Account Updater is solely dependent on the customer's issuing bank and that bank's participation in this service. Sometimes even if the customer's card is compatible, it might not be eligible for automatic updates if the issuing bank does not participate

computers, it might not be eligible for automatic updates if the issuing bank does not participate.

Prepaid, gift cards and cards processed with ApplePay or GooglePay are not supported.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

How It Works

Account Updater works on a transaction level whether you initiate a **Sale**, **Auth**, or **Return**. The card needs to be tokenized, the `card.save` need to be `Yes` first, and then all future transactions are going to be checked for card updates, if any. In the event that the card has been updated, we will automatically charge the new card and will return the new details in the `card` object along with some additional status details.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

POST Sale with Account Updater



<https://gateway.maverickpayments.com/payment/sale>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Body raw (json)

json

```
{
  "terminal": {
    "id": 24
  },
  "amount": "1.10",
  "source": "Internet",
  "level": 1,
  "card": {
    "name": "John Wick",
    "number": 4000000000000051,
    "exp": "05/20"
```

ACH Payments

The Automated Clearing House (**ACH**) is an electronic funds-transfer system that facilitates payments in the U.S. The ACH is run by the National Automated Clearing House Association (**NACHA**).

- **Debit:** Removes funds from the customer account and funds to the business account.
- **Credit:** Removes funds from the business account to fund credit to the customer.

AUTHORIZATION Bearer Token

Token

General Information

We offer a secure, streamlined ACH payment processing system. This endpoint enables you to make secure bank-to-bank transfers. We offer one-time and recurring ACH payments for various payment scenarios including corporate, consumer, telephone, and web payments.

ACH Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the ACH record	Integer	Yes	No	Yes
amount	Amount of the transaction including tax	Number	Yes	Yes	No
tax	The tax included in the amount in absolute value	Number	No	No	No
checkNumber	Check Number	String	Yes	No	No
traceNumber	Trace Number	String	Yes	No	Yes
transactionID	Transaction ID	Integer	Yes	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

Transactions

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

SEC Codes

Standard Entry Class (SEC) code is a three letter code that describes how a customer or business authorized an ACH transaction.

You will need to provide the SEC Code when creating an ACH transaction.

Here is a list of SEC codes we support.

IMPORTANT Note that some SEC codes do not allow addendaText

Code	Debit	Credit	Addenda Text
PPD	Yes	Yes	Allowed
CCD	Yes	Yes	Allowed
WEB	Yes	No	Not Allowed
TEL	Yes	No	Not Allowed

Please note: The SEC codes that a merchant is able to process with is determined in underwriting of a merchant. If a SEC code is utilized that has not been approved for the merchant, then the transaction will be rejected. If additional SEC codes are needed, then a ticket may be opened in the dashboard to request the additional option from our underwriting team.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

Statuses

When you have successfully created an ACH Transaction, it will be given one of the following

statuses, depending on the case.

Status	Description
Voided	The item was voided upon entry for various administrative purposes. This is very rare, and typically warrants an interactive login or call to support
Hold	The item was accepted but placed on hold . This can be common and typically occurs if your daily processing limits have been exceeded. A held item is typically held for a reason and can only be released by us.
Pending	This is the "so far so good" status which means your item will be processed soon.
Submitted	A variant of Pending , consider Pending and Submitted to be identical. This is the most common status you will see.

Once your item has been accepted (status = **Pending** or **Submitted**) there are a few more statuses that get applied to it:

Status	Description
Transmitted	This occurs when the item has been sent out to the ACH network. The most significant thing to know about this status is that your item can no longer be edited or VOIDED .
Settled	For DEBIT items, this means that the debited funds have been successfully settled in your account. For CREDIT items, this means that the pre-funding requirements for your credit have been met and the credit is "all good."
Returned	This status occurs when an item has been returned for one of many different reasons.

Returned is considered a "rested" status. Once a transaction has this status, it **never leaves it**.

Verification Statuses

We have internal advanced prescreen ACH payment tools and based on your account settings some transaction types will require verification. We use these to reduce the risk of fraud and returns. This service will process a submitted Routing and Account Number against our database containing positive and negative ACH/check writing history. It will validate the account is open and in good standing while also returning information about critical accounts and transactions.

In most cases, you will see your `verification.status` in **Pending**, meaning no additional

verification was required, and if needed we can perform a manual check for a specific ACH transaction record.

IMPORTANT If your account is setup with mandatory validation and your ACH transactions do not pass our validation tool we will not process them.

Status	Description
Pending	The transaction awaits verification.
APIError	There has been a problem with the verification API. If this occurs please contact us to investigate the problem.
Fail	The transaction has failed our verification processes.
Pass	The transaction has passed our verification processes.

Sources

Every ACH transaction record in our dashboard has a source. These are the current sources:

Source	Description
Dashboard	The transaction is initialized by the dashboard interface.
Imported	The transaction is initialized by the import CSV file.
Hosted	The transaction is initialized by the hosted form.
API	The transaction is initialized by the current ACH API.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

Actions

Actions give you the possibility to update your ACH records in specific statuses.

The available actions are as follows

Action	Description
--------	-------------

Action	Description
void	This is used to void a transaction. This action will change the status of a transaction to voided. Keep in mind that void can't be used before a transaction is submitted for processing.
cancel	This is used to change a recurring transaction record to a "canceled" status.
verify	This is used to pre-verify a transaction before you submit it. We use several different algorithms for this verification process.

IMPORTANT You can void a transaction only in these statuses:

1. Held
2. Pending
3. Submitted

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

POST Action



`https://dashboard.maverickpayments.com/api/ach/<id>/<action>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

History Log

Utilizing this endpoint you can see the full history log of an ACH transaction record.

Fields	Description	Type	Filterable	Required	Readonly
date	Date and time of the log	Datetime	Yes	No	Yes
description	Description of the log	String	No	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

GET Log



<https://dashboard.maverickpayments.com/api/ach/<id>/log>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

GET List



<https://dashboard.maverickpayments.com/api/ach>

Use this endpoint to list all ACH transactions in your dashboard.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

GET View



<https://dashboard.maverickpayments.com/api/ach/325>

View specific ACH transaction records.

In the example we are viewing transaction with `id` 325

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

POST Create ACH



<https://dashboard.maverickpayments.com/api/ach>

Use this endpoint to create ACH Transactions.

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the ACH record	Integer	Yes	No	Yes
amount	Amount of the transaction including tax	Number	No	Yes	No
tax	The tax included in the amount in absolute value	Number	No	No	No
checkNumber	Check Number	String	Yes	No	No
routingNumber	Routing Number	String	Yes	Yes	No
accountName	Name of the account	String	No	Yes	No
accountNumber	Access	String	Yes	Yes	No

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
  "amount": 55.95,
  "tax": 5.95,
  "routingNumber": "123123123",
  "accountName": "John Wick",
  "accountNumber": "1122334455",
  "accountType": "Checking",
  "transactionType": "Debit",
  "customer": {
    "email": "test@test.com"
  }
}
```



<https://dashboard.maverickpayments.com/api/ach>

When creating a new ACH transaction record you have the ability to save the customer and payment information to your [ACH Customers](#) for future payments. In order to do this you need to pass the `customer.save` as `Yes`.

IMPORTANT When you want to save a customer from an initial transaction the `customer` object fields become required.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
  "amount": 9.99,
  "tax": 1.99,
  "SECCode": "PPD",
  "routingNumber": "123456789",
  "accountName": "Jack Wick's Account",
  "accountNumber": "1234567890",
  "accountType": "Checking",
  "transactionType": "Debit",
  "customer": {
    "save": "Yes"
```

POST Create ACH for an existing Customer



<https://dashboard.maverickpayments.com/api/ach>

An example request with an existing customer in the Customer Vault. Keep in mind that these are the minimum required parameters. Feel free to add any additional parameters as needed.

The Customer may have multiple accounts, when `account.id` is not passed, the system will get first available.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
  "amount": 9.95,
  "transactionType": "Debit",
  "dba": {
    "id": "9"
  },
  "customer": {
    "id": "42"
  }
}
```

POST Create ACH for an existing Customer and specific Account



<https://dashboard.maverickpayments.com/api/ach>

An example request with an existing customer account in the Customer Vault.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
  "amount": 55.95,
  "transactionType": "Debit",
  "dba": {
    "id": "5"
  },
  "customer": {
    "id": "1"
  },
  "account": {
    "id": "2"
  }
}
```

DELETE Remove



<https://dashboard.maverickpayments.com/api/ach/>

A transaction can be deleted if there is no status set to it from our system.

Once a transaction gets into these statuses **Pending, Submitted** or **Held** you can only perform a **VOID** action request.

IMPORTANT If the transaction is in these statuses:

Transmitted, Settled or **Returned** you cannot perform any actions to it.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Hosted Form

With our ACH embedded hosted form functionality you can achieve quick, efficient and secure online transactions.

The overall process to generate and prepare a hosted gateway payment form is as follows.

1. Create a POST request with the required parameters for your needs.
2. We will return the code of the hosted form, html form, html link and the url in the response.

Field	Description	Type	Required
dba	DBA Object	Object	Yes
dba.id	DBA ID	Integer	Yes
amount	Payment Amount	Number	No
memo	Short note or memo	String	No
returnUrl	The return url after payment completion (i.e. success/error page)	String	No
useLogo	Use the logo of your merchant profile ☐ Yes or ☐ No	ENUM	No
sendReceipt	Send a customized receipt after successful payment ☐ Yes or ☐ No	ENUM	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)



https://dashboard.maverickpayments.com/api/ach/hosted-form

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

```
json

{
  "dba": {
    "id": 1
  },
  "amount": 2,
  "memo": "Invoice 123",
  "returnUrl": "https://example.com",
  "useLogo": "Yes",
  "sendReceipt": "Yes"
}
```

Customers

Use this endpoint to store customer information in your dashboard for quick ACH payment management.

Customers Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the customer	String	Yes	No	Yes
firstName	First name of the customer	String	Yes	Yes	No
lastName	Last name of the customer	String	Yes	Yes	No
phone	Phone number of the customer	String	Yes	No	No
email	Email address	String	Yes	No	No

	of the customer				
address1	Address of the customer line 1	String	No	Yes	No
address2	Address of the customer	String	No	No	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

GET List Customers



<https://dashboard.maverickpayments.com/api/ach/customer>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

GET View specific Customer



<https://dashboard.maverickpayments.com/api/ach/customer/<id>>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

POST Create Customer



<https://dashboard.maverickpayments.com/api/ach/customer>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

```
json
```



```
{
  "firstName": "John",
  "lastName": "Wick",
  "phone": "+1 818-777-7777",
  "email": "john@wick.com",
  "address1": "26520 Agoura Road 1st Floor",
  "address2": "",
  "city": "CALABASAS",
  "state": "CA",
  "zipCode": "91302",
  "accountName": "John Wick"
```

PUT Update Customer



https://dashboard.maverickpayments.com/api/ach/customer/36

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
  "accountNumber": "1234567899",
  "routingNumber": "123456789",
  "address1": "26520 Agoura Road 1st Floor"
}
```

DELETE Delete a Customer



https://dashboard.maverickpayments.com/api/ach/customer/<id>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Customer Accounts

Account Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the account	String	Yes	No	Yes
name	Name of the account	String	Yes	Yes	No
type	Checking or Savings	ENUM	Yes	Yes	No
routingNumber	Routing Number	String	Yes	Yes	No
accountNumber	Access Number	String	Yes	Yes	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

GET List Customer Accounts



<https://dashboard.maverickpayments.com/api/ach/customer74/account>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

POST Create Customer Account



<https://dashboard.maverickpayments.com/api/ach/customer/74/account>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
```

```
{
  "name": "Jack Wick",
  "type": "Savings",
  "accountNumber": "987654321",
  "routingNumber": "123456789"
}
```

PUT Update Customer Account



<https://dashboard.maverickpayments.com/api/ach/customer/74/account/36>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw (json)

json

```
{
  "type": "Checking"
}
```

DELETE Delete a Customer Account



<https://dashboard.maverickpayments.com/api/ach/customer/74/account/36>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

Body raw

```
{
  "name": "Jack Wick",
  "type": "Savings",
  "accountNumber": "987654321",
  "routingNumber": "123456789"
}
```

Bank Information

Utilizing this endpoing you can view/verify the bank inforamtion associated with an ABA/Routing Number.

ABA Object

Fields	Description	Type	Filterable	Required	Readonly
id	ABA/Routing Number	Integer	Yes	No	Yes
bank	Name of the bank	String	No	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

GET View



<https://dashboard.maverickpayments.com/api/ach/aba/<aba>>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

ACH Settlements

Utilizing this endpoint you can view your ACH settlement details

Settlement Object

Fields	Description	Type
settlement	Settlement Object	Object
settlement.id	Settlement ID	Integer
settlement.date	Settlement Date	DateTime
settlement.amount	Settlement Amount	Number
settlement.type	Settlement Type Origination File Settlement Late	ENUM

	Settlement , ATM Return , ATMVerify Fee Only Settlement , Reserved for Future Use , Reserve Release , Transaction Fee Only Settlement	
approvedDebits	Approved Debit Amount	Number
approvedCredits	Approved Credit Amount	Number

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

GET List



<https://dashboard.maverickpayments.com/api/ach/settlements/<dbald>>

List settlements for a specific `dba.id`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

GET View



<https://dashboard.maverickpayments.com/api/ach/settlements/<dbald>/details/<settlementId>>

Get settlement details for the given `dba.id` and `settlement.id`

Settlement Details Object

Fields	Description	Type	Filterable
transaction	Transaction Object	Object	No
transaction.id	Transaction ID	Integer	Yes
transaction.type	Transaction Type <code>debit</code> , <code>credit</code>	ENUM	No
amount	Total Amount	Number	Yes
customerId	Customer ID	String	No

accountName	Account Name	String	Yes
-------------	--------------	--------	-----

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [ACH Payments](#)

ACH Webhooks

All the ACH group of events you can subscribe to.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

New ACH Record

Notification when a new ACH record is created.

Event Identification

json

```
{
  ...
  "module": "ach",
  "action": "create",
  "data": achObject,
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

ACH Status Update

Notification when an ACH status is updated.

Event Identification

json

5

```
{
  ...
  "module": "ach",
  "action": "updateStatus",
  "data": achObject,
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

New ACH Customer

Notification when a new ACH Customer has been successfully added.

```
json

{
  ...
  "module": "ach",
  "action": "createCustomer",
  "data": achObject,
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [ACH Payments](#)

Reporting

You can use this endpoint for all the available reports through our API.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Sandbox

IMPORTANT Please be aware the reporting section URL is different than what is referenced above in the merchant section of this documentation. Please ensure to use the correct URL endpoint for reporting as shown below.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET Sandbox Dashboard



`https://sandbox-dashboard.maverickpayments.com/<path>`

For testing purposes, please use our sandbox endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Authorizations

Returns a list of all authorizations for a specific `dba.id`

IMPORTANT If no `date` is specified in the request as a filter we will return authorizations for the last 5 days from the current date.

Authorizations Object

Fields	Description	Type	Filterable	Required	Readonly
id	Auth Identification Number	Integer	No	No	Yes
card	Card details	Object	No	No	Yes
card.number	Card number	Integer	Yes	No	Yes
card.bin	BIN Object	Object	No	No	Yes
card.bin.bin	Bank Identification Number	Integer	Yes	No	Yes
card.bin.brand	Brand of the card	String	Yes	No	Yes
card.bin.type	Debit, Credit or ChargeCard	ENUM	No	No	Yes

card.bin.cate	Category of	String	No	No	Yes
---------------	-------------	--------	----	----	-----

Authorization Statuses

Below you can find some of the most common authorization statuses:

Keep in mind that we may return other statuses as well this is just for your quick reference.

Status	Description
Successful approval/completion	The authorization has been successfully approved
Insufficient funds	The authorization was declined due to insufficient funds on the card
Do not honor	The authorization has been completely rejected by the issuing bank
Pick up card	The authorization has been Pick up card and needs to be held if possible. (Usually a stolen card)
Refer to Issuer	The authorization has been declined. The customer should contact their bank for more information
Invalid account number	The authorization has been declined. The card number has been incorrectly entered

AUTHORIZATION Bearer Token

Token

GET List



<https://dashboard.maverickpayments.com/api/reporting/authorizations/<dbald>>

IMPORTANT If no `date` is specified in the request as a filter we will return authorizations for the last 5 days from the current date.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Authorizations](#)



https://dashboard.maverickpayments.com/api/reporting/authorizations/<dbald>?filter[card.bin.brand]=Visa&filter[terminal.number]=7000&filter[date][gte]=2020-03-24 00:00:00&filter[date][lte]=2020-03-24 23:59:59

Example request to list all authorizations for a specific `dbaId`, `card.bin.brand.visa` and `terminal.number` between a date range

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Authorizations](#)

PARAMS

filter[card.bin.brand]	Visa
filter[terminal.number]	7000
filter[date][gte]	2020-03-24 00:00:00
filter[date][lte]	2020-03-24 23:59:59

Batches

View batches for a specific `dbaId`. You can view the full batch summary for a specific date or ID and also all the transactions that are included in that batch.

IMPORTANT If no `batch.date` is specified in the request as a filter we will return results for the last 5 days from the current date.

Batch Object

Fields	Description	Type	Filterable	Required	Readonly
id	Batch Identification Number	Integer	No	No	Yes
card	Card details	Object	No	No	Yes
card.number	Card number	Integer	Yes	No	Yes
card.bin	BIN Objecct	Objecct	No	No	Yes
card.bin.bin	Bank Identification	Integer	No	No	Yes

	Number				
card.bin.brand	Brand of the card	String	Yes	No	Yes
card.bin.type	Debit, Credit or ChargeCard	ENUM	No	No	Yes
card.bin.cate	Category of	String	No	No	Yes

AUTHORIZATION Bearer Token

Token

GET List



<https://dashboard.maverickpayments.com/api/reporting/batches/<dbald>>

Use this endpoint to list all the batches for a specific `dba.id`

IMPORTANT If no `batch.date` is specified in the request as a filter we will return results for the last 5 days from the current date.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

GET List with Filters



[https://dashboard.maverickpayments.com/api/reporting/batches/<dba id>?filter\[card.bin.brand\]=Visa&filter\[date\]\[gte\]=2020-03-24&filter\[date\]\[lte\]=2020-03-24](https://dashboard.maverickpayments.com/api/reporting/batches/<dba id>?filter[card.bin.brand]=Visa&filter[date][gte]=2020-03-24&filter[date][lte]=2020-03-24)

Example request to list all the transactions the are included in a batch for a specific date

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

PARAMS

`filter[card.bin.brand]` Visa

filter[date][gte]

2020-03-24

filter[date][lte]

2020-03-24

GET Summary



<https://dashboard.maverickpayments.com/api/reporting/batch-summary/<dba.id>/<batch.id> or <batch.date>>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

Payouts

You can utilize this endpoint to list all payout information for a specific `dba.Id`

Payouts List Object

Fields	Description	Type	Filterable	Required	Readonly
processingDate	Date	Date	Yes	No	Yes
deposit	Deposit Amount	Number	No	No	Yes
feeTotalAmount	Fee Amount	Number	No	No	Yes
chargeback	Chargeback Object	Object	No	No	Yes
chargeback.totalCount	Chargeback Count	Integer	No	No	Yes
chargeback.totalAmount	Chargeback Amount	Number	No	No	Yes
reservedAmount	Reserve Amount	Number	No	No	Yes
releasedAmount	Released Amount	Number	No	No	Yes

AUTHORIZATION Bearer Token

Token

GET List



https://dashboard.maverickpayments.com/api/reporting/payouts/acq/<dbald>?filter[processingDate][gte]=2023-04-01&filter[processingDate][lte]=2023-04-30

NOTE Keep in mind that running this request without specifying a processingDate filter will return all available records for the current month

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Payouts](#)

PARAMS

filter[processingDate][gte]	2023-04-01
filter[processingDate][lte]	2023-04-30

GET View



https://dashboard.maverickpayments.com/api/reporting/payout/acq/<dbald>/<processingDate>

View detailed payout information for a specific date

Payouts View Object

Fields	Description	Type	Filterable	Required	Readonly
processingDate	Date	Date	Yes	Yes	Yes
deposit	Deposit Amount	Number	No	No	Yes
fees	Fee Object	Object	No	No	Yes
fees.items	Fees Items Object	Object	No	No	Yes
fees.items.cardType	Fee Card Type	String	No	No	Yes
fees.items.amount	Fee Amount	Number	No	No	Yes

fees.totalAmount	Fees Total Amount	Number	No	No	Yes
chargebacks	Chargebacks Object	Object	No	No	Yes
chargebacks.items	Chargebacks Items Object	Object	No	No	Yes
chargebacks.id	Chargeback	String	No	No	Yes

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Payouts](#)

GET Export



<https://dashboard.maverickpayments.com/api/reporting/request>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Payouts](#)

Body raw (json)

json

```
{
  "name": "PayoutsExport",
  "params": {
    "format": "csv",
    "from": "2023-04-01",
    "to": "2023-04-10",
    "merchantAccountId": 1
  }
}
```

Chargebacks

You can use this endpoint to manage all chargeback-related information.

You can do the following:

- List all chargebacks for a specific `dba.id`
- View specific chargeback information for `chargeback.id`

- Dispute a `case.id` for a specific `chargeback.id`

How to use our Chargeback system

Our chargeback system is designed around chargeback cases. When the first case arrives we create a chargeback with an `id`. Every new case that arrives for a specific chargeback `id` updates the chargeback information and gets listed in the `cases` object.

IMPORTANT A specific `chargeback.id` can have more than one cases associated with it, as new information can arrive.

We suggest the current flow:

1. List your chargebacks. If a certain `chargeback.id` has `attention =Yes`, you can dispute it and upload evidence.
2. View the specific `chargeback.id`, this will list one or more cases associated with the chargeback. Make note of the `case.id` that has `attention =Yes`.
3. Use our **Attachments** and upload temporary file/files for the dispute.
4. **Create** a dispute to a `case.id` for a specific `chargeback.id`
5. **Preview** the created dispute if needed before submitting it.
6. Use the Dispute **Submit** endpoint to submit the dispute file to a specific `chargeback.id`

Chargeback Object

Fields	Description	Type
<code>id</code>	The unique ID that is assigned by our system to every chargeback	Integer
<code>dba</code>	Object	Object
<code>dba.id</code>	The ID of the DBA	Integer
<code>type</code>	<code>Chargeback</code> or <code>Retrieval</code>	ENUM
<code>amount</code>	The amount of the retrieval or chargeback. This is not always equal to the amount of the transaction.	Number
<code>card</code>	Object	Integer
<code>card.brand</code>	Card Brand	String
<code>card.number</code>	Card Number	String
<code>date</code>	Object	Object

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Disputes

By utilizing this endpoint you can dispute specific chargeback cases.

The process is as follows:

1. First, use our standard [Attachments](#) endpoint but you need to pass an additional URL parameter `temporary`. This will return a unique `id`.
2. After you have your temporary file id you can create the Dispute for a specific `chargeback.id` and the desired `case.id`.

You can see the examples below

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

POST Upload a temporary file



`https://dashboard.maverickpayments.com/api/attachment/upload/temporary`

In order to upload a temporary file and submit a dispute to a chargeback case you need to utilize our standard Attachments endpoint and pass an additional URL parameter `temporary`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

POST Create a Dispute



`https://dashboard.maverickpayments.com/api/reporting/chargeback/<chargebackId>/dispute/<casesId>/create`

After uploading the file/files you need to create the dispute by assigning all the temporary `attachment.id` to the `case.id`.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET Preview



`https://dashboard.maverickpayments.com/api/reporting/chargeback/<chargebackId>/dispute/<casesId>/preview/<disputeId>`

Use this endpoint if you want to preview your dispute before submitting it.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

POST Submit



`https://dashboard.maverickpayments.com/api/reporting/chargeback/<chargebackId>/dispute/<casesId>/submit/<disputeId>`

Use this endpoint to submit your dispute

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Webhooks

Use webhooks to be notified about events that happen in your account.

Webhook Object

Fields	Description	Type
id	Unique ID of the event	Integer
module	Event group	String
action	Event identifier	String
date	Date of the event	Datetime
data	Event Data	Object

Example

javascript

```
{
  "id": "1",
  "module": "ach",
  "action": "create",
  "date": "2019-08-03 19:31:55",
  "data": {...}
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Signatures

We sign the webhook events that are sent to your endpoints. We do so by including a signature in each event's `Webhook-Signature` header. This allows you to verify that the events were sent by us, not by a third party.

IMPORTANT You are not required to implement this kind of signature check, but it's **strongly recommended**.

`Webhook-Signature` is a [SHA-512](#) sum of following fields

```
<webhookSignature><id><module><action><date>
```

You can view and manage your **Webhook Signature** in your Dashboard. Keep in mind that every **Webhook URL** has its own `<webhookSignature>`

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Events

Groups of events you can subscribe to.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Chargeback

Chargeback group of events you can subscribe to.

Chargeback Object

Fields	Description	Type
id	The unique ID assigned by our system to every case.	Integer
dba	Object	Object
dba.id	The ID of the DBA	Integer
identifier	The Merchant Identification Number (MID)	Integer
disputeId	We assign a unique ID to the first case of a dispute. Every related case update will have a unique id and the same disputeId.	Integer
merchantRefId	A reference number provided by merchant or their vendor for this transaction.	String
merchantEmail	Merchant email address	String
number	The unique number assigned	String

Example

json

```
{
  "id": "200",
  "dba": {
    "id": "1217"
  },
  "identifier": "201100000000",
  "disputeId": "100",
  "merchantRefId": "0123456",
  "merchantEmail": "jhon@example.com",
  "number": "2019248118022",
  "type": "Chargeback".
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

New Chargeback Record

New Chargeback Record

Notification when a new Chargeback record is created.

Event Identification

json

```
{
  ...
  "module": "chargeback",
  "action": "create",
  "data": chargebackObject,
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Chargeback Update

Notification when a Chargeback is updated.

Event Identification

json

```
{
  ...
  "module": "chargeback",
  "action": "update",
  "data": chargebackObject,
  ...
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

View

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET List



`https://dashboard.maverickpayments.com/api/reporting/chargebacks`

You can utilize this endpoint to list all chargebacks

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET View



`https://dashboard.maverickpayments.com/api/reporting/chargeback/<id>`

By utilizing this endpoint you can view detailed information for a specific chargeback

Fields	Description	Type
id	The unique ID that is assigned by our system to every case.	Integer
dba	Object	Object
dba.id	The ID of the DBA	Integer
mid	The Merchant Identification Number (MID)	Integer
merchantRefId	A reference number provided by the merchant or their vendor for this transaction.	String
merchantEmail	Merchant email address	String
type	<code>Chargeback</code> or <code>Retrieval</code>	ENUM
visaRDR	<code>Yes</code> or <code>No</code> - Identifies if the chargeback is Visa RDR	ENUM
authCode	The authorization code passed with the settlement record	String
acquirerReferenceNumber	An identification number for a credit card transaction assigned	Object

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Statements

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET List



https://dashboard.maverickpayments.com/api/reporting/statements/<dbald>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET Download



https://dashboard.maverickpayments.com/api/reporting/statement/<statementId>

To download a specific statement, use its corresponding `id` . All the statements are in pdf format.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Reserve

You can use this endpoint to view reserve activity for a specific `dba.id`

Reserve Object

Fields	Description	Type	Filterable	Required	Readonly
id	Reserve id	Integer	No	No	Yes
type	Reserve amount activity type <code>Debit</code> or <code>Credit</code>	ENUM	No	No	Yes
amount	The amount that is either credited or	Number	No	No	Yes

	created or debited to the reserve.				
reserve	Current accumulated reserve amount	Number	No	No	Yes
description	Reserve funding activity type	ENUM	No	No	Yes

Reserve Descriptions

Below you can find all the reserve descriptions that we return

Status	Description
Calculated Reserve	An amount has been withheld and added to the reserve
Calculated Release	An amount has been released from the reserve
One Time Reserve	One time amount has been withheld and added to the reserve
One Time Release	One time amount has been released from the reserve
Record Adjustment Reserve	One time adjustment amount has been withheld and added to the reserve (usually due to an accounting error)
Record Adjustment Release	One time adjustment amount has been released from the reserve (usually due to an accounting error)
Transfer Funds on Reserve	An amount has been transferred to the reserve. This is usually done when a merchant begins with a fixed reserve

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET List



<https://dashboard.maverickpayments.com/api/reporting/reserve/<dbald>>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Fraud Report

At the end of each month, we create a customized and highly detailed fraud report for each merchant. To download it use the following endpoint by providing the `dbaId` and `date` for the desired fraud report pdf.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET **Generate**



`https://dashboard.maverickpayments.com/api/reporting/fraud/<dbaId>/<year-month>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Visa Verifi

PRODUCT SUMMARY

Once a Merchant obtains a merchant account (MID) through us and is registered through us on Verifi*, they can leverage this API to access Order Insight and Notification services to drive dispute prevention. This guide includes details needed to integrate with us and to leverage Verifi services. There are two ways you can integrate with us and utilize Visa Verifi's services.

1. Directly utilizing our Payment Gateway services
2. Using an external third-party Payment service.

**please contact us if wanting to register as a merchant for Verifi services*

PRODUCT OVERVIEW

Order Insight provides Issuers and Cardholders with real-time information covering purchase details and Merchant information to enrich the Cardholder experience, eliminate billing confusion, and prevent friendly fraud. A single integration allows data to be shared and used for three distinct purposes – Cardholder digital experience, Call Center Experience, and pre-dispute Compelling Evidence fraud dispute deflection.

Compelling Evidence introduces new rules that help merchants combat first-party misuse (friendly

Compelling Evidence introduces new rules that help merchants combat first-party misuse (friendly fraud) by weighting a cardholder's non-fraud prior transactions with the merchant as evidence of likely legitimacy of the disputed transaction. If a clear link between the merchant and the cardholder can be identified, the issuing bank is much more likely to rule the dispute in favor of the business; however, submitting evidence does not *guarantee* an auto-win as issuing banks still have discretion as to whether a dispute is ruled in favor of a merchant.

Visa's qualifying criteria to demonstrate the link is as follows:

For all disputes with Visa reason code 10.4, merchants can increase their odds of winning by providing two prior transactions with the same cardholder where:

- No fraud activity has been reported
- The same payment credential was used
- Processing occurred more than 119 calendar days and fewer than 366 calendar days prior to the disputed transaction processing date

Merchants must provide:

1. Product descriptions for the disputed charge and the two chosen transactions - reference product object table below.
2. The device ID, device fingerprint or the IP address of the customer
3. Proof that one or more of the following match across both non-fraud transactions and the disputed transaction:
 - a. Customer email
 - b. Delivery address
 - c. Device ID / device fingerprint
 - d. IP address

Our systems will detect and prefill other required information and will upon receiving qualifying dispute query for previous transactions that meet the required criteria.

To increase chances of qualifying, update your integration to share information included in the following sections for the Verifi API.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Submitting External Transactions

If you are not utilizing our payment gateway services and still wish to participate in the Visa Verifi program you can do so by sending us all of your transactions and the corresponding necessary information. To do so you can utilize this endpoint and leverage our systems to do the rest automatically. The transactions that you submit will become available for lookup through the Visa Verifi program.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

POST Submit



<https://dashboard.maverickpayments.com/api/visa-verifi/<merchantAccountId>/transaction>

Fields	Description	Type	Filterable	Required
terminalId	ID of the terminal for which you're submitting external transaction	Integer	No	Yes
transactionId	Unique ID of the transaction in the external system	Integer	String	No
amount	Total Amount of the transaction	Decimal	No	Yes
date	Date of the transaction	Datetime	No	Yes
cardBin	The first six digits of the card used in the transaction	Integer	No	Yes
cardNumber	The last four digits of the card used in the transaction	Integer	No	Yes
cardType	Card type	String	No	No

Product Object

This is the structure of each product object. When submitting the external transaction please provide a list of these objects inside `order.products` field.

Fields	Description	Type	Filterable	Required
name	Name of the purchased product	String	No	Yes
price	Price of a single product	Decimal	No	Yes
quantity	Quantity of purchased products	Integer	No	Yes

Example Product Object

json

```
{
  "name": "Hosting",
  "price": "24.00",
  "quantity": "1.00",
}
```

Tax Object

This is the structure of each tax object. When submitting the external transaction please provide a list of these objects inside `order.taxes` field.

Fields	Description	Type	Filterable	Required
type	Type of tax	String	No	Yes
amount	Tax amount	Decimal	No	Yes
rate	Tax rate	Integer	No	Yes
category	Tax category	String	No	Yes

Example Tax Object

json

```
{
  "type": "VAT",
  "amount": "2.40",
  "rate": "10.00",
  "category": "VAT"
}
```

Billing Object

This is the structure of the billing object. It provides data about the billed person. When submitting the external transaction please provide it under `order.billing` field.

Fields	Description	Type	Filterable	Required
name	Name of the billed person	String	No	Yes
country	Country	String	No	Yes
state	State	String	No	No
city	City	String	No	Yes
street	Street	String	No	Yes
zip	Zip	String	No	No

zip	zip	String	Number	No
-----	-----	--------	--------	----

Example Billing Object

json

```
{
  "name": "Craig Dewayne",
  "country": "United States",
  "state": "Arkansas",
  "city": "Pea Ridge",
  "street": "1302 Spruce St",
  "zip": "72751"
}
```

Shipping Object

This is the structure of the Shipping object. It provides data about the order shipping. When submitting the external transaction please provide it under `order.shipping` field.

Fields	Description	Type	Filterable	Required
fromZip	Shipping from zip	String	Number	No
toAddress	Delivery address information	String	No	Yes
toCity	Delivery city information	String	No	No
toZip	Shipping to zip	String	Number	No
toCountry	Shipping Country	String	No	Yes

Example Shipping Object

json

```
{
  "toCountry": "United States",
  "toCity": "Pea Ridge",
  "toAddress": "1302 Spruce St",
  "toZip": "72751",
  "fromZip": "31151"
}
```

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)



https://dashboard.maverickpayments.com/api/visa-verifi/<merchantAccountId>/order-insights

You can utilize this endpoint to list all Visa Verifi requests either as OrderInsight or Compelling evidence

List all requests from Visa Verifi for a specific merchant's account for a specific period.

Response Object

Fields	Description	Type	Filterable	Required	Readonly
id	ID	Integer	No	No	Yes
insightId	Insight ID in Visa System	Integer	No	No	Yes
source	Source of the request: OI=orderInsight, CI=compelling evidence	String	Yes	No	Yes
cardBin	The first 6 digits of the Card	Integer	No	No	Yes
cardLast4	The last 4 digits of the Card	Integer	No	No	Yes
paymentType	Card Brand	String	No	No	Yes
transactionDate	Transaction Date according to VISA	Date	No	No	Yes

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Other Reports

Based on the reports that are available to you, you can utilize this endpoint to export data-intensive reports from our system.

IMPORTANT Reports are executed in background mode and you need to check the status of each report utilizing or Status Reports endpoint.

Reporting Object

Fields	Description	Type	Filterable	Required	Readonly
--------	-------------	------	------------	----------	----------

name	Unique Name of the report	String	No	Yes	No
params	Report parameters	Object	No	Yes	No
params.format	File format of the report. Example: <code>csv</code> , <code>xlsx</code>	ENUM	No	Yes	No
params.xxx	Other report parameters	String	No	No	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET Request a Report



<https://dashboard.maverickpayments.com/api/reporting/request>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Body raw

```
{
  "name": "ResidualExport",
  "params": {
    "format": "csv",
    "date": "2022-02",
    "isPublished": "Yes",
    "isHeld": "No",
    "dbaId": 1,
  }
}
```

GET Check Status



<https://dashboard.maverickpayments.com/api/reporting/status/<reportId>>

Use this endpoint to check the status of a specific requested report.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET Download



`https://dashboard.maverickpayments.com/api/reporting/download/<reportId>`

After checking the status of a requested report and when it is ready to be downloaded, you can utilize this endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

Gateway Test Cards

We offer you test cards for the sandbox environment so you can confirm your integration works before using real card data.

IMPORTANT For AVS you can use the Address: 8320 and ZIP: 85284

Card Number	Network	Expiration Date	CVV
4539225011794489	VISA	12/30	999
4957587837877027	VISA	12/30	999
4632633008802809	VISA	12/30	999
4539225011794430	VISA	12/30	999
5296345017707556	MASTERCARD	12/30	998
5309572686772257	MASTERCARD	12/30	998
6011421812165456	DISCOVER	12/30	996
6011891662320957	DISCOVER	12/30	996
340200784265287	AMEX	12/30	9997
371632530176123	AMEX	12/30	9997
4111111111111111	VISA	12/30	999
4000111111111115	VISA	12/30	999

Partial Approval

There are cases where you will encounter partial approvals, such as gift cards etc. To test this use the following:

Card Number	Network	Expiration Date	CVV	Amount	Approved Amount
2223000048 400011	MASTERCAR D	12/25	998	11.10	5.55

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

Platforms

Platforms represent different types of partners, such as resellers and third-party solution providers, utilizing our platform for mutual merchants. Board your merchants, view reporting, receive webhooks for important updates, process payments on behalf of, and perform other valuable functions to offer a more integrated and seamless payment experience by leveraging our dashboard and infrastructure.

Sandbox

GET Sandbox Dashboard

<https://sandbox-dashboard.maverickpayments.com/<path>>

For testing purposes, please use our sandbox endpoint.

Onboarding


For platforms, such as resellers which generally include ISO and ISV partners, this enables the ability to systematically onboard merchants via our API. This enables platforms to better manage the interface and experience for boarding their merchants to our system.

Boarding Applications

This endpoint provides an interface for working with Boarding Applications. Each application belongs to a pre-created campaign. A campaign controls several aspects of a Boarding Application, such as pricing fees, the type of processing and several other parameters.

The overall boarding process is as follows:

1. Create a Boarding Application and get the Boarding Application `id`
2. Update the Boarding Application data using the `id`
 - a. Update Principal using the `principals.id`
 - b. Add Principals or Mass Update/Insert Principals if needed
 - c. Update the Processing/ACH section
 - d. Upload necessary documents and assign them to the Boarding Application
 - e. Update Fee where necessary
3. Request **eSign** or use **AutoSign** functionality to get needed signatures from principals.
4. Update application `status` to `Underwriting` or use **AutoUnderwriting** functionality
5. Check application `status` for changes.

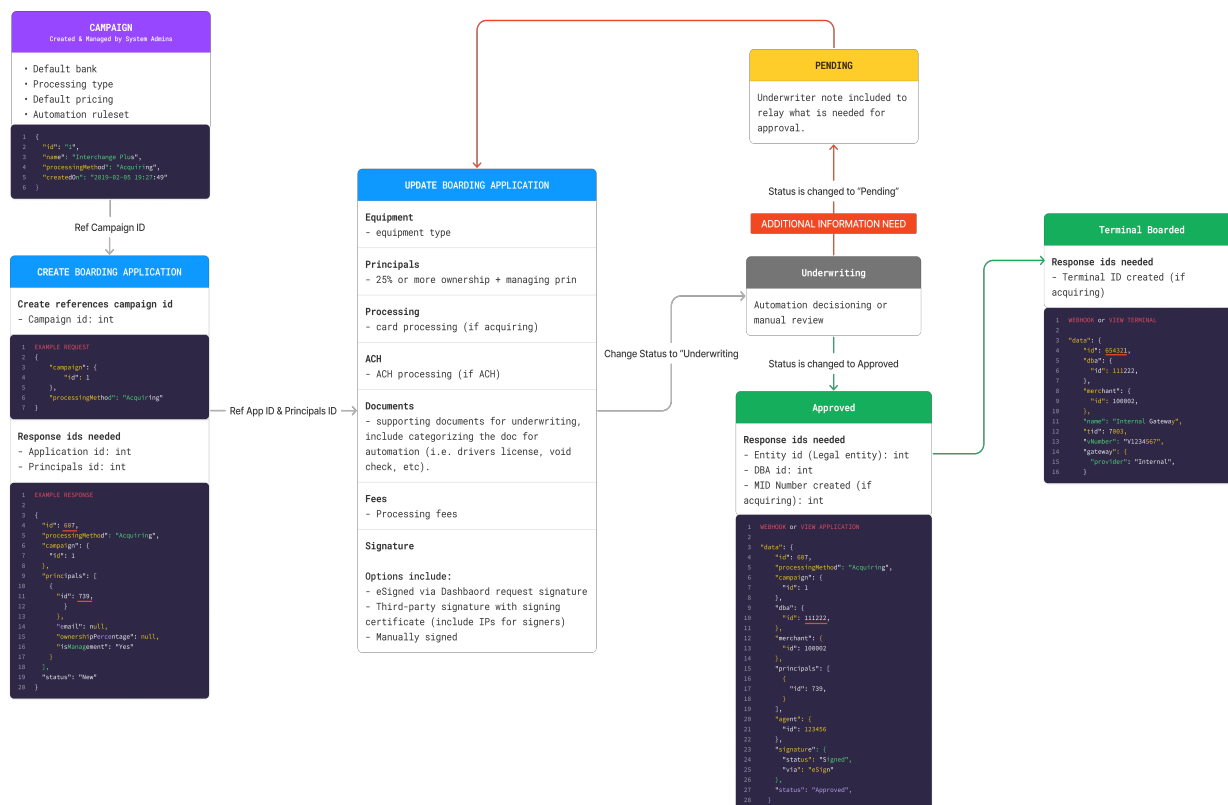

Expand Flow Chart

> Keep in mind that after creating an application you can get the `url` and send it for merchant completion. The link will initiate a web interface which allows the Boarding Application to be completed by the merchant online.

Application Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the Boarding Application	Integer	Yes	No	Yes
processingMethod	Acquiring , ACH , All	ENUM	Yes	Yes	Yes
campaign	Object	Object	No	Yes	Yes
campaign.id	Unique ID of the Campaign to which the Boarding Application is assigned	Integer	Yes	Yes	Yes
company	Object	Object	No	Yes	Yes
company.name	Corporate / Legal Name	String	Yes	Yes	No
company.type	Individual	ENUM	No	Yes	No

AUTHORIZATION Bearer Token

Token

Campaigns

A Boarding Application always starts by choosing a campaign and `processingMethod` . We have two main types of campaigns `Standard` or `Other` .

A standard campaign is a pre-fixed system campaign with standard pricing fees (Interchange or 3 Tier). Other is used for all the other types of campaigns where we do special conditions, pricing fees etc. The `processingMethod` determines the method of processing that a merchants wants to apply for.

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the campaign	Integer	Yes	No	Yes
name	Name of the campaign	String	Yes	No	Yes
type	Standard	ENUM	Yes	No	Yes

	or Other				
processingMethod	Acquiring, ACH or All	ENUM	Yes	No	Yes
pricingModel	Pricing Model Object	Object	No	No	Yes
pricingModel.name	Name of the Pricing Model	String	No	No	Yes
createdOn	Date and Time of creation	DateTime	Yes	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List



<https://dashboard.maverickpayments.com/api/boarding-application/campaigns>

Use this endpoint to list all Campaigns

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Equipment

You can utilize this endpoint to perform several operations in the Equipment section of the Boarding Application

Equipment Object

Fields	Description	Type	Filterable	Required	Readonly
equipment	Equipment Info	Object	No	No	No
equipment.used	Equipment Used Object	Object	No	No	No
equipment.used.value	Equipment Used Value	String	No	No	No

equipment.used.locked	Equipment Used Locked Flag ☐ Yes or ☐ No	Enum	No	No	No
equipment.note	Equipment Note Object	Object	No	No	No
equipment.note.value	Equipment Note Value	String	No	No	No
equipment.note.locked	Equipment Note Locked	Enum	No	No	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

Terminals

When creating a boarding application we give you the ability to add existing terminals.

By utilizing this endpoint you can perform several operations with the Existing terminals section of the Boarding Application.

IMPORTANT You can only create, update, and delete Terminals information on pre-approved applications.

Equipment Terminal Object

Fields	Description	Type	Filterable	Required	Readonly
tid	TID	Integer	No	No	No
vnumber	V#	String	No	No	No
gateway	Internal or Other	ENUM	No	No	No
note	Note	String	No	No	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

https://dashboard.maverickpayments.com/api/boarding-application/<id>/equipment/terminals

List all terminals that have been added to a Boarding Application. These terminals will be sent to the merchant when the application is approved.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET View



https://dashboard.maverickpayments.com/api/boarding-application/<id>/equipment/terminal/<tid>

View a specific Terminal in the Equipment section of the Boarding Application

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET View



https://dashboard.maverickpayments.com/api/boarding-application/<id>/equipment

Use this endpoint to view the equipment settings on a Boarding Application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

PUT Update



https://dashboard.maverickpayments.com/api/boarding-application/<id>/equipment

Use this endpoint to update the equipment section of a Boarding Application

Just as in the dashboard, most of the fields are lockable.

Depending on permission you might not be able to update locked fields.

Important: Attempting to update a locked field or a lock flag without the appropriate permissions will simply return the old values for these fields as they won't be updated.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "equipment": {
    "used": {
      "value": "Equipment Name"
    },
    "note": {
      "value": "note"
    },
    "providedBy": {
      "value": "Deployment Center"
    }
  }
}
```

List

Use this endpoint to list all Boarding Applications that you have available.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List Boarding Applications



<https://dashboard.maverickpayments.com/api/boarding-application>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Create

An application needs to be created first before proceeding to updating with the necessary fields. We have 3 types of Boarding Applications based on the processing type that the merchant is

applying for.

1. An Acquiring Boarding Application
2. An ACH Boarding Application
3. A hybrid, Acquiring and ACH Boarding Application.

Keep in mind that the number of required fields are dependent on the `processingMethod`. For example if the Boarding Application is for Acquiring there is no need to send ACH section. Also for an Acquiring Boarding Application based on the `processing.sales` values we might require additional fields if the merchant has 70% or more `processing.sales.mail` + `processing.sales.internet`.

When creating a boarding application via AppConnect token, you must explicitly provide an **agent id**.

The Agent ID which you want to set on the boarding application must have authorized the AppConnect. Example:

javascript

```
...  
"agent": {  
  "id": 654  
}
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

POST Create Boarding Application



<https://dashboard.maverickpayments.com/api/boarding-application>

Creating an Acquiring Boarding Application from a standard Campaign with `ID` 206 as an example.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{  
  "campaign": {  
    "id": 206
```

```
    },
    "processingMethod": "Acquiring"
  }
}
```

Delete

You can use this endpoint to Delete a boarding application.

NOTE This functionality is permission based, and in some case we might return an exception

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

DELETE Delete Boarding Application



`https://dashboard.maverickpayments.com/api/boarding-application/<id>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

View

You can either view the full Boarding Application or only a specific section.

Keep in mind that based on the `processingMethod` the Processing/ACH section can be null.

The sections of the Boarding Application that are available to be viewed/updated separately are as follows:

- Principals
- Processing
- ACH
- Documents
- Fees

Each section and all endpoints associated with it are described in detail in our developers documentation

AUTHORIZATION Bearer Token

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET View Boarding Application



`https://dashboard.maverickpayments.com/api/boarding-application/<id>`

You can utilize this endpoint for viewing the full Boarding Application

View Boarding Application with `id` 607

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Update

For testing purposes, please use our sandbox endpoint below.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Update Boarding Application



`https://dashboard.maverickpayments.com/api/boarding-application/608`

In the below example, we are updating only the `company.name` of the Boarding Application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "processingMethod": "Acquiring",
  "mcc": {
    "type": "Acquiring"
  }
}
```

```
    "id": "123"
  },
  "campaign": {
    "id": 206
  },
  "company": {
    "name": "Demo Company 2"
  }
}
```

Principals

You can use this endpoint to execute all necessary operations in the Principals section of the Boarding Application. You can do the following:

- List all Principals
- Create an additional Principal
- Update Principal informaion
- Delete a Principal

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List Principals



<https://dashboard.maverickpayments.com/api/boarding-application/608/principals>

List all Principals for Boarding Application 608.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

POST Create Principal



<https://dashboard.maverickpayments.com/api/boarding-application/608/principal>

Add a second Principal to Boarding Application 608

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "title": "CEO",
  "name": {
    "first": "Robert",
    "last": "Smith"
  },
  "dayOfBirth": "1986-10-18",
  "ssn": null,
  "nationalId": null,
  "nationality": {
    "id": 100
```

PUT Update a Single Principal



<https://dashboard.maverickpayments.com/api/boarding-application/607/principal/741>

You can utilize this endpoint to update information on a single principal in the Principals section of the Boarding Application.

Updating the `dayOfBirth` for Principal with `id` 741 for Boarding Application 607.

NOTE Only send the parameters that you want to update, there is no need to send a full request with all the parameters for the Principal.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "dayOfBirth": "1986-10-21"
}
```

PUT Mass update Principals



<https://dashboard.maverickpayments.com/api/boarding-application/608/principals>

https://dashboard.maverickpayments.com/api/boarding-application/607/principals

You can utilize this endpoint to mass add, update or delete principal information.

IMPORTANT Only send the parameters that you want to update for a specific principal, there is no need to send a full request with all the parameters for the Principal. However, if you have more than one principal on the Boarding Application you will need to provide all the Principal id's even if there are no changes to them or else those id's that are not provided in the request will be deleted.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

```
json

[
  {
    "id": 744,
    "dayOfBirth": "1986-10-21"
  }
]
```

DELETE Delete Principal



https://dashboard.maverickpayments.com/api/boarding-application/607/principal/741

Delete Principal with `id` 741 for Boarding Application 607.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Processing

You can use this endpoint to execute all necessary operations in the Processing section of the Boarding Application. You can do the following:

- View all the information in the Processing section
- Update information in the Processing section

IMPORTANT: If you want to update multiple Bank Accounts read the [Bank Accounts](#) section.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET View Processing section



`https://dashboard.maverickpayments.com/api/boarding-application/607/processing`

You can use this endpoint to view the necessary information in the Processing section of the Boarding Application.

Viewing only the Processing section of Boarding Application with `id` 607

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

PUT Update Processing section



`https://dashboard.maverickpayments.com/api/boarding-application/607/processing`

You can use this endpoint to update the necessary information in the Processing section of the Boarding Application.

Update the `bank.accountNumber` and `bank.routingNumber` in the Processing section of Boarding Application with `id` 607

NOTE You do not need to send the all the parameters in the Processing section. You can send only the parameters that you are updating.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "bank": {
    "accountNumber": "222222233",
    "routingNumber": "444444444"
  }
}
```

Merchant Category Codes (MCCs)

In the finance ecosystem, Merchant Category Codes (also known as MCCs) are used to classify businesses by the type of products or services they provide.

For example, restaurants, hospitals and grocery stores have different MCCs. These MCC codes are used for calculating interchange fees, authorizing payments, and preventing fraud.

The MCC of sellers get configured during onboarding; it's important that your sellers have MCCs that match the services they're offering.

The below endpoint provides a list of MCCs numbers, their description and associated system identifier.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List MCCs



`https://dashboard.maverickpayments.com/api/boarding-application/mcc`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

ACH

You can use this endpoint to execute all necessary operations in the ACH section of the Boarding Application. You can do the following:

- View all the information in the ACH section
- Update information in the ACH section

IMPORTANT: If you want to update multiple Bank Accounts read the [Bank Accounts](#) section.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET View ACH section



`https://dashboard.maverickpayments.com/api/boarding-application/609/ach`

You can use this endpoint to view the necessary information in the ACH section of the Boarding Application.

Viewing only the ACH section of Boarding Application with `id` 609

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

PUT Update ACH section



`https://dashboard.maverickpayments.com/api/boarding-application/609/ach`

You can use this endpoint to update the necessary information in the ACH section of the Boarding Application.

Update the `bank.accountNumber` and `bank.routingNumber` in the ACH section of Boarding Application with `id` 609

NOTE You do not need to send all the parameters in the Ach section. You can send only the parameters that you are updating.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "bank": {
    "accountNumber": "1122334455",
    "routingNumber": "112233440"
  }
}
```

Documents

This endpoint is used for all the supporting documents on a Boarding Application. There are several things to consider with documents on a Boarding Application.

1. The process begins by utilizing one of our upload methods via the [Attachments](#) endpoint.
2. Each attachment needs to be assigned to a Boarding Application and categorized with `about.id`. (See [Attachment About](#)) Assigning an `about.id` tells us what the attached document contains.

IMPORTANT It is important to note that the drivers license category with `about.id` 6 needs an additional `principal.id`, since more than one principals can exist on a Boarding Application.

NOTE We allow more than one `about.id` to be set to an attachment when you are uploading a larger document that has more information in it.

Documents Object

Fields	Description	Type	Filterable	Required	Readonly
attachment	Object	Object	No	No	Yes
attachment.id	Relation to the ID of the attachment	Integer	No	No	Yes
about	Object	Object	No	No	Yes
about.id	ID of the about	String	No	No	Yes
principal	Object	String	No	No	Yes
principal.id	Principal ID on the Boarding Application	String	No	No	Yes

You can use this endpoint to execute all necessary operations in the Documents section of the Boarding Application. You can do the following:

- View all assigned documents to a Boarding Application
- Assign documents to a Boarding Application
- Update documents to a Boarding Application
- Delete documents in a Boarding Application

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

Attachment About

The Attachment-about endpoint is used for the categorization of all the supporting documents that can be assigned to a Boarding Application. We have a list of several categories that are used to tell us what the document on a Boarding Application contains.

IMPORTANT Always add `about.id` to your documents when assigning them to a Boarding Application. This will speed up the Underwriting process. We allow more than one `about.id` to be added to a document when you have more information in it.

Attachment About Object

Fields	Description	Type	Filterable	Required	Readonly
id	ID of the about	Integer	No	No	Yes
name	Description of the about	String	No	No	Yes
owner	<code>true</code> or <code>false</code>	ENUM	No	No	Yes
forMerchant	<code>true</code> or <code>false</code>	ENUM	No	No	Yes
forStaff	<code>true</code> or <code>false</code>	ENUM	No	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List All Document Categories



<https://dashboard.maverickpayments.com/api/boarding-application/attachments/about>

Note: Keep in mind that the `about.id` differs from our Sandbox and Production environments. Please ensure to use and assign the correct `about.id` with their corresponding environment.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET View all documents



https://dashboard.maverickpayments.com/api/boarding-application/<id>/documents

You can utilize this endpoint to list all uploaded documents to a boarding application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET MPA



https://dashboard.maverickpayments.com/api/boarding-application/<id>/download-signed-document/<type>
>

Once a boarding application has been signed, you can utilize this endpoint to download the merchant agreement.

Type	Description
ach	The signed ACH merchant agreement pdf
acquiring	The signed Acquiring merchant agreement pdf
certificate	The e-signed certificate pdf
all	This will download all MPA related documents in a zip file

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

POST Assign a single document



https://dashboard.maverickpayments.com/api/boarding-application/607/document

In this example, we will add one document and categorize it by adding to it `about.id` [1,2] for "Other" and "Voided Check"

NOTE We allow more than one `about.id` to be set to an attachment when you are uploading a larger document that has more information in it.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "attachment": {
    "id": 1916
  },
  "about": [
    1,
    2
  ]
}
```

PUT Assign multiple documents



<https://dashboard.maverickpayments.com/api/boarding-application/607/documents>

In this example, we will add

- One document and categorize it by adding to it `about.id` 2 for "Voided Check"
- And another document and categorize it by adding to it `about.id` 6 for "Driver's License" and additionally adding a `principal.id` so that we can provide additional detail to which principal this driver's license belongs.

IMPORTANT Again it is important to mention that `principal.id` is needed if the `about.owner` is true. See our **Attachment About** endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
[
  {
    "attachment": {
      "id": 1916
    },
    "about": [2]
  },
  {

```

```
"attachment": {  
  "id": 1015
```

PUT Update a single document



<https://dashboard.maverickpayments.com/api/boarding-application/607/document/1916>

In this example, we will update the `about.id` for document with `id` 1916

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{  
  "about": [  
    2,  
    4  
  ]  
}
```

DELETE Delete a single document



<https://dashboard.maverickpayments.com/api/boarding-application/607/document/1916>

In this example, we will delete document with `id` 1916

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Fees

You can use this endpoint to execute all necessary operations in the Fee section of the Boarding Application. You can do the following:

- List all the fees in the Fee section
- View a single fee in the Fee section
- Update a single or multiple fees in the Fee section (except Other Fees)

Fee Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the fee line item for the specific Boarding Application	Integer	No	Yes	Yes
type	Object	Object	No	No	Yes
type.id	This is a relation to the ID of fee line item Fees	Integer	No	No	Yes
type.name	Name of the Fee	String	No	No	Yes
type.type	Fee value type percent , amount , boolean	ENUM	No	No	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

Types

Use this endpoint to list all the system fee types with their corresponding detailed information.

Fields	Description	Type	Filterable	Required	Readonly
id	ID of the fee	Integer	No	No	Yes
name	Fee name	String	No	No	Yes
type	percent or amount	ENUM	No	No	Yes
period	Year , Month , h , Week , Day ,	ENUM	No	No	Yes

	OneTime , Transaction				
processingMethod	Acquiring or Ach	ENUM	No	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List



<https://dashboard.maverickpayments.com/api/fees>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Other Fees

Other Fee Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the Boarding Application Fee	Integer	Yes	Yes	Yes
type	Fee Type Object	Object	Yes	No	Yes
type.id	Unique ID of the Fee Type	Integer	No	No	Yes
type.name	Name of the Fee	String	No	No	Yes
type.type	Fee value type percent , amount	ENUM	No	No	No
type.period	Fee period	ENUM	No	No	No

Year ,

Month

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

POST Add



<https://dashboard.maverickpayments.com/api/boarding-application/608/fee/other>

This endpoint is used to add up to two **Other Fees** in the Fee section of the Boarding Application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

PUT Update



<https://dashboard.maverickpayments.com/api/boarding-application/608/fee/other/7241201>

This endpoint is used to update a specific **Other Fee** in the Fee section of the Boarding Application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

DELETE Delete



<https://dashboard.maverickpayments.com/api/boarding-application/608/fee/other/7241201>

This endpoint is used to remove a specific **Other Fee** in the Fee section of the Boarding Application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET List all fees



<https://dashboard.maverickpayments.com/api/boarding-application/608/fees>

Listing all fees for boarding application with `id` 608

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET View a specific fee



<https://dashboard.maverickpayments.com/api/boarding-application/608/fee/19445>

View all the information for fee with `id` 19445 for boarding application with `id` 608

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

PUT Update a single fee



<https://dashboard.maverickpayments.com/api/boarding-application/608/fee/19445>

Update the value for fee with `id` 19445 for boarding application with `id` 608

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{  
  "value": "0.10000"  
}
```

PUT Update multiple fees



<https://dashboard.maverickpayments.com/api/boarding-application/608/fees>

Update the values for fees with `id` 19452 and `id` 19451 for boarding application with `id` 608

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
[
  {
    "id": 19452,
    "value": "0.01"
  },
  {
    "id": 19451,
    "value": "0.02"
  }
]
```

Bank Accounts

Multiple Bank Accounts are supported only for Acquiring Boarding Applications

Each acquiring boarding application can have up to two bank accounts used for different purposes. For example one bank account for Debits and one bank account for deposits or a single bank account used for both billing and deposits.

The endpoint for updating bank accounts is the same as the endpoint for updating a boarding application:

Bank Accounts Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the bank account	Integer	No	Yes	Yes
type	All, Deposits, Debits, Credits, Billing	ENUM	No	Yes	Yes
accountNumber	Bank account number	Integer	No	Yes	Yes

routingNumber	Bank routing number	Integer	No	Yes	No
---------------	---------------------	---------	----	-----	----

The supported Bank Accounts types are: `All, Deposits, Debits` for Processing and `All, Credits, Debits, Billing` for ACH.

If you want to use a single Bank Account you can continue using the standard `bank` field in the request parameters. (This will be deprecated soon)

For multiple Bank Accounts, you have to use the new `banks` parameter in the request.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Add



`https://dashboard.maverickpayments.com/api/boarding-application/<id>/processing`

When creating separate Bank Accounts all Bank Account types have to be provided in the request.

When creating separate Bank Accounts the Bank Account with type "All" will be deleted.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

PUT Update



`https://dashboard.maverickpayments.com/api/boarding-application/<id>`

To update a Bank Account, you have to provide the ID of the Bank Account you want to update:

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "processing": {
    "banks": [
      {
        "id": 1,
        "type": "All",
        "accountNumber": "221221331331",
        "routingNumber": "123123123"
      }
    ]
  }
}
```

PUT Change



<https://dashboard.maverickpayments.com/api/boarding-application/<id>/processing>

In the case, a Boarding Application has multiple Bank Accounts assigned and you want to switch to a single Bank Account, you can use the following request

Keep in mind that if you switch from multiple Bank Accounts to using a single Bank Account with the type "All", the other Bank Account types will be deleted

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "banks": [
    {
      "type": "All",
      "accountNumber": "1122334412",
      "routingNumber": "123123123"
    }
  ]
}
```

Validate

Use this endpoint to validate your Boarding Application before changing the to Underwriting.

In doing so you will eliminate status change exception errors and you will make sure there is no missing required information in the Boarding Application.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET Validate a Boarding Application



<https://dashboard.maverickpayments.com/api/boarding-application/386/validate>

Validate Boarding Application with `id` 386

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

URL

You can get the Boarding Application URL to send out for merchant completion via our online web interface form.

Utilizing this endpoint we will return the URL that can be used to fill in all required information.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET GET URL of Boarding Application



<https://dashboard.maverickpayments.com/api/boarding-application/608/url>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Signature

An application needs to be completed with a signature(s) before you can send it to Underwriting for

An application needs to be completed with a signature(s) before you can send it to Underwriting for approval and boarding.

There are several ways to achieve signing of the application.

- Using our E-sign. Here you can either manually request an e-signature or use our [Boarding Application Automation](#) options.
- Manually Sign, by uploading a signed boarding application pdf with a wet signature.
- Using an external e-sign service. Here you will need to upload the externally signed pdf and supporting documents and information such as the IP of the signor/s.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

Request E-sign

When manually requesting e-signing we initiate an email to all the principals on the application with a link to our online eSign section.

IMPORTANT Keep in mind that before initiating a signature request the Boarding Application needs to be fully completed with all the required field. You can always use our **Validate** endpoint for verification.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Request Signature



`https://dashboard.maverickpayments.com/api/boarding-application/<id>/request-signature`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Embed E-sign

You can use this functionality to embed our proprietary e-sign in your workflow.

IMPORTANT: It is important to know that this functionality is applicable only on applications that have one principal owner, otherwise, use the standard **Request E-sign** endpoint.

To use this feature, the following steps need to be performed.

1. The following script must be added to the head of your page where you have integrated the boarding application process.

html

```
<script src="https://dashboard.maverickpayments.com/js/boarding-application/signature.js"></script>
```

2. Create a PUT request to the following URL

html

```
https://dashboard.maverickpayments.com/api/boarding-application/<id>/request-signature/embed
```

This will return a JSON containing domain, signature.id and a signature.token

IMPORTANT: Before generating an embeded e-sign request it is always recommended to use our **Validate** endpoint to verify that all required application fields are filled, otherwise you won't be able to sign the application and will be presented with a validation error.

3. You need to implement the function from the library that is being loaded in step 1 to create the popup modal window. The function can be loaded on different events, **click**, **submit**, **change**, etc. based on your preference. The function has two parameters. The first is the JSON that you get from step 2, and the second is a callback function.

The callback function is something that you need to create based on your preferences. There you can decide whether to have a redirect to your success pages with the signature parameter included in it or some other action.

Here is what to expect as data for success in the callback function

json

```
{
  event: "sign",
  boardingApplication: {
    id: 1
  },
  principal: {
    id : 1,
    name: {
      first: "John",
      last: "Wick"
    }
  }
}
```

If an e-sign is rejected in the above example the `sign.status` = **Rejected**

If there are any errors in the callback you will receive the following data

json

```
{
```

```
    event: "exception",
    name: "Bad Request",
    message: "Wrong email",
    code: 400,
    status: 400
}
```

Take a look at some examples in the navigation bar that we have created for you on how to integrate and embed e-sign with different flows for callback function

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

Embed E-sign Example Flow 1

In the below flow, we will show you how to initiate the popup module and perform a callback function with a redirect once the application is signed.

1. First, we will load the necessary script library in the head of our page where we have integrated the boarding application process.

html

```
<script src="https://dashboard.maverickpayments.com/js/boarding-application/signature.js"></script>
```

2. After that we will request the necessary signature info from our embed e-sign endpoint.
3. For this example we will create a simple button at the end of our boarding application with the title "Sign Here" and a redirect to a page after the signing process is complete:

Create an example function called **signFunction**:

javascript

```
function signFunction() {
    let boardingApplicationSignature = new BoardingApplicationSignature;
    boardingApplicationSignature.open({
        "id": 10,
        "token": "130bb9ce-2151-4e01-8952-52e815c6d444",
        "domain": "dashboard.example.com"
    }, function(data) {
        window.location="https://example.com?data="+JSON.stringify(data);
    })
}
```

And the button:

html

```
<button onclick="signFunction()">Sign here</button>
```

When the button is clicked a modular popup will show with an iframe of our e-sign page. If all the required application fields are filled in and a signature is applied we will redirect to example.com with the following data:

html

```
https://example.com?data={"event":"sign","boardingApplication":{"id":1},"principal":{"id":1}}
```

However, if there are validation errors we will redirect to example.com with the following data.

html

```
https://www.example.com/?data={"event":"exception","name":"Bad%20Request","message":"The%20"
```

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

Embeded E-sign Example Flow 2

In the below flow, we will show you how to initiate a popup module window and close it after you get an e-sign event.

1. First, we will load the necessary script library in the head of our page where we have integrated the boarding application process.

html

```
<script src="https://dashboard.maverickpayments.com/js/boarding-application/signature.js"></script>
```

2. After that we will request the necessary signature info from our embed e-sign endpoint.
3. For this example we will create a simple button at the end of our boarding application with the title "Sign Here" and close it after we get an e-sign event, we put a small delay as well on the close event but that is something you can exclude if needed.

Create an example function called **signFunction**:

javascript

```
function signFunction() {  
  let boardingApplicationSignature = new BoardingApplicationSignature;  
  boardingApplicationSignature.open({  
    "id": 10,  
    "token": "130bb9ce-2151-4e01-8952-52e815c6d444",  
    "domain": "dashboard.example.com"  
  }, function (data) {
```



```
        setTimeout(function() {  
            boardingApplicationSignature.close();  
        }, 2000);  
    })
```

And the button:

html

```
<button onclick="signFunction()">Sign here</button>
```

When the button is clicked a modular popup will show with an iframe of our e-sign page. If all the required application fields are filled in and a signature is applied we will close the popup

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Request Embed



<https://dashboard.maverickpayments.com/api/boarding-application/<id>/request-signature/embed>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Manually Signing

An application can be manually signed via the API. Before sending a manual signing request, the signed PDF must be uploaded to the system via the **[Attachment Temporary Upload-API]**

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

POST Manual Sign



<https://dashboard.maverickpayments.com/api/boarding-application/<id>/sign/manual>

Plain Text

An application can be manually signed via the **API**. Before sending a manual signing request,

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

External eSign Signing

An application can be signed with an external e-Signature via the API. Before sending the signing request, you need to upload the externally signed PDF via the **[Attachment Temporary Upload-API]**

IMPORTANT Keep in mind that you will need to provide the externally signed documents and ip information for all the principals listed as signors on the Boarding Application

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

POST External eSign



<https://dashboard.maverickpayments.com/api/boarding-application/233/sign/external>

Plain Text

An application can be manually signed via the **API**. Before sending a manual signing request,

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "signedBoardingApplication": <uploadedAttachmentId>,
  "signingCertificate": {
    "<principalId>": <uploadedAttachmentId>
  },
  "documentType": "Acquiring",
  "ip": {
```

```
"<principalId>": "192.158.1.38",  
"<principalId>": "192.158.1.39"
```

```
}
```

```
2
```

Automation

We offer Boarding Application automation to streamline some of the processes where needed. At this point there are two options, **AutoSign** and **AutoUnderwriting**.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

AutoSign

Enabling this option will trigger the eSign section of the online application after all the required fields from the other sections have been completed.

NOTE If you feel confident that all the information will be filled correctly on a Boarding Application we always encourage you to use this automation as it will speed up the approval process.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Set AutoSign



<https://dashboard.maverickpayments.com/api/boarding-application/608/auto-sign/Yes>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

AutoUnderwriting

Enabling this option will trigger the eSign section of the online Boarding Application and after the application is signed its status will automatically change to **Underwriting**.

NOTE If you feel confident that all the information will be filled correctly on a Boarding

Application we always encourage you to use this automation as it will speed up the approval process.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Set AutoUnderwriting



<https://dashboard.maverickpayments.com/api/boarding-application/608/auto-underwriting/Yes>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Status

In order to initiate the approval process of a Boarding Application its status needs to be changed to Underwriting.

This can be achieved either using the Automation options or by manually changing the status of the application.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

PUT Set status to Underwriting



<https://dashboard.maverickpayments.com/api/boarding-application/608/status/Underwriting>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Notes

By utilizing this endpoint you can read all notes associated with the Boarding Application. During the underwriting process, additional information may be requested and this is the endpoint to read all

the notes from our Underwriting team.

Notes Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the Boarding Application Note	Integer	Yes	No	Yes
note	Content of the note	String	No	Yes	No
user	The user who create the note	String	No	No	Yes
notification	Notification for the added note Yes No	ENUM	No	Yes	No
updatedAt	Date and Time of last update on the application note	Datetime	Yes	No	Yes

You can do the following:

- List all notes for a specific Boarding Application
- Create a note for a specific Boarding Application

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List



<https://dashboard.maverickpayments.com/api/boarding-application/608/notes>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

POST Create



<https://dashboard.maverickpayments.com/api/boarding-application/608/note>

Create a note for Boarding Application with `id` 608 and send a notification to the appropriate department

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Body raw (json)

json

```
{
  "note": "I will send the needed information ASAP",
  "notification": "Yes"
}
```

Forms

By utilizing this endpoint, you can perform several operations with the forms associated with the application.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET List



<https://dashboard.maverickpayments.com/api/boarding-application/<id>/forms>

List all forms for a specific boarding application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET View



<https://dashboard.maverickpayments.com/api/boarding-application/<boardingApplicationId>/form/<formId>>

View a specific Form for a specific Boarding Application.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

GET Download Signed Document



`https://dashboard.maverickpayments.com/api/boarding-application/<boardingApplicationId>/form/<formId>/download/<type>`

Once a boarding application form has been signed, you can utilize this endpoint to download the signed documents.

Type	Description
all	This will download all signed related documents in a zip file
document	The form document pdf
certificate	The e-signed certificate pdf

Download all signed documents for the form with ID 1 of the boarding application with ID 1.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Underwriting Results

While a boarding application is in **Underwriting** Status multiple checks are performed to determine if all the provided data is valid. Sometimes some of those checks may not pass or may raise warning flags in our system. In those cases additional information from the agent will be required regarding the merchant.

From the response you can get an overview of which check has passed and in some cases which have not. Also the response will always contain a list of required documents specific to that boarding application together with a flag indicating if that document is already provided.

Keep in mind that the required documents are just an example. For different boarding application different document types may be required. However the structure is always the same.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Boarding Applications](#)

GET Checks



`https://dashboard.maverickpayments.com/api/boarding-application/<id>/checks`

To track and review those checks you can utilise this endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Boarding Applications](#)

Merchants

This endpoint is used to view all Merchant account related information.

Merchants Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the DBA record	Integer	Yes	No	Yes
name	Name of the DBA	String	Yes	No	Yes
principals	List of principals and details	Object	No	No	Yes
principals.name	Name Object	Object	No	No	Yes
principals.name.first	First Name	String	No	No	Yes
principals.name.last	Last Name	String	No	No	Yes
principals.isSigner	☐ Yes , ☐ No (If this is the principal)	ENUM	No	No	Yes

AUTHORIZATION Bearer Token

Token

.....

Terminals

By utilizing this endpoint you can read all terminal/s related information for a specific merchant.

Terminal Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique system ID of the terminal	Integer	Yes	No	Yes
dba	DBA Object	Object	No	No	Yes
dba.id	Unique ID of the DBA record	Integer	Yes	No	Yes
dba.name	Merchant DBA	String	No	No	Yes
merchant	Merchant Object	Integer	No	No	Yes
merchant.id	Unique ID of the merchant	Integer	Yes	No	Yes
merchant.name	Merchant Legal name	String	No	No	Yes
name	A name	String	Yes	No	Yes

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Merchants](#)

GET List Terminals



<https://dashboard.maverickpayments.com/api/terminals>

List all terminals with their associated `merchant.id` and `dba.id`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET View a specific Terminal



`https://dashboard.maverickpayments.com/api/terminal/<id>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET VAR Sheet



`https://dashboard.maverickpayments.com/api/terminal/<id>/var-download`

By utilizing this endpoint you can download a pdf file containing the terminal information, also known as VAR Sheet.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET VAR View



`https://dashboard.maverickpayments.com/api/terminal/<id>/var-list`

By utilizing this endpoint you can view VAR sheet data for a specific terminal

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

GET List Merchants



`https://dashboard.maverickpayments.com/api/merchant`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Merchants](#)

DBA

This endpoint is used to view all Merchant DBA related information

This endpoint is used to view all merchant DBA related information.

DBA Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the DBA record	Integer	No	No	Yes
name	Name of the DBA	String	No	No	Yes
address	Object	Object	No	No	Yes
address.street	Street	String	No	No	Yes
address.city	City	String	No	No	Yes
address.zip	Zip code	String	No	No	Yes
address.state	Object	Object	No	No	Yes
address.state.id	State ID	String	No	No	Yes
address.country	Object	Object	No	No	Yes

AUTHORIZATION Bearer Token

Token

GET List



<https://dashboard.maverickpayments.com/api/dba>

Use this endpoint to list all DBAs that you have available.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [DBA](#)

GET View



<https://dashboard.maverickpayments.com/api/dba/1>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [DBA](#)

Attachments

This endpoint is used for the Dashboard's file system. Each attachment uploaded via this endpoint can be used in several endpoints, including but not limited to the Boarding Application, Tickets, Chargebacks and etc.

NOTE We provide several upload methods for your convenience.

Attachments Object

Fields	Description	Type	Filterable	Required	Readonly
id	ID of the attached file	Integer	Yes	No	Yes
name	File name	String	No	No	Yes
type	File type	String	No	No	Yes
size	File size in bytes	Number	No	No	Yes
createdOn	Date and time of file creation	Datetime	No	No	Yes

AUTHORIZATION Bearer Token

Token

Temporary Upload

You can utilize this upload for temporary attachment to the system. These attachments can be used for uploading signed boarding applications and signing certificates, which can then be provided in the external e-signing requests

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Attachments](#)



https://dashboard.maverickpayments.com/api/attachment/upload?temporary=true

You can utilize the standard upload endpoint if your file is 16MB or less. Anything above 16MB you need to utilize the chunk upload endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

PARAMS

temporary true

Chunk Upload

The chunk upload endpoints allow you to upload files larger than 16MB by uploading them into smaller chunks/parts. The overall process is as follows:

- 1. Initialize (providing file information)
- 2. Upload the divided chunks/parts of the file

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Attachments](#)

POST Initialize



https://dashboard.maverickpayments.com/api/attachment/init

Initialize Object

Fields	Description	Type	Filterable	Required	Readonly
name	File name	String	No	Yes	No
size	File size in bytes	Number	No	Yes	No
hash	MD5 File Checksum	String	No	Yes	No

There are a couple of things to note here. Before sending an initialize request you need to have an MD5 checksum for the file that you wish to upload. The required parameters are listed in the Object table.

After successful initialization, we will return a unique `id` that needs to be provided when uploading the separated chunks/parts.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

Body raw (json)

json

```
{
  "name": "forReview.png",
  "size": 989,
  "hash": "555347cd00852cbf81caaffeb995e388"
}
```

PUT Upload Request 1/2



`https://dashboard.maverickpayments.com/api/attachment/upload/<id>`

You need to separate the larger file into smaller chunks/parts no bigger than 16MB. After the separation, the files need to be uploaded with the correct sequence of parts.

IMPORTANT The upload process remains in pending status until all the chunks have been uploaded. At the end if we detect that the checksum is not the same as the initialized we will return an error: The provided hash at the beginning does not match the hash of the uploaded file.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

HEADERS

Content-Type application/octet-stream

Body file



`https://dashboard.maverickpayments.com/api/attachment/upload/<id>`

You need to separate the larger file into smaller chunks/parts no bigger than 16MB. After the separation, the files need to be uploaded with the correct sequence of parts.

IMPORTANT The upload process remains in pending status until all the chunks have been uploaded. At the end if we detect that the checksum is not the same as the initialized we will return an error: The provided hash at the beginning does not match the hash of the uploaded file.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

HEADERS

Content-Type application/octet-stream

Body file

POST Standard Upload



`https://dashboard.maverickpayments.com/api/attachment/upload`

You can utilize the standard upload endpoint if your file is 16MB or less. Anything above 16MB you need to utilize the chunk upload endpoint.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

GET List attachments



`https://dashboard.maverickpayments.com/api/attachments`

List all of your attachments in the Dashboard's file system.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

GET View



`https://dashboard.maverickpayments.com/api/attachment/<id>`

View a specific attachment

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

GET View in browser



`https://dashboard.maverickpayments.com/api/attachment/<id>/download/inline`

View a specific attachment in browser

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

GET Download



`https://dashboard.maverickpayments.com/api/attachment/<id>/download`

Download an attachment.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Attachments](#)

DELETE Delete



`https://dashboard.maverickpayments.com/api/attachment/<id>`

Deleting attachments can be achieved by utilizing this endpoint.

IMPORTANT Any attachment that is already in use by one or more endpoint in the Dashboard cannot be deleted.

AUTHORIZATION Bearer Token

Webhooks

Use webhooks to be notified about events that happen in your account.

Webhook Object

Fields	Description	Type
id	Unique ID of the event	Integer
module	Event group	String
action	Event identifier	String
date	Date of the event	Datetime
data	Event Data	Object

Example

javascript

```
{
  "id": "1",
  "module": "ach",
  "action": "create",
  "date": "2019-08-03 19:31:55",
  "data": {...}
}
```

Signatures

We sign the webhook events that are sent to your endpoints. We do so by including a signature in each event's `Webhook-Signature` header. This allows you to verify that the events were sent by us, not by a third party.

IMPORTANT You are not required to implement this kind of signature check, but it's **strongly recommended**.

`Webhook-Signature` is a [SHA-512](#) sum of following fields

`<webhookSignature><id><module><action><date>`

You can view and manage your **Webhook Signature** in your Dashboard. Keep in mind that every

Webhook URL has its own `<webhookSignature>`

Events

Groups of events you can subscribe to.

Boarding Application

Notifications related to our Boarding Applications.

This webhook will be triggered when a new Boarding Application is created and when there are status change events related to the Application.

json

```
{
  "id": 1763,
  "module": "boardingApplication",
  "action": "statusChanged",
  "date": "2023-08-18 11:08:06",
  "data": {
    "id": 246146,
    "processingMethod": "Acquiring",
    "mcc": "1750",
    "campaign": {
      "id": 19859
    }
  }
}
```

Boarding Application Status Change

Notification when a Boarding Application status changes.

javascript

```
{
  "id": 115,
  "module": "boardingApplication",
  "action": "statusChanged",
  "date": "2025-11-20 11:53:25",
  "data": {
    "id": 296,
    "processingMethod": "Acquiring",
    "mcc": {
      "id": null
    }
  }
}
```

Boarding Application Addendum Added

Notification when a new Addendum is added to a Boarding Application.

javascript

```
{
  "id": 116,
  "module": "boardingApplication",
  "action": "addendumAdded",
  "date": "2025-11-20 11:56:04",
  "data": {
    "boardingApplication": {
      "id": 30
    },
    "form": {
      "id": 51
    }
  }
}
```

Boarding Application Failed Check

Notification when a Boarding Application check fails.

javascript

```
{
  "id": 117,
  "module": "boardingApplication",
  "action": "failedCheck",
  "date": "2025-11-20 11:57:29",
  "data": {
    "boardingApplication": {
      "id": 30
    },
    "check": {
      "type": "GAuthenticate"
    }
  }
}
```

Boarding Application Note Added

Notification when a new note is added to a Boarding Application.

javascript

```
{
  "id": 118,
  "module": "boardingApplication",
  "action": "noteAdded",
  "date": "2025-11-20 12:00:31",
  "data": {
    "boardingApplication": {
      "id": 83
    },
    "note": {
      "id": 2.
    }
  }
}
```

Boarding Application Note Updated

Notification when a Boarding Application note is updated.

javascript

```
{
  "id": 119,
  "module": "boardingApplication",
  "action": "noteUpdated",
  "date": "2025-11-20 12:01:15",
  "data": {
    "boardingApplication": {
      "id": 71
    },
    "note": {
      "id": 28.
    }
  }
}
```

Boarding Application Pre-Generated

Notification when a Boarding Application is being pre-generated.

javascript

```
{
  "id": 120,
  "module": "boardingApplication",
  "action": "preGenerated",
  "date": "2025-11-20 12:02:16",
  "data": {
    "sourceBoardingApplication": {
      "id": 49
    },
    "options": {
      "clonedEsign": "Yes".
    }
  }
}
```

Boarding Application Failed Auto Approved

Notification when a Boarding Application fails an auto-approve.

javascript

```
{
  "id": 192,
  "module": "boardingApplication",
  "action": "failedAutoApprove",
  "date": "2025-12-03 13:15:42",
  "data": {
    "boardingApplication": {
      "id": 10,
      "status": "Underwriting"
    },
    "autoApprovalResults": {
```

Merchant

Merchant group of events you can subscribe to

Account

New Acquiring Account

Notification when a new Acquiring Merchant is created.

json

```
{
  "id": 7428,
  "module": "merchant",
  "action": "acqCreate",
  "date": "2023-08-18 11:00:12",
  "data": {
    "id": 117038,
    "mid": 123456789000,
    "bank": {
      "name": "Axiom Bank",
      "accountNumber": "6965"
```

New ACH Account

Notification when a new ACH Merchant is created.

json

```
{
  "id": 7431,
  "module": "merchant",
  "action": "achCreate",
  "date": "2023-08-18 11:02:34",
  "data": {
    "id": 1565,
    "bank": {
      "name": "UNITED COMMUNITY BANK",
      "accountNumber": "9059"
    }
  }
},
```

Closed Acquiring Account

Notification when a new ACH Merchant is created.

json

```
{
  "id": 7431,
  "module": "merchant",
  "action": "achCreate",
  "date": "2023-08-18 11:02:34",
  "data": {
    "id": 1565,
    "bank": {
      "name": "UNITED COMMUNITY BANK",
      "accountNumber": "9059"
    }
  }
},
```

Closed ACH Account

Notification when an ACH Merchant is closed.

json

```
{
```

```
"id": 7431,
"module": "merchant",
"action": "achClose",
"date": "2023-08-18 11:02:34",
"data": {
  "id": 1565,
  "bank": {
    "name": "UNITED COMMUNITY BANK",
    "accountNumber": "9059"
  }
},
```

Terminal

Terminal information events you can subscribe to. This webhook group is helpful when you have newly approved MIDs or if there have been updates with their terminals.

New Terminal Record

Notification when a new Merchant terminal is created

json

```
{
  "id": 1722,
  "module": "merchantTerminal",
  "action": "create",
  "date": "2023-06-28 14:23:19",
  "data": {
    "id": 154163,
    "dba": {
      "id": 98555,
      "name": "DBA Name"
    }
  }
},
```

Update Terminal Record

Notification when a merchant terminal is updated

json

```
{
  "id": 1717,
  "module": "merchantTerminal",
  "action": "update",
```

```
"date": "2023-06-28 14:19:12",
"data": {
  "id": 154162,
  "dba": {
    "id": 98555,
    "name": "DBA Name"
  }
}
```

Delete Terminal Record

Notification when a merchant terminal is deleted

json

```
{
  "id": 1721,
  "module": "merchantTerminal",
  "action": "delete",
  "date": "2023-06-28 14:20:33",
  "data": {
    "id": 154162,
    "dba": {
      "id": 98555,
      "name": "DBA Name"
    }
  }
}
```

Tickets

Ticket group of events you can subscribe to

Ticket Added

Notification when a new Ticket is created.

javascript

```
{
  "id": 51,
  "module": "ticket",
  "action": "created",
  "date": "2025-11-17 15:01:03",
  "data": {
    "ticket": {
      "id": 3818,
```



```
"subject": "Ticket Title/Name",
"text": "First 120 characters of the ticket text",
"status": "New",
```

Ticket Status Change

Notification when a Ticket status changes.

javascript

```
{
  "id": 55,
  "module": "ticket",
  "action": "statusChanged",
  "date": "2025-11-17 14:54:55",
  "data": {
    "ticket": {
      "id": 9334,
      "status": "In Review"
    },
    "dba": {
```

Ticket Note Added

Notification when a Ticket Note is added.

javascript

```
{
  "id": 54,
  "module": "ticket",
  "action": "noteAdded",
  "date": "2025-11-17 14:56:25",
  "data": {
    "ticket": {
      "id": 4491,
    },
    "note": {
      "id": 123,
```

Ticket Note Updated

Notification when a Ticket Note is updated.

javascript

```
{
  "id": 56,
  "module": "ticket",
  "action": "noteUpdated",
  "date": "2025-11-18 08:43:18",
  "data": {
    "ticket": {
      "id": 4491,
    },
    "note": {
      "id": 123,
    }
  }
}
```

Ticket Response Added

Notification when a Ticket Response is added.

javascript

```
{
  "id": 52,
  "module": "ticket",
  "action": "responseAdded",
  "date": "2025-11-17 15:00:06",
  "data": {
    "ticket": {
      "id": 108
    },
    "response": {
      "id": 123,
    }
  }
}
```

Ticket Response Updated

Notification when a Ticket Response is updated.

javascript

```
{
  "id": 53,
  "module": "ticket",
  "action": "responseUpdated",
  "date": "2025-11-17 14:59:17",
  "data": {
    "ticket": {
      "id": 108
    },
    "response": {
      "id": 123,
    }
  }
}
```

```
response : {  
  "id": 123,
```

Reporting

You can use this endpoint for all the available reports through our API.

Authorizations

Returns a list of all authorizations for a specific `dba.id`

IMPORTANT If no `date` is specified in the request as a filter we will return authorizations for the last 5 days from the current date.

Authorizations Object

Fields	Description	Type	Filterable	Required	Readonly
id	Auth Identification Number	Integer	No	No	Yes
card	Card details	Object	No	No	Yes
card.number	Card number	Integer	Yes	No	Yes
card.bin	BIN Object	Object	No	No	Yes
card.bin.bin	Bank Identification Number	Integer	Yes	No	Yes
card.bin.brand	Brand of the card	String	Yes	No	Yes
card.bin.type	Debit , Credit or ChargeCard	ENUM	No	No	Yes
card.bin.cate	Category of	String	No	No	Yes

Authorization Statuses

Below you can find some of the most common authorization statuses:

Keep in mind that we may return other statuses as well this is just for your quick reference.

Status	Description
Successful approval/completion	The authorization has been successfully approved
Insufficient funds	The authorization was declined due to insufficient funds on the card
Do not honor	The authorization has been completely rejected by the issuing bank
Pick up card	The authorization has been Pick up card and needs to be held if possible. (Usually a stolen card)
Refer to Issuer	The authorization has been declined. The customer should contact their bank for more information
Invalid account number	The authorization has been declined. The card number has been incorrectly entered

AUTHORIZATION Bearer Token

Token

GET List



<https://dashboard.maverickpayments.com/api/reporting/authorizations/<dbald>>

IMPORTANT If no `date` is specified in the request as a filter we will return authorizations for the last 5 days from the current date.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Authorizations](#)

GET List with Filters



[https://dashboard.maverickpayments.com/api/reporting/authorizations/<dbald>?filter\[card.bin.brand\]=Visa&filter\[terminal.number\]=7000&filter\[date\]\[gte\]=2020-03-24 00:00:00&filter\[date\]\[lte\]=2020-03-24 23:59:59](https://dashboard.maverickpayments.com/api/reporting/authorizations/<dbald>?filter[card.bin.brand]=Visa&filter[terminal.number]=7000&filter[date][gte]=2020-03-24 00:00:00&filter[date][lte]=2020-03-24 23:59:59)

Example request to list all authorizations for a

specific `dbaId` , `card.bin.brand.visa` and `terminal.number` between a date range

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Authorizations](#)

PARAMS

<code>filter[card.bin.brand]</code>	Visa
<code>filter[terminal.number]</code>	7000
<code>filter[date][gte]</code>	2020-03-24 00:00:00
<code>filter[date][lte]</code>	2020-03-24 23:59:59

Batches

View batches for a specific `dbaId` . You can view the full batch summary for a specific date or ID and also all the transactions that are included in that batch. We also have an endpoint to view a full batch overview for all your dba's in a summarized manner for a specific date.

IMPORTANT If no `batch.date` is specified in the request as a filter we will return results for the last 5 days from the current date.

Batch Object

Fields	Description	Type	Filterable	Required	Readonly
<code>id</code>	Batch Identification Number	Integer	No	No	Yes
<code>card</code>	Card details	Object	No	No	Yes
<code>card.number</code>	Card number	Integer	Yes	No	Yes
<code>card.bin</code>	BIN Objecct	Objecct	No	No	Yes
<code>card.bin.bin</code>	Bank Identification Number	Integer	No	No	Yes
<code>card.bin.brand</code>	Brand of the card	String	Yes	No	Yes
<code>card.bin.type</code>	<code>Debit</code> , <code>Credit</code> or	ENUM	No	No	Yes

	ChargeCard				
card.bin.cate	Category of	String	No	No	Yes

AUTHORIZATION Bearer Token

Token

GET List



<https://dashboard.maverickpayments.com/api/reporting/batches/<dbald>>

Use this endpoint to list all the batches for a specific `dba.id`

IMPORTANT If no `batch.date` is specified in the request as a filter we will return results for the last 5 days from the current date.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

GET List with Filters



[https://dashboard.maverickpayments.com/api/reporting/batches/<dba id>?filter\[card.bin.brand\]=Visa&filter\[date\]\[gte\]=2020-03-24&filter\[date\]\[lte\]=2020-03-24](https://dashboard.maverickpayments.com/api/reporting/batches/<dba id>?filter[card.bin.brand]=Visa&filter[date][gte]=2020-03-24&filter[date][lte]=2020-03-24)

Example request to list all the transactions that are included in a batch for a specific date

If you filter by Date, the range cannot exceed 30 days.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

PARAMS

<code>filter[card.bin.brand]</code>	Visa
<code>filter[date][gte]</code>	2020-03-24
<code>filter[date][lte]</code>	2020-03-24



https://dashboard.maverickpayments.com/api/reporting/batch-summary/<dba.id>/<batch.id> or <batch.date>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

GET Overview



https://dashboard.maverickpayments.com/api/reporting/batch-overview/<batch.date>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Batches](#)

Payouts

You can utilize this endpoint to list all payout information for a specific `dba.Id`

Payouts List Object

Fields	Description	Type	Filterable	Required	Readonly
processingDate	Date	Date	Yes	No	Yes
deposit	Deposit Amount	Number	No	No	Yes
feeTotalAmount	Fee Amount	Number	No	No	Yes
chargeback	Chargeback Object	Object	No	No	Yes
chargeback.totalCount	Chargeback Count	Integer	No	No	Yes
chargeback.totalAmount	Chargeback Amount	Number	No	No	Yes
reservedAmount	Reserve Amount	Number	No	No	Yes

releasedAmount	Released Amount	Number	No	No	Yes
----------------	-----------------	--------	----	----	-----

AUTHORIZATION Bearer Token

Token

GET List



https://dashboard.maverickpayments.com/api/reporting/payouts/acq/<dbald>?filter[processingDate][gte]=2023-04-01&filter[processingDate][lte]=2023-04-30

NOTE Keep in mind that running this request without specifying a processingDate filter will return all available records for the current month

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder **Payouts**

PARAMS

filter[processingDate][gte]	2023-04-01
filter[processingDate][lte]	2023-04-30

GET View



https://dashboard.maverickpayments.com/api/reporting/payout/acq/<dbald>/<processingDate>

View detailed payout information for a specific date

Payouts View Object

Fields	Description	Type	Filterable	Required	Readonly
processingDate	Date	Date	Yes	Yes	Yes
deposit	Deposit Amount	Number	No	No	Yes
fees	Fee Object	Object	No	No	Yes
fees.items	Fees Items Object	Object	No	No	Yes

	Object				
fees.items.cardType	Fee Card Type	String	No	No	Yes
fees.items.amount	Fee Amount	Number	No	No	Yes
fees.totalAmount	Fees Total Amount	Number	No	No	Yes
chargebacks	Chargebacks Object	Object	No	No	Yes
chargebacks.items	Chargebacks Items Object	Object	No	No	Yes
chargebacks.i	Chargeback	String	No	No	Yes

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Payouts](#)

GET Export



<https://dashboard.maverickpayments.com/api/reporting/request>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Payouts](#)

Body raw (json)

json

```
{
  "name": "PayoutsExport",
  "params": {
    "format": "csv",
    "from": "2023-04-01",
    "to": "2023-04-10",
    "merchantAccountId": 1
  }
}
```

Chargebacks

You can use this endpoint to manage all chargeback-related information.

You can do the following:

- List all chargebacks for a specific `dba.id`
- View specific chargeback information for `chargeback.id`
- Dispute a `case.id` for a specific `chargeback.id`

How to use our Chargeback system

Our chargeback system is designed around chargeback cases. When the first case arrives we create a chargeback with an `id`. Every new case that arrives for a specific chargeback `id` updates the chargeback information and gets listed in the `cases` object.

IMPORTANT A specific `chargeback.id` can have more than one cases associated with it, as new information can arrive.

We suggest the current flow:

1. List your chargebacks. If a certain `chargeback.id` has `attention =Yes`, you can dispute it and upload evidence.
2. View the specific `chargeback.id`, this will list one or more cases associated with the chargeback. Make note of the `case.id` that has `attention =Yes`.
3. Use our **Attachments** and upload temporary file/files for the dispute.
4. **Create** a dispute to a `case.id` for a specific `chargeback.id`
5. **Preview** the created dispute if needed before submitting it.
6. Use the Dispute **Submit** endpoint to submit the dispute file to a specific `chargeback.id`

Chargeback Object

Fields	Description	Type
<code>id</code>	The unique ID that is assigned by our system to every chargeback	Integer
<code>dba</code>	Object	Object
<code>dba.id</code>	The ID of the DBA	Integer
<code>type</code>	<code>Chargeback</code> or <code>Retrieval</code>	ENUM
<code>amount</code>	The amount of the retrieval or chargeback. This is not always equal to the amount of the transaction.	Number
<code>card</code>	Object	Integer

card.brand	Card Brand	String
card.number	Card Number	String
date	Object	Object

View

GET List

<https://dashboard.maverickpayments.com/api/reporting/chargebacks>

You can utilize this endpoint to list all chargebacks

GET View

<https://dashboard.maverickpayments.com/api/reporting/chargeback/<id>>

By utilizing this endpoint you can view detailed information for a specific chargeback

Fields	Description	Type
id	The unique ID that is assigned by our system to every case.	Integer
dba	Object	Object
dba.id	The ID of the DBA	Integer
mid	The Merchant Identification Number (MID)	Integer
merchantRefId	A reference number provided by the merchant or their vendor for this transaction.	String
merchantEmail	Merchant email address	String
type	Chargeback or Retrieval	ENUM
visaRDR	Yes or No - Identifies if the chargeback is Visa RDR	ENUM
authCode	The authorization code passed with the settlement record	String
acquirerReferenceNumber	An identification number for a credit card transaction assigned	Object

Disputes

By utilizing this endpoint you can dispute specific chargeback cases. A merchant token must be utilized or the platform must be setup on Connect and merchant authorization provided to submit disputes.

The process is as follows:

1. First, use our standard **Attachments** endpoint but you need to pass an additional URL parameter `temporary`. This will return a unique `id`.
2. After you have your temporary file id you can create the Dispute for a specific `chargeback.id` and the desired `case.id`.

You can see the examples below

POST Upload a temporary file

`https://dashboard.maverickpayments.com/api/attachment/upload/temporary`

In order to upload a temporary file and submit a dispute to a chargeback case you need to utilize our standard Attachments endpoint and pass an additional URL parameter `temporary`

POST Create a Dispute

`https://dashboard.maverickpayments.com/api/reporting/chargeback/<chargebackId>/dispute/<casesId>/create`

After uploading the file/files you need to create the dispute by assigning all the temporary `attachment.id` to the `case.id`.

GET Preview

`https://dashboard.maverickpayments.com/api/reporting/chargeback/<chargebackId>/dispute/<casesId>/preview/<disputeId>`

Use this endpoint if you want to preview your dispute before submitting it.

POST Submit

`https://dashboard.maverickpayments.com/api/reporting/chargeback/<chargebackId>/dispute/<casesId>/submit/<disputeId>`

Use this endpoint to submit your dispute

Webhooks

Use webhooks to be notified about events that happen in your account.

Webhook Object

Fields	Description	Type
id	Unique ID of the event	Integer
module	Event group	String
action	Event identifier	String
date	Date of the event	Datetime
data	Event Data	Object

Example

javascript

```
{
  "id": "1",
  "module": "ach",
  "action": "create",
  "date": "2019-08-03 19:31:55",
  "data": {...}
}
```

Signatures

We sign the webhook events that are sent to your endpoints. We do so by including a signature in each event's `Webhook-Signature` header. This allows you to verify that the events were sent by us, not by a third party.

IMPORTANT You are not required to implement this kind of signature check but it's **strongly**

... You are not required to implement this kind of signature check, but it's strongly recommended.

Webhook-Signature is a SHA-512 sum of following fields

<webhookSignature><id><module><action><date>

You can view and manage your **Webhook Signature** in your Dashboard. Keep in mind that every **Webhook URL** has its own <webhookSignature>

Events

Groups of events you can subscribe to.

Chargeback

Chargeback group of events you can subscribe to.

Chargeback Object

Fields	Description	Type
id	The unique ID assigned by our system to every case.	Integer
dba	Object	Object
dba.id	The ID of the DBA	Integer
identifier	The Merchant Identification Number (MID)	Integer
disputeId	We assign a unique ID to the first case of a dispute. Every related case update will have a unique id and the same disputeId.	Integer
merchantRefId	A reference number provided by merchant or their vendor for this transaction.	String
merchantEmail	Merchant email address	String
number	The unique number assigned	String

Example

json

```
{
  "id": "200",
  "dba": {
    "id": "1217"
  },
  "identifier": "201100000000",
  "disputeId": "100",
  "merchantRefId": "0123456",
  "merchantEmail": "jhon@example.com",
  "number": "2019248118022",
  "type": "Chargeback".
}
```

New Chargeback Record

Notification when a new Chargeback record is created.

Event Identification

json

```
{
  ...
  "module": "chargeback",
  "action": "create",
  "data": chargebackObject,
  ...
}
```

Chargeback Update

Notification when a Chargeback is updated.

Event Identification

json

```
{
  ...
  "module": "chargeback",
  "action": "update",
  "data": chargebackObject,
  ...
}
```

Statements

GET List

https://dashboard.maverickpayments.com/api/reporting/statements/<dbald>

GET Download

https://dashboard.maverickpayments.com/api/reporting/statement/<statementId>

To download a specific statement, use its corresponding `id` . All the statements are in pdf format.

Reserve

You can use this endpoint to view reserve activity for a specific `dba.id`

Reserve Object

Fields	Description	Type	Filterable	Required	Readonly
id	Reserve id	Integer	No	No	Yes
type	Reserve amount activity type <code>Debit</code> or <code>Credit</code>	ENUM	No	No	Yes
amount	The amount that is either credited or debited to the reserve.	Number	No	No	Yes
reserve	Current accumulated reserve amount	Number	No	No	Yes
description	Reserve funding activity type	ENUM	No	No	Yes

Reserve Descriptions

Below you can find all the reserve descriptions that we return

Status	Description
Calculated Reserve	An amount has been withheld and added to the reserve
Calculated Release	An amount has been released from the reserve
One Time Reserve	One time amount has been withheld and added to the reserve
One Time Release	One time amount has been released from the reserve
Record Adjustment Reserve	One time adjustment amount has been withheld and added to the reserve (usually due to an accounting error)
Record Adjustment Release	One time adjustment amount has been released from the reserve (usually due to an accounting error)
Transfer Funds on Reserve	An amount has been transferred to the reserve. This is usually done when a merchant begins with a fixed reserve

GET List

<https://dashboard.maverickpayments.com/api/reporting/reserve/<dbald>>

Fraud Report

At the end of each month, we create a customized and highly detailed fraud report for each merchant. To download it use the following endpoint by providing the `dbaId` and `date` for the desired fraud report pdf.

GET Generate

<https://dashboard.maverickpayments.com/api/reporting/fraud/<dbald>/<year-month>>

Other Reports

Based on the reports that are available to you, you can utilize this endpoint to export data-intensive reports from our system.

IMPORTANT Reports are executed in background mode and you need to check the status of each report utilizing our Status Reports endpoint.

Reporting Object

Fields	Description	Type	Filterable	Required	Readonly
name	Unique Name of the report	String	No	Yes	No
params	Report parameters	Object	No	Yes	No
params.format	File format of the report. Example: <code>csv</code> , <code>xlsx</code>	ENUM	No	Yes	No
params.xxx	Other report parameters	String	No	No	No

GET Request a Report

<https://dashboard.maverickpayments.com/api/reporting/request>

Body raw

```
{
  "name": "ResidualExport",
  "params": {
    "format": "csv",
    "date": "2022-02",
    "isPublished": "Yes",
    "isHeld": "No",
    "dbaId": 1,
  }
}
```

GET Check Status

<https://dashboard.maverickpayments.com/api/reporting/status/<reportId>>

Use this endpoint to check the status of a specific requested report.

GET Download

<https://dashboard.maverickpayments.com/api/reporting/download/<reportId>>

After checking the status of a requested report and when it is ready to be downloaded, you can utilize this endpoint.

Residuals

You can utilize this endpoint to read all of your residual data.

Residuals Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the residual agent	Integer	No	No	Yes
mid	The merchant identification number	Integer	Yes	No	Yes
date	Date and time when the residual was processed	Datetime	Yes	No	Yes
acquirer	Acquirer Object	Object	No	No	Yes
acquirer.id	ID of the acquirer bank	Integer	No	No	Yes
merchant	Merchant Object	Object	No	No	Yes
merchant.id	Unique ID of	Integer	No	No	Yes

GET List

<https://dashboard.maverickpayments.com/api/residual>

Use this endpoint to list all available residuals

GET View

<https://dashboard.maverickpayments.com/api/residual/<Id>>

By utilizing this endpoint you can view details for a specific merchant residual.

Tickets

You can utilize this endpoint for our ticketing system.

You can the following:

1. List all tickets
2. View a specific ticket
3. Create a new ticket
4. Close or re-open an existing ticket
5. Add a response to an existing ticket
6. *Add notes to an existing ticket
7. List all ticket categories

*Only agent users can add notes to existing tickets.

Ticket Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the ticket	Integer	Yes	No	Yes
dba	DBA Object	Object	No	No	No
dba.id	Unique ID of the DBA	Integer	Yes	No	No
category	Category Object	Object	No	No	No

category.id	Unique ID of the category	Integer	Yes	Yes	No
title	Title of the ticket	String	Yes	Yes	No
text	Content of the ticket	String	No	Yes	No
status	Status of the ticket New	ENUM	Yes	No	No

AUTHORIZATION Bearer Token

Token

Update Ticket Status

You can use this endpoint to Close an existing ticket or Re-Open a closed ticket.
If closing a ticket, the reason should be included:

Field	Description	Type
Non-Receipt	Ticket is closed out, but may be opened at a later time	String
Completed	Ticket is considered in a rested and final status. This ticket may not be opened and instead a new ticket should be created.	String

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Tickets](#)

PUT Close



https://dashboard.maverickpayments.com/api/ticket/<ticketId>/close

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Body raw (json)

```
json

{
  "closedReason": "Non-Receipt"
}
```

PUT Re-Open



<https://dashboard.maverickpayments.com/api/ticket/<ticketId>/reopen>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Responses

You can use this endpoint to:

1. Create ticket responses
2. List all responses for a specific `ticket.id`
3. Upload an attachment to a response.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Tickets](#)

GET List



<https://dashboard.maverickpayments.com/api/ticket/<id>/responses>

Use this endpoint to list all responses for a specific ticket.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)



`https://dashboard.maverickpayments.com/api/ticket/<id>/response`

Create a response for a specific ticket

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Body raw (json)

json

```
{  
  "text": "Demo Example",  
  "attentionMerchant": "Yes"  
}
```

POST Add an Attachment

`https://dashboard.maverickpayments.com/api/ticket/<id>/response/<responseld>/document`

Use this endpoint to add attachments to a ticket response

NOTE To create an attachment use our Attachemnts endpoint first.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Attachments

You can use this endpoint to add an attachment to an existing ticket.

NOTE You first need to create the ticket and then add an attachment to it.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Tickets](#)

GET List



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/documents`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

GET View



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/document/<Id>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

GET Download Attachment



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/document/<attachmentId>/download`

Download single document for a specific ticket.

Example:

Download attachment with `ID 1` for a ticket with `ID 1`.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

GET Download Attachments



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/documents/download`

Download all attached documents for a specific ticket.

Example:

Download attachments for a ticket with `ID 1`.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

POST Create



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/document`

To use this endpoint, you must first create a ticket and upload the file using the standard upload endpoint. Once the file is uploaded, you can call this endpoint to attach it to the desired ticket.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

DELETE Delete



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/document/<attachmentId>`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Categories

This endpoint is used to list all the available categories under which you can open a ticket.

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Tickets](#)

GET List



`https://dashboard.maverickpayments.com/api/ticket/categories`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Notes

You can use this endpoint for notes that are associated with a ticket.

You can do the following:

1. List all notes in a ticket
2. View a specific note for a ticket
3. Create a ticket note
4. Update a ticket note
5. Add an attachment to a ticket note

Notes Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the note	Integer	No	No	Yes
note	The contents of the note	String	No	Yes	No
creator	Object	Object	No	No	No
creator.id	Unique ID of the user who created the note	Integer	No	No	No

AUTHORIZATION Bearer Token

This folder is using Bearer Token from folder [Tickets](#)

GET List



<https://dashboard.maverickpayments.com/api/ticket/<ticketId>/notes>

Use this endpoint to list all the notes for a specific `ticket.id`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

GET View



<https://dashboard.maverickpayments.com/api/ticket/<ticketId>/note/<noteId>>

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

POST Create



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/note`

This endpoint is used to add notes to a ticket.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Body raw (json)

```
json

{
  "note": "I am adding a new note for this ticket"
}
```

PUT Update



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/note/<noteId>`

You can use this endpoint to update/make corrections to an existing ticket note.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Body raw (json)

```
json

{
  "note": "I am updating a note for this ticket"
}
```

DELETE Delete



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/note/<noteId>`

Use this endpoint to delete a ticket note.

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

POST Attachments



`https://dashboard.maverickpayments.com/api/ticket/<ticketId>/note/<noteId>/document`

You can use this endpoint to add an attachment to an existing ticket note.

NOTE You first need to create the note and then add an attachment to it.

In order to add an attachment you need to first use our [Attachments](#) endpoint to upload a file and get the file `id`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

GET List



`https://dashboard.maverickpayments.com/api/tickets`

Use this endpoint to list all of your tickets. If needing to sort in descending order, utilize `?sort=-createdOn`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

POST Create



`https://dashboard.maverickpayments.com/api/ticket`

Use this endpoint to create a new ticket.

When creating a ticket via AppConnect, you must explicitly provide **createdBy** value.

The User which you want to set as creator of the ticket must have authorized the AppConnect. Example:

javascript

```
{
  ....
  "createdBy": {
    "id": 654
  }
}
```

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Body raw (json)

json

```
{
  "dba": {
    "id": 2
  },
  "category": {
    "id": 4
  },
  "title": "Charback Help",
  "text": "One of my merchants is inquiring about chargebacks. I need your clarification",
  "notifyMerchant": "No",
  "attentionMerchant": "No"
```

GET View a specific ticket



<https://dashboard.maverickpayments.com/api/ticket/<ticketId>>

View all the information for a specific `ticket.id`

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

PUT Hide



https://dashboard.maverickpayments.com/api/ticket/<ticketId>/hide

This endpoint allows hiding or unhiding a ticket for a **merchant** or an **agent**.

Parameters

Parameter	Type	Description
<code>from</code>	string	Specifies who the visibility rule applies to. Possible values: <code>Merchant</code> , <code>Agent</code> .
<code>hide</code>	string	Defines the visibility behavior depending on the <code>from</code> value.

When `"from": "Merchant"`

Value	Description
<code>Yes</code>	Hide the ticket from the merchant
<code>No</code>	Make the ticket visible to the merchant

When `"from": "Agent"`

Value	Description
<code>No</code>	Ticket is visible to all agents
<code>Root</code>	Ticket is hidden from root agents
<code>Owner</code>	Ticket is hidden from the agent owners
<code>Agent</code>	Ticket is hidden from the assigned agent

AUTHORIZATION Bearer Token

This request is using Bearer Token from folder [Tickets](#)

Body raw (json)

json

```
{
  "from": "Merchant",
  "hide": "Yes"
}
```

Connect

Connect offers flexibility for certified solutions to integrate to the Merchant API and includes the most streamlined approach for mutual merchants to share their data to third-party systems. Connect allows third-parties to access reporting and perform various functions on behalf of merchants for an open payment ecosystem.

The image displays three overlapping UI components:

- Connected Apps:** A dashboard header with a blue arrow and a '+' button. Below it, it shows 'Your connect ID is: rd92xBYn3z'. A table header includes 'Name' and 'Created On'. The table body contains the text 'No results found.'
- App Connect ID:** A form with a label 'App Connect ID' and a text input field containing 'bMRmeKProe'.
- Example wants to access your account:** A modal dialog with the title 'Example wants to access your account'. It lists permissions under 'This will allow Example to:':
 - ☒ Allow access to read Merchant information data.
 - ☒ Allow access to view Authorizations.
 - ☒ Allow access to view Batches.
 - ☒ Allow access to view Chargebacks.
 - ☒ Allow access to dispute Chargebacks.Below the list, it states: 'You may be sharing sensitive info with this site or app. You can always see or remove access in your account.' At the bottom are 'Cancel' and 'Confirm' buttons.

The two primary use cases for connect are (1) resellers looking to monetize payments by boarding their merchants on our platform, which will come with inherited permissions such as being able to process payments on behalf of the merchant for example. For software platforms looking to onboard merchants and be able to process payments in a frictionless way, Connect provides the level of flexibility needed to accomplish that, and (2) third-party solution providers which are not the reseller of record where they are provided one token with a seamless way to request merchants to provide permission to perform various functions on their behalf whether it is run reporting, manage chargebacks, or other tasks.

While not limited to the following, Connect we designed with the following in mind:

- Software platforms: many software platforms provide a solution to merchants in which an integrated payments solution only makes things easier for the merchant to run their business. Generally referred to as ISVs, you can become a reseller to onboard your merchants and

Generally referred to as ISVs, you can become a reseller to onboard your merchants and perform other functions as well such as processing payments, access to reporting, and so on. As the reseller of record, an ISV would systematically be able to board a merchant then inherit the permission to perform these other functions. This enables the software platform to offer a integrated payments offering in which they monetize revenue on while driving a valuable solution offering to their user base of merchants.

- Payment gateways: payment gateways can streamline onboarding and other tools such as chargeback reporting by using Connect.
- Chargeback management solutions: third-party providers managing chargebacks and disputes for merchants can pull chargeback reporting, provide responses and rebuttals to disputes, and perform other necessary functions on behalf of merchants systematically allowing a more integrated and efficient way.
- CRM solutions: CRM solutions can manage various tools to provide mutual merchants a more streamlined and robust experience when using us as the payment processor to more efficiently run their business from the CRM platform.

Interested in setting up Connect for your API integration? Contact us!

Webhooks

Access Granted

Notification when new access has been granted

json

```
{
  "id": 8083,
  "module": "appConnect",
  "action": "grantAccess",
  "date": "2023-09-27 14:22:22",
  "data": {
    "appConnect": {
      "id": 13
    },
    "user": {
      "id": 22
    }
  }
}
```

Access Updated

Notification when modifications have been made to existing granted access

json


```
{
  "id": 8086,
  "module": "appConnect",
  "action": "updateAccess",
  "date": "2023-09-27 14:23:38",
  "data": {
    "appConnect": {
      "id": 98
    },
    "user": {
      "id": 97
    }
  }
}
```

Access Revoked

Notification when access has been revoked.

json

```
{
  "id": 8089,
  "module": "appConnect",
  "action": "revokeAccess",
  "date": "2023-09-27 14:24:26",
  "data": {
    "appConnect": {
      "id": 89
    },
    "user": {
      "id": 95
    }
  }
}
```

Misc

Address Checker

We have created a zip code database to validate all the city, state, and zip code information on the application. Use this endpoint to get the necessary ids that need to be provided in the corresponding fields on the Boarding Application.

GET List Countries

<https://dashboard.maverickpayments.com/api/countries>

Use this endpoint to list all countries and their corresponding code information

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the country	Integer	Yes	Yes	Yes
name	Full name of the county	String	Yes	No	Yes
code	Object	Object	Yes	No	Yes
code.alpha2	2 letter country code abbreviation	String	Yes	Yes	Yes
code.alpha3	3 letter country code abbreviation	String	Yes	Yes	Yes

GET List States

<https://dashboard.maverickpayments.com/api/country/<id>/states>

Use this endpoint to list all available state information for a specific country code.

States Object

Fields	Description	Type	Filterable	Required	Readonly
id	Unique ID of the state	Integer	Yes	Yes	Yes
name	Full name of the state	String	Yes	No	Yes
code	2 letter state code abbreviation	String	Yes	No	Yes

GET List Cities and Zip Codes

<https://dashboard.maverickpayments.com/api/country/<id>/state/<id>/zip>

Use this endpoint to list all available cities and their zip code information for a specific state code.

Fields	Description	Type	Filterable	Required	Readonly
--------	-------------	------	------------	----------	----------

id	Unique ID of the zip code	Integer	No	No	Yes
zip	Object	Object	No	No	Yes
zip.code	Zip code	String	Yes	Yes	Yes
zip.type	Standard , Acceptable	ENUM	Yes	No	Yes
city	Object	Object	No	No	Yes
city.name	Full name of the city	String	Yes	Yes	Yes
city.type	Standard , Acceptable	ENUM	Yes	No	Yes
county	Full name of the county	String	Yes	No	Yes
state	Object	Object	No	No	Yes
state.id	The ID of the	Integer	Yes	No	Yes

GET Filter by City and State

[https://dashboard.maverickpayments.com/api/country/199/state/5/zip?filter\[city.name\]=Los Angeles&filter\[zip.code\]=90069](https://dashboard.maverickpayments.com/api/country/199/state/5/zip?filter[city.name]=Los Angeles&filter[zip.code]=90069)

Keep in mind that you can use filters to list only specific cities or list cities for a specific zip code. We validate state, city, and zip code combinations on the Boarding Application, so make sure you are providing the correct information.

PARAMS

filter[city.name]	Los Angeles
filter[zip.code]	90069

BIN Check

You can use this endpoint to get detailed information on a BIN

BIN Object

Fields	Description	Type	Filterable	Required	Readonly
--------	-------------	------	------------	----------	----------

bin	Bank Identification Number	Integer	Yes	No	Yes
brand	Brand of the card	String	No	No	Yes
type	Debit, Credit or ChargeCard	ENUM	No	No	Yes
category	Category of the card	String	No	No	Yes
organization	Organization	String	No	No	Yes
country	Country	Object	No	No	Yes
country.name	Name of the country	String	No	No	Yes
country.code	ISO Code of	String	No	No	Yes

GET Get BIN Information

<https://dashboard.maverickpayments.com/api/bin/<bin>>

View information for a specific BIN record.