# CounterScene-3D: Stateful Native-Asset Spatial Evaluation

Yunfei Lu GPT-6.1-sol

Chinese edition | Interactive benchmark

**Abstract**

CounterScene-3D connects executable spatial evaluation with learning-oriented reward diagnosis. Five task families contain thirty native-asset instances and sixty ordered operations. Models respond to consequential changes while preserving actual prior accomplishments. Deterministic geometry, continuous motion checks, auxiliary visual assessment and controlled reward probes distinguish execution readiness, incremental progress and functional completion. A two-model comparison and open-weight selection/refinement studies provide reproducible evidence and concrete directions for curriculum and reward research.

## 1 Design and contribution

Spatial reasoning becomes consequential when an action changes what the next decision must preserve. CounterScene-3D retains observations, programs, executed native transforms, feedback and irreversible commitments, making this dependency inspectable.

**Research foundations.** 3DCodeVerse establishes executable worlds with execution, spatial measurement, visual assessment and repair [1]. BlenderGym studies code-based reconstruction and generation/verification allocation [2]; BlenderWorld uses multi-view task-specific visual rubrics [3]. SceneScript and VoxPoser provide structured-scene and spatial-action context [4, 5]. Our contribution combines actual state continuity, targeted shortcut audits and separate reward/outcome evidence in a compact protocol. Hybrid checking and iterative repair are established foundations.

Each family has two seeds and three levels: one, two and three ordered operations, with A using k06/k14/k34 identifiers. Longer horizons introduce new observations and preservation obligations. Observed performance characterizes this gradient without assuming a monotonic ranking.

**A: relocation and restoration.** Move a work surface, park its payloads at the original floor location, restore measured surface-relative offsets, then update another work area while preserving the restoration. Explicit targets distinguish goal completion from generic collision clearance.

**B: progressive repair.** Repair witnessed interpenetrations as work zones become editable. Earlier repairs and unreleased zones remain fixed. Declared future faults are temporarily permitted; the final operation enforces the complete hard and feasible-soft contract. Impossible soft preferences require identification.

**C: changing-view reconstruction.** Reconstruct native instances from calibrated views, then update after substantial target changes and new oblique observations. Additional views have a query budget. Hidden-view agreement, every-object centre accuracy and native physical rules jointly determine success.

**D: stateful manipulation.** Grasp distinct balls, deliver and release them, then reach onward waypoints. Later operations inherit actual terminal joints and released-object positions; earlier releases become obstacles. Measured offsets connect command angles to physical motion.

**E: misleading diagnostics.** Repair actual faults while public feedback contains witnessed wrong verdicts, omissions, noise or hidden pairs. Geometry measurements support verification. Repair outcomes and diagnosis are reported separately, enabling controlled feedback studies.

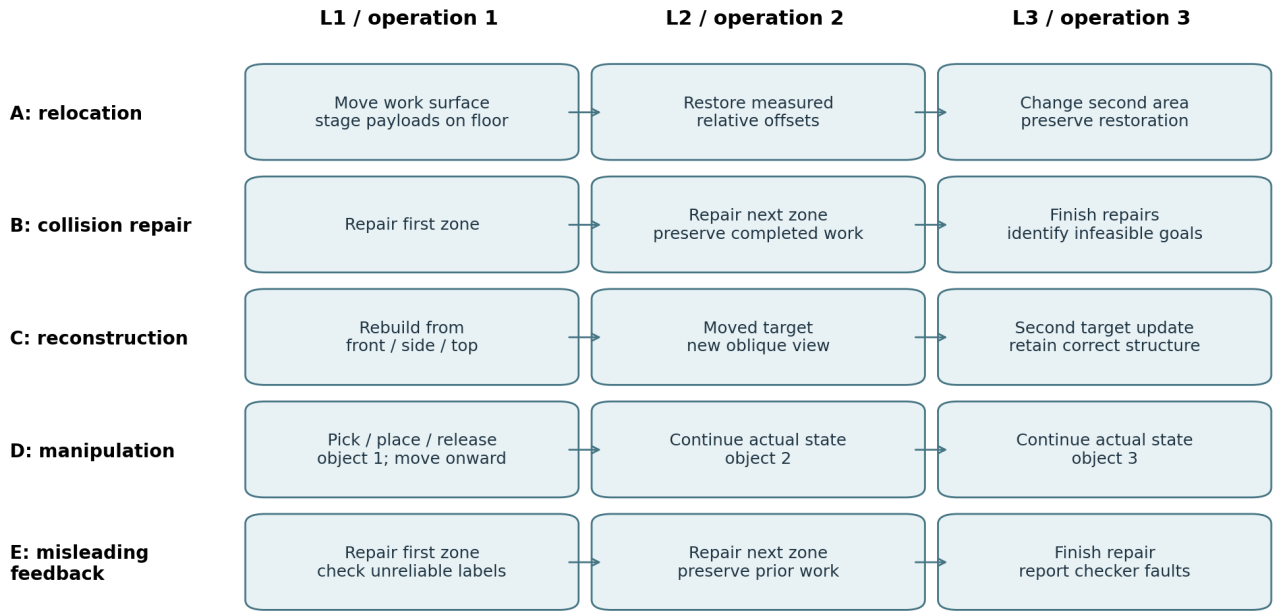



Figure 1: Implemented dependencies across five families. Subsequent operations preserve prior accomplishments.

## 2 Execution and measurement

Participants emit restricted Python returning complete native placements or controller payloads. Bounded arithmetic and collections are allowed; imports, attributes, files and network access are denied. Fixed catalogue identity and proportions bind programs to actual assets.

Content-bound stages, gold replay, jointly feasible preferences and mesh checks establish executable witnesses. Shortcut controls challenge stale answers, fixture-only patches, omitted observations and earlier-program reuse. These explicit controls make task dependencies testable.

Static checks use actual meshes for support, boundaries, contact and intersection. Certified relocation and reconstruction paths use component enclosures. D additionally checks continuous arm, tool and payload clearance, limits, grasp/release events and resting objects. Unresolved overlap remains unproven. The evaluated scope is geometric and kinematic; richer dynamics are an extension opportunity.

Strict success requires every operation and preservation obligation. Later corrections retain earlier outcomes in episode scoring. C requires hidden per-object silhouette IoU averaged across hidden cameras of at least 0.8, plus every native bounds centre within 0.05 metres. D requires the complete continuous/event contract. Infrastructure interruptions are excluded; journaled responses and exact program bytes support repeatable recovery.

## 3 Comparison protocol and results

GPT-6.1 Sol and Claude Opus 5.5 use medium reasoning, up to 8,000 output tokens and fourteen actions per operation. Thirty instances per model yield sixty primary trajectories; ten additional L3 requests form an independent-generation panel. Primary means describe six instances per task/model. Generation variance, fixed-output rescoring and visual-judge repetition remain distinct. The extension adds five completed exploratory controls; one administrative continuation is excluded.

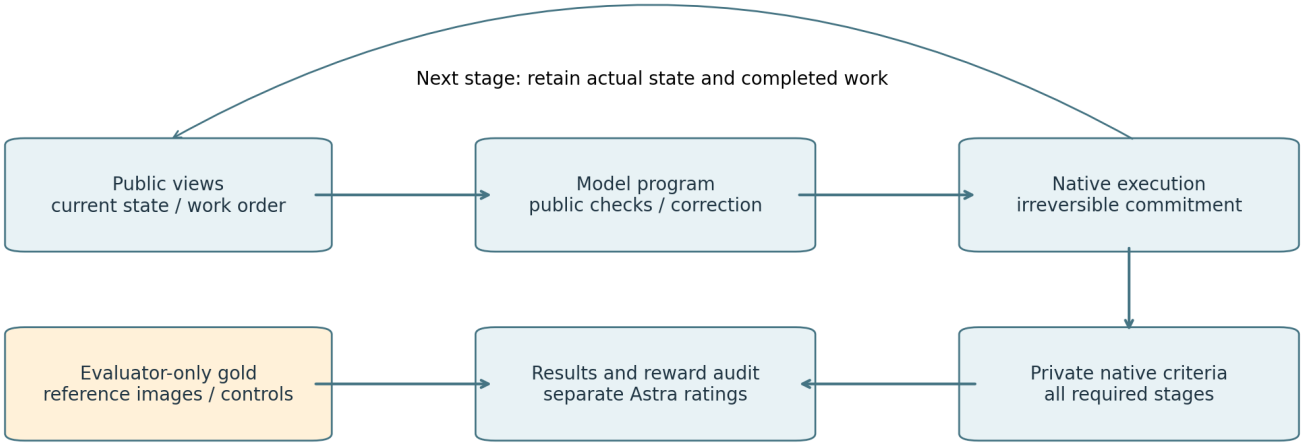



Figure 2: Public observations guide decisions; evaluator-only targets support separate outcome checks.

# 4 Results and observable failure modes

All 70 planned frontier trajectories are eligible. The table reports six primary instances per task/model. These development counts do not establish a general ranking.

| Task | Model | $n/6$ | Strict | Shaped |
|---|---|---|---|---|
| A | Claude | 6 | 1.000 | 1.000 |
| A | GPT | 6 | 1.000 | 1.000 |
| B | Claude | 6 | 0.833 | 0.982 |
| B | GPT | 6 | 0.833 | 0.981 |
| C | Claude | 6 | 0.333 | 0.432 |
| C | GPT | 6 | 0.500 | 0.580 |
| D | Claude | 6 | 1.000 | 1.000 |
| D | GPT | 6 | 1.000 | 1.000 |
| E | Claude | 6 | 0.833 | 0.765 |
| E | GPT | 6 | 1.000 | 0.912 |

Across 10 completed independent-request panels, shaped-reward population variance ranges from 0.0000 to 0.2223. This is generation variability, not repeat-scoring variance; the panel remains too small for a stable uncertainty estimate.

| Observed failure category | GPT | Claude |
|---|---|---|
| checker diagnosis | 6 | 6 |
| hard constraint violation | 1 | 1 |
| hidden view grounding | 0 | 4 |
| metric grounding | 2 | 4 |
| native physical conflict | 3 | 3 |
| native relation violation | 0 | 1 |
| tool or program error | 11 | 1 |

Counts are primary trajectories with an observed issue, including diagnostic errors in geometrically successful episodes. Labels can overlap. Tool errors are observable invalid actions; metric and hidden-view failures distinguish reconstruction precision from visual overlap.

A concrete shared blind spot occurs in B-L2-s0: both participants submit an unchanged program after the public checker reports hard-constraint failures. Their earlier stage succeeds, but the final relation repair fails. This is

observable failure to act on feedback, not evidence about private reasoning or intent. Valid execution and collision clearance alone do not imply task completion.

C-L2-s0 provides an updating failure: Claude passes the first reconstruction, then fails hidden-view and metric checks after the target changes. Its second stage uses thirteen actions without an extra view query. This localizes the observed failure to the later update; it does not prove that additional queries would have repaired it.

GPT C-L2-s1 exposes a different failure: the first reconstruction passes visual overlap and metric-centre checks but retains a native physical conflict. Its second stage passes, yet the episode fails because earlier committed errors remain. This is why visual agreement and terminal-only evaluation are insufficient. Claude shares the physical-conflict label on this instance and additionally fails metric grounding, distinguishing the common geometric blind spot from its reconstruction errors.

E-L3-s1 separates repair from diagnosis: GPT meets 26/26 native relations and detects 2/4 checker faults; Claude meets 25/26 and detects 0/4. Geometric success therefore does not imply complete diagnosis; scalar summaries must not collapse these dimensions.

**Reward evidence.** Calibration covers 30 instances and 360 repeated scores. Maximum fixed-control shaped-reward variance is 0.0000; ordering checks all pass. Participant numerical rescoring is separate from generation variance. Deterministic stability does not establish validity under optimization.

The completed Qwen study has 10/10 pools, each with four candidates. Across these pools, mean independently audited hidden quality is 0.000 for the first candidate and 0.200 after public-reward selection. Exact saved-response replay reproduces selection without new generation. Selection gains are development evidence; ties, failures and task-level outcomes remain in the accompanying tables.

In E, selected public reward averages 0.300, versus hidden quality 0.000. This exposes a proxy-quality gap; without a demonstrated increase over the first candidate, it does not establish that optimization learned an exploit.

Astra fixed-image sample variances range from 0.0000 to 0.0093 across 15 control artifacts. Mean calibration coverage is 0.906. 7 primary functional failures receive auxiliary visual scores of at least 0.75; visual plausibility therefore cannot replace execution checks.

Weak visual-control ordering holds in 5/5 observed families. Gold strictly exceeds stale in 5/5 families. Ties weaken discrimination. This is a validity diagnostic, not a functional acceptance gate.

Together, executable acceptance, controlled ordering and candidate selection provide a practical basis for learning-oriented reward research. Curriculum schedules and feedback density can now be tested against unchanged native acceptance criteria.

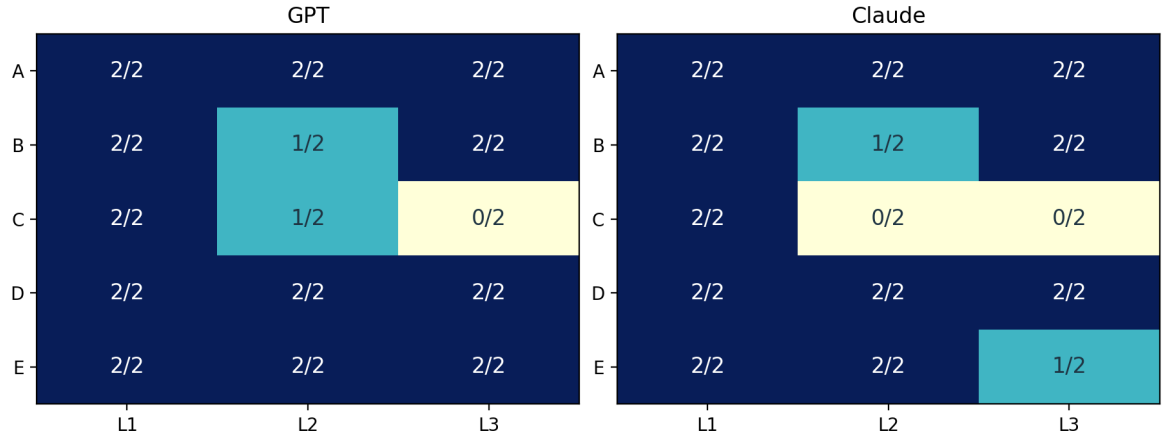



Figure 3: Primary strict successes by level, with two seeds per cell, characterize the current development cohort.




Figure 4: C-L3-s0 reference and executed renders. Hidden IoU complements metric and native physical criteria.

# 5 Reward diagnosis and learning implications

Rubrics as Rewards and AdvancedIF/RIFL motivate explicit criteria and aggregation [6, 7]. VideoEdit studies when finer credit assignment supports outcomes [8]; we therefore inspect behavioral progress without rewarding additional calls.

Per-stage $R_{\text{det}}$ requires admissible functional success. $R_{\text{shaped}}$ averages applicable function, constraint, preservation, diagnosis, operation, reconstruction and motion components. Episode rewards average required stages; missing stages contribute zero, and inapplicable dimensions are omitted. Immutable admissibility gates retain physical and preservation requirements while permitting safe partial progress.

Gold, empty, stale/stationary and safe intermediate controls test ordering. A five-output native-repeat subset independently re-executes one GPT output per family: complete stage measurements match across two executions each.

Astra anonymously compares reference and candidate images for identity/layout, visible support, clearance and goal match. Uncertain items remain missing with coverage reported. D uses representative trajectory frames. Repeated images characterize judge variability; broader judge/human checks address known model-judge biases [9]. Visual evidence complements functional acceptance.

The original Qwen3.5:9B Q4_K_M study contains ten best-of-four pools. Public feedback selects candidates; withheld outcomes audit selection. The extension introduces matched proposal/refinement arms and separately exposes the actual scalar evaluator reward.

**Extended learning diagnostics.** Uniform random selection in the original pools yields mean hidden quality 0.075, compared with 0.20 after public-reward selection. Gains are concentrated in A. Five completed feedback/view controls add behavioral context: GPT solves B-L2-s0 with execution-only feedback where its structured/scalar runs do not, while its fixed-view C-L2-s0 run succeeds in 10 calls versus 26 with active access. These post-hoc single-case comparisons motivate larger matched panels; one Claude C continuation is administratively incomplete and excluded.

Eight matched-budget arms cover C, D, two-operation A and E: independent proposals versus public-feedback refinement, three proposals per stage. A public-only JSON adapter produces programs without target answers. Twenty-six of 30 proposals enter native scoring, separating interface competence from geometric planning. All eight episodes remain below strict completion; 29 proposals receive zero admissible reward, identifying a curriculum and feedback-density opportunity.

Two D studies directly expose actual shaped reward, each reusing a starter and adding two generations. One starts from the matched first proposal; the other from the first publicly executable own proposal. Neither increases reward or reaches strict completion. A separate safe D candidate receives partial reward 0.4 without completing transfer. These distinctions make progress signals inspectable and inform staged RL investigation; training benefits require the expanded experiments below.

**Per-dimension robustness.** The table makes each attack and guard explicit. Bounded means hackable-but-bounded; classifications apply to the tested domain. Full examples and mitigations accompany the task packages and study data.

| Dimension | Class | Attack; verification guard |
|---|---|---|
| Program/identity | Hard-to-hack | Malformed or substituted assets; interpreter and identity checks. |
| Physics/contact | Bounded | Contact tolerances; actual mesh and fail-closed unknowns. |
| Operation goals | Bounded | Clear scene but missed operation; explicit targets. |
| Soft/diagnosis | Bounded | Invented impossibility; joint witnesses and claim checks. |
| Metric grounding | Bounded | Matching silhouettes, wrong centres; conjunctive metric audit. |
| Trajectory/events | Bounded | Endpoint shortcuts; continuous checks and actual releases. |
| Edit/preservation | Bounded | Unchanged low-edit answer; active goals and preservation. |
| Checker agreement | Bounded | False passes; separate geometry and diagnosis. |
| Visual quality | Soft/vibes | Occlusion or appearance; auxiliary role and coverage. |
| Target access | Bounded | Hidden-file access; restricted public interface. |

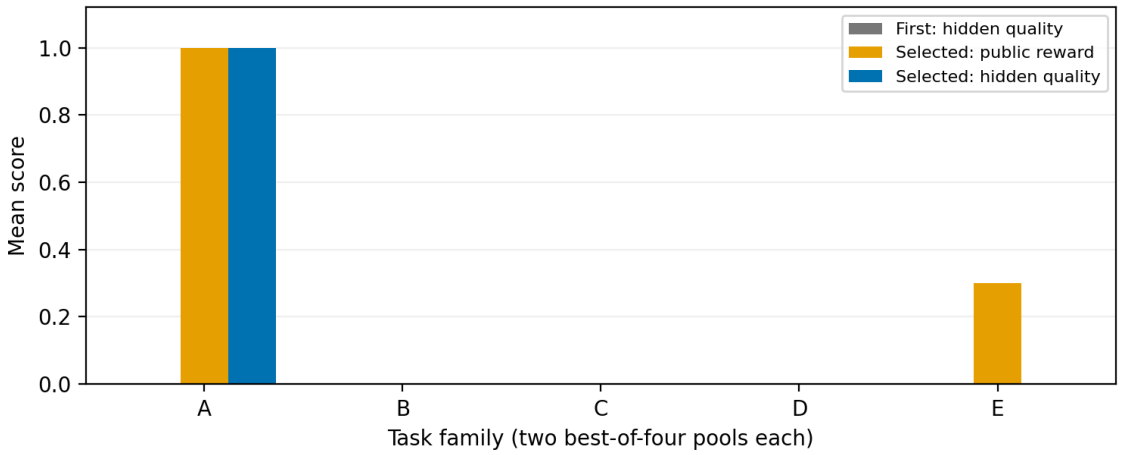



Figure 5: Original best-of-four selection and withheld quality. A supplies the observed gain; expanded diagnostics identify subsequent curriculum targets.

# 6 Reproducibility and areas for improvement

Self-contained packages retain public inputs, evaluator targets, gold, scorers, native assets and licenses. One command reconstructs rewards, tables, statistics and supplementary selection; optional native replay executes retained programs. Native scenes, timelines and motion paths remain linked. Published development-session material is a disclosed privacy derivative.

**Scale and coverage.** Expand reserved scenes, catalogues, seeds and matched feedback/view conditions. The present extension is exploratory and includes one administrative exclusion. Larger panels and matched interface/context settings will support stronger causal and generalization estimates.

**Learning studies.** The safety gate yields sparse feedback for this initial policy. Develop curricula from executable placements to coupled geometry and longer horizons, compare progress-sensitive feedback under fixed acceptance criteria, and run longer adaptive optimization followed by short RL studies. The current evidence informs these choices; trained-policy gains remain to be measured.

**Physical and visual scope.** Calibrate conservative enclosure rejections with independent mesh tests, then add friction, forces and grasp dynamics. Extend blinded judge/human review and event-sensitive clips. Match the smaller-model scaffold to full motion and physical-pair diagnosis interfaces before broader comparisons.

**Reward design.** Compare weights and attack policies on reserved outcomes. Existing per-dimension analyses and source-bound evidence provide a reproducible basis for testing whether optimization preserves functional quality.

# 7 Motion evidence

These trajectories expose calibration, pickup, release and onward movement as separate obligations. Earlier releases remain obstacles. Joint-derived paths and representative native frames make the relationship between plausible endpoints and certified transfers inspectable.

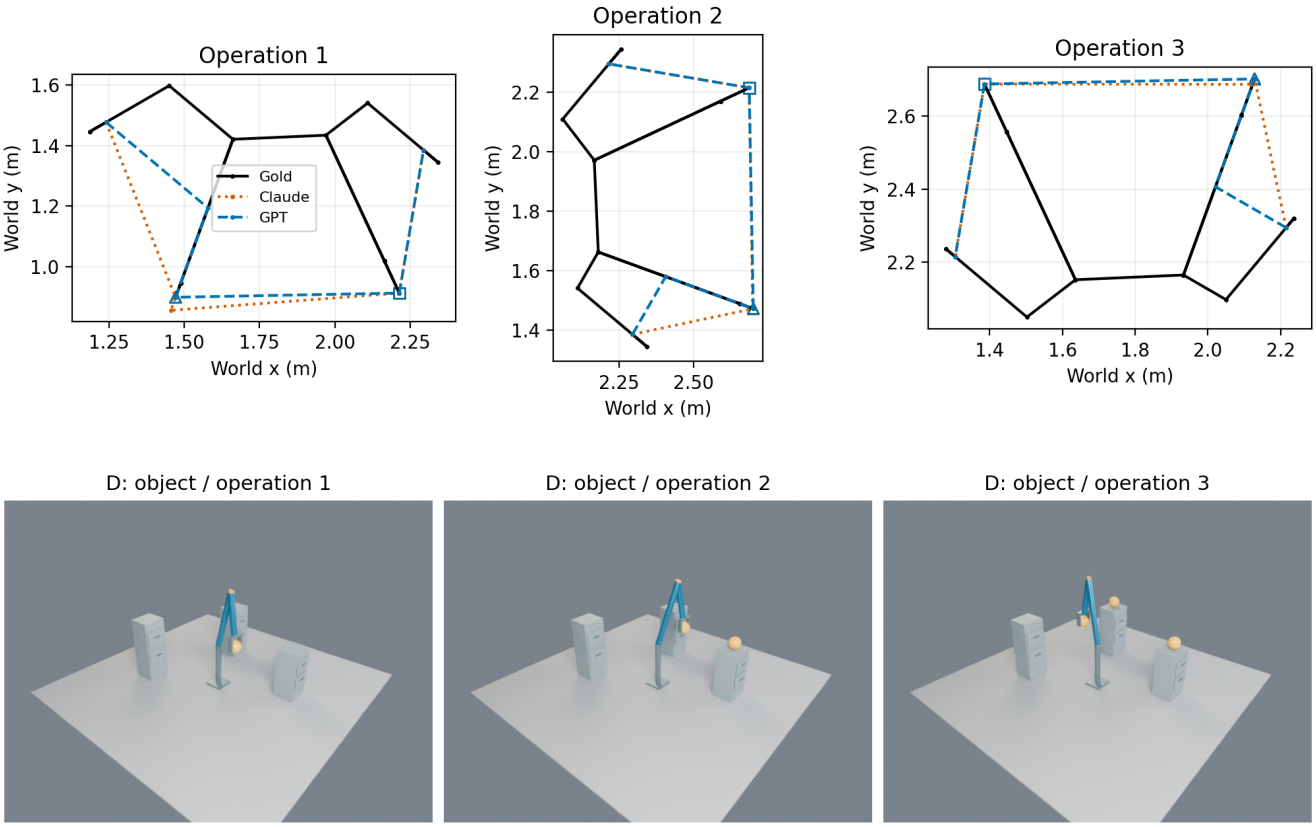



Figure 6: D-L3-s0 joint-derived trajectories and representative native transfer frames. Triangles mark grasps, squares releases; continuous certificates establish motion validity.

# 8 Benchmark examples

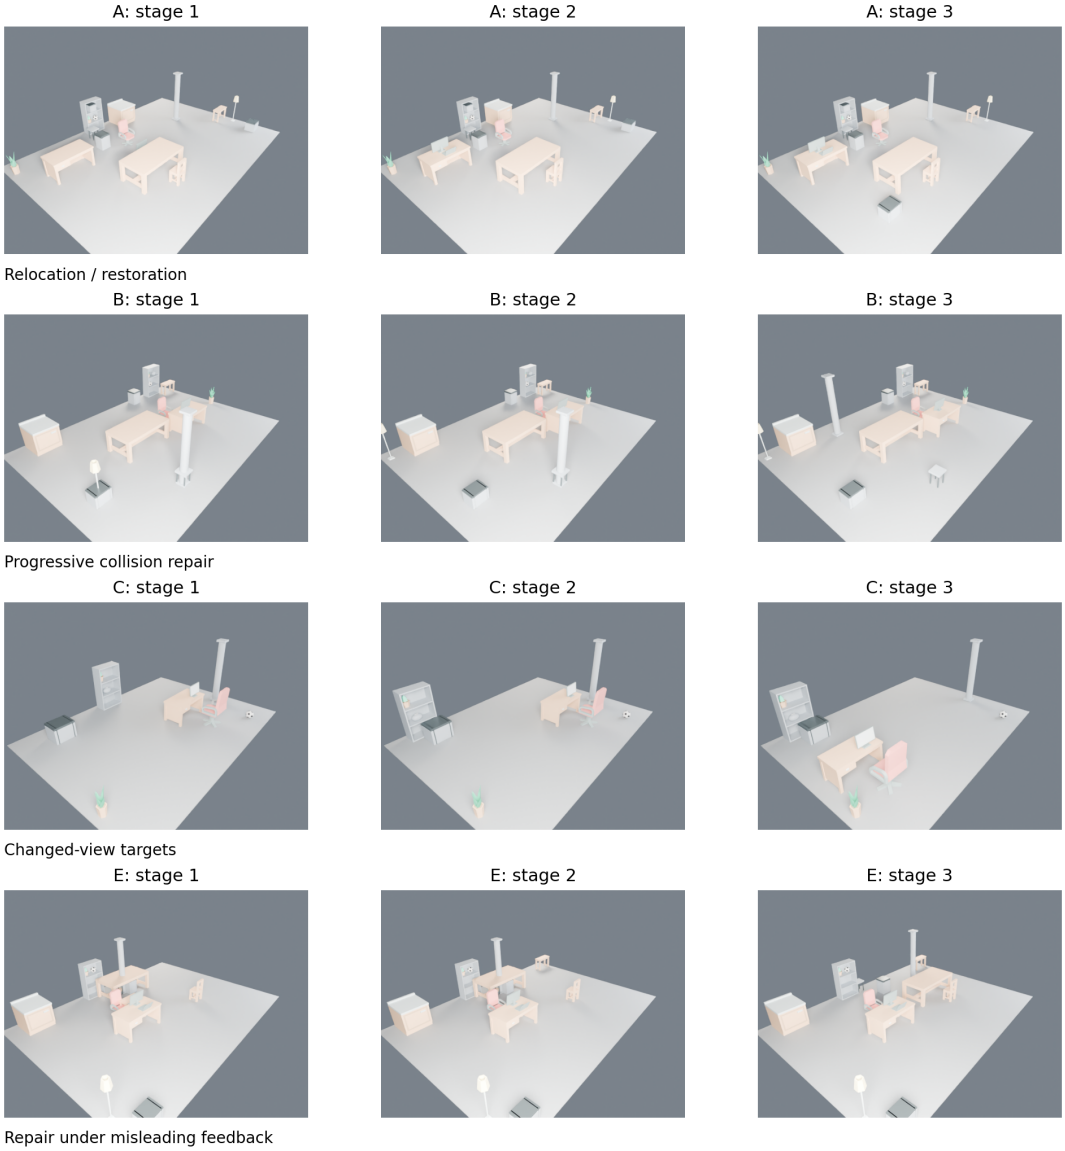



Figure 7: Actual three-stage gold witnesses for A/B/C/E. B/E intermediate states retain explicitly declared future faults.

# References


[1] Gao et al. 3DCodeVerse: Exploring 3D Worlds as Code. 2026 preprint. https://arxiv.org/abs/2610.22341. Official harness: https://github.com/gaoypeng/3dcodeverse/tree/main/harness.

[2] Gu et al. BlenderGym: Benchmarking Foundational Model Systems for Graphics Editing. CVPR, 2025. https://arxiv.org/abs/2504.01786.

[3] Fang et al. BlenderWorld: Benchmarking Visual Agents for 3D Creation from Real-World References. 2026 preprint. https://arxiv.org/abs/2610.23986.

[4] Avetisyan et al. SceneScript: Reconstructing Scenes With An Autoregressive Structured Language Model. 2024. https://arxiv.org/abs/2403.13064.

[5] Huang et al. VoxPoser: Composable 3D Value Maps for Robotic Manipulation with Language Models. 2023. https://arxiv.org/abs/2307.05973.

[6] Gunjal et al. Rubrics as Rewards: Reinforcement Learning Beyond Verifiable Domains. 2025 preprint. https://arxiv.org/abs/2507.17746.

[7] He et al. AdvancedIF: Rubric-Based Benchmarking and Reinforcement Learning for Advancing LLM Instruction Following. 2025 preprint. https://arxiv.org/abs/2511.10507.

[8] Zhao et al. When Fine-Grained Credit Assignment Helps and Hurts: Multimodal Agentic Reinforcement Learning through Video Editing. 2026 preprint. https://arxiv.org/abs/2610.35497.

[9] Zheng et al. Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena. NeurIPS Datasets and Benchmarks, 2023. https://arxiv.org/abs/2306.05685.