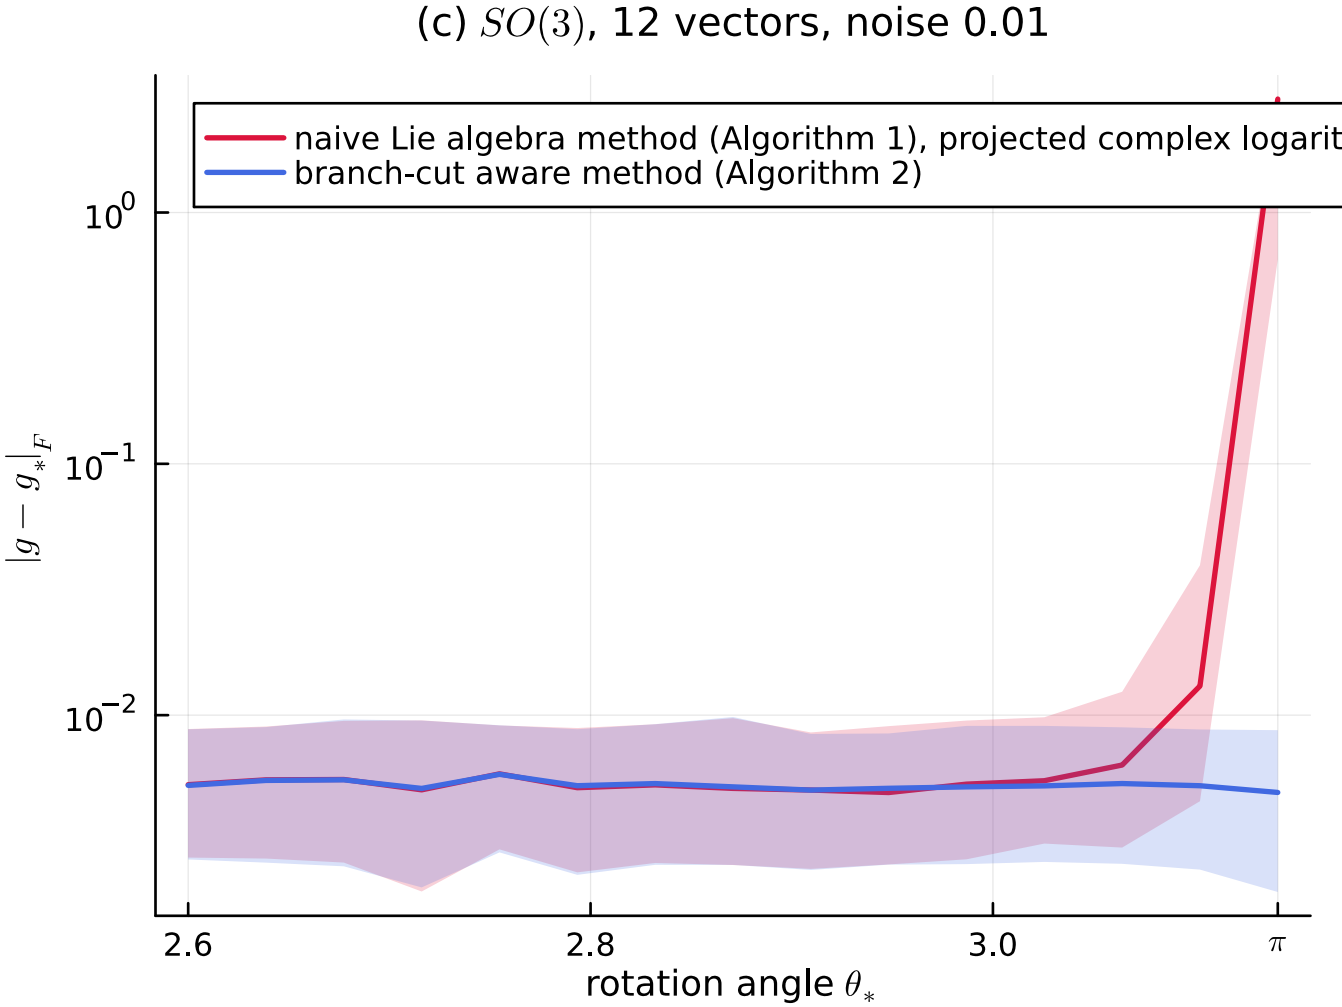
(c) $SO(3)$, 12 vectors, noise 0.01
naive Lie algebra method (Algorithm 1), projected complex logarit
branch-cut aware method (Algorithm 2)
10^0
10^{-1}
10^{-2}
$|g - g_*|_F$
2.6
2.8
3.0
π
rotation angle θ_*