


Agent-Flow Codex Fast Path Guide

Use one persistent worktree, targeted context, focused validation, and deliberate escalation.

The Short Version

Agent-Flow should feel like one persistent Codex work session, not a ceremony after every prompt.

start or continue one AF worktree -> keep working there -> wrap up when you ask

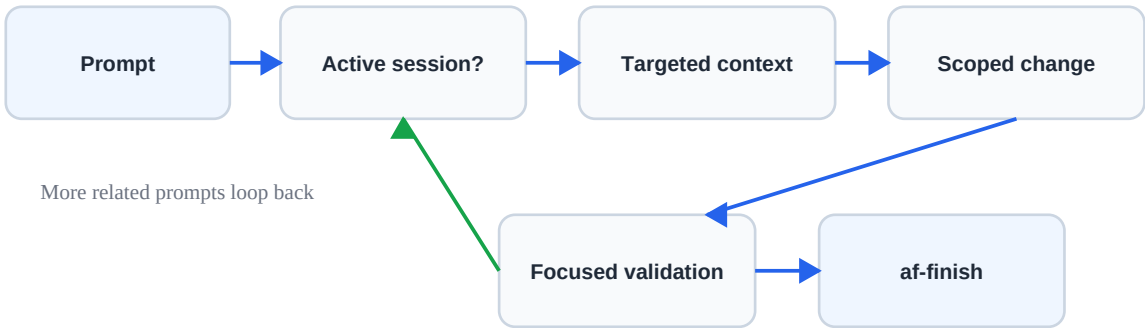

Daily Commands

Moment	Action
Start or continue file-changing work	af-flow
Check current state	af-status
Ask for a quick checkpoint	af-review
Pick up, audit, or clean worktrees	af-reconcile
Commit and prepare to merge	af-finish


Specialist skills are optional add-ons, not daily mandatory steps.

Effort Preflight

Pick effort before acting. Use extra-high for most development and computer-use work; downgrade only when the task is clearly cheap and easy to verify.

Work	Codex setting
Read-only help, status, command lookup	fast profile or base medium
Trivial one-file edit or narrow docs copy	base gpt-5.5 / medium
Normal development, debugging, refactoring	base gpt-5.5 / xhigh / low verbosity
Browser or computer-use workflow	base gpt-5.5 / xhigh
Review, release, security-sensitive work	deep profile or xhigh effort


Escalation Flow

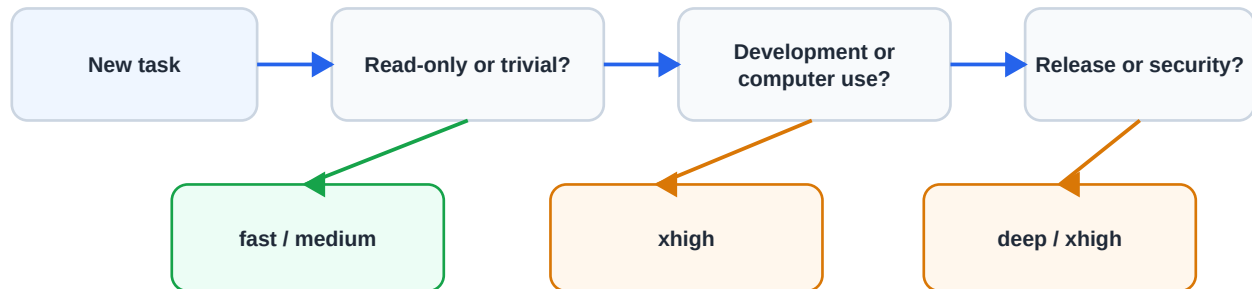

Avoid In Routine Sessions

Avoid full repo scans, full reviews, security reviews, visual capture, audit campaigns, release checks, and subagent fan-out unless requested, risk-triggered, or needed after repeated failure.

Worktree Mental Model

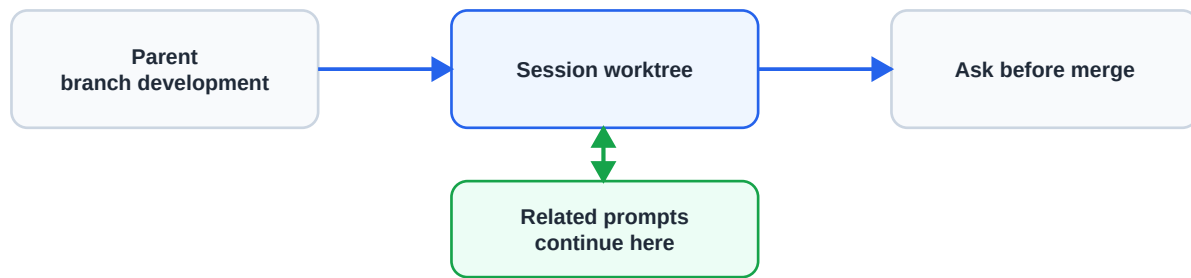

The session worktree is the durable working context. Chat can be fluid; Git metadata, files, and the devlog stay grounded.

Practical Prompts

Start or continue work:

Use `af-flow` for this file-changing request. Keep related work in the same AF session worktree until I ask to finish, review, reconcile, merge, or switch direction.

Check status:

Use `af-status` and tell me what AF sessions are active or ready.

Wrap up:

Use `af-finish`. Validate, update the devlog, commit the session, and report the merge command.

Release:

Use `af-reconcile`, then `af-full-review`, then `af-release`.

Rule of thumb: keep the workflow light. Use extra-high reasoning for real development and computer-use work unless the preflight clearly says the task is cheap.