
Programming



Programming?

```
00110001 00000000
                  00000000
                                int count = 0;
00110001 00000001
                  00000001
                                int sum = 0;
00110011 00000001
                  00000010
                                while (count <= 10) {
01010001 00001011
                  00000010
                                    sum += count;
00100010 00000010
                  00001000
                                    count += 1;
         00000001
                  0000000
01000011
                                3
         00000001
                  00000001
01000001
                                Debug.Log(sum);
00010000 00000010 00000000
01100010 00000000 00000000
```

FLOWCHART: TASKS OF A HOTEL CLEANER

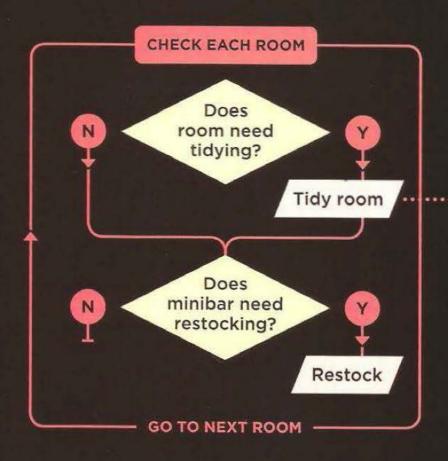

LIST: STEPS REQUIRED TO TIDY A ROOM

Remove used bedding STEP 1 Wipe all surfaces STEP 2 Vacuum floors STEP 3 Fit new bedding STEP 4 Remove used towels and soaps STEP 5 Clean toilet, bath, sink, surfaces STEP 6 Place new towels and soaps STEP 7 Wipe bathroom floor STEP 8

From: JavaScript & jQuery by Jon Duckett

Compilation

```
int count = 0;
int sum = 0;
while (count <= 10) {
    sum += count;
    count += 1;
}
Debug.Log(sum);</pre>
*Almost
```

```
00110001000000000000000000110001000000010000000100110011000000010000001001010001000010110000001001000011000000010000000001000010000000100000001000100000000000100000000011000100000000000000000
```

Programming Languages in Unity

C# UnityScript Boo

C# UnityScript Boo (~2014)

C# UnityScript (rumored?) Boo (~2014)

C# (C Sharp)






Variables

Storing Data

Named Boxes

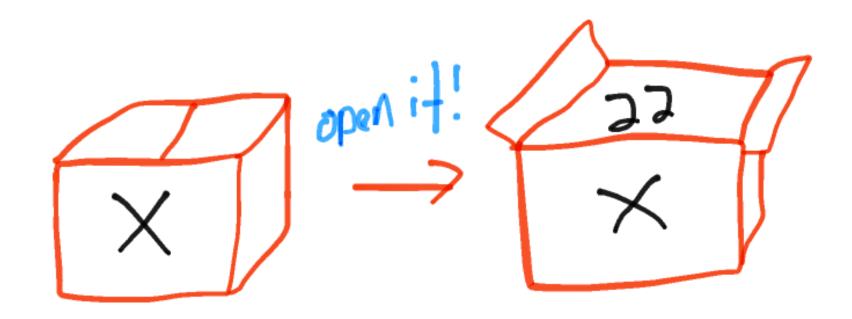

VALUE VARIABLE NAME int numJupiterMoons = 67; **VARIABLE TYPE ASSIGNMENT OPERATOR**

```
// Camel Case
// Good - short, descriptive
numJupiterMoons
materialColor
playerSpeed
// Bad - long, ambiguous
thatFirstThing
```

theSuperImportantVariableThatMustNotBeNamed

Integral Types Table (C# Reference)

Visual Studio 2015 Other Versions -

The following table shows the sizes and ranges of the integral types, which constitute a subset of simple types.

Туре	Range	Size
sbyte	-128 to 127	Signed 8-bit integer
byte	0 to 255	Unsigned 8-bit integer
char	U+0000 to U+ffff	Unicode 16-bit character
short	-32,768 to 32,767	Signed 16-bit integer
ushort	0 to 65,535	Unsigned 16-bit integer
int	-2,147,483,648 to 2,147,483,647	Signed 32-bit integer
uint	0 to 4,294,967,295	Unsigned 32-bit integer
long	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807	Signed 64-bit integer
ulong	0 to 18,446,744,073,709,551,615	Unsigned 64-bit integer

float taxAmount = 0.07f;

Floating-Point Types Table (C# Reference)

Visual Studio 2015 Other Versions -

The following table shows the precision and approximate ranges for the floating-point types.

	Туре	Approximate range	Precision
→	float	±1.5e-45 to ±3.4e38	7 digits
	double	±5.0e-324 to ±1.7e308	15-16 digits

decimal (C# Reference)

Visual Studio 2015 Other Versions ▼

The **decimal** keyword indicates a 128-bit data type. Compared to floating-point types, the **decimal** type has more precision and a smaller range, which makes it appropriate for financial and monetary calculations. The approximate range and precision for the **decimal** type are shown in the following table.

Туре	Approximate Range	Precision	.NET Framework type
decimal	$(-7.9 \times 10^{28} \text{ to } 7.9 \times 10^{28}) / (10^{0} \text{ to } 28)$	28-29 significant digits	System.Decimal

START END

string quoteOfDay = "Perfect is the enemy of good.";

```
// -- EXERCISES ------
// - magnets, $25.75
// 2. Print the value of your total cost variable:
// 4. Find the average of the following test scores: 100, 90, 85, 74, 82
```