

prb2_p

March 12, 2022

```
[1]: import numpy as np
import matplotlib.pyplot as plt
```

1 Sheet 2, Exercise 3

```
[53]: def gauss_siedel(A, b, k):
    n, m = Q.shape
    D = np.reshape([Q[i][j] if i==j else 0 for i in range(n) for j in
    ↪range(n)], (n, n))
    L = np.reshape([Q[i][j] if i>j else 0 for i in range(n) for j in range(n)],
    ↪(n, n))
    U = np.reshape([Q[i][j] if i<j else 0 for i in range(n) for j in range(n)],
    ↪(n, n))

    x = np.random.rand(n)
    for i in range(k):
        x = np.linalg.inv(D)@(b - (L + U)@x)
    return x

def poisson_mat(n, m=None):
    return 2 * np.eye(n, m) + (-1) * np.eye(n, m, k=1) + (-1) * np.eye(n, m,
    ↪k=-1)

# test
for n in range(5, 20):
    Q = poisson_mat(n)
    b = np.ones(n)
    x = gauss_siedel(Q, b, k=1000)
    np.testing.assert_allclose(Q@x, b, rtol=1e-5, err_msg=f'GS failed at dim -
    ↪{n}')
```

2 Sheet 2, Exercise 5


```
[60]: def neumann_polynomial_preconditioner(n, p):
        Q = poisson_mat(n)
        D = np.reshape([Q[i][j] if i==j else 0 for i in range(n) for j in
        ↪range(n)], (n ,n))
        N = Q - D
        C_p = np.zeros([n, n])
        for k in range(p+1):
            C_p += np.linalg.matrix_power(N @ np.linalg.inv(D), k)
        return np.linalg.inv(D) @ C_p

n = 20
Q = poisson_mat(n)
P = np.arange(1, 10)
cond_2 = []
for p in P:
    C_p = neumann_polynomial_preconditioner(n, p)
    cond_2.append(np.linalg.cond(C_p @ Q, p=2))
    print(p, cond_2[p-1], sep='\t')

plt.figure(figsize=[7, 4])
plt.scatter(P, cond_2)
print("Max. and Min. Singular value are far apart from each other for uneven
    ↪p")
```

1	31706.88589269506
2	534.147900485917
3	31706.885892666996
4	890.0968016459952
5	31706.885892699214
6	1245.8213126008322
7	31706.885892666185
8	1601.2319940002324
9	31706.88589270954

Max. and Min. Singular value are far apart from each other for uneven p

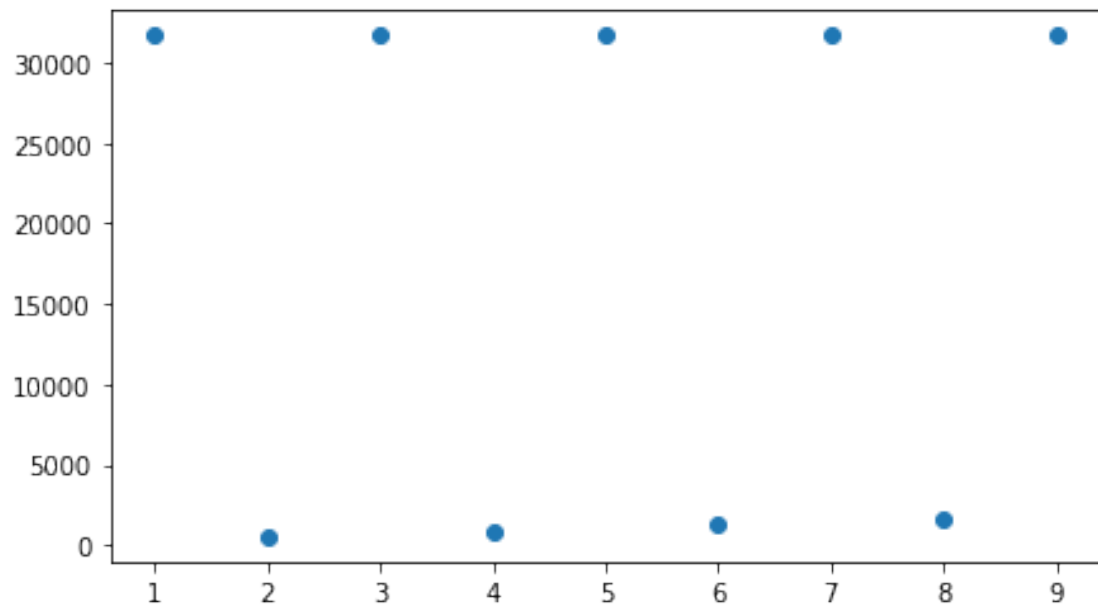

[]:

[]:

[]: