SYSTEM DESIGN / RELEASE ENGINEERING

Repaido platform architecture & delivery

A detailed HLD and LLD of apps, APIs, data, events, sensitive flows, observability, and selective production delivery. Includes the source API route catalog.

REVIEWED SOURCE

1af3cf0925689c4978765b557e12b527c79d1261

ENVIRONMENT

Google Cloud project: repaido
Region: us-central1

WEB

Firebase Hosting

Customer, worker and admin SPA routes

API

Cloud Run × 3

Main API, public work API, private worker

RULES

Firestore Rules

Emulator-tested security release

CONSOLE

Separate Cloud Run

Engineer-only architecture console

PUBLICLY OBSERVED LIVE STATE · 14 Oct 2026, 01:02 UTC

HOSTING

b421e09592a7

Build 4d2d4a26…

MAIN + WORK API

Same build as Hosting

Health endpoints: OK

ENGINEERING CONSOLE

f7446fcaae38

Four collectors: connected

The selective pipelines are present in this checkout. Compared with the live b421e095… site, this pending checkout spans multiple components, so its next customer release selects FULL. This PDF is not a complete cloud inventory export.

How a release target is chosen

The planner compares a reviewed commit with an explicitly supplied deployed baseline; it does not infer production from HEAD~1.

1. **Explicit request** — Manual batch; audit live triggers
2. **Pinned commit** — HEAD equals 40-character SHA
3. **Config + plan** — Generated YAML checked; diff classified
4. **Clean checkout** — No uncommitted source
5. **Source inventory** — Actual gcloud upload list
6. **No active build** — global + us-central1

PATH CLASSIFIER

web/ · firebase.json · .firebaserc	WEB	cloudbuild-web.yaml
backend/	API	cloudbuild-api.yaml
firestore.rules · rules tests	RULES	cloudbuild-rules.yaml
Multiple targets · unknown build input	FULL	cloudbuild.yaml
engineering/ only	CONSOLE	engineering/release.py
docs/ · android/ only	NONE	No customer pipeline

Fail closed: firestore.indexes.json is refused because no index publication step exists. Console and Android changes require separate release workflows; customer releases do not publish either.

The full production pipeline

Fifteen Cloud Build steps, in the exact order recorded in cloudbuild.yaml. The full batch is used for overlapping or unfamiliar changes.

01 / require-explicit-release

Manual release gate

Requires _RELEASE_APPROVED=true and pinned commit.

02 / check-build-history-access

Build history access

Checks release-order permissions.

03 / check-firestore-rules-access

Rules access

Checks existing Rules release + IAM.

04 / backend-tests

Backend tests

Python 3.12, Node, SQLite test mode.

05 / web-tests-and-build

Web tests + build

Rules emulator, npm tests, Vite, build-info.

06 / build-api

Build API image

Docker build from backend/.

07 / push-api

Push API image

Artifact Registry tag = Cloud Build ID.

08 / deploy-candidate

Main API candidate

No-traffic tag; health, Routes, Firestore/media.

09 / await-release-turn

Release ordering

Waits for older builds from same trigger.

10 / deploy-firestore-rules

Publish Rules

Compile, activate and verify changed Rules.

11 / deploy-work-services

Work candidates

Deploy work API + worker; configure/pause Scheduler.

12 / promote-backend

Promote main API

Traffic = verified main revision, 100%.

13 / promote-work-services

Promote work services

Traffic = verified work revisions; resume Scheduler.

14 / deploy-firebase-hosting

Deploy Hosting

Firebase Hosting only; SPA build + rewrites.

15 / verify-hosting-release

Verify public paths

Hosting + main/work API share this build ID.

Production change order: Rules → work candidate setup/Scheduler pause → main traffic → work traffic/Scheduler resume → Hosting. These are separate operations, not one atomic transaction.

Selective pipelines: deploy only what changed

Each lane retains the release gate and ordering check, while skipping unrelated production surfaces.

WEB

6 Cloud Build steps
No Cloud Run revision

- **Gate + history** — Manual override and build access.
- **Test + build** — pnpm; npm test; Vite. No Rules emulator.
- **Release turn** — Same-trigger ordering check.
- **Publish Hosting** — firebase deploy --only hosting.
- **Verify** — build-info commit + build ID.

API

11 Cloud Build steps
Three Run services

- **Gate + history** — Manual override and access.
- **Backend tests** — Pytest in SQLite test mode.
- **Image** — Docker build + explicit push.
- **Main candidate** — No-traffic health + config checks.
- **Work + traffic** — Work candidates, then main/work promotion.
- **Verify** — Main and work API build IDs.

RULES

6 Cloud Build steps
No image or Hosting

- **Gate + access** — Build history and Rules IAM.
- **Emulator** — Demo project; local Rules tests.
- **Release turn** — Same-trigger ordering check.
- **Publish** — Compile, activate and verify Rules.

Build IDs after a partial release: Hosting and API IDs can differ. The web verifier checks Hosting; the API verifier checks main and work API; the Rules publisher verifies the active ruleset.

Engineering console: independent release

The console has its own source archive, three-step Cloud Build, Cloud Run runtime identity, sign-in checks and promotion.

01
Resolve engineer accounts
Clean commit and no active builds; active Firebase accounts. Unavailable accounts may be deferred.

02
Preflight cloud access
Check Firebase config and Artifact Registry before a paid build.

03
Stage reviewed source
Filtered git archive; per-file SHA-256 manifest; no credentials.

04
IAM + engineer claims
Dedicated read-only runtime role; grant engineer claim.

05
Build console image
Manifest check, console tests, Docker build and push.

06
Deploy candidate
Dedicated Run service; prior service uses no-traffic tag.

07
Verify candidate
Health, live collectors, private API rejection, sign-in UI.

08
Authorize origins
Add returned Run origins to Firebase Auth allowlist.


09
Promote + reverify
100% verified revision; check each public origin.

OBSERVED CONSOLE

Public /health at 14 Oct 2026, 01:02 UTC reports revision **f7446fcaae38**, build **5765c997…**, four collectors connected, and engineer account checks passing. The current selective-release checkout is separate and has not been published to the customer site.

Production topology: build plane and serving plane

Solid arrows are serving or delivery paths; dashed arrows represent build/deployment supply.

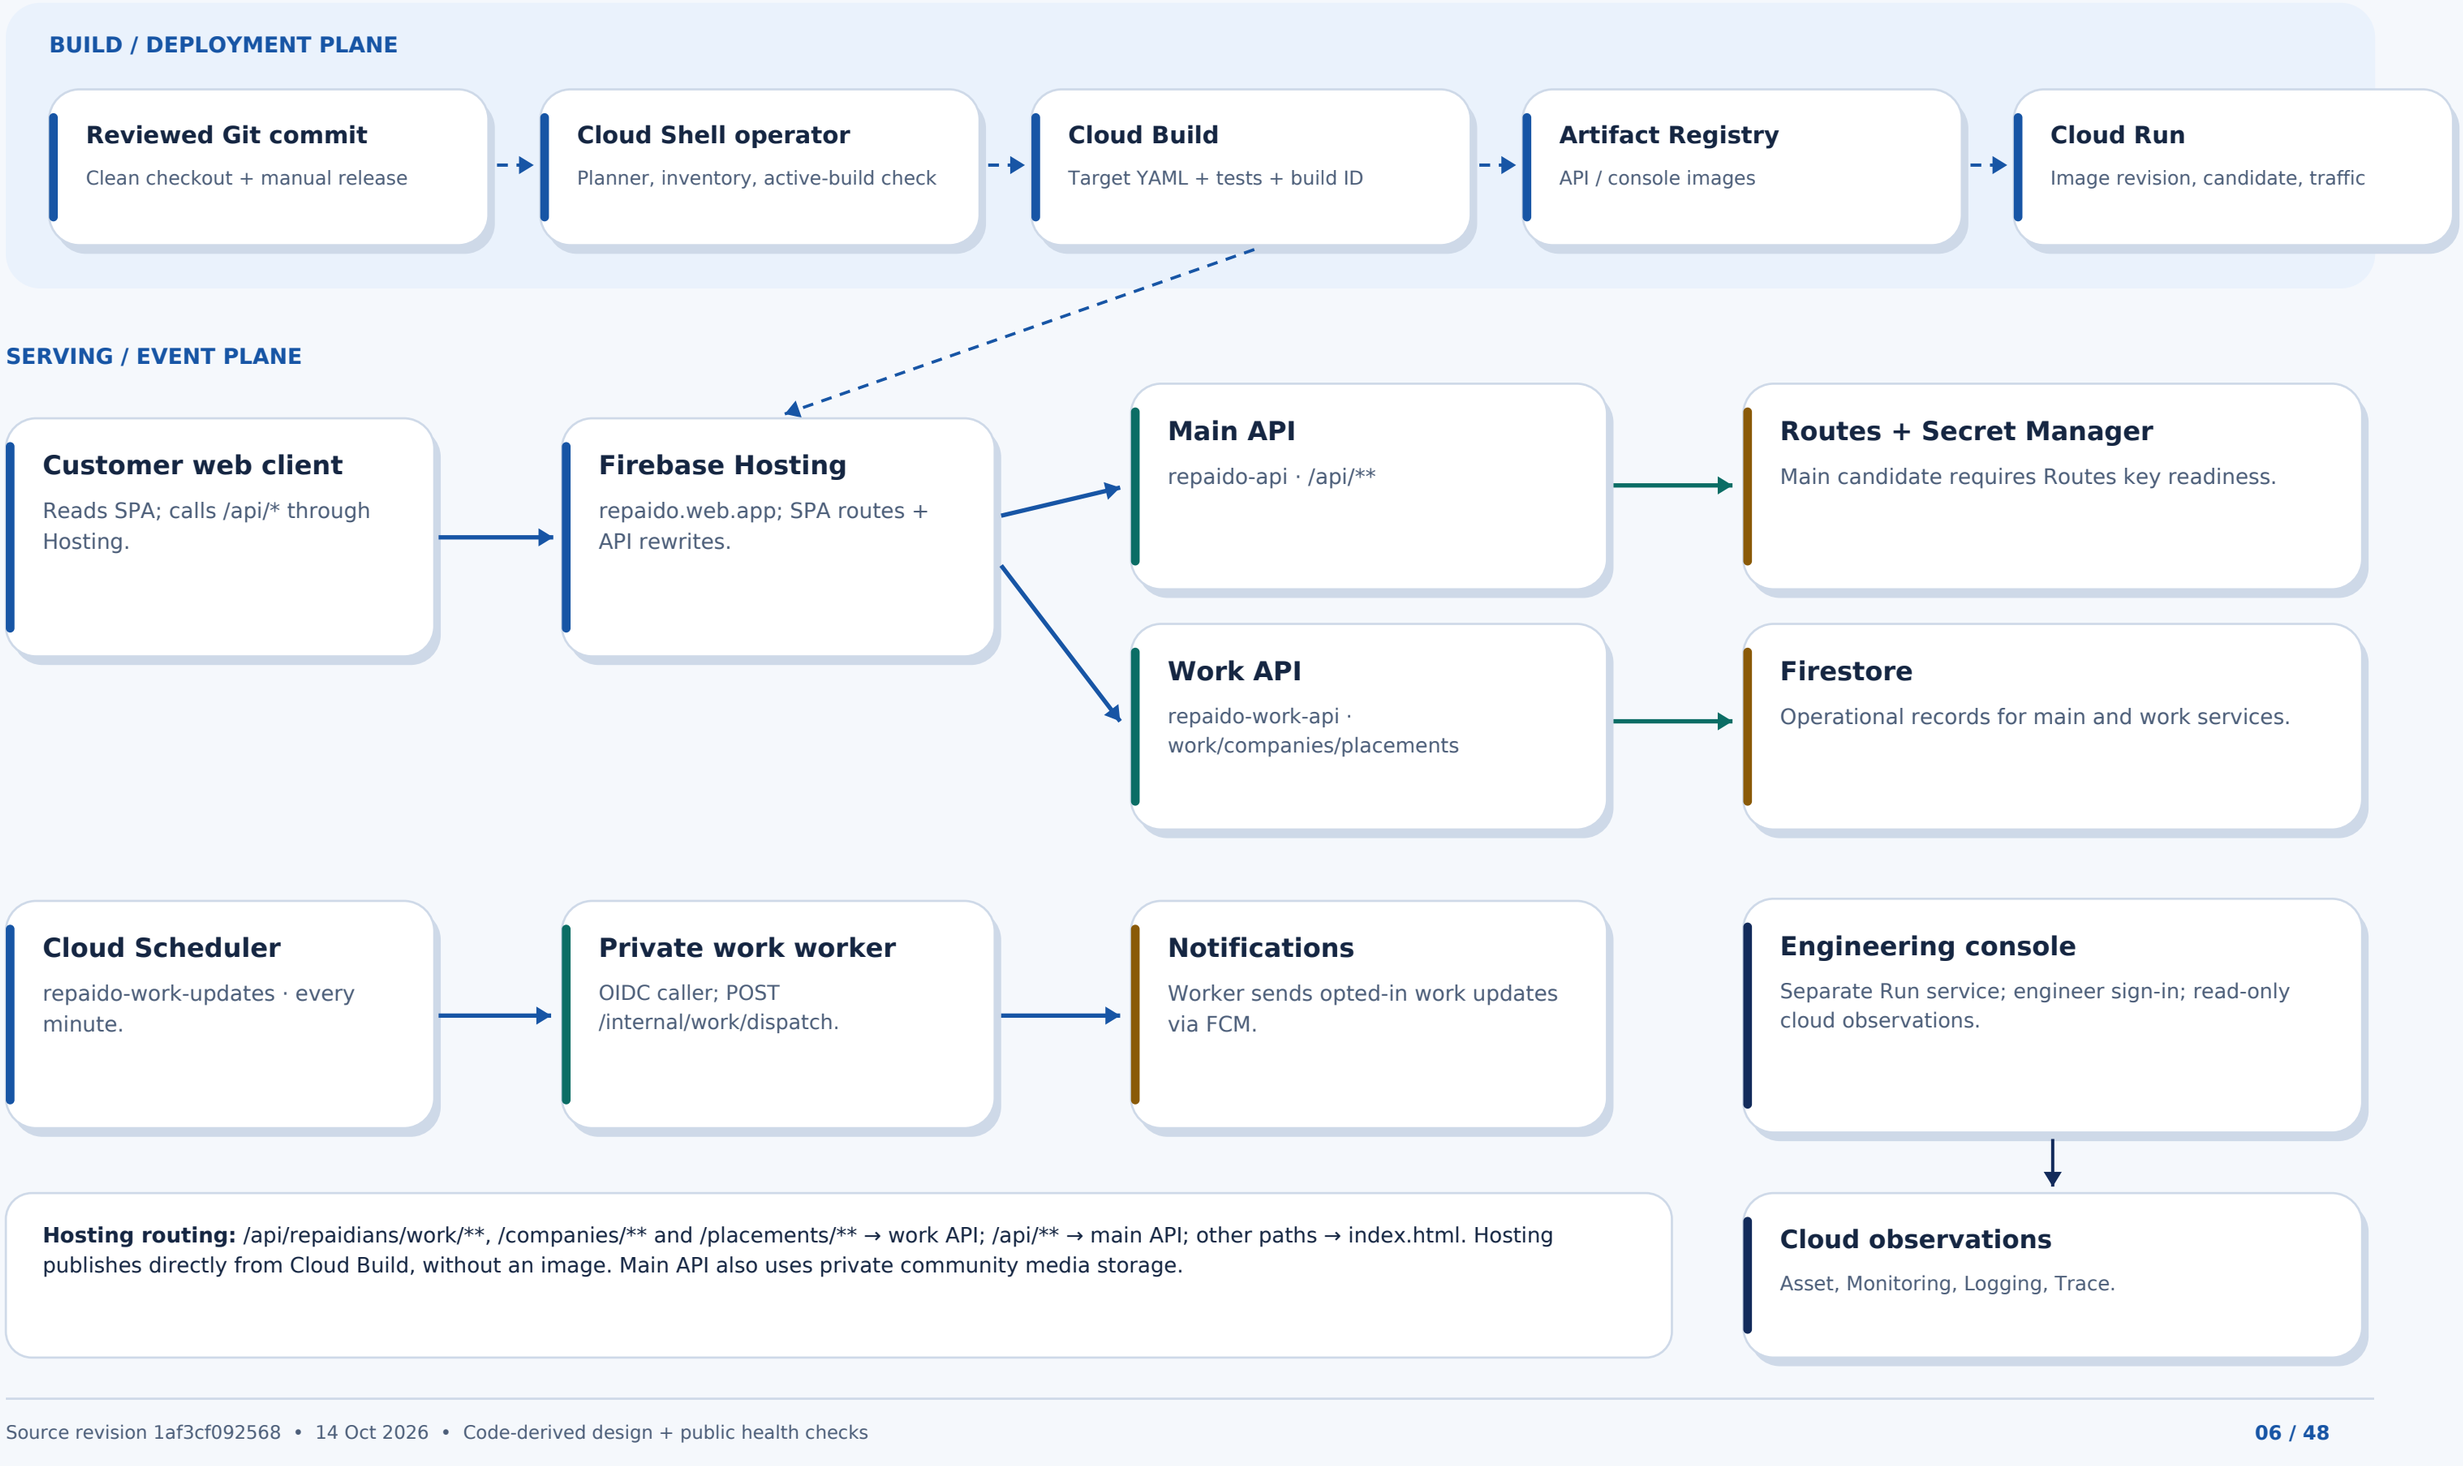

Service contracts and trust boundaries

These limits and identities come from the deployment commands; the main API retains other existing runtime settings.

MAIN API · repaido-api

Existing service required. Same backend image. New candidate uses --no-traffic and a build tag. Sets REPAIDO_BUILD_ID, Firestore storage mode and the Google Routes secret. Checks health, routing readiness and durable community media before traffic promotion.

WORK API · repaido-work-api

work_service:app from the same image. Public service; inherits the main runtime identity. 1 CPU · 512 MiB · concurrency 64 · timeout 60 s · min 0 / max 20. Mail ownership and Cloudflare Stream secrets are removed.

PRIVATE WORKER · repaido-work-worker

work_worker:app from the same image. IAM-protected; the Scheduler caller is granted invoker. 1 CPU · 512 MiB · concurrency 1 · timeout 240 s · min 0 / max 2. Push enabled; signing-key secrets filtered.

ENGINEERING CONSOLE

repaido-engineering uses a dedicated read-only identity. Public ingress, but engineering APIs require an engineer account. 1 CPU · 512 MiB · concurrency 40 · timeout 180 s · min 0 / max 1; CPU throttled.

FIREBASE HOSTING

Deploys web/dist with build-info.json. SPA routes serve index.html. Specific work/companies/placements API paths rewrite to the work API; other /api/** paths to the main API. No Docker image is needed for a web-only release.

FIRESTORE RULES

The Rules API publisher checks the existing release, compares source, compiles changed Rules, activates the ruleset and reads back its identity. Firestore indexes have no automated step and cause the selective planner to stop.

PRIVATE DISPATCH PATH

Cloud Scheduler → OIDC scheduler identity → Private worker POST → FCM delivery

Job **repaido-work-updates** runs every minute in Asia/Kolkata with a 240-second deadline, up to three retries and 30–300-second backoff. The work deployment pauses it during candidate setup; promotion resumes it. New work services may serve on first creation because --no-traffic is conditional on a prior service.

Failure boundaries and operational controls

The pipeline verifies candidates before promotion, but production updates are sequential and are not automatically rolled back.

WINDOW 1

Before candidate

Tests or image build fail
No new production traffic. Existing site stays live.

WINDOW 2

Candidate checks

Main/work candidate fails
Main traffic stays; first-time work service creation can serve immediately.

WINDOW 3

Rules published

Later step fails
New Firestore Rules can already be active.

WINDOW 4

Work setup

Failure before work promotion
Scheduler may remain paused; inspect and restore delivery.

WINDOW 5

Traffic / Hosting

Failure during promotion
Main, work and Hosting may serve different builds.

RESPONSE MAP

Cloud Run	Inspect tagged/serving revisions and restore a previously verified revision if needed.
Hosting	Restore a prior Hosting release if web publication or rewrites are wrong.
Rules	Restore a previously reviewed Rules release if access changes are wrong.
Scheduler	Check the private work-updates job is active after a work deployment failure.

COST CONTROL THAT THE REPO ACTUALLY IMPLEMENTS

The repo provides a manual release gate (false by default) and component-scoped builds. Disabling the live production push trigger is recommended but was not verified here. The root source archive is still uploaded for selective releases; runtime, storage and network costs continue. Measure savings in Billing Reports.

Operator path, source trace and evidence limits

Use the plan before any approved release. This document describes checked-in behavior and the limited public endpoints read for verification.

1 Review the exact change set

Identify the real deployed baseline. The plan compares two full Git SHAs, classifies changed paths and reports the selected config. A docs-only change does not publish the customer app.

2 Submit only an authorized batch

Use the same reviewed SHA and baseline with --release in authenticated Cloud Shell. The helper checks clean source, upload inventory and active builds before submitting Cloud Build.

OFFLINE PLAN

```
bash scripts/release-batch.sh --plan <reviewed-40-char-sha> --changed-from <deployed-40-char-sha>
```

MANUAL RELEASE · only after a release request

```
bash scripts/release-batch.sh --release <reviewed-40-char-sha> --changed-from <deployed-40-char-sha>
```

CHECKED SOURCE

- scripts/release-batch.sh + scripts/plan-release.py
- cloudbuild.yaml + cloudbuild-{web,api,rules}.yaml
- scripts/deploy-work-services.py + scripts/deploy-firestore-rules.py
- firebase.json + backend/Dockerfile
- engineering/release.py + engineering/cloudbuild.yaml

Evidence limit: public health checks confirmed the build IDs shown on page 1, but this document does not claim a complete live IAM, network, billing, secret, or capacity audit. Source files define the intended pipeline; a Cloud Shell audit is required to compare every live resource with it.

How to read this blueprint

HLD shows system boundaries; LLD follows commands, data and event triggers. Evidence levels are kept separate.

Source-derived

Routes, code paths, Cloud Build steps, Hosting rewrites and data controls were inspected in this checkout. They describe intended behavior at source revision 1af3cf092568.

Publicly observed

The prior public health check at 14 Oct 2026, 01:02 UTC reported Hosting and main/work API build b421e09592a7, and a separate console revision f7446fcaae38. These are a point-in-time snapshot.

Needs authorized audit

The PDF does not claim a complete current GCP inventory, configured secrets, all IAM grants, provider readiness, real-time end-to-end tracing, scale certification or deployed Android binary parity.

DOCUMENT MAP

Pages 1–9: manual deployment selection, target pipelines, traffic switch, security controls and the observed release snapshot.

Pages 10–30: runtime topology, auth, discovery, events, campaigns, bookings, contracts, community, transport, commerce, rewards, payment, push, media, observability, data and release operations.

Remaining pages: the complete code-derived HTTP method + path catalog, grouped by runtime and source module. Prefix each listed path with **/api** through Firebase Hosting, except the direct engineering console and the private worker. Catalog entries do not imply anonymous access; role checks vary by endpoint.

CATALOG SNAPSHOT

MAIN 508

WORK 15

WORKER 2

CONSOLE 6

Count = method/path declarations after excluding OpenAPI/docs, HEAD and OPTIONS. The work router is also mounted by the main runtime; repeated paths are shown once per runtime.

01 Runtime topology and trust boundaries

HLD: four browser experiences share one Hosting deployment; API routing and authorization remain server-owned.

REQUEST / EVENT FLOW

Customer + business SPA

Web/Android surfaces; persona-specific panels

→

Firebase Hosting

Same-origin assets and ordered /api rewrites

→

Cloud Run APIs

Main + work API; private worker separate

→

Firestore + media

Authoritative records and owned objects

→

External services

Firebase, Razorpay, Routes, Cloudflare when configured

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Entry and dispatch

The web shell serves customer, agent, contractor, cab owner, driver, scrap collector and administrator experiences. /worker modes are presentation and business-role choices, not a separate authorization layer. Specific /api/repaidians/work, companies and placements rewrites precede the generic /api/** rewrite.

Three API runtimes

repaido-api mounts the broad operations and community routers. repaido-work-api mounts the work discovery router and has bounded admission. repaido-work-worker exposes only health and private dispatch. The latter does not run the main API lifespan scheduler.

Shared state boundary

Production code selects Firestore; local tests can select SQLite. Both public APIs and the private worker use the existing transactional record adapter. Splitting runtime deployment does not imply separate databases or independently owned data schemas.

External and uncertain

Payment gateway, maps/routing, FCM push, object storage and Cloudflare live video are integration boundaries. Their readiness depends on service configuration and account status. A source route or asset type is not proof that a provider is healthy or a Cloud Function exists.

Source: firebase.json; backend/main.py; backend/work_service.py; backend/work_worker.py; docs/REPAIDIANS_WORK_ARCHITECTURE.md

02 Identity, roles and sensitive access

LLD: a Firebase identity is verified on each protected API; a business profile has its own review and permission state.

REQUEST / EVENT FLOW

Sign-in
Firebase ID token on client

→

API verifier
Validate token + current account

→

Role / owner checks
Scope, status, participants, consent

→

Transaction
Expected version + idempotency

→

Audit response
Bounded result; no credential echo

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Multi-business identities

One phone identity may own separate service-work, cab owner, driver and scrap collector registrations. Each business is independently pending, approved, rejected or expired. A client-side desk switch never grants a capability; protected endpoints re-evaluate the server record.

Contract and community scope

Private proposals are restricted to their customer and proposer; award creates the canonical project and enables private messaging. Public progress defaults off and is separately consented. Repaidians posting and professional capabilities rely on approved records, not a self-selected profile label.

Engineer console

The separate console accepts a Repaido Firebase ID token with an engineer custom claim and performs a revoked-account check. Its engineering API is read-only, access is audited with a pseudonymous actor hash, and source excerpts redact string literals.

Boundary failures

Reject missing, expired or wrong-owner tokens before reads of private data. Conditional credentials and secrets stay in Cloud Run/Secret Manager. Response caches and continuation cursors bind account and filter state; changing identity invalidates private cached views.

Source: docs/business-suites.md; docs/CUSTOM_CONTRACTS.md; engineering/server/app.py; docs/REPAIDIANS_WORK_ARCHITECTURE.md

03 Search: public catalogue to live availability

LLD: discovery indexes narrow candidates; current operational records decide visibility, distance and eligibility.

REQUEST / EVENT FLOW

Typed query + city
POST discovery/search or hiring/search

→

Snapshot prefix index
Bloom prefilter + exact postings

→

Candidate hydration
Approved workers, catalogue, reviews

→

Live eligibility
Location, online, travel radius, stock

→

Result + booking
Displayed card; final command rechecks

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Repair and service discovery

POST /operations/discovery/search combines service text, category and worker matches. Professional ranking considers service match, review confidence and distance. Only approved, online professionals with recently updated location are shown; displayed availability is reconfirmed after a request.

Hiring and category reads

POST /operations/hiring/search and /recommendations use worker/category/review evidence. Public city-only leaderboards have short server and per-tab caches, while GPS and live availability bypass the public server cache. Failed refreshes can retain visible cards with a retry indication.

Index correctness

The immutable snapshot uses a versioned Bloom filter only as a negative prefilter, then exact prefix postings. A Bloom positive is never enough to create a hit. Every content change changes the snapshot digest; larger data sets need a dedicated materialized search index and measured load tests.

Search limits

The current code still has some wide cross-city/online-worker reads. A bounded index improves ordinary city queries but does not establish million-worker scale. Final hire/booking actions must check current status, city, radius, ownership and pricing against authoritative records.

Source: backend/discovery.py; backend/search_index.py; backend/hire_discovery.py; docs/HIRING_SEARCH.md

04 Behavioural signals and recommendation events

LLD: consented activity changes ranking and home focus; it does not authorize price or override current supply.

REQUEST / EVENT FLOW

User action
Search/view/banner event with event ID

→

Consent gate
Account-scoped preference version

→

Signal ledger
Deduplicate, rate-limit, cap weights

→

Feed assembly
Transport / repair + local cards

→

Client hydration
Refresh or retain cards; clear on sign-out

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Signal collection

POST /operations/discovery/events accepts only consented, typed actions. Source weights are search 1.5, category view 1, service view 2 and banner open 0.5. Event IDs, recent-target and rate limits constrain repeats; per-category signal scores are capped.

Contextual feed

GET /operations/discovery/feed works without personal data; /feed/personal uses an enabled version-2 preference. The feed can prioritize transport or repair and local categories from recent signals. It is a deterministic presentation choice, not an inferred guarantee of intent, availability or fare.

Work discovery

The separate work API accepts opt-in behaviour and combines interests with native jobs/contracts. Its documented work-v2 score weights trade .45, skill .25, city .15, experience .10, and optional interest terms .025 each. Results are ranked within a bounded page, not a global probability.

Recommendations and rechecks

Signal projections are disposable; authoritative service, professional, contract and transport records still control each card and command. Opt-out/reset stops personalization. Stale cards can be displayed briefly during revalidation but cannot create unauthorized bookings.

Source: backend/discovery.py; backend/repaidians_work.py; docs/work-discovery-api.md; docs/HIRING_SEARCH.md

05 Campaign suggestions and price integrity

LLD: the funded campaign engine selects offers, then atomically reserves an eligible discount at checkout.

REQUEST / EVENT FLOW

Admin campaign
Budget, placement, dates, service

→

Eligible feed
City, margin, consent, limits

→

Click / selection
Tracked event and candidate quote

→

Order command
Recheck offer version + price

→

Reservation ledger
Budget and user use committed

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Configuration

Administrators manage campaigns and controls under /operations/admin/campaigns and /campaign-controls. A campaign must be active, dated, attached to a real service and funded. The server rejects an offer that exceeds its discount ceiling or violates the minimum company margin after worker share, bonus reserve and risk allowance.

Personal feed and push

POST /operations/campaigns/feed gives general cards; /feed/personal uses campaign/discovery consent. Placement may be home, explore, checkout, launch or push. Delivery rechecks campaign version, customer device audience, push preference, quiet hours and daily limits at send time.

Selection and booking

The quote and select APIs return an exact advertised price. The job/order transaction rechecks campaign version, city, service, per-user limit and remaining budget before reserving a discount. Reservation is durable; cancellation does not automatically release it, preventing a budget or reuse race.

What is not claimed

The engine is a deterministic, bounded policy system, not autonomous six-month profit optimization. Personal signals can reorder eligible cards, but cannot change a campaign amount or invent an offer. Real checkout total and subsidy accounting must come from the server snapshot.

Source: backend/promotions.py; backend/operations.py; backend/discovery.py

06 Repair booking and service work lifecycle

LLD: discovery creates a request; worker assignment, visits, evidence, payment and review form a versioned lifecycle.

REQUEST / EVENT FLOW

Discovery card
Search + quote / availability

→

Booking command
Customer request + retry key

→

Dispatch
Offer worker; timeout and reassignment

→

Visit
Arrival, work log, evidence, follow-up

→

Completion
Payment, receipt, verified review

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

State and retry safety

Operations jobs are authoritative. Commands record an idempotency key and payload fingerprint so identical retries return the same result while mismatched replays fail. Assignment and completion follow server state transitions, not a client toast or a cached card.

Background obligations

The main API operational scheduler runs roughly every 30 seconds. Its sweep expires worker offers, emits preparation reminders, assesses auditable obligations and dispatches waiting jobs. The same sweep calls shared-departure alert processing; it is not an independent Cloud Function.

Evidence and protection

Arrival can use a server-side code; capture sessions own image uploads. Private job evidence and reports are role-checked. Tracking requires a session and consent, and a completed or stopped session must no longer act as continuous location sharing.

Settlement and support

Gateway order/check and signed webhook paths verify payment. Job receipt, review, stop/resolution and support routes remain available for post-booking management. A gateway capture is collection evidence; settlement/payout has separate administrator and provider state.

Source: backend/operations.py; backend/integrations.py; backend/evidence.py; backend/lifecycle.py; backend/procurement.py

07 Hiring, contractor work and private tenders

LLD: a customer request can match eligible contractors, receive private bids, award work and create a project ledger.

REQUEST / EVENT FLOW

Customer requirement
Custom query + private site/terms

→

Native tender
Indexed trade/city/skill facets

→

Eligible discovery
Contractor/work API bounded pages

→

Private proposal
Bid, interest, enquiries

→

Award + project
Terms, team, records, payments

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Native records and discovery

POST /operations/custom-contracts/queries writes a normalized tender. Contractor opportunities and the separate Repaidians work API read native records through indexed projections. Discovery cannot make a private request public or reveal exact site, proposals or payment records.

Before and after award

Interests are intent receipts, not hires. Proposal text and accepted terms live in bounded private documents. Award atomically creates the canonical contract project; only then can private customer-contractor messaging and the project record lifecycle proceed.

Hiring lifecycle

Projects can invite or accept workers; applications, decisions and capacity constraints are server-owned. Pending offers reserve capacity and accepted workers count once. The project work state still requires start, pause and completion commands even after hiring closes.

Customer visibility

The bookings view should emphasize request status, bids, project milestones and actions. Match scoring is explainable candidate evidence, not a guarantee. Public progress is opt-in by the customer, media needs uploader consent, and revocation is checked on reads.

Source: backend/custom_contracts.py; backend/contract_work.py; backend/contract_records.py; docs/CUSTOM_CONTRACTS.md

08 Repaidians, companies and work updates

LLD: social publication and professional opportunity discovery share identity but have different audiences and rules.

REQUEST / EVENT FLOW

Native write
Post, project, tender, profile, job

→

Projection index
Bounded work/search projection

→

Work API query
Scoped match and visibility check

→

Application / watch
Ownership + state transaction

→

Durable update
Notification and optional push

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Social surface

The main API owns /repaidians/feed, publications, comments, follows, messages, media and notifications. Approved professional records gate professional publishing. Blocks, audience settings and visibility are checked when content is read or acted upon.

Work surface

The work API serves preferences, interests, jobs, contracts, company pages and placements. Native source records remain authoritative; indexing updates and a bounded backfill feed projections. Work-service admission is capped and may return 503 with Retry-After under overload.

Delivery semantics

A private worker processes due work updates from durable state. Its dispatch-time checks re-evaluate consent, blocks, ownership and current status. Daily contract-watch updates are limited; FCM transport is at-least-once, so stable IDs support client deduplication after ambiguous provider receipts.

Cross-app consistency

The customer bookings, contractor desk and Repaidians work panels are views of linked native records rather than three independent posts. A stale projection can delay discovery; it cannot authorize an award or reveal a private tender.

Source: backend/repaidians.py; backend/repaidians_work.py; backend/work_worker.py; docs/REPAIDIANS_WORK_ARCHITECTURE.md

09 Cab, shared ride and live journey safety

LLD: owners publish capacity; customers join a matched route; boarding, movement and guest tracking remain state-bound.

REQUEST / EVENT FLOW

Approved fleet
Owner / driver + vehicle review

→

Publish route
Departure, stops, seats, per-seat fare

→

Nearby search
Pickup area + route eligibility

→

Join and board
Owner accepts; passenger status

→

Journey
Position, guest link, expiry

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Supply and matching

Cab owners configure vehicle details and prices; partner and vehicle approval is separate. /transport/nearby and /shared/search use bounded local records. A published ride is discoverable only while scheduled and eligible for the searched pickup/route.

Shared departure events

Joining creates a passenger request and alerts the owner/driver. Commands update acceptance, boarded, travelling, drop-off, finish, cancel or reschedule state. Departure reminders and passenger arrival cues are processed by the main API scheduler and stored as notifications; push delivery depends on device and provider readiness.

Precise location boundary

Position submission requires current journey state, tracking consent/session and server checks. A guest tracking token is scoped to one active ride, not an account login. It stops working after the journey/consent ends. A map can show recent coordinates but must identify stale location.

Payment and fare truth

Owner-defined tariffs are snapshotted before customer acceptance. The documented ₹500 advance credits the fare, with a ₹500 minimum total. Payment and route-provider readiness are independent from UI publication; the server policy endpoint reports integration readiness.

Source: backend/local_business.py; backend/mobility_journeys.py; backend/shared_departure_alerts.py; docs/business-suites.md

10 Marketplace, rentals, B2B and scrap

LLD: distinct commerce models share authentication and payments, but each has separate inventory, approval and fulfillment.

REQUEST / EVENT FLOW

Browse / quote
Market, retail, rentals, B2B, scrap

→

Source record
Listing, stock, RFQ or pickup report

→

Decision
Owner/shop/buyer/customer acceptance

→

Fulfillment
Pickup, delivery, weighing, return

→

Ledger
Payment, receipt, dispute/refund

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Listings and retail

Marketplace listing photos, publish, search, radius, contact and moderation routes are separate from retail checkout. Retail quote/order/payment routes snapshot price and stock. Shop acceptance, customer receipt and reconciliation remain explicit state transitions.

Rentals and B2B

Rental catalog/inventory, booking code, pickup/return commands, payment and deposit refund form one lifecycle. B2B listings, RFQs, quotations and PDFs form another; quotes are not a public listing purchase.

Scrap sale

The customer submits a collection. A buyer inspects, records weighing evidence and an itemized net-weight price; the customer approves before collection and confirms actual payment receipt. The buyer-to-customer payment is not gateway verified merely because a UI record says paid.

Public cleanup is separate

Roadside litter reports require permission, private before/after evidence, assigned collector, fresh proximity and independent admin verification. Repaido-funded cash rewards are manual; points are awarded once from verified cleanups. A report is not an ownership claim or automatic public-property removal permit.

Source: backend/marketplace.py; backend/retail_checkout.py; backend/rentals.py; backend/b2b.py; backend/cleanup.py; docs/COMMUNITY_CLEANUP.md

11 Captain points, offers and leaderboard privacy

LLD: cleanup rewards are deterministic server calculations with explicit cash and discount accounting.

REQUEST / EVENT FLOW

Verified cleanup
Admin evidence + independent review

→

Award ledger
10 points once; capped daily

→

Rolling qualification
100 points in last 30 days

→

Private/opt-in view
City rank and selected avatar

→

Offer reservation
Server policy + one use window

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Points and Gold

Only verified cleanup awards count: 10 points each, at most five scored verifications per India-calendar day. Gold requires 100 points earned in the last 30 days. Ranking points remain full for 30 days, then decay linearly over the next 30 days to a 30% floor; lifetime totals remain.

Evidence and privacy

Scoring checks include permission, safe material, independent reviewer, distinct before/after uploads, disposal record, fresh 300 m site proximity and once-only award. Device GPS is not anti-spoof proof. The optional city leaderboard publishes only opt-in profile details and a separately uploaded portrait, never report photos or exact sites.

Offer status

Repair visiting fee stays at 30% per product decision. Shared-ride, cab-base and rental benefits are locked pending approved rupee caps and checkout adapters. Refurbished-appliance CAPTAINREFURB25 is 25% up to ₹1,000 on an approved category allowlist, reserved with stock and a price snapshot.

Funding and redemption

Repaido funds the eligible refurbished discount; the shop payable retains the undiscounted item amount and a community reward expense balances the ledger. Manual cleanup cash handover and customer receipt are a different ledger. No offer is inferred from leaderboard rank alone at checkout.

Source: backend/captain_rewards.py; backend/cleanup.py; docs/COMMUNITY_CLEANUP.md

12 Payment, external provider and refund boundaries

LLD: an intent/order is not a capture; a capture is not provider settlement or a contractor payout.

REQUEST / EVENT FLOW

Server quote
Paise amount + immutable terms

→

Gateway order
Server-created provider reference

→

Provider confirmation
Signed webhook / retrieval

→

Internal ledger
Idempotent capture and entitlement

→

Settlement / refund
Separate reconciliation + status

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Trust and integrity

Browser and Android clients may initiate payment but cannot declare success. /operations/webhooks/razorpay/{channel} and check routes authenticate provider evidence. Order, capture and refund references must be replay-safe and tied to the exact booking or order.

Contracts

A partial-payment request reserves integer paise against the agreed total. Customer approval precedes an online gateway order. External NEFT/RTGS reports remain pending until an authorized operator verifies reference, evidence and reason. Gateway collection is not evidence of contractor payout.

Other domains

Jobs, retail, rentals, market listings, cab bookings, home-plan invoices and professional membership have domain-specific payment routes in the appendix. Shared gateway utilities do not make those lifecycles interchangeable; each record owns its amount and completion state.

Sensitive records

Bank details, provider secrets, identity documents and raw evidence must be limited to authorized handlers. The engineering console never forwards secret resources, raw request bodies, headers or log payloads. Operational audits should retain event IDs, actor references and amounts without exporting credentials.

Source: backend/integrations.py; backend/contract_records.py; backend/retail_checkout.py; backend/local_business.py; engineering/server/cloud.py

13 Scheduler, outbox, push and event processing

LLD: two scheduling models coexist: an in-process operational sweep and a separately invoked private work worker.

REQUEST / EVENT FLOW

State change
Transaction + durable event/outbox

→

Due selector
Main sweep or Scheduler worker

→

Eligibility check
Audience, status, consent, expiry

→

FCM send
Provider attempt + stable event ID

→

Device
In-app bell; optional sound/push

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Operational sweep

The main API lifespan starts a ~30-second loop that calls operations_tick. It expires job offers, queues reminders, dispatches waiting jobs and checks shared departures. A distinct authenticated POST /operations/internal/tick invokes broader domain ticks and reconciliation; its invocation cadence must be audited in Cloud Scheduler.

Private work dispatch

The documented Cloud Scheduler job repaido-work-updates runs each minute in Asia/Kolkata and calls POST /internal/work/dispatch on a non-public Cloud Run worker using OIDC. IAM and application-layer audience/account checks both apply. Work updates, push relay and expired live sessions are processed in bounded batches.

Delivery semantics

Work push uses leases, per-device receipts, retries and eligibility rechecks. A crash between provider acceptance and receipt commit can repeat a push: stable notification IDs allow device deduplication. Device ownership is rechecked after account migration and lock-screen content stays generic.

Monitoring consequence

Observe enqueue-to-send lag, due queue depth, retries, permission failures and provider acceptance separately from client display. A notification stored in Firestore does not prove that a sound played or that the OS delivered push; client telemetry is required for that end-to-end claim.

Source: backend/main.py; backend/operations.py; backend/shared_departure_alerts.py; backend/work_worker.py; docs/REPAIDIANS_WORK_ARCHITECTURE.md

14 Live media and object boundaries

LLD: API routes control entitlement and metadata; live media streams through Cloudflare, while private uploads stay access-checked.

REQUEST / EVENT FLOW

Publisher
Approved Repaidian starts a session

→

Main API
Create, activate, heartbeat, audience

→

Cloudflare Stream
WHIP ingest + WHEP playback

→

Viewer
Short-lived signed play URL

→

Expiry
Lease, duration and admin end

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Live video

The API creates a provider live input only when Cloudflare account, token and signing key are configured. Provider endpoint host/scheme are validated. Broadcast transport is direct to Cloudflare; the Repaido API does not relay video bytes or certify a million-request-per-second media load.

Lease and audience

Activate and heartbeat keep a bounded session live. Watch returns a short-lived signed playback URL after checking current visibility and entitlement. End, missing heartbeat or maximum duration closes/revokes the session. A due index supports bounded expiration work.

Recorded and private media

Repaidians posts and the evidence/document services use owned media references. Read routes check publication visibility or authorized participant roles. Private cleanup, contract, identity and job evidence must not be projected into public media or the engineering console.

Provider readiness

GET /repaidians/live/status reports whether required Cloudflare configuration is present; a source implementation alone does not establish that live streaming is enabled in production. Provider errors should surface as unavailable, not fake playback URLs.

Source: backend/repaidians_live.py; backend/repaidians.py; backend/evidence.py; docs/CUSTOM_CONTRACTS.md

15 Observability and the engineering console

HLD: a read-only console combines source-declared links with bounded GCP observations; each view carries provenance.

REQUEST / EVENT FLOW

Source graph
Routes, service declarations, call edges

→

Cloud Asset
Selected GCP resources and references

→

Metrics / logs
5-minute metrics; recent sanitized events

→

Cloud Trace
Recent sampled spans

→

Engineer canvas
Authorized zoom, detail and live refresh

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Inventory and evidence

The collector reads selected Cloud Asset Inventory types including Run, Firestore, storage, network and Cloud Functions if present. Inventory caches for 300 seconds. A control-plane Ready condition is not an end-to-end service test; inferred source links are labelled separately from observed assets.

Metrics and logging

Cloud Monitoring data is refreshed on a 60-second cache using a trailing five-minute interval. Cloud Logging reads at most 100 recent Cloud Run/Function entries over 15 minutes, with a 15-second cache. It extracts sanitized metadata, not raw log content, secrets, request bodies or headers.

Traces and precision

Cloud Trace uses a 15-minute window and a 60-second cache, with a bounded trace/span page. Unsampled or uninstrumented calls are invisible. A missing line or span does not prove that no call happened. Collector states distinguish connected, stale and unavailable.

Access and operations

Engineer-only Firebase claims protect /engineering-api endpoints; SSE streams are bounded. The console can support triage, but it cannot replace incident alerting, SLO instrumentation, database audit review, full distributed tracing or provider status checks until those are explicitly measured and validated.

Source: engineering/server/app.py; engineering/server/cloud.py; engineering/server/catalog.py; engineering/README.md

16 Data design, privacy and failure modes

LLD: transactional native records are authoritative; indexes, caches and feeds are projections with explicit invalidation.

REQUEST / EVENT FLOW

Command
Owner + version + retry key

→

Native record
Firestore transaction / SQLite test

→

Projection
Index, feed, rank, outbox

→

Query cache
Bounded TTL + account binding

→

Revalidation
Current state before action

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Consistency map

Jobs, tenders, projects, vehicles, shared departures, shop orders and cleanup reports own lifecycle state. Firestore transactions coordinate related counters, reservations, points and notifications. Search postings, city leaderboards and work projections are rebuilt or advanced from source records.

PII and precise position

Exact home/site addresses, identity documents, private proposals, bank references, location tracks and report photos require route-level ownership and role checks. Guest ride links carry scoped expiring access only. Opt-in public progress and leaderboard avatars are independent disclosure decisions.

Cache and projection misses

A short client/server cache can show an older card, but commands re-read authoritative status and price. Background indexing can lag; partial backfill must not be represented as exhaustive results. Retry after 503 uses jitter and keeps visible prior results instead of triggering repeated full-screen loading.

Operational scale gates

Current per-process caches, bounded pages and autoscaling settings are design controls, not load certification. Large city search, global ranking, push throughput, Cloudflare viewer scale and database cost need representative traffic tests, read/write budgets, error budgets and regional failure exercises.

Source: backend/operations.py; backend/search_index.py; backend/repaidians_work.py; docs/HIRING_SEARCH.md; docs/COMMUNITY_CLEANUP.md

17 Network ingress and request controls

HLD: Hosting, Cloud Run and provider egress have separate trust decisions; same-origin transport does not grant data access.

REQUEST / EVENT FLOW

Browser / Android
HTTPS + Firebase ID token

→

Firebase Hosting
Static SPA; ordered /api rewrites

→

Cloud Run ingress
Main / work; private worker IAM

→

Middleware + route
Body bounds, CORS, auth, ownership

→

Provider egress
GCP APIs, Razorpay, FCM, Routes, Stream

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Public path map

firebase.json routes exact work paths before /api/** to repaido-api. Each API strips the /api prefix after the Hosting rewrite. The customer shell and business panels are one web deployment; the direct engineering console is a separate Cloud Run origin and authorization surface.

Transport controls

The main and work APIs configure exact allowed frontend origins and security headers. The work API adds bounded admission, a short queue wait and Retry-After on overload. CORS only controls browser cross-origin transport; Firebase identity, role, owner and consent checks still protect data.

Private boundaries

The work worker has no Hosting rewrite and requires Cloud Run invoker IAM plus an application-verified Scheduler token. Engineer APIs require the engineer claim and revoked-account check. Backend service identities read Firestore and provider secrets from configured runtime bindings.

Infrastructure uncertainty


Source declarations show expected edges, not a live VPC, firewall, load balancer, NAT or IAM graph. The engineering collector can read selected Cloud Asset types and explicit references if permission is granted; omitted assets and network flows must be audited independently.

Source: firebase.json; backend/main.py; backend/work_service.py; backend/work_worker.py; engineering/server/cloud.py

18 Sensitive-process data zones and disclosures

LLD: identity, money, precise location and private media each require a separate server-side authorization and retention boundary.

REQUEST / EVENT FLOW

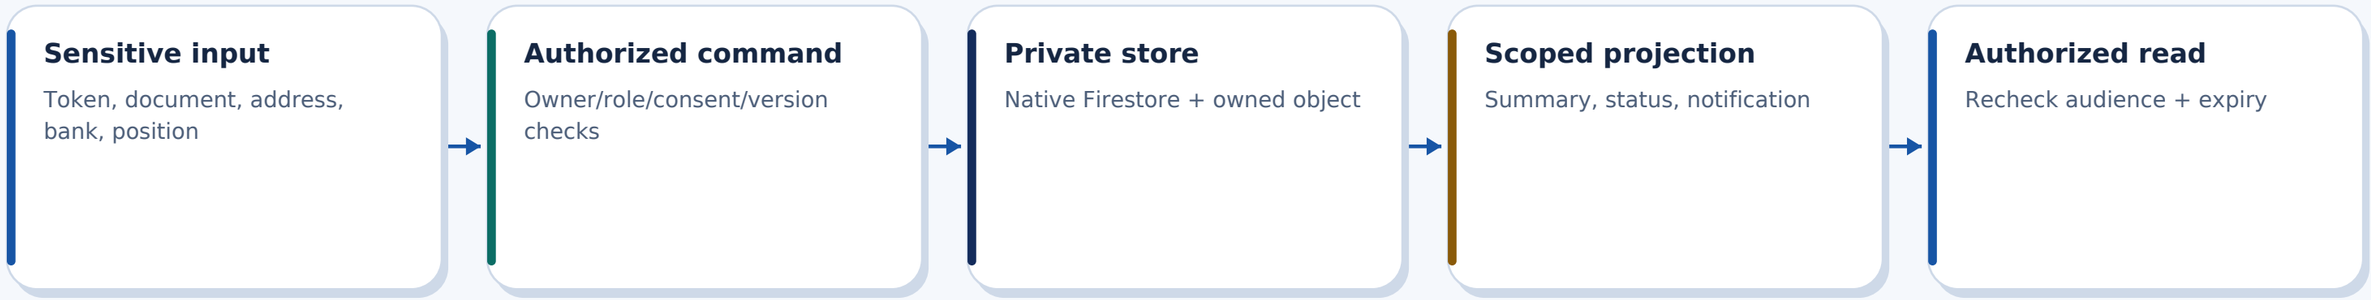

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Identity and documents

Business verification documents, account portraits and job/cleanup evidence use distinct upload owners and read endpoints. An approved business status cannot be inferred from an uploaded file; an administrator reviews each business registration and evidence record.

Money and contracts

Exact payment amounts, gateway capture references, external bank transfer evidence and payout status belong to domain ledgers. Private contract scope, bid text, site, messages and reports stay participant-only. Public progress requires owner and uploader choices and live revocation checks.

Location and guest access

A device position has freshness, accuracy, state and consent checks before journey or cleanup use. Guest ride tracking is scoped and expires with the journey. Worker attendance and cleanup proximity are evidence of a reported event; neither establishes continuous surveillance or fraud-proof GPS.

Logs and operational reads

Engineering collection strips log payloads, headers, secrets, environment values and database documents. The console shows summarized route, service, status and trace metadata. Production access reviews must also cover retention, support exports, backups and operator permissions; those cannot be certified from this source snapshot.

Source: backend/integrations.py; backend/contract_records.py; backend/mobility_journeys.py; backend/cleanup.py; engineering/server/cloud.py

19 Event trigger matrix across apps

LLD: user commands write native state; indexes, notifications and recommendations consume bounded projections and due work.

REQUEST / EVENT FLOW

Interaction
Search, publish, join, pay, verify

→

API command
Typed payload + retry protection

→

Native commit
Owner record, version, event

→

Async projection
Index, feed, queue, badge

→

Read surface
Bookings, bell, work, explore

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Discovery triggers

Search/category/service/banner events update consented interests, which affect personal discovery feed and campaign ranking. Worker, service and catalogue writes change search snapshots or native work projections. A new shared departure enters local transport discovery after publication; final join checks current capacity.

Business triggers

A custom contract query creates a tender and matching work projection; private bids and award update customer bookings, contractor desk and Repaidians work state. A ride join creates a passenger request and driver alert. Boarding, departure, reschedule and location commands update both business and passenger views.

Money and recognition triggers

A provider capture updates the domain payment ledger only after verification. A verified cleanup adds one points award and may change Gold/leaderboard ranking; an approved cash reward remains separate until handover and reporter receipt. Campaign clicks do not reserve a discount until eligible checkout.

Due work and observable states

Main in-process sweep handles operations reminders and shared-departure alerts. Authenticated /operations/internal/tick handles wider reconciliation. Scheduler invokes the private work worker for queued updates, FCM relay and live expiry. Monitoring should correlate the native event ID through projection, queue, send receipt and final UI acknowledgement.

Source: backend/discovery.py; backend/promotions.py; backend/repaidians_work.py; backend/integrations.py; backend/work_worker.py

20 Release, verification and incident response

HLD: select the changed service; verify its contract and live revision; keep rollback and observability aligned.

REQUEST / EVENT FLOW

Changed files
Select web / api / rules / console

→

Cloud Build
Target-specific tests and image

→

Candidate
Check build ID, storage, routes

→

Promotion
Explicit release gate

→

Observe / revert
Health, errors, latency, policy

DESIGN DETAILS AND OPERATIONAL CONSEQUENCES

Selective pipeline

The first nine pages document the exact checked-in Cloud Build steps. Web changes use a Hosting-only pipeline, API changes use one immutable image for main/work runtimes, rules changes run emulator tests, and the engineer console has its own build. Mixed changes select the full path.

Verification

Check the released source/build ID on Hosting and service health endpoints. Run a representative protected request, a private-worker dispatch check when relevant, and Firestore rule tests for access changes. The source tree may be ahead of the publicly observed October 14 snapshot; never confuse a Git commit with a live revision.

Incident drill

Record the failed build or revision, isolate the affected service and check logs/metrics with exact time bounds. Verify whether a provider, scheduler, projection or client cache failed before replaying jobs. Revert traffic or Hosting/rules with an explicit compatible schema review; background events may still be in flight.

Evidence gap register

A full live resource audit needs authorized GCP inventory and IAM inspection. This PDF describes code-declared routes and the noted public health checks; it cannot certify every database index, secret binding, Cloud Function, external account, alert policy, trace coverage or deployed customer APK.

Source: cloudbuild*.yaml; engineering/cloudbuild.yaml; scripts/release-batch.sh; firebase.json; public health snapshot 14 Oct 2026 01:02 UTC

API catalog / 001–030 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	GET	/account/profile	account_profile
MAIN	PATCH	/account/profile	account_profile
MAIN	POST	/account/profile/email-verification	account_profile
MAIN	POST	/account/profile/email-verification/confirm	account_profile
MAIN	GET	/operations/b2b/listings	b2b
MAIN	POST	/operations/b2b/listings	b2b
MAIN	DELETE	/operations/b2b/listings/{lid}	b2b
MAIN	GET	/operations/b2b/listings/{lid}	b2b
MAIN	PUT	/operations/b2b/listings/{lid}	b2b
MAIN	POST	/operations/b2b/listings/{lid}/status	b2b
MAIN	POST	/operations/b2b/photos	b2b
MAIN	GET	/operations/b2b/photos/{media_id}	b2b
MAIN	GET	/operations/b2b/policy	b2b
MAIN	POST	/operations/b2b/quotation	b2b
MAIN	GET	/operations/b2b/quotation/{number}/pdf	b2b
MAIN	GET	/operations/b2b/rfq	b2b
MAIN	POST	/operations/b2b/rfq	b2b
MAIN	GET	/operations/b2b/rfq/{rid}	b2b
MAIN	POST	/operations/b2b/rfq/{rid}/decision	b2b
MAIN	GET	/operations/local-business/captain/avatar/{public_id}/{photo_id}	captain_rewards
MAIN	GET	/operations/local-business/captain/leaderboard	captain_rewards
MAIN	GET	/operations/local-business/captain/me	captain_rewards
MAIN	GET	/operations/local-business/captain/photo/{photo_id}	captain_rewards
MAIN	POST	/operations/local-business/captain/profile	captain_rewards
MAIN	GET	/operations/local-business/cleanup/admin	cleanup
MAIN	POST	/operations/local-business/cleanup/admin/{identifier}/actions	cleanup
MAIN	GET	/operations/local-business/cleanup/admin/{identifier}/photos/{document_id}	cleanup
MAIN	GET	/operations/local-business/cleanup/collector	cleanup
MAIN	GET	/operations/local-business/cleanup/reports	cleanup
MAIN	POST	/operations/local-business/cleanup/reports	cleanup

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 031–060 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/local-business/cleanup/reports/{identifier}/actions	cleanup
MAIN	GET	/operations/local-business/cleanup/reports/{identifier}/photos/{document_id}	cleanup
MAIN	POST	/operations/contracts/admin/payments/{payment_id}/verify-external	contract_records
MAIN	GET	/operations/contracts/attachments/{attachment_id}	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/attachments	contract_records
MAIN	GET	/operations/contracts/projects/{pid}/bank-instructions	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/payments	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/payments/{payment_id}/approve	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/payments/{payment_id}/check	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/payments/{payment_id}/order	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/payments/{payment_id}/reported	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/progress	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/progress/{progress_id}/review	contract_records
MAIN	PUT	/operations/contracts/projects/{pid}/public-progress	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/purchases	contract_records
MAIN	POST	/operations/contracts/projects/{pid}/purchases/{purchase_id}/review	contract_records
MAIN	GET	/operations/contracts/projects/{pid}/records	contract_records
MAIN	GET	/operations/contracts/projects/{pid}/report.pdf	contract_records
MAIN	GET	/operations/contracts/public/attachments/{attachment_id}	contract_records
MAIN	GET	/operations/contracts/public/contractors/{uid}/projects	contract_records
MAIN	GET	/operations/contracts/public/projects/{pid}/progress	contract_records
MAIN	GET	/operations/contracts/reports/{report_id}.pdf	contract_records
MAIN	GET	/operations/contractor/agents	contract_work
MAIN	GET	/operations/contractor/hiring/applications	contract_work
MAIN	GET	/operations/contractor/hiring/applications/{aid}	contract_work
MAIN	POST	/operations/contractor/hiring/applications/{aid}/decision	contract_work
MAIN	POST	/operations/contractor/hiring/applications/{aid}/view	contract_work
MAIN	POST	/operations/contractor/hiring/applications/{aid}/withdraw	contract_work
MAIN	GET	/operations/contractor/opportunities	contract_work
MAIN	GET	/operations/contractor/overview	contract_work

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 061–090 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	PUT	/operations/contractor/profile	contract_work
MAIN	POST	/operations/contractor/projects	contract_work
MAIN	POST	/operations/contractor/projects/private	contract_work
MAIN	POST	/operations/contractor/projects/{pid}/apply	contract_work
MAIN	GET	/operations/contractor/projects/{pid}/candidates	contract_work
MAIN	POST	/operations/contractor/projects/{pid}/commands	contract_work
MAIN	PUT	/operations/contractor/projects/{pid}/hiring	contract_work
MAIN	POST	/operations/contractor/projects/{pid}/invitations	contract_work
MAIN	GET	/operations/contractor/published	contract_work
MAIN	GET	/operations/contractor/published/{tid}	contract_work
MAIN	GET	/operations/contractor/sectors	contract_work
MAIN	POST	/operations/contractor/tenders	contract_work
MAIN	POST	/operations/contractor/tenders/{tid}/bid	contract_work
MAIN	POST	/operations/contractor/tenders/{tid}/commands	contract_work
MAIN	GET	/operations/contractor/workspace	contract_work
MAIN	POST	/operations/coupons/check	coupons
MAIN	POST	/operations/coupons/choose	coupons
MAIN	POST	/operations/coupons/launch	coupons
MAIN	GET	/operations/coupons/wallet	coupons
MAIN	POST	/operations/custom-contracts/agent-opportunities	custom_contracts
MAIN	GET	/operations/custom-contracts/public/{qid}/progress	custom_contracts
MAIN	GET	/operations/custom-contracts/queries	custom_contracts
MAIN	POST	/operations/custom-contracts/queries	custom_contracts
MAIN	GET	/operations/custom-contracts/queries/{qid}	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/agent-messages	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/bids	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/commands	custom_contracts
MAIN	GET	/operations/custom-contracts/queries/{qid}/comments	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/comments	custom_contracts
MAIN	GET	/operations/custom-contracts/queries/{qid}/enquiries	custom_contracts

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 091–120 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/custom-contracts/queries/{qid}/enquiries	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/interest	custom_contracts
MAIN	GET	/operations/custom-contracts/queries/{qid}/interests	custom_contracts
MAIN	GET	/operations/custom-contracts/queries/{qid}/messages	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/messages	custom_contracts
MAIN	PUT	/operations/custom-contracts/queries/{qid}/reaction	custom_contracts
MAIN	GET	/operations/custom-contracts/queries/{qid}/updates	custom_contracts
MAIN	POST	/operations/custom-contracts/queries/{qid}/view	custom_contracts
MAIN	POST	/operations/discovery/events	discovery
MAIN	GET	/operations/discovery/feed	discovery
MAIN	GET	/operations/discovery/feed/personal	discovery
MAIN	POST	/operations/discovery/interest	discovery
MAIN	GET	/operations/discovery/preferences	discovery
MAIN	PUT	/operations/discovery/preferences	discovery
MAIN	POST	/operations/discovery/preferences/reset	discovery
MAIN	POST	/operations/discovery/search	discovery
MAIN	GET	/operations/admin/evidence/{evidence_id}/photo	evidence
MAIN	GET	/operations/admin/jobs/{job_id}/evidence	evidence
MAIN	POST	/operations/capture-sessions/{capture_id}/photo	evidence
MAIN	GET	/operations/evidence/{evidence_id}/photo	evidence
MAIN	POST	/operations/jobs/{job_id}/capture-session	evidence
MAIN	GET	/operations/jobs/{job_id}/evidence	evidence
MAIN	POST	/operations/hiring/leaderboard	hire_discovery
MAIN	GET	/operations/hiring/my-weekly-rank	hire_discovery
MAIN	POST	/operations/hiring/recommendations	hire_discovery
MAIN	PUT	/operations/admin/hiring-policy	hiring
MAIN	GET	/operations/hiring/policy	hiring
MAIN	GET	/operations/hiring/requests	hiring
MAIN	POST	/operations/hiring/requests	hiring
MAIN	POST	/operations/hiring/requests/{hid}/decision	hiring

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 121–150 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/hiring/search	hiring
MAIN	GET	/operations/worker/hire-membership	hiring
MAIN	POST	/operations/worker/hire-membership/accept	hiring
MAIN	POST	/operations/worker/hire-membership/payment-check	hiring
MAIN	POST	/operations/worker/hire-membership/payment-order	hiring
MAIN	GET	/operations/admin/home	home_plans
MAIN	POST	/operations/admin/home/issues/{iid}/resolve	home_plans
MAIN	GET	/operations/admin/home/plans/{pid}/brief.pdf	home_plans
MAIN	POST	/operations/admin/home/plans/{pid}/quote	home_plans
MAIN	POST	/operations/admin/home/workers/{wid}/review	home_plans
MAIN	GET	/operations/home/catalog	home_plans
MAIN	POST	/operations/home/jobs/{jid}/log	home_plans
MAIN	GET	/operations/home/plans	home_plans
MAIN	POST	/operations/home/plans	home_plans
MAIN	GET	/operations/home/plans/{pid}/brief.pdf	home_plans
MAIN	POST	/operations/home/plans/{pid}/changes	home_plans
MAIN	POST	/operations/home/plans/{pid}/changes/{cid}	home_plans
MAIN	POST	/operations/home/plans/{pid}/decision	home_plans
MAIN	POST	/operations/home/plans/{pid}/invoices/{index}/check	home_plans
MAIN	POST	/operations/home/plans/{pid}/invoices/{index}/order	home_plans
MAIN	POST	/operations/home/plans/{pid}/issues	home_plans
MAIN	GET	/operations/home/worker-availability	home_plans
MAIN	PUT	/operations/home/worker-availability	home_plans
MAIN	GET	/operations/admin/documents/{document_id}	integrations
MAIN	GET	/operations/admin/finance	integrations
MAIN	POST	/operations/admin/payouts/{job_id}/retry-failed	integrations
MAIN	POST	/operations/admin/settlement-policy	integrations
MAIN	POST	/operations/admin/settlements/{job_id}/calculate	integrations
MAIN	POST	/operations/admin/settlements/{job_id}/release	integrations
MAIN	GET	/operations/admin/verification/{worker_id}	integrations

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 151–180 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/admin/verification/{worker_id}/bank	integrations
MAIN	POST	/operations/admin/verification/{worker_id}/identity	integrations
MAIN	POST	/operations/devices	integrations
MAIN	DELETE	/operations/devices/{device_id}	integrations
MAIN	GET	/operations/integrations/status	integrations
MAIN	POST	/operations/internal/tick	integrations
MAIN	GET	/operations/jobs/{job_id}/payment	integrations
MAIN	POST	/operations/jobs/{job_id}/payment-check	integrations
MAIN	POST	/operations/jobs/{job_id}/payment-order	integrations
MAIN	GET	/operations/jobs/{job_id}/tracking	integrations
MAIN	POST	/operations/jobs/{job_id}/tracking-session	integrations
MAIN	GET	/operations/notifications	integrations
MAIN	POST	/operations/tracking/position	integrations
MAIN	POST	/operations/tracking/stop	integrations
MAIN	POST	/operations/webhooks/razorpay/{channel}	integrations
MAIN	POST	/operations/worker/bonus/withdraw	integrations
MAIN	POST	/operations/worker/documents/{kind}	integrations
MAIN	GET	/operations/worker/earnings	integrations
MAIN	POST	/operations/worker/settlement-policy/accept	integrations
MAIN	GET	/operations/worker/verification	integrations
MAIN	POST	/operations/worker/verification/submit	integrations
MAIN	GET	/operations/addresses	lifecycle
MAIN	DELETE	/operations/addresses/{address_id}	lifecycle
MAIN	PUT	/operations/addresses/{address_id}	lifecycle
MAIN	POST	/operations/admin/jobs/{job_id}/penalty-review	lifecycle
MAIN	POST	/operations/admin/jobs/{job_id}/resolution	lifecycle
MAIN	POST	/operations/admin/resolutions/{resolution_id}/withdraw	lifecycle
MAIN	GET	/operations/admin/review-reports	lifecycle
MAIN	POST	/operations/admin/review-reports/{report_id}/resolve	lifecycle
MAIN	POST	/operations/admin/reward-metrics/{worker_id}/correction	lifecycle

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 181–210 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	GET	/operations/admin/support	lifecycle
MAIN	GET	/operations/admin/support/{case_id}	lifecycle
MAIN	POST	/operations/admin/support/{case_id}/actions	lifecycle
MAIN	POST	/operations/admin/support/{case_id}/messages	lifecycle
MAIN	POST	/operations/jobs/{job_id}/confirm-arrival	lifecycle
MAIN	GET	/operations/jobs/{job_id}/rebook-draft	lifecycle
MAIN	GET	/operations/jobs/{job_id}/receipt	lifecycle
MAIN	GET	/operations/jobs/{job_id}/resolutions	lifecycle
MAIN	POST	/operations/jobs/{job_id}/review/reply	lifecycle
MAIN	POST	/operations/jobs/{job_id}/review/report	lifecycle
MAIN	POST	/operations/jobs/{job_id}/stop-request	lifecycle
MAIN	POST	/operations/notifications/read-all	lifecycle
MAIN	POST	/operations/notifications/{notification_id}/read	lifecycle
MAIN	GET	/operations/profile	lifecycle
MAIN	PUT	/operations/profile	lifecycle
MAIN	POST	/operations/resolutions/{resolution_id}/decision	lifecycle
MAIN	GET	/operations/support	lifecycle
MAIN	POST	/operations/support	lifecycle
MAIN	GET	/operations/support/{case_id}	lifecycle
MAIN	POST	/operations/support/{case_id}/actions	lifecycle
MAIN	POST	/operations/support/{case_id}/messages	lifecycle
MAIN	GET	/operations/local-business/admin/documents/{identifier}	local_business
MAIN	GET	/operations/local-business/admin/reconciliation	local_business
MAIN	POST	/operations/local-business/admin/reconciliation/{kind}/{identifier}	local_business
MAIN	GET	/operations/local-business/admin/reviews	local_business
MAIN	POST	/operations/local-business/admin/{kind}/{identifier}/review	local_business
MAIN	POST	/operations/local-business/documents	local_business
MAIN	GET	/operations/local-business/documents/{identifier}	local_business
MAIN	GET	/operations/local-business/partner	local_business
MAIN	PUT	/operations/local-business/partner	local_business

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 211–240 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	GET	/operations/local-business/policy	local_business
MAIN	POST	/operations/local-business/quotes	local_business
MAIN	GET	/operations/local-business/rides	local_business
MAIN	POST	/operations/local-business/rides	local_business
MAIN	POST	/operations/local-business/rides/{identifier}/commands	local_business
MAIN	GET	/operations/local-business/rides/{identifier}/license	local_business
MAIN	POST	/operations/local-business/rides/{identifier}/payment-check	local_business
MAIN	POST	/operations/local-business/rides/{identifier}/payment-order	local_business
MAIN	POST	/operations/local-business/rides/{identifier}/refund	local_business
MAIN	GET	/operations/local-business/scrap	local_business
MAIN	POST	/operations/local-business/scrap	local_business
MAIN	POST	/operations/local-business/scrap/{identifier}/commands	local_business
MAIN	POST	/operations/local-business/scrap/{identifier}/evaluation	local_business
MAIN	GET	/operations/local-business/scrap/{identifier}/weighing-photo	local_business
MAIN	POST	/operations/local-business/vehicles/search	local_business
MAIN	PUT	/operations/local-business/vehicles/{identifier}	local_business
MAIN	GET	/admin/bookings	main
MAIN	PATCH	/admin/bookings/{booking_id}	main
MAIN	GET	/admin/partner-applications	main
MAIN	POST	/auth/login	main
MAIN	POST	/auth/logout	main
MAIN	GET	/auth/me	main
MAIN	POST	/auth/register	main
MAIN	POST	/auth/session	main
MAIN	GET	/bookings	main
MAIN	POST	/bookings	main
MAIN	POST	/bookings/{booking_id}/cancel	main
MAIN	POST	/bookings/{booking_id}/reschedule	main
MAIN	GET	/bookings/{booking_id}/tracking	main
MAIN	GET	/catalog	main

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 241–270 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/checkout/booking/order	main
MAIN	POST	/checkout/booking/verify	main
MAIN	POST	/checkout/spare/order	main
MAIN	POST	/checkout/spare/verify	main
MAIN	GET	/health	main
MAIN	POST	/partner-applications	main
MAIN	POST	/shop-applications	main
MAIN	GET	/slots	main
MAIN	GET	/spare-orders	main
MAIN	POST	/specialist-payments/order	main
MAIN	POST	/specialist-payments/verify	main
MAIN	GET	/specialists	main
MAIN	GET	/support-tickets	main
MAIN	POST	/technicians	main
MAIN	GET	/operations/admin/market	marketplace
MAIN	POST	/operations/admin/market/{lid}/hide	marketplace
MAIN	PUT	/operations/admin/service-terms/{sid}	marketplace
MAIN	GET	/operations/market/eligibility	marketplace
MAIN	POST	/operations/market/listings	marketplace
MAIN	GET	/operations/market/mine	marketplace
MAIN	POST	/operations/market/photos	marketplace
MAIN	GET	/operations/market/photos/{pid}	marketplace
MAIN	GET	/operations/market/policy	marketplace
MAIN	POST	/operations/market/search	marketplace
MAIN	POST	/operations/market/{lid}/close	marketplace
MAIN	GET	/operations/market/{lid}/contact	marketplace
MAIN	POST	/operations/market/{lid}/payment-check	marketplace
MAIN	POST	/operations/market/{lid}/payment-order	marketplace
MAIN	POST	/operations/market/{lid}/publish-free	marketplace

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 271–300 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/market/{lid}/radius	marketplace
MAIN	POST	/operations/market/{lid}/report	marketplace
MAIN	GET	/operations/service-terms/{sid}	marketplace
MAIN	GET	/operations/local-business/driver-invitations	mobility_journeys
MAIN	POST	/operations/local-business/driver-invitations/{identifier}	mobility_journeys
MAIN	GET	/operations/local-business/guest-tracking/{token}	mobility_journeys
MAIN	POST	/operations/local-business/journeys/{kind}/{identifier}/consent	mobility_journeys
MAIN	POST	/operations/local-business/journeys/{kind}/{identifier}/position	mobility_journeys
MAIN	DELETE	/operations/local-business/journeys/{kind}/{identifier}/share	mobility_journeys
MAIN	POST	/operations/local-business/journeys/{kind}/{identifier}/share	mobility_journeys
MAIN	GET	/operations/local-business/journeys/{kind}/{identifier}/tracking	mobility_journeys
MAIN	POST	/operations/local-business/journeys/{kind}/{identifier}/tracking-session	mobility_journeys
MAIN	GET	/operations/local-business/shared	mobility_journeys
MAIN	POST	/operations/local-business/shared	mobility_journeys
MAIN	POST	/operations/local-business/shared/search	mobility_journeys
MAIN	GET	/operations/local-business/shared/{identifier}/arrival	mobility_journeys
MAIN	POST	/operations/local-business/shared/{identifier}/arrival-position	mobility_journeys
MAIN	POST	/operations/local-business/shared/{identifier}/commands	mobility_journeys
MAIN	POST	/operations/local-business/shared/{identifier}/join	mobility_journeys
MAIN	GET	/operations/local-business/transport/nearby	mobility_journeys
MAIN	PUT	/operations/local-business/vehicles/{identifier}/driver	mobility_journeys
MAIN	POST	/operations/local-business/vehicles/{identifier}/telemetry	mobility_journeys
MAIN	POST	/operations/local-business/vehicles/{identifier}/tracker	mobility_journeys
MAIN	GET	/operations/admin/audit	operations
MAIN	POST	/operations/admin/inventory	operations
MAIN	GET	/operations/admin/jobs	operations
MAIN	POST	/operations/admin/shops	operations
MAIN	POST	/operations/admin/tick	operations
MAIN	GET	/operations/admin/workers	operations
MAIN	POST	/operations/admin/workers/{worker_id}/review	operations

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 301–330 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/bookings	operations
MAIN	GET	/operations/inventory	operations
MAIN	GET	/operations/jobs	operations
MAIN	GET	/operations/jobs/{job_id}	operations
MAIN	POST	/operations/jobs/{job_id}/commands	operations
MAIN	GET	/operations/professionals	operations
MAIN	POST	/operations/professionals/search	operations
MAIN	GET	/operations/shop/orders	operations
MAIN	POST	/operations/shop/orders/{job_id}/handover	operations
MAIN	POST	/operations/worker/availability	operations
MAIN	GET	/operations/worker/me	operations
MAIN	POST	/operations/worker/onboarding	operations
MAIN	POST	/operations/opportunities/open	opportunities
MAIN	GET	/operations/opportunities/order	opportunities
MAIN	POST	/operations/admin/contractors/{wid}/review	partner_program
MAIN	PUT	/operations/admin/partner-policy	partner_program
MAIN	GET	/operations/admin/partner-program	partner_program
MAIN	GET	/operations/partner-policy	partner_program
MAIN	POST	/operations/worker/contractor-application	partner_program
MAIN	GET	/operations/worker/partner-program	partner_program
MAIN	POST	/operations/worker/partner-program/agree	partner_program
MAIN	POST	/operations/jobs/{job_id}/parts/{quote_id}/payment-check	parts_payments
MAIN	POST	/operations/jobs/{job_id}/parts/{quote_id}/payment-order	parts_payments
MAIN	GET	/operations/admin/procurement	procurement
MAIN	POST	/operations/admin/purchase-orders/{oid}/assessment	procurement
MAIN	GET	/operations/jobs/{jid}/arrival-code	procurement
MAIN	GET	/operations/jobs/{jid}/procurement	procurement
MAIN	POST	/operations/jobs/{jid}/purchase-orders/{oid}/verify-pickup	procurement
MAIN	POST	/operations/jobs/{jid}/verify-arrival	procurement
MAIN	GET	/operations/jobs/{job_id}/market	procurement

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 331–360 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	GET	/operations/shop/inventory	procurement
MAIN	PUT	/operations/shop/inventory/{product_id}	procurement
MAIN	GET	/operations/shop/payables	procurement
MAIN	GET	/operations/shop/purchase-orders	procurement
MAIN	POST	/operations/shop/purchase-orders/{oid}/decision	procurement
MAIN	GET	/operations/shop/purchase-orders/{oid}/otp	procurement
MAIN	GET	/operations/worker/home-offers	professional_offers
MAIN	POST	/operations/worker/home-offers	professional_offers
MAIN	DELETE	/operations/worker/home-offers/{offer_id}	professional_offers
MAIN	PUT	/operations/admin/campaign-controls	promotions
MAIN	POST	/operations/admin/campaign-media	promotions
MAIN	GET	/operations/admin/campaign-media/{mid}	promotions
MAIN	GET	/operations/admin/campaigns	promotions
MAIN	PUT	/operations/admin/campaigns/{cid}	promotions
MAIN	GET	/operations/campaign-media/{mid}	promotions
MAIN	POST	/operations/campaigns/feed	promotions
MAIN	POST	/operations/campaigns/feed/personal	promotions
MAIN	GET	/operations/campaigns/preferences	promotions
MAIN	PUT	/operations/campaigns/preferences	promotions
MAIN	POST	/operations/campaigns/quote	promotions
MAIN	POST	/operations/campaigns/select	promotions
MAIN	DELETE	/operations/campaigns/selection	promotions
MAIN	GET	/operations/campaigns/selection	promotions
MAIN	POST	/operations/campaigns/{cid}/events	promotions
MAIN	POST	/operations/admin/jobs/{job_id}/refund	refunds
MAIN	GET	/operations/admin/refunds	refunds
MAIN	POST	/operations/admin/refunds/{refund_id}/reconcile	refunds
MAIN	GET	/operations/admin/rentals	rentals
MAIN	POST	/operations/admin/rentals/{rid}/resolve	rentals
MAIN	GET	/operations/rentals	rentals

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 361–390 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/rentals	rentals
MAIN	GET	/operations/rentals/catalog	rentals
MAIN	GET	/operations/rentals/{rid}/code	rentals
MAIN	POST	/operations/rentals/{rid}/commands	rentals
MAIN	POST	/operations/rentals/{rid}/payment-check	rentals
MAIN	POST	/operations/rentals/{rid}/payment-order	rentals
MAIN	POST	/operations/rentals/{rid}/refund-deposit	rentals
MAIN	GET	/operations/shop/rental-inventory	rentals
MAIN	PUT	/operations/shop/rental-inventory/{pid}	rentals
MAIN	PUT	/repaidians/activity/{action}/{publication_id}	repaidians
MAIN	GET	/repaidians/admin/reports	repaidians
MAIN	POST	/repaidians/admin/reports/{report_id}/resolve	repaidians
MAIN	GET	/repaidians/bids/{tender_id}	repaidians
MAIN	POST	/repaidians/bids/{tender_id}	repaidians
MAIN	GET	/repaidians/blocks	repaidians
MAIN	PUT	/repaidians/blocks/{member_id}	repaidians
MAIN	GET	/repaidians/comments/{publication_id}	repaidians
MAIN	POST	/repaidians/comments/{publication_id}	repaidians
MAIN	GET	/repaidians/feed	repaidians
MAIN	PUT	/repaidians/follow/{member_id}	repaidians
MAIN	POST	/repaidians/media	repaidians
MAIN	GET	/repaidians/media/{asset_id}	repaidians
MAIN	GET	/repaidians/members	repaidians
MAIN	GET	/repaidians/members/{member_id}	repaidians
MAIN	GET	/repaidians/messages/{recipient_id}	repaidians
MAIN	POST	/repaidians/messages/{recipient_id}	repaidians
MAIN	GET	/repaidians/notifications	repaidians
MAIN	POST	/repaidians/notifications/read	repaidians
MAIN	PATCH	/repaidians/profile	repaidians
MAIN	POST	/repaidians/publications	repaidians

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 391–420 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	DELETE	/repaidians/publications/{publication_id}	repaidians
MAIN	GET	/repaidians/publications/{publication_id}	repaidians
MAIN	POST	/repaidians/reports	repaidians
MAIN	GET	/repaidians/settings	repaidians
MAIN	PATCH	/repaidians/settings	repaidians
MAIN	GET	/repaidians/state	repaidians
MAIN	GET	/repaidians/tenders/{tender_id}/contact	repaidians
MAIN	GET	/repaidians/threads	repaidians
MAIN	POST	/repaidians/usage	repaidians
MAIN	GET	/repaidians/subscription	repaidians_billing
MAIN	POST	/repaidians/subscription/check	repaidians_billing
MAIN	POST	/repaidians/subscription/order	repaidians_billing
MAIN	POST	/repaidians/webhooks/razorpay	repaidians_billing
MAIN	POST	/repaidians/admin/live/{identifier}/end	repaidians_live
MAIN	GET	/repaidians/live	repaidians_live
MAIN	POST	/repaidians/live	repaidians_live
MAIN	GET	/repaidians/live/status	repaidians_live
MAIN	POST	/repaidians/live/{identifier}/activate	repaidians_live
MAIN	POST	/repaidians/live/{identifier}/end	repaidians_live
MAIN	POST	/repaidians/live/{identifier}/heartbeat	repaidians_live
MAIN	POST	/repaidians/live/{identifier}/watch	repaidians_live
MAIN	POST	/repaidians/milestones/preview	repaidians_milestones
MAIN	GET	/repaidians/network/connections	repaidians_network
MAIN	GET	/repaidians/network/members/{member_id}/connection	repaidians_network
MAIN	POST	/repaidians/network/members/{member_id}/connection	repaidians_network
MAIN	GET	/repaidians/network/members/{member_id}/endorsements	repaidians_network
MAIN	PUT	/repaidians/network/members/{member_id}/endorsements	repaidians_network
MAIN	GET	/repaidians/network/members/{member_id}/profile	repaidians_network
MAIN	GET	/repaidians/network/members/{member_id}/recommendations	repaidians_network
MAIN	POST	/repaidians/network/members/{member_id}/recommendations	repaidians_network

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 421–450 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	GET	/repaidians/network/preferences	repaidians_network
MAIN	PATCH	/repaidians/network/preferences	repaidians_network
MAIN	GET	/repaidians/network/profile	repaidians_network
MAIN	PATCH	/repaidians/network/profile	repaidians_network
MAIN	GET	/repaidians/network/recommendations	repaidians_network
MAIN	PUT	/repaidians/network/recommendations/{recommendation_id}	repaidians_network
MAIN	GET	/operations/market/listings/{key}	repaidians_opportunities
MAIN	GET	/repaidians/opportunities	repaidians_opportunities
MAIN	GET	/repaidians/opportunities/{source}/{key}	repaidians_opportunities
MAIN	PUT	/repaidians/opportunities/{source}/{key}/saved	repaidians_opportunities
MAIN	GET	/repaidians/companies	repaidians_work
MAIN	GET	/repaidians/companies/{cid}	repaidians_work
MAIN	GET	/repaidians/placements/{pid}	repaidians_work
MAIN	POST	/repaidians/placements/{pid}/congratulate	repaidians_work
MAIN	POST	/repaidians/work/behavior	repaidians_work
MAIN	GET	/repaidians/work/contracts	repaidians_work
MAIN	GET	/repaidians/work/contracts/{tid}/watch	repaidians_work
MAIN	PUT	/repaidians/work/contracts/{tid}/watch	repaidians_work
MAIN	GET	/repaidians/work/interests	repaidians_work
MAIN	GET	/repaidians/work/jobs	repaidians_work
MAIN	GET	/repaidians/work/jobs/{jid}	repaidians_work
MAIN	GET	/repaidians/work/preferences	repaidians_work
MAIN	PATCH	/repaidians/work/preferences	repaidians_work
MAIN	GET	/operations/retail/orders	retail_checkout
MAIN	POST	/operations/retail/orders	retail_checkout
MAIN	POST	/operations/retail/orders/{oid}/payment	retail_checkout
MAIN	POST	/operations/retail/orders/{oid}/received	retail_checkout
MAIN	POST	/operations/retail/orders/{oid}/verify	retail_checkout
MAIN	POST	/operations/retail/quote	retail_checkout
MAIN	GET	/operations/retail/shop-orders	retail_checkout

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 451–480 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	GET	/operations/admin/rewards	rewards
MAIN	POST	/operations/admin/rewards/{worker_id}/review	rewards
MAIN	GET	/operations/worker/wallet	rewards
MAIN	POST	/operations/worker/wallet/review-request	rewards
MAIN	GET	/operations/admin/shop-payouts	shop_payouts
MAIN	POST	/operations/admin/shop-payouts/{bid}/reconcile	shop_payouts
MAIN	POST	/operations/admin/shops/{sid}/bank	shop_payouts
MAIN	GET	/operations/shop/prime	shop_prime
MAIN	POST	/operations/shop/prime/check	shop_prime
MAIN	POST	/operations/shop/prime/order	shop_prime
MAIN	GET	/operations/admin/shops	shops
MAIN	POST	/operations/admin/shops/{shop_id}/review	shops
MAIN	POST	/operations/shop/application	shops
MAIN	GET	/operations/shop/me	shops
MAIN	GET	/operations/cart/orders	tenders
MAIN	POST	/operations/cart/orders	tenders
MAIN	GET	/operations/network/admin/reports	worker_network
MAIN	POST	/operations/network/admin/reports/{rid}	worker_network
MAIN	DELETE	/operations/network/blocks/{wid}	worker_network
MAIN	POST	/operations/network/blocks/{wid}	worker_network
MAIN	GET	/operations/network/connections	worker_network
MAIN	POST	/operations/network/connections/{wid}	worker_network
MAIN	GET	/operations/network/groups	worker_network
MAIN	POST	/operations/network/groups	worker_network
MAIN	POST	/operations/network/groups/{gid}/join	worker_network
MAIN	POST	/operations/network/groups/{gid}/leave	worker_network
MAIN	GET	/operations/network/groups/{gid}/posts	worker_network
MAIN	POST	/operations/network/groups/{gid}/posts	worker_network
MAIN	GET	/operations/network/inbox	worker_network
MAIN	GET	/operations/network/messages/{wid}	worker_network

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 481–510 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
MAIN	POST	/operations/network/messages/{wid}	worker_network
MAIN	GET	/operations/network/people/{wid}	worker_network
MAIN	GET	/operations/network/plan	worker_network
MAIN	POST	/operations/network/plan/check	worker_network
MAIN	POST	/operations/network/plan/order	worker_network
MAIN	POST	/operations/network/posts/{pid}/hide	worker_network
MAIN	POST	/operations/network/posts/{pid}/replies	worker_network
MAIN	POST	/operations/network/reports	worker_network
MAIN	GET	/operations/network/search	worker_network
MAIN	GET	/operations/professional-media/{mid}	worker_records
MAIN	GET	/operations/professionals/{wid}	worker_records
MAIN	GET	/operations/worker/calendar	worker_records
MAIN	POST	/operations/worker/profile-photo/{kind}	worker_records
MAIN	GET	/operations/worker/profile-progress	worker_records
MAIN	GET	/operations/worker/public-profile	worker_records
MAIN	PUT	/operations/worker/public-profile	worker_records
MAIN	GET	/operations/worker/records	worker_records
MAIN	GET	/operations/worker/tasks/{jid}/report	worker_records
MAIN	GET	/operations/worker/tasks/{jid}/report.pdf	worker_records
MAIN	GET	/operations/admin/audit-history	workspace
MAIN	GET	/operations/admin/onboarding-overview	workspace
MAIN	POST	/operations/admin/support/{case_id}/claim	workspace
MAIN	POST	/operations/discovery/leaderboard	workspace
MAIN	GET	/operations/media/{mid}	workspace
MAIN	GET	/operations/products/catalog	workspace
MAIN	POST	/operations/shop/photos	workspace
MAIN	POST	/operations/worker/selfie-session	workspace
MAIN	POST	/operations/worker/selfies/{sid}	workspace
WORK	GET	/repaidians/companies	repaidians_work
WORK	GET	/repaidians/companies/{cid}	repaidians_work

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.

API catalog / 511–531 of 531

Code-derived HTTP method + path declarations. Same path under two runtimes is intentional; auth and data access are enforced by the handler.

RUNTIME	METHOD	API PATH	SOURCE MODULE
WORK	GET	/repaidians/placements/{pid}	repaidians_work
WORK	POST	/repaidians/placements/{pid}/congratulate	repaidians_work
WORK	POST	/repaidians/work/behavior	repaidians_work
WORK	GET	/repaidians/work/contracts	repaidians_work
WORK	GET	/repaidians/work/contracts/{tid}/watch	repaidians_work
WORK	PUT	/repaidians/work/contracts/{tid}/watch	repaidians_work
WORK	GET	/repaidians/work/interests	repaidians_work
WORK	GET	/repaidians/work/jobs	repaidians_work
WORK	GET	/repaidians/work/jobs/{jid}	repaidians_work
WORK	GET	/repaidians/work/preferences	repaidians_work
WORK	PATCH	/repaidians/work/preferences	repaidians_work
WORK	GET	/health	work_service
WORK	GET	/repaidians/work/health	work_service
WORKER	GET	/health	work_worker
WORKER	POST	/internal/work/dispatch	work_worker
CONSOLE	GET	/engineering-api/blueprint	engineering.server.app
CONSOLE	GET	/engineering-api/config	engineering.server.app
CONSOLE	GET	/engineering-api/snapshot	engineering.server.app
CONSOLE	GET	/engineering-api/source	engineering.server.app
CONSOLE	GET	/engineering-api/stream	engineering.server.app
CONSOLE	GET	/health	engineering.server.app

Route inventory generated from FastAPI registrations in isolated SQLite mode. It is not an authorization audit or a guarantee that a route exists on the currently deployed revision.