

Hello World Template version: 1.0

[[doc-title]]

[[doc-type]]

Version: [[doc-version]]

Release Date: [[doc-release-date]]



#### 1 Markdown2

#### 1.1 Formatted Text Examples

Below is an illustration of the Format toolbar used to format text:

Here are some examples of the effects different options have on text:

#### 1.1.1 Font buttons:

As well as the standard Font drop down box showing a list of all the fonts on your system and the **Point** size box that allows you to set the font size, two shortcut buttons have been added that allow you to increase the selected text or group of text objects at the press of a button: A Will increase the font size by 2 points every time you press the button. A Will decrease the font size by 2 points every time you press the button.

#### 1.1.2 Text Format:

The standard text format options are also available for text i.e. bold, italic, underline and

outline: B Text I Text u Text a Text

Note: You can combine any of these formats together, as in the last example above which is a combination of the bold, underline and outline formats.

#### 1.1.3 Text Justification:

- $\checkmark$  Text can be aligned to the
  - left,
  - 2. right,
  - 3. centre
- ✓ or one of the three full justifications: Full Justification, Density Justification and Aspect Justification. Note: The Full justification spreads the words across the page but does not change the size of them. The Density Justification also spreads the words and does not change their size but puts spaces between the characters in a word. The Aspect Justification spreads the words but stretches the words to fill the space as well. The Density and Aspect methods can provide some visually interesting effects.

## Go back to the top

## 1.2 Useful markdown links:

- ✓ Link 1
  - 1. This is link 1



- ✓ Link 2
  - 1. This is link 2
- ✓ Link 3
  - 1. This is link 3
    - Link 4
      - This is link 4 ordered under link 3

## 1.2.1 I just have to store some code here, if you don't mind

## 1.2.1.1 I'll put it here

LoGiC iS rEaL !!!

```
if(a == 0){
    a = 0;
}
```

## 1.2.1.2 And also here

# It's getting better

```
if (false == true) {
   // log some message
}
```

## 1.2.1.3 You know the process...

I'll just assert and finish this...

```
public void justAssert(){
    boolean checkTrue = true;
    Assert.assertTrue(checkTrue);
}
//let me return true he he
public boolean trueStatement(){
    return true;
}
```

yo test edit



## 2 Markdown1

#### 2.1 PUZZLES CLOUD MARKDOWN FILE HEADING 1

## 2.1.1 Welcome to the puzzles cloud md file HEADING 2

## 2.1.1.1 Let's start with stupid jokes HEADING 3

## 2.1.1.1.1 Let me tell you stupid joke on German: HEADING4

- ✓ "Hey Philipp, wie war denn der Urlaub?"
- ✓ "Gräßlich! Im Hotel hatte ich Zimmernummer hundert. Und vom Türschild ist die Eins abgefallen!"

# ÜÜÜÜÜÜ- that was stupid

- 2.1.1.1.2 Let's switch to the Czech language HEADING 4
  - ✓ "Co rłńóobi trakłńótośźr u fśźryśźżzjera?"
  - Warćękocze. ąćęłńóśźż!!!! Just kidding, that was Poland language u fool, let's switch to the Czech for real

# 2.1.1.1.2.1 Real Czech language HEADING 5 ýžáčďéěíňóřšťúů

- ✓ Jak říkáte albínskému muži z Prahy?
- ✓ Prázdný Čech.

# 2.2 Longest Serbian word he he HEADING 1

Here you go: АБВГДЪЕЖЗИЈКЛЉМНЊОПРСТУФХЦЧЏШ

## 2.2.1 Serbian literature HEADING 2




Весела песма Из школе се враћа Стева сав весео путем пева. Уз пут среће бака Јелу: "Ћирилицу знадем целу!" Кући дође, па са врата: "Ћирилицу знадем, тата!" "Све сад, мајко, читам сам, јер од данас и "ш" знам!" Оком тражи и сестрицу: "Сејо, знадем ћирилицу!" Потом оде до икона, па начини три поклона. Хоће Стева да се јави и захвали Светом Сави. Свети Сава Стеву чује, па се скупа с њим радује: "Српство ми је од сад јаче за још једно вредно ђаче!"

## 2.3 It's enough, lets start with some smart things HEADING 1

## 1. PLAY THIS VIDEO AND THANKS ME LATER!

## HIT THAT PLAY BUTTON

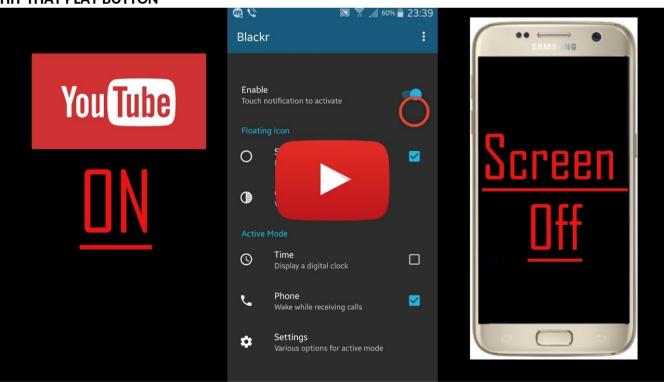

Yep, it's a picture, fool... lol Here you go, CLICK IT:



edit test 2 tests



#### 3 Markdown3

## 3.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 3.1.1 TODO

#### 3.1.1.1 TODO version 1.0

- $\checkmark$  [x] Test environment and credentials
- √ [x] specify voucher content fields
- √ [x] specify voucher pricing fields
- $\checkmark$  [x] specify payment method fields

## 3.1.1.2 TODO version 1.0-next

- ✓ [] refactor entities and apply relationships
- √ [] provide full resource schemas
- ✓ [] enforce validation of resource schemas

## 3.1.2 Test environment and credentials

## TODO

Username	Password	Description
test@test.org	test	just protected
test@gmail.com	test	just testing
testtest	test	qa

## 3.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

As of writing no hosting solution has been chosen yet. Therefor the actual API which is used to configure the load-balancers remains unspecified for now.

All Edge Service Instances **must** register themselves on the registry on startup and unregister on shutdown.



## 3.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

See [Message Relay] for more information.

## 3.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 3.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.

All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

## 3.1.6.1 Login

3.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNIY3JI dC1wYXNzcGhyYXNI

POST /api/rest/v1/auth/login HTTP/1.1
Authorization: Basic \${ICP\_SHOP\_DIGEST}
Accept: application/vnd.api+json

## 3.1.6.1.2 Login response

HTTP/1.1 201 Created

Content-Type: application/vnd.api+json



## 3.1.6.1.3 Cookies

Name		Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	N	MmQ5ZjkxO GltMTM4My0 0M2E0LWI1M DYtYmUwZjY wMzJiZDY5		I	Seassion	true	false

# 3.1.6.2 Logout

## 3.1.6.2.1 Logout request

Variables	Description	Example

POST /api/rest/v1/auth/logout HTTP/1.1

Authorization: No Auth

Accept: application/vnd.api+json

## 3.1.6.2.2 Logout response

HTTP/1.1 204 No Content

## 3.1.6.3 Voucher list

See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.



# 3.1.6.3.1 Voucher list request

GET /api/rest/v1/vouchers HTTP/1.1

Authorization: No Auth

Accept: application/vnd.api+json

## 3.1.6.3.2 Voucher list response

HTTP/1.1 200 OK

Content-Type: application/vnd.api+json



```
"data":[
  {
      "id": "f634f09f-9a06-4297-a326-0d703938b702",
      "type": "voucher",
      "attributes":{
         "code": "LEBALLINNL10",
         "currency": "EUR",
         "ean-code": "8717472242211",
         "encryption-type":0,
         "kind":0,
         "name": "Lebara All-in NL 10 EUR",
         "provider-code":"LEBARA",
         "provider-name": "Lebara",
         "short-name": "All-in NL 10",
         "value":10.0,
         "price-total":11.99,
         "price-tax":0.00,
         "price-fee":1.99,
         "payment-methods": {
            "wirecard-creditcard":{
               "name": "Credit Card",
               "provider-name":"Wirecard",
               "image-url":"https://wirecard.com/logo.png"
            "wirecard-paypal":{
               "name":"PayPal",
               "provider-name":"Wirecard"
            }
         }
     }
  },
      "id": "a3473e20-19b4-44fe-8389-67a511854759",
      "type":"voucher",
      "attributes":{
         "code": "LEBALLINNL15",
         "currency":"EUR",
         "ean-code": "8717472242129",
         "encryption-type":0,
         "kind":0,
         "name":"Lebara All-in NL 15 EUR",
         "provider-code": "LEBARA",
         "provider-name": "Lebara",
         "short-name": "All-in NL 15",
         "value":15.0,
         "price-total":16.99,
         "price-tax":0.00,
         "price-fee":1.99,
         "payment-methods":[
            "wirecard-creditcard":{
               "name": "Credit Card",
               "provider-name": "Wirecard",
               "image-url": "https://wirecard.com/logo.png"
            "wirecard-paypal":{
```



# 3.1.6.4 Voucher detail



## 3.1.6.4.1 Voucher detail request

```
GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
```

3.1.6.4.2 Voucher detail response

```
HTTP/1.1 200 OK
Content-Type: application/vnd.api+json
{
    "data":{
       "id": "f634f09f-9a06-4297-a326-0d703938b702",
       "type": "voucher",
       "attributes":{
          "code": "LEBALLINNL10",
          "currency": "EUR",
          "ean-code": "8717472242211",
          "encryption-type":0,
          "kind":0,
          "name": "Lebara All-in NL 10 EUR",
          "provider-code":"LEBARA",
          "provider-name": "Lebara",
          "short-name": "All-in NL 10",
          "value":10.0,
          "price-total":11.99,
          "price-tax":0.00,
          "price-fee":1.99,
          "payment-methods": {
             "wirecard-creditcard":{
                "name": "Credit Card",
                "provider-name": "Wirecard",
                "image-url":"https://wirecard.com/logo.png"
             "wirecard-paypal":{
                "name": "PayPal",
                "provider-name": "Wirecard"
          }
       }
    }
}
```

## 3.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

```
3.1.6.5.1 Voucher order request
```

```
| Variables | Description | Example | | -------
```



```
POST /api/rest/v1/voucher-orders HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
{
   "data": {
    "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c",
     "type": "voucher-order",
     "attributes": {
       "voucher-code": "VODADE15"
       "payment-method": "Wirecard VISA",
       "notification-type": "email",
       "notification-target": "me@my-email.com",
       "provider-text-url": "https://provider.texts",
       "order-success-redirect-url": "/success",
       "order-failed-redirect-url": "failed",
       "order-canceled-redirect-url": "/cancel"
     }
  }
}
```

field name	type	constrains	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968- 4b60-aa5b- 62fe7fdd905c
type	string	n/a	type of request, must be "voucher- order", "voucher- order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"



field name	type	constrains	description	example
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed- redirect-url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

3.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created
Content-Type: application/vnd.api+json
{
   "data": {
    "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c",
     "type": "voucher-order",
     "attributes": {
       "notification-status": "pending",
       "confirmation-status": "pending",
       "notification-type": "email",
       "notification-target": "me@my-email.com",
       "payment-provider": "wirecard",
       "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-
h0mLD2zDgf26ptjxSNRiKFiIlM",
       "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc",
       "payment-status": "pending",
       "payment-method": "creditcard",
       "voucher-code": "LEBALLINNL10",
       "voucher-currency": "EUR",
       "voucher-value": 10.0
       "voucher-status": "pending",
       "order-price-total": 11.99,
       "order-tax-total": 0.00,
       "order-fee-total": 0.99,
       "order-status": "pending",
       "serial-number": "1234",
       "confirmation-date": "0",
       "batch-number": "1234"
    }
  }
}
```

#### 3.1.6.6 Voucher order detail



## 3.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
```

3.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK
Content-Type: application/vnd.api+json
   "data": {
     "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c",
     "type": "voucher-order",
     "attributes": {
       "notification-status": "pending",
       "confirmation-status": "pending",
       "notification-type": "email",
       "notification-target": "me@my-email.com",
       "payment-provider": "wirecard",
       "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-
h0mLD2zDgf26ptjxSNRiKFiIlM",
       "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc",
       "payment-status": "pending",
       "payment-method": "creditcard",
       "voucher-code": "LEBALLINNL10",
       "voucher-currency": "EUR",
       "voucher-value": 10.0
       "voucher-status": "pending",
       "order-price-total": 11.99,
       "order-tax-total": 0.00,
       "order-fee-total": 1.99,
       "order-status": "pending",
       "serial-number": "1234",
       "confirmation-date": "1611313953175"
    }
  }
}
```

## 3.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

## 3.1.6.7.1 Provider Text request

Variables Description Example



```
GET /api/rest/v1/provider-texts/ HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json

GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
```

## 3.1.6.7.2 Provider Text response

```
HTTP/1.1 201 Created
Content-Type: application/vnd.api+json
{
   "data": [
       "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661",
       "type": "voucher-text",
       "attributes": {
         "provider-code": "ABOUTYOU",
         "kind": "title",
         "title": "Produktname",
         "body": "About You-Geschenkkarte"
       }
     },
       "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81",
       "type": "voucher-text",
       "attributes": {
         "provider-code": "ABOUTYOU",
         "kind": "subtitle",
         "title": "Slogan",
         "body": "Hol Dir per E-Mail eine About You-Geschenkkarte."
     }
   ]
}
```

#### 3.1.6.8 Content

See [Content Service] for more information on the source of these fields.

## 3.1.6.8.1 Content request

Variables Description Example



```
GET /api/rest/v1/content/i18next.json HTTP/1.1
Authorization: No Auth
Accept: application/json
```

## 3.1.6.8.2 Content response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
   "en": {
     "world.hello": "Hello, World!",
     "example.text": "Lorem ipsum dolor sit amet...",
     "button.cancel": "Cancel",
     "radio.options": {
      "option-1": "Selection 1",
       "option-2": "Selection 2",
     }
   },
   "de": {
     "world.hello": "Hallo, Welt!",
     "example.text": "Lorem ipsum dolor sit amet...",
     "button.cancel": "Abbrechen"
     "radio.options": {
       "option-1": "Auswahl 1",
       "option-2": "Auswahl 2",
   }
}
```

## 3.1.6.9 Verification

See for more information on the source of these fields.



3.1.6.9.1 Verification request by phone number

```
POST /api/rest/v1//auth/phone-number-verification HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json

{
   "data": {
      "id": "38f4dfef-9baa-4302-831f-e41df4ce4084",
      "type": "phone-number-verification",
      "attributes": {
            "phone-number": "+381691994655",
            "sms-confirmation-code": "716569"
            }
        }
    }
}
```

3.1.6.9.2 Verification by phone number response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "data": {
        "type": "phone-number-verification",
        "attributes": {
            "phone-number": "+381691994655",
            "ok": false,
            "remaining-number-of-attempts": 4,
            "remaining-expiration-time": 0
        }
    }
}
```

3.1.6.9.3 Verification request by sms

3.1.6.9.4 Verification by sms number response

```
HTTP/1.1 200 OK
Content-Type: application/vnd.api+json
```



```
{
  "data": {
    "type": "sms-verification-code",
    "attributes": {
        "phone-number": "+381691994655",
        "ok": true,
        "remaining-number-of-attempts": 2,
        "remaining-delay-time": 20,
        "remaining-expiration-time": 1800
    }
}
```

#### 3.1.6.10 Cookies

## 3.1.6.10.1 Cookies request

```
POST /api/rest/v1/cookies HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
   "data": [
       "type": "cookie",
       "id": "shopId",
       "attributes": {
         "name": "shopId",
         "value": "1234"
       }
     },
       "type": "cookie",
       "id": "ns_dev_id",
       "attributes": {
         "name": "ns_dev_id",
         "value": "device_id"
       }
     }
   ]
}
```

## 3.1.6.10.2 Cookies response

```
HTTP/1.1 200 OK
```

#### 3.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.



## 3.1.6.11.1 Documentation request

```
GET /api/rest/v1/vouchers?schema HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
```

## 3.1.6.11.2 Documentation response

Complete Response is omitted because of size, here is just a part:

```
HTTP/1.1 200 OK
   "required": [
     "createdDate",
     "notificationStatus",
     "notificationTarget",
     "notificationType",
     "orderFeeTotal",
     "orderPriceTotal",
     "orderStatus",
     "orderTaxTotal",
     "paymentMethod",
     "paymentProvider",
     "paymentStatus",
     "shortId",
     "voucherCode",
     "voucherCurrency",
     "voucherStatus",
     "voucherValue"
   ]
}
```

#### 3.1.6.12 i18 internationalization

✓ Retrieves i18next json based on requested language

## 3.1.6.12.1 i18 request

```
GET api/rest/v1/content/i18next.json/de HTTP/1.1
Authorization: No Auth
Accept: application/vnd.api+json
```



## 4 Markdown4

#### 4.1 From today's featured article



Figure 1 Lionel Matthews

Lionel Matthews (15 August 1912 -- 2 March 1944) was an Australian Army officer during World War II who was posthumously awarded the George Cross, the highest non-combat award for heroism for members of the Australian armed forces at the time. Matthews served in the 27th Brigade during the Malayan campaign, and at the surrender of Singapore in 1942 became a prisoner of war (POW). He was awarded the Military Cross for courage, energy and ability under fire during this fighting.

#### 4.1.1 Did you know ...

- ✓ that in 2017 you could finally have breakfast at Tiffany's (pictured)?
- ✓ that the British mycologist Denis Garrett, "one of the last 'string and sealing wax'
  scientists", once bought plastic lavatory cisterns for his laboratory to use in
  experiments?
- ✓ that sand in the stomach of the ocean surgeon helps to grind up its food?

#### 4.1.1.1 In the news

- 1. More than 300 girls are kidnapped from a secondary school by armed bandits in Zamfara, Nigeria.
- 2. In tennis, Naomi Osaka wins the women's singles and Novak Djokovic wins the men's singles at the Australian Open (both winners pictured).

## 4.1.1.1.1 On this day

## 4.1.1.1.1.1 March 2

**1444** -- The League of Lezhë, an alliance of regional chieftains, was established in Venetian Albania with Skanderbeg as its commander.

**1865** -- New Zealand Wars: Carl Sylvius Völkner (pictured), a Protestant missionary, was killed by Hauhau militants in Ōpōtiki for working as an agent for George Grey, Governor-General of New Zealand.

**1937** -- The Steel Workers Organizing Committee, precursor to the United Steel Workers of America, had a major success when it signed a collective-bargaining agreement with U.S.



Steel.

1962 -- Led by General Ne Win, the Burmese military seized power in a coup d'état.

aaaaaaaaaaaaaaa

# 4.1.1.1.1.1 Today's featured picture

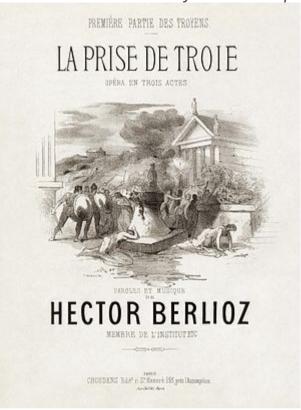


Figure 2 Today's featured picture

## 4.2 Armed conflicts and attacks

- ✓ Zamfara kidnapping
  - 1. All 279 abducted schoolgirls from a boarding school in Zamfara State, Nigeria, are released by their armed kidnappers. (Reuters)

## 4.2.1 Health and environment

- ✓ COVID-19 pandemic
  - 1. COVID-19 pandemic in Asia
    - COVID-19 pandemic in Indonesia
      - <u>Indonesia</u> reports their first two cases of <u>Lineage B.1.1.7</u>
         variant first detected in the United Kingdom. (Liputan6.com)
    - COVID-19 pandemic in Iraq
      - Iraq receives 50,000 doses of Sinopharm vaccines as the country officially begins its vaccination campaign. (Asharq Al-Awsat)
    - COVID-19 pandemic in Mongolia



- Mongolia surpasses 3,000 cases of COVID-19. (Montsame)
- COVID-19 pandemic in the Philippines
  - The Philippines reports their first six cases of 501.V2 variant first detected in South Africa. (GMA News)



#### 5 Markdown5

## 5.1 Пандемија ковида 19

## 5.1.1 Мере изолације у Кини

## 5.1.1.1 Провинција Хубеи

Град	Датум карантина	Популација
Вухан	23. јануар 2020	11 081 000
Хуанганг	23. јануар 2020	6 630 000
E3X0	23. јануар 2020	1 007 700
Шиби	24. јануар 2020	490 900
Јингзу	24. јануар 2020	5 590 200
Зиијанг	24. јануар 2020	497 600
<u> Јичанг</u>	24. јануар 2020	4 135 900

Власти такође наређују затварање јавних забавних места попут биоскопа, позоришта, па чак и сајбер кафеа. Свим становницима је наређено да не напуштају град осим ако им власти не дозволе. Здравствена управа у Вухану обавезује ношење маске на јавним местима. 25. јануара, кинеске власти проширују карантинску зону на готово читаву провинцију Хубеиа.

Власти такође наређују затварање јавних забавних места попут биоскопа, позоришта, па чак и сајбер кафеа. Свим становницима је наређено да не напуштају град осим ако им власти не дозволе. Здравствена управа у Вухану обавезује ношење маске на јавним местима. 25. јануара, кинеске власти проширују карантинску зону на готово читаву провинцију Хубеиа.

## Вухан

## 5.1.1.1.1 Напредовање вируса корона у Кини

Хонг Конг и Макао проглашавају прве случајеве 22. јануара. Почетком фебруара, број умрлих у Кини премашио је број епидемије САРС-а.



#### 5.1.2 Here are some test codes

```
public class Test {
     * This method returns status of checkbox (is checkbox checked). Method finds element by
checkbox text and gets class of that element, after that
      * it checks if class contains 'checkbox-checked', if class contains that text then
checkbox is selected and true value is return
      * if checkbox doesn't contain that text then false is returned
      * @param checkboxText - text of checkbox of witch you want to get status (e.g. "Read
Only")
      * @return - method is returning boolean value. If checkbox class contains "checkbox-
checked" then true is returned in other case
      * false is returned
     private boolean getCheckboxCheckedStatusByName(String checkboxText) {
         boolean isChecked = false;
         waitForDisplayedElement(ue("getCheckboxStatusByText", checkboxText));
         String checked = getDisplayedElement(ue("getCheckboxStatusByText",
checkboxText)).getAttribute("class");
         if (checked.contains("checkbox-checked")) {
             isChecked = true;
         return isChecked;
    }
}
<div class="plainlinks"
     style="background-color: #FBEBEA; border-radius:5px; margin-top:10px; position:relative;
border: 1px solid #aaa; font-family: 'Helvetica', 'Arial', sans-serif; line-height: 18px; box-
shadow: 0 1px 1px rgba( 0, 0, 0, 0.15 ); overflow:hidden;">
     <div style="display:block; top:4px; width:100%; text-align:center;;">
         <div style="color:#000085; font-size:25px; line-height:25px">
             <div style="padding-left:50px;"></div>
         <div style="padding-top:2px; color:#444; font-size:1.15em; line-height:1.5;">
             <div style="padding-left:8px; padding-right:8px;">Учествујте у <b><a
                     href="/wiki/%D0%92%D0%B8%D0%BA%D0%B8%D0%BF
%D0%B5%D0%B4%D0%B8%D1%98%D0%B0:%D0%9A%D0%B0%D0%BC%D0%BF%D0%B0%D1%9A%D0%B0
%D1%83%D1%80%D0%B5%D1%92%D0%B8%D0%B2%D0%B0%D1%9A%D0%B0
%D1%80%D0%B5%D1%84%D0%B5%D1%80%D0%B5%D0%BD%D1%86%D0%B8_1Lib1Ref_2021"
                     title="Википедија:Кампања уређивања референци 1Lib1Ref 2021">Кампањи
уређивања референци
                 "1lib1ref"</a></b> од 15. јануара до 5. фебруара.
             </div>
         </div>
     </div>
</div>
```

#### 5.2 Here is some youtube video



## 6 h1 Heading 8-)

## 6.1 h2 Heading

## 6.1.1 h3 Heading

## 6.1.1.1 h4 Heading

6.1.1.1.1 h5 Heading

6.1.1.1.1.1 h6 Heading

## 6.2 Horizontal Rules

## 6.3 Typographic replacements

Enable typographer option to see result.

test.. test.... test?.... test!....

!!!!!! ???? ,, -- ---

## 6.4 Emphasis

This is bold text

## This is bold text

This is italic text

This is italic text

Strikethrough

## 6.5 Blockquotes

Blockquotes can also be nested...

...by using additional greater-than signs right next to each other...

...or with spaces between arrows.

<sup>&</sup>quot;Smartypants, double quotes" and 'single quotes'



#### 6.6 Lists

## Unordered

- ✓ Create a list by starting a line with +, -, or \*
- ✓ Sub-lists are made by indenting 2 spaces:
  - 1. Marker character change forces new list start:
    - Ac tristique libero volutpat at
    - Facilisis in pretium nisl aliquet
    - Nulla volutpat aliquam velit
- √ Very easy!

## Ordered

- 1. Lorem ipsum dolor sit amet
- 2. Consectetur adipiscing elit
- 3. Integer molestie lorem at massa
- 4. You can use sequential numbers...
- 5. ...or keep all the numbers as 1.

Orderd list with text between elements

- 1. Lorem ipsum dolor sit amet
- 2. Consectetur adipiscing elit
- 4. You can use sequential numbers...
- 5. ...or keep all the numbers as 1.

Start numbering with offset:

- 1. foo
- 2. bar

#### 6.7 Code

Inline code

## Indented code

```
// Some comments
line 1 of code
line 2 of code
line 3 of code
```

## Block code "fences"

Sample text here...

# Syntax highlighting



```
var foo = function (bar) {
  return bar++;
};
console.log(foo(5));
```

## 6.8 Tables

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.


# Right aligned columns

Description	Option
path to data files to supply the data that will be passed into templates.	data
engine to be used for processing templates. Handlebars is the default.	engine
extension to be used for dest files.	ext

## 6.9 Links

link text link with title

Autoconverted link <a href="https://github.com/nodeca/pica">https://github.com/nodeca/pica</a> (enable linkify to see)





# 6.10 Images







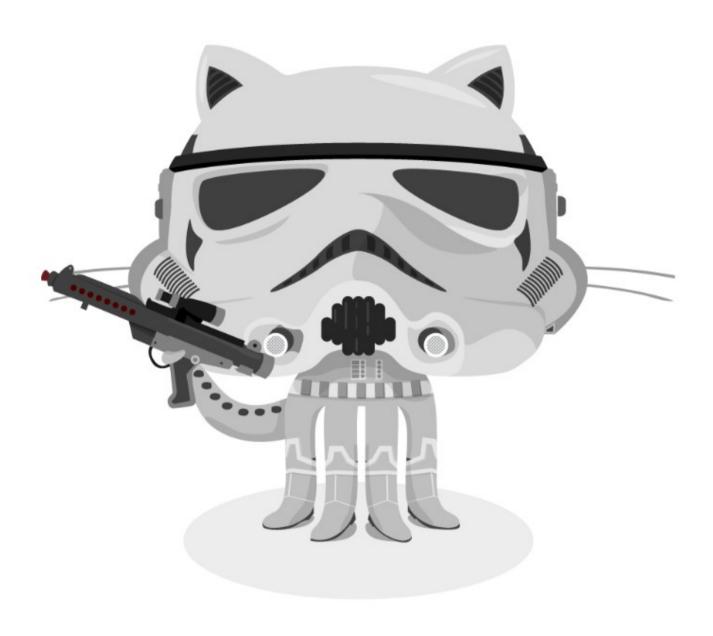


Figure 3 The Stormtroopocat Like links, Images also have a footnote style syntax





Figure 4 The Dojocat

With a reference later in the document defining the URL location:

# 6.11 Plugins

The killer feature of markdown-it is very effective support of syntax plugins.

# 6.11.1 **Emojies**

Classic markup: :wink: :crush: :cry: :tear: :laughing: :yum:



# **Shortcuts (emoticons): :-) :-( 8-) ;)**

see how to change output with twemoji.

```
6.11.2 Subscript / Superscript

/ 19th
/ H2O

6.11.3 <ins>
Inserted text

6.11.4 <mark>
==Marked text==

6.11.5 Footnotes
Footnote 1 link

Footnote 2 link

Inline footnote^[Text of inline footnote] definition.

Duplicated footnote reference

6.11.6 Definition lists

Term 1
```

Definition 1 with lazy continuation.

Term 2 with inline markup

Definition 2

```
{ some code, part of Definition 2 }
```

Third paragraph of definition 2.



# Compact style:

Term 1 ~ Definition 1

Term 2 ~ Definition 2a ~ Definition 2b

## 6.11.7 Abbreviations

This is HTML abbreviation example.

It converts "HTML", but keep intact partial entries like "xxxHTMLyyy" and so on.

\*[HTML]: Hyper Text Markup Language

## 6.11.8 Custom containers

::: warning here be dragons :::

- 1. Footnote can have markup and multiple paragraphs.
  - 1. Footnote text.





Figure 5 C:\puzzles-cloud-docs-site\images\logo.png