



**Template version: 1.0**

[[doc-title]]

[[doc-subtitle]]

[[doc-type]]

[[doc-company]]  
[[doc-company-url]]

**Document Number:** [[doc-id]]  
**Version:** [[doc-version]]  
**Release Date:** [[release-date]]



## Document History

Author Name: [[doc-author]]

Author Contact: [[doc-author-email]]

## Document Revision

Version Number	Release Date	Status	Change Description	Author
[[doc-version]]	[[doc-release-date]]	Draft	[[change-description]]	[[doc-author-name]]

## Intellectual Property Rights

This document is exclusive property of [[doc-company]] and all rights are reserved.



## ***Table of Contents***

### ***Introduction 12***

### ***References 12***

### ***Markdown3 14***

### ***Edge Service 14***

#### ***TODO 14***

##### ***TODO version 1.0 14***

##### ***TODO version 1.0-next 14***

#### ***Test environment and credentials 14***

#### ***Edge Service Registry 14***

#### ***Edge Service Relay 14***

#### ***Edge Service Client 14***

#### ***ReST API 14***

##### ***Login 15***

###### ***Login request 15***

###### ***Login response 15***

###### ***Cookies 15***

##### ***Logout 15***

###### ***Logout request 15***

###### ***Logout response 15***

##### ***Voucher list 15***

###### ***Voucher list request 15***

###### ***Voucher list response 15***

##### ***Voucher detail 15***

###### ***Voucher detail request 15***

###### ***Voucher detail response 15***

##### ***Voucher order 15***

###### ***Voucher order request 15***

###### ***Voucher order response 16***

##### ***Voucher order detail 16***

###### ***Voucher order detail request 16***

###### ***Voucher order detail response 16***

##### ***Provider Text 16***

###### ***Provider Text request 16***

###### ***Provider Text response 17***

##### ***Content 17***

###### ***Content request 17***

###### ***Content response 17***

##### ***Verification 17***

###### ***Verification request by phone number 17***

###### ***Verification by phone number response 17***

###### ***Verification request by sms 17***

###### ***Verification by sms number response 17***

##### ***Cookies 17***

###### ***Cookies request 17***

###### ***Cookies response 17***



Documentation	17
Documentation request	17
Documentation response	17
i18 internationalization	17
i18 request	17

## **Markdown3 18**

### **Edge Service 18**

TODO	18
TODO version 1.0	18
TODO version 1.0-next	18
Test environment and credentials	18
Edge Service Registry	18
Edge Service Relay	18
Edge Service Client	18
ReST API	18
Login	19
Login request	19
Login response	19
Cookies	19
Logout	19
Logout request	19
Logout response	19
Voucher list	19
Voucher list request	19
Voucher list response	19
Voucher detail	19
Voucher detail request	19
Voucher detail response	19
Voucher order	19
Voucher order request	19
Voucher order response	20
Voucher order detail	20
Voucher order detail request	20
Voucher order detail response	20
Provider Text	20
Provider Text request	20
Provider Text response	21
Content	21
Content request	21
Content response	21
Verification	21
Verification request by phone number	21
Verification by phone number response	21
Verification request by sms	21
Verification by sms number response	21
Cookies	21
Cookies request	21
Cookies response	21
Documentation	21



Documentation request	21
Documentation response	21
i18 internationalization	21
i18 request	21

## **Markdown4-2 22**

### **From today's featured article 22**

Did you know ...	22
In the news	22
On this day	22
March 2	22
Today's featured picture	23

### **Armed conflicts and attacks 23**

Health and environment	23
------------------------	----

## **Markdown3 24**

### **Edge Service 24**

TODO	24
TODO version 1.0	24
TODO version 1.0-next	24
Test environment and credentials	24
Edge Service Registry	24
Edge Service Relay	24
Edge Service Client	24
ReST API	24
Login	25
Login request	25
Login response	25
Cookies	25
Logout	25
Logout request	25
Logout response	25
Voucher list	25
Voucher list request	25
Voucher list response	25
Voucher detail	25
Voucher detail request	25
Voucher detail response	25
Voucher order	25
Voucher order request	25
Voucher order response	26
Voucher order detail	26
Voucher order detail request	26
Voucher order detail response	26
Provider Text	26
Provider Text request	26
Provider Text response	27
Content	27
Content request	27



Content response	27
Verification	27
Verification request by phone number	27
Verification by phone number response	27
Verification request by sms	27
Verification by sms number response	27
Cookies	27
Cookies request	27
Cookies response	27
Documentation	27
Documentation request	27
Documentation response	27
i18 internationalization	27
i18 request	27

## **Markdown3 28**

### **Edge Service 28**

TODO	28
TODO version 1.0	28
TODO version 1.0-next	28
Test environment and credentials	28
Edge Service Registry	28
Edge Service Relay	28
Edge Service Client	28
ReST API	28
Login	29
Login request	29
Login response	29
Cookies	29
Logout	29
Logout request	29
Logout response	29
Voucher list	29
Voucher list request	29
Voucher list response	29
Voucher detail	29
Voucher detail request	29
Voucher detail response	29
Voucher order	29
Voucher order request	29
Voucher order response	30
Voucher order detail	30
Voucher order detail request	30
Voucher order detail response	30
Provider Text	30
Provider Text request	30
Provider Text response	31
Content	31
Content request	31
Content response	31



Verification	31
Verification request by phone number	31
Verification by phone number response	31
Verification request by sms	31
Verification by sms number response	31
Cookies	31
Cookies request	31
Cookies response	31
Documentation	31
Documentation request	31
Documentation response	31
i18n internationalization	31
i18n request	31

## **Markdown4-2 32**

### **From today's featured article 32**

Did you know ...	32
In the news	32
On this day	32
March 2	32
Today's featured picture	33

### **Armed conflicts and attacks 33**

Health and environment	33
------------------------	----

## **Markdown3 34**

### **Edge Service 34**

TODO	34
TODO version 1.0	34
TODO version 1.0-next	34
Test environment and credentials	34
Edge Service Registry	34
Edge Service Relay	34
Edge Service Client	34
ReST API	34
Login	35
Login request	35
Login response	35
Cookies	35
Logout	35
Logout request	35
Logout response	35
Voucher list	35
Voucher list request	35
Voucher list response	35
Voucher detail	35
Voucher detail request	35
Voucher detail response	35
Voucher order	35
Voucher order request	35



Voucher order response	36
Voucher order detail	36
Voucher order detail request	36
Voucher order detail response	36
Provider Text	36
Provider Text request	36
Provider Text response	37
Content	37
Content request	37
Content response	37
Verification	37
Verification request by phone number	37
Verification by phone number response	37
Verification request by sms	37
Verification by sms number response	37
Cookies	37
Cookies request	37
Cookies response	37
Documentation	37
Documentation request	37
Documentation response	37
i18n internationalization	37
i18n request	37

### ***UC3 Just testing 38***

#### **Edge Service 38**

TODO	38
TODO version 1.0	38
TODO version 1.0-next	38
Test environment and credentials	38
Edge Service Registry	38
Edge Service Relay	38
Edge Service Client	38
ReST API	38
Login	39
Login request	39
Login response	39
Cookies	39
Logout	39
Logout request	39
Logout response	39
Voucher list	39
Voucher list request	39
Voucher list response	39
Voucher detail	39
Voucher detail request	39
Voucher detail response	39
Voucher order	39
Voucher order request	39
Voucher order response	40





Voucher order detail	40
Voucher order detail request	40
Voucher order detail response	40
Provider Text	40
Provider Text request	40
Provider Text response	41
Content	41
Content request	41
Content response	41
Verification	41
Verification request by phone number	41
Verification by phone number response	41
Verification request by sms	41
Verification by sms number response	41
Cookies	41
Cookies request	41
Cookies response	41
Documentation	41
Documentation request	41
Documentation response	41
i18n internationalization	41
i18n request	41

## ***UC3 Just testing*** 42

### **Edge Service** 42

TODO	42
TODO version 1.0	42
TODO version 1.0-next	42
Test environment and credentials	42
Edge Service Registry	42
Edge Service Relay	42
Edge Service Client	42
ReST API	42
Login	43
Login request	43
Login response	43
Cookies	43
Logout	43
Logout request	43
Logout response	43
Voucher list	43
Voucher list request	43
Voucher list response	43
Voucher detail	43
Voucher detail request	43
Voucher detail response	43
Voucher order	43
Voucher order request	43
Voucher order response	44
Voucher order detail	44



Voucher order detail request	44
Voucher order detail response	44
Provider Text	44
Provider Text request	44
Provider Text response	45
Content	45
Content request	45
Content response	45
Verification	45
Verification request by phone number	45
Verification by phone number response	45
Verification request by sms	45
Verification by sms number response	45
Cookies	45
Cookies request	45
Cookies response	45
Documentation	45
Documentation request	45
Documentation response	45
i18 internationalization	45
i18 request	45
<b>Backticks</b>	<b>46</b>
<b>Backticks MD file</b>	<b>46</b>
Backtickts in heading	46
<b>End of file</b>	<b>46</b>
<b>Backticks</b>	<b>47</b>
<b>Backticks MD file</b>	<b>47</b>
Backtickts in heading	47
<b>End of file</b>	<b>47</b>
<b>Backticks</b>	<b>48</b>
<b>Backticks MD file</b>	<b>48</b>
Backtickts in heading	48
<b>End of file</b>	<b>48</b>
<b>Just checking tables - heading 1</b>	<b>49</b>
<b>Tables are under heading 2</b>	<b>49</b>
<b>test2</b>	<b>50</b>
<b>Markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2</b>	
Formatted Text Examples	50
Font buttons:	50
Text Format:	50
Text Justification:	50
Useful markdown links:	50
I just have to store some code here, if you don't mind	51
I'll put it here	51



And also here 51  
You know the process... 51

## Markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2

Formatted Text Examples 51  
Font buttons: 51  
Text Format: 51  
Text Justification: 51  
Useful markdown links: 51  
I just have to store some code here, if you don't mind 52  
I'll put it here 52  
And also here 52  
You know the process... 52

### *Table of Tables*

Table 1: Document references 12

Table 49

Table 49



# 1 Introduction

## 1.1 References

Referenced documents in creation of this document are listed in the Table 1.

Document Reference	Document Title	Version	Filename
[1]	[[ reference-doc-title ]]		[[ reference-doc-filename ]]
[2]			
[3]			
[4]			
[5]			
[6]			
[7]			
[8]			

Table 1: Document references





## 2 Markdown3

### 2.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 2.1.1 TODO

##### 2.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

##### 2.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

#### 2.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="#">test@test.org</a>	test	just protected
<a href="#">test@gmail.com</a>	test	just testing
testtest	test	qa

#### 2.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefore the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and un-register on shutdown.

#### 2.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

#### 2.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 2.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.

All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

### 2.1.6.1 Login

#### 2.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNIY3JldC1wYXNzcGhyYXNl

```
POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic ${ICP_SHOP_DIGEST} Accept: application/vnd.api+json
```

#### 2.1.6.1.2 Login response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
```

#### 2.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	Mm05ZjkxOGItMjA5LWVlbnRlcmlkcy9mUw8pbnNlZDY5	mattent.com	/api/v1/mocks	SessMon	true	false

### 2.1.6.2 Logout

#### 2.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

#### 2.1.6.2.2 Logout response

|HTTP/1.1 204 No Content

### 2.1.6.3 Voucher list

*See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.*

#### 2.1.6.3.1 Voucher list request

```
|GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 2.1.6.3.2 Voucher list response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
[{"data":{ "id":"f634f09f-9a06-4297-a326-0d703938b702", "type":"voucher", "attributes":{"code":"LEBALLINNL10", "currency":"EUR", "ean-code":"8717472242211", "encryption-type":0, "kind":0, "name":"Lebara All-in NL 10 EUR", "provider-code":"LEBARA", "provider-name":"Lebara", "short-name":"All-in NL 10", "value":10.0, "price-total":11.99, "price-tax":0.00, "price-fee":1.99, "payment-methods":{"wirecard-creditcard":{"name":"Credit Card", "provider-name":"Wirecard", "image-url":"https://wirecard.com/logo.png"} "wirecard-paypal":{"name":"PayPal", "provider-name":"Wirecard"} } } }, {"id":"a3473e20-19b4-44fe-8389-67a511854759", "type":"voucher", "attributes":{"code":"LEBALLINNL15", "currency":"EUR", "ean-code":"8717472242129", "encryption-type":0, "kind":0, "name":"Lebara All-in NL 15 EUR", "provider-code":"LEBARA", "provider-name":"Lebara", "short-name":"All-in NL 15", "value":15.0, "price-total":16.99, "price-tax":0.00, "price-fee":1.99, "payment-methods":{"wirecard-creditcard":{"name":"Credit Card", "provider-name":"Wirecard", "image-url":"https://wirecard.com/logo.png"} "wirecard-paypal":{"name":"PayPal", "provider-name":"Wirecard"} } } } ]
```

#### 2.1.6.4 Voucher detail

#### 2.1.6.4.1 Voucher detail request

```
|GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 2.1.6.4.2 Voucher detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
{
  "data": {
    "id": "f6340f9f-9a06-4297-a326-0d703938b702",
    "type": "voucher",
    "attributes": {
      "code": "LEBALLINNL10",
      "currency": "EUR",
      "ean-code": "8717472242211",
      "encryption-type": 0,
      "kind": 0,
      "name": "Lebara All-in NL 10 EUR",
      "provider-code": "LEBARA",
      "provider-name": "Lebara",
      "short-name": "All-in NL 10",
      "value": 10.0,
      "price-total": 11.99,
      "price-tax": 0.00,
      "price-fee": 1.99,
      "payment-methods": {
        "wirecard-creditcard": {
          "name": "Credit Card",
          "provider-name": "Wirecard",
          "image-url": "https://wirecard.com/logo.png"
        },
        "wirecard-paypal": {
          "name": "PayPal",
          "provider-name": "Wirecard"
        }
      }
    }
  }
}
```

#### 2.1.6.5 Voucher order

*See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.*

#### 2.1.6.5.1 Voucher order request

Variables	Description	Example



```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constraints	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### 2.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

#### 2.1.6.6 Voucher order detail

##### 2.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 2.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

##### 2.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

##### 2.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------





```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 2.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine
|About You-Geschenkkarte." } } ] }
```

#### 2.1.6.8 Content

*See [Content Service] for more information on the source of these fields.*

##### 2.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 2.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit
|amet...", "button.cancel": "Abbrechen", "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

#### 2.1.6.9 Verification

*See for more information on the source of these fields.*

##### 2.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-
|confirmation-code": "716569" } } }
```

##### 2.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-
|attempts": 4, "remaining-expiration-time": 0 } } }
```

##### 2.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

##### 2.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

#### 2.1.6.10 Cookies

##### 2.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":
|"device_id" } } ] }
```

##### 2.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

#### 2.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

##### 2.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 2.1.6.11.2 Documentation response

Complete Response is omitted because of size, here is just a part :

```
|HTTP/1.1 200 OK
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",
|"voucherStatus", "voucherValue" ] }
```

#### 2.1.6.12 i18next internationalization

*# Retrieves i18next json based on requested language*

##### 2.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



### 3 Markdown3

#### 3.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

##### 3.1.1 TODO

###### 3.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

###### 3.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

##### 3.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="#">test@test.org</a>	test	just protected
<a href="#">test@gmail.com</a>	test	just testing
testtest	test	qa

##### 3.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefore the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and un-register on shutdown.

##### 3.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

##### 3.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

##### 3.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.





```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constraints	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

### 3.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

### 3.1.6.6 Voucher order detail

#### 3.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 3.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

### 3.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

#### 3.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------



```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

### 3.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine
|About You-Geschenkkarte." } } ] }
```

### 3.1.6.8 Content

*See [Content Service] for more information on the source of these fields.*

#### 3.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 3.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit
|amet...", "button.cancel": "Abbrechen", "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

### 3.1.6.9 Verification

*See for more information on the source of these fields.*

#### 3.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-
|confirmation-code": "716569" } } }
```

#### 3.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-
|attempts": 4, "remaining-expiration-time": 0 } } }
```

#### 3.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

#### 3.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

### 3.1.6.10 Cookies

#### 3.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":
|"device_id" } } ] }
```

#### 3.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

### 3.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

#### 3.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 3.1.6.11.2 Documentation response

Complete Response is omitted because of size, here is just a part :

```
|HTTP/1.1 200 OK
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",
|"voucherStatus", "voucherValue" ] }
```

### 3.1.6.12 i18 internationalization

*# Retrieves i18next json based on requested language*

#### 3.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



## 4 Markdown4-2

### 4.1 From today's featured article



Lionel Matthews (15 August 1912 -- 2 March 1944) was an Australian Army officer during World War II who was posthumously awarded the George Cross, the highest non-combat award for heroism for members of the Australian armed forces at the time. Matthews served in the 27th Brigade during the Malayan campaign, and at the surrender of Singapore in 1942 became a prisoner of war (POW). He was awarded the Military Cross for courage, energy and ability under fire during this fighting.

#### 4.1.1 *Did you know ...*

- # *that in 2017 you could finally have breakfast at Tiffany's (pictured)?*
- # *that the British mycologist Denis Garrett, "one of the last 'string and sealing wax' scientists", once bought plastic lavatory cisterns for his laboratory to use in experiments?*
- # *that sand in the stomach of the ocean surgeon helps to grind up its food?*

#### 4.1.1.1 *In the news*

1. More than 300 girls are kidnapped from a secondary school by armed bandits in Zamfara, Nigeria.
2. In tennis, Naomi Osaka wins the women's singles and Novak Djokovic wins the men's singles at the Australian Open (both winners pictured).

#### 4.1.1.1.1 *On this day*

##### 4.1.1.1.1.1 *March 2*

**1444** -- *The League of Lezhë, an alliance of regional chieftains, was established in Venetian Albania with Skanderbeg as its commander.*

**1865** -- *New Zealand Wars: Carl Sylvius Völkner (pictured), a Protestant missionary, was killed by Hauhau militants in #p#tiki for working as an agent for George Grey, Governor-General of New Zealand.*

**1937** -- *The Steel Workers Organizing Committee, precursor to the United Steel Workers of America, had a major success when it signed a collective-bargaining agreement with U.S. Steel.*


**1962** -- *Led by General Ne Win, the Burmese military seized power in a coup d'état.*

aaaaaaaaaaaaaaaaaaaa





#### 4.1.1.1.1.1 Today's featured picture

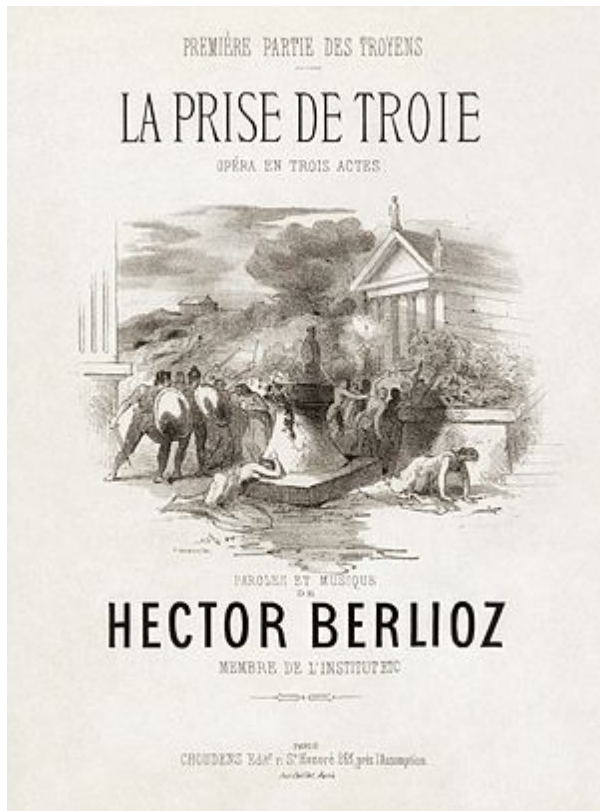

## 4.2 Armed conflicts and attacks

### # Zamfara kidnapping

1. All 279 abducted schoolgirls from a boarding school in Zamfara State, Nigeria, are released by their armed kidnappers. (Reuters)

## 4.2.1 Health and environment

### # [COVID-19 pandemic](#)

1. [COVID-19 pandemic in Asia](#)

#### # [COVID-19 pandemic in Indonesia](#)

- # [Indonesia](#) reports their first two cases of [Lineage B.1.1.7](#) variant first detected in the United Kingdom. (Liputan6.com)

#### # [COVID-19 pandemic in Iraq](#)

- # Iraq receives 50,000 doses of Sinopharm vaccines as the country officially begins its vaccination campaign. (Asharq Al-Awsat)

#### # COVID-19 pandemic in Mongolia

- # Mongolia surpasses 3,000 cases of COVID-19. (Montsame)

#### # COVID-19 pandemic in the Philippines

- # The Philippines reports their first six cases of 501.V2 variant first detected in South Africa. (GMA News)



## 5 Markdown3

### 5.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 5.1.1 TODO

##### 5.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

##### 5.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

#### 5.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="#">test@test.org</a>	test	just protected
<a href="#">test@gmail.com</a>	test	just testing
testtest	test	qa

#### 5.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefore the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and unregister on shutdown.

#### 5.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

#### 5.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 5.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.





All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

#### 5.1.6.1 Login

##### 5.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNlY3JldC1wYXNzcGhyYXNi

POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic \${ICP\_SHOP\_DIGEST} Accept: application/vnd.api+json

##### 5.1.6.1.2 Login response

HTTP/1.1 201 Created Content-Type: application/vnd.api+json

##### 5.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	MmQ5ZjkkxOGItMmM4ZjYyZDZ5	mimas.com	/api/rest/v1	1 month	true	false

#### 5.1.6.2 Logout

##### 5.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 5.1.6.2.2 Logout response

HTTP/1.1 204 No Content

#### 5.1.6.3 Voucher list

See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.

##### 5.1.6.3.1 Voucher list request

GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 5.1.6.3.2 Voucher list response

HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
{ "data": [ { "id": "f634f09f-9a06-4297-a326-0d703938b702", "type": "voucher", "attributes": { "code": "LEBALLINNL10", "currency": "EUR", "ean-code": "8717472242211", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 10 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 10", "value": 10.0, "price-total": 11.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } }, { "id": "a3473e20-19b4-44fe-8389-67a511854759", "type": "voucher", "attributes": { "code": "LEBALLINNL15", "currency": "EUR", "ean-code": "8717472242129", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 15 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 15", "value": 15.0, "price-total": 16.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } } ] }

#### 5.1.6.4 Voucher detail

##### 5.1.6.4.1 Voucher detail request

GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 5.1.6.4.2 Voucher detail response

HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
{ "data": { "id": "f634f09f-9a06-4297-a326-0d703938b702", "type": "voucher", "attributes": { "code": "LEBALLINNL10", "currency": "EUR", "ean-code": "8717472242211", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 10 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 10", "value": 10.0, "price-total": 11.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } }

#### 5.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

##### 5.1.6.5.1 Voucher order request

| Variables | Description | Example | | -----|

-----| | -----| |



```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constraints	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### 5.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

#### 5.1.6.6 Voucher order detail

##### 5.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 5.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

#### 5.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

##### 5.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------



```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 5.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine
|About You-Geschenkkarte." } } ] }
```

#### 5.1.6.8 Content

See [Content Service] for more information on the source of these fields.

##### 5.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 5.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit
|amet...", "button.cancel": "Abbrechen" "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

#### 5.1.6.9 Verification

See for more information on the source of these fields.

##### 5.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-
|confirmation-code": "716569" } } }
```

##### 5.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-
|attempts": 4, "remaining-expiration-time": 0 } } }
```

##### 5.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

##### 5.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

#### 5.1.6.10 Cookies

##### 5.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":
|"device_id" } } ] }
```

##### 5.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

#### 5.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

##### 5.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 5.1.6.11.2 Documentation response

Complete Response is omitted because of size , here is just a part :

```
|HTTP/1.1 200 OK
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",
|"voucherStatus", "voucherValue" ] }
```

#### 5.1.6.12 i18 internationalization

# Retrieves i18next json based on requested language

##### 5.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



## 6 Markdown3

### 6.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 6.1.1 TODO

##### 6.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

##### 6.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

#### 6.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="#">test@test.org</a>	test	just protected
<a href="#">test@gmail.com</a>	test	just testing
testtest	test	qa

#### 6.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefor the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and un-register on shutdown.

#### 6.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

#### 6.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 6.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.



All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

#### 6.1.6.1 Login

##### 6.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNlY3JldC1wYXNzcGhyYXNi

POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic \${ICP\_SHOP\_DIGEST} Accept: application/vnd.api+json

##### 6.1.6.1.2 Login response

HTTP/1.1 201 Created Content-Type: application/vnd.api+json

##### 6.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	MmQ5ZjkkxOGItMmM4ZjY5LWUwZjZiZDY5	mimas.com	/api/rest/v1	1 month	true	false

#### 6.1.6.2 Logout

##### 6.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 6.1.6.2.2 Logout response

HTTP/1.1 204 No Content

#### 6.1.6.3 Voucher list

See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.

##### 6.1.6.3.1 Voucher list request

GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 6.1.6.3.2 Voucher list response

HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
{ "data": [ { "id": "f634f09f-9a06-4297-a326-0d703938b702", "type": "voucher", "attributes": { "code": "LEBALLINNL10", "currency": "EUR", "ean-code": "8717472242211", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 10 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 10", "value": 10.0, "price-total": 11.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } }, { "id": "a3473e20-19b4-44fe-8389-67a511854759", "type": "voucher", "attributes": { "code": "LEBALLINNL15", "currency": "EUR", "ean-code": "8717472242129", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 15 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 15", "value": 15.0, "price-total": 16.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } } ] }

#### 6.1.6.4 Voucher detail

##### 6.1.6.4.1 Voucher detail request

GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 6.1.6.4.2 Voucher detail response

HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
{ "data": { "id": "f634f09f-9a06-4297-a326-0d703938b702", "type": "voucher", "attributes": { "code": "LEBALLINNL10", "currency": "EUR", "ean-code": "8717472242211", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 10 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 10", "value": 10.0, "price-total": 11.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } }

#### 6.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

##### 6.1.6.5.1 Voucher order request

| Variables | Description | Example | | -----|

-----| | -----| |



```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constrains	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### 6.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

#### 6.1.6.6 Voucher order detail

##### 6.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 6.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

#### 6.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

##### 6.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------





```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 6.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine
|About You-Geschenkkarte." } } ] }
```

#### 6.1.6.8 Content

See [Content Service] for more information on the source of these fields.

##### 6.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 6.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit
|amet...", "button.cancel": "Abbrechen", "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

#### 6.1.6.9 Verification

See for more information on the source of these fields.

##### 6.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-
|confirmation-code": "716569" } } }
```

##### 6.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-
|attempts": 4, "remaining-expiration-time": 0 } } }
```

##### 6.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

##### 6.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

#### 6.1.6.10 Cookies

##### 6.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":
|"device_id" } } ] }
```

##### 6.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

#### 6.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

##### 6.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 6.1.6.11.2 Documentation response

Complete Response is omitted because of size, here is just a part :

```
|HTTP/1.1 200 OK
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",
|"voucherStatus", "voucherValue" ] }
```

#### 6.1.6.12 i18next internationalization

# Retrieves i18next json based on requested language

##### 6.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



## 7 Markdown4-2

### 7.1 From today's featured article



Lionel Matthews (15 August 1912 -- 2 March 1944) was an Australian Army officer during World War II who was posthumously awarded the George Cross, the highest non-combat award for heroism for members of the Australian armed forces at the time. Matthews served in the 27th Brigade during the Malayan campaign, and at the surrender of Singapore in 1942 became a prisoner of war (POW). He was awarded the Military Cross for courage, energy and ability under fire during this fighting.

#### 7.1.1 *Did you know ...*

- # *that in 2017 you could finally have breakfast at Tiffany's (pictured)?*
- # *that the British mycologist Denis Garrett, "one of the last 'string and sealing wax' scientists", once bought plastic lavatory cisterns for his laboratory to use in experiments?*
- # *that sand in the stomach of the ocean surgeon helps to grind up its food?*

#### 7.1.1.1 *In the news*

3. More than 300 girls are kidnapped from a secondary school by armed bandits in Zamfara, Nigeria.
4. In tennis, Naomi Osaka wins the women's singles and Novak Djokovic wins the men's singles at the Australian Open (both winners pictured).

#### 7.1.1.1.1 *On this day*

#### 7.1.1.1.1 *March 2*

**1444** -- *The League of Lezhë, an alliance of regional chieftains, was established in Venetian Albania with Skanderbeg as its commander.*

**1865** -- *New Zealand Wars: Carl Sylvius Völkner (pictured), a Protestant missionary, was killed by Hauhau militants in #p#tiki for working as an agent for George Grey, Governor-General of New Zealand.*

**1937** -- *The Steel Workers Organizing Committee, precursor to the United Steel Workers of America, had a major success when it signed a collective-bargaining agreement with U.S. Steel.*


**1962** -- *Led by General Ne Win, the Burmese military seized power in a coup d'état.*

aaaaaaaaaaaaaaaaaaaa





#### 7.1.1.1.1.1 Today's featured picture

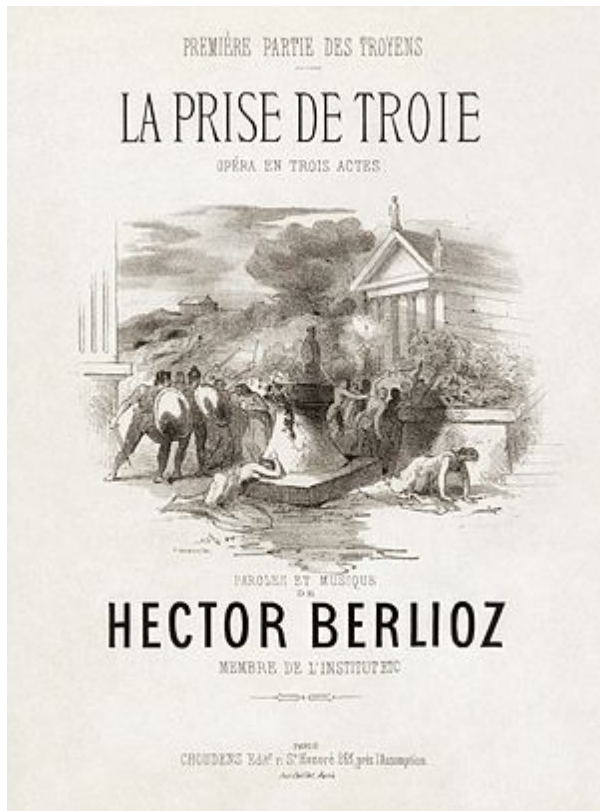

## 7.2 Armed conflicts and attacks

### # Zamfara kidnapping

1. All 279 abducted schoolgirls from a boarding school in Zamfara State, Nigeria, are released by their armed kidnappers. (Reuters)

## 7.2.1 Health and environment

### # [COVID-19 pandemic](#)

1. [COVID-19 pandemic in Asia](#)

#### # [COVID-19 pandemic in Indonesia](#)

- # [Indonesia](#) reports their first two cases of [Lineage B.1.1.7](#) variant first detected in the United Kingdom. (Liputan6.com)

#### # [COVID-19 pandemic in Iraq](#)

- # Iraq receives 50,000 doses of Sinopharm vaccines as the country officially begins its vaccination campaign. (Asharq Al-Awsat)

#### # COVID-19 pandemic in Mongolia

- # Mongolia surpasses 3,000 cases of COVID-19. (Montsame)

#### # COVID-19 pandemic in the Philippines

- # The Philippines reports their first six cases of 501.V2 variant first detected in South Africa. (GMA News)



## 8 Markdown3

### 8.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 8.1.1 TODO

##### 8.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

##### 8.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

#### 8.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="#">test@test.org</a>	test	just protected
<a href="#">test@gmail.com</a>	test	just testing
testtest	test	qa

#### 8.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefore the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and un-register on shutdown.

#### 8.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

#### 8.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 8.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.

All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

#### 8.1.6.1 Login

#### 8.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNIY3JldC1wYXNzcGhyYXNl

```
POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic ${ICP_SHOP_DIGEST} Accept: application/vnd.api+json
```

#### 8.1.6.1.2 Login response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
```

#### 8.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	Mm05ZjkxOGItMjA5LWVlbnRlcmlkcy9mUw8pbnNlZDY5	mattent.com	/api/v1/mocks	SessMon	true	false

### 8.1.6.2 Logout

#### 8.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

#### 8.1.6.2.2 Logout response

|HTTP/1.1 204 No Content

### 8.1.6.3 Voucher list

See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.

#### 8.1.6.3.1 Voucher list request

```
|GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 8.1.6.3.2 Voucher list response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
[{"data":{  {      "id":"f634f09f-9a06-4297-a326-0d703938b702",      "type":"voucher",      "attributes":{        "code":"LEBALLNNL10",        "currency":"EUR",        "ean-code":"8717472242211",        "encryption-type":0,        "kind":0,        "name":"Lebara All-in NL 10 EUR",        "provider-code":"LEBARA",        "provider-name":"Lebara",        "short-name":"All-in NL 10",        "value":10.0,        "price-total":11.99,        "price-tax":0.00,        "price-fee":1.99,        "payment-methods":{          "wirecard-creditcard":{            "name":"Credit Card",            "provider-name":"Wirecard",            "image-url":"https://wirecard.com/logo.png"          },          "wirecard-paypal":{            "name":"PayPal",            "provider-name":"Wirecard"          }        }      },      "id":"a3473e20-19b4-44fe-8389-67a511854759",      "type":"voucher",      "attributes":{        "code":"LEBALLNNL15",        "currency":"EUR",        "ean-code":"8717472242129",        "encryption-type":0,        "kind":0,        "name":"Lebara All-in NL 15 EUR",        "provider-code":"LEBARA",        "provider-name":"Lebara",        "short-name":"All-in NL 15",        "value":15.0,        "price-total":16.99,        "price-tax":0.00,        "price-fee":1.99,        "payment-methods":{          "wirecard-creditcard":{            "name":"Credit Card",            "provider-name":"Wirecard",            "image-url":"https://wirecard.com/logo.png"          },          "wirecard-paypal":{            "name":"PayPal",            "provider-name":"Wirecard"          }        }      }    }    ]
```

#### 8.1.6.4 Voucher detail

#### 8.1.6.4.1 Voucher detail request

```
|GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 8.1.6.4.2 Voucher detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
{
  "data": {
    "id": "f6340f09f-9a06-4297-a326-0d703938b702",
    "type": "voucher",
    "attributes": {
      "code": "LEBALLINNL10",
      "currency": "EUR",
      "ean-code": "8717472242211",
      "encryption-type": 0,
      "kind": 0,
      "name": "Lebara All-in NL 10 EUR",
      "provider-code": "LEBARA",
      "provider-name": "Lebara",
      "short-name": "All-in NL 10",
      "value": 10.0,
      "price-total": 11.99,
      "price-tax": 0.00,
      "price-fee": 1.99,
      "payment-methods": {
        "wirecard-creditcard": {
          "name": "Credit Card",
          "provider-name": "Wirecard",
          "image-url": "https://wirecard.com/logo.png"
        },
        "wirecard-paypal": {
          "name": "PayPal",
          "provider-name": "Wirecard"
        }
      }
    }
  }
}
```

#### 8.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

#### 8.1.6.5.1 Voucher order request

Variables	Description	Example



```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constraints	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### 8.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

#### 8.1.6.6 Voucher order detail

##### 8.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 8.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

##### 8.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

##### 8.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------



```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 8.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine
|About You-Geschenkkarte." } } ] }
```

#### 8.1.6.8 Content

See [Content Service] for more information on the source of these fields.

##### 8.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 8.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit
|amet...", "button.cancel": "Abbrechen", "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

#### 8.1.6.9 Verification

See for more information on the source of these fields.

##### 8.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-
|confirmation-code": "716569" } } }
```

##### 8.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-
|attempts": 4, "remaining-expiration-time": 0 } } }
```

##### 8.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

##### 8.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

#### 8.1.6.10 Cookies

##### 8.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":
|"device_id" } } ] }
```

##### 8.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

#### 8.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

##### 8.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 8.1.6.11.2 Documentation response

Complete Response is omitted because of size, here is just a part :

```
|HTTP/1.1 200 OK
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",
|"voucherStatus", "voucherValue" ] }
```

#### 8.1.6.12 i18 internationalization

# Retrieves i18next json based on requested language

##### 8.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



## 9 UC3 Just testing

### 9.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 9.1.1 TODO

##### 9.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

##### 9.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

#### 9.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="#">test@test.org</a>	test	just protected
<a href="#">test@gmail.com</a>	test	just testing
testtest	test	qa

#### 9.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefore the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and unregister on shutdown.

#### 9.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

#### 9.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 9.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.





All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

#### 9.1.6.1 Login

##### 9.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNlY3JldC1wYXNzcGhyYXNi

POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic \${ICP\_SHOP\_DIGEST} Accept: application/vnd.api+json

##### 9.1.6.1.2 Login response

HTTP/1.1 201 Created Content-Type: application/vnd.api+json

##### 9.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	MmQ5ZjkkxOGItMmM4ZjY5ZDZ5	mimas.com	/api/rest/v1	1 month	true	false

#### 9.1.6.2 Logout

##### 9.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 9.1.6.2.2 Logout response

HTTP/1.1 204 No Content

#### 9.1.6.3 Voucher list

See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.

##### 9.1.6.3.1 Voucher list request

GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 9.1.6.3.2 Voucher list response

HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
{ "data": [ { "id": "f634f09f-9a06-4297-a326-0d703938b702", "type": "voucher", "attributes": { "code": "LEBALLINNL10", "currency": "EUR", "ean-code": "8717472242211", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 10 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 10", "value": 10.0, "price-total": 11.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } }, { "id": "a3473e20-19b4-44fe-8389-67a511854759", "type": "voucher", "attributes": { "code": "LEBALLINNL15", "currency": "EUR", "ean-code": "8717472242129", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 15 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 15", "value": 15.0, "price-total": 16.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } } ] }

#### 9.1.6.4 Voucher detail

##### 9.1.6.4.1 Voucher detail request

GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

##### 9.1.6.4.2 Voucher detail response

HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
{ "data": { "id": "f634f09f-9a06-4297-a326-0d703938b702", "type": "voucher", "attributes": { "code": "LEBALLINNL10", "currency": "EUR", "ean-code": "8717472242211", "encryption-type": 0, "kind": 0, "name": "Lebara All-in NL 10 EUR", "provider-code": "LEBARA", "provider-name": "Lebara", "short-name": "All-in NL 10", "value": 10.0, "price-total": 11.99, "price-tax": 0.00, "price-fee": 1.99, "payment-methods": { "wirecard-creditcard": { "name": "Credit Card", "provider-name": "Wirecard", "image-url": "https://wirecard.com/logo.png" }, "wirecard-paypal": { "name": "PayPal", "provider-name": "Wirecard" } } } }

#### 9.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

##### 9.1.6.5.1 Voucher order request

| Variables | Description | Example | | -----|

-----|



```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constraints	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### 9.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

#### 9.1.6.6 Voucher order detail

##### 9.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 9.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilIM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

#### 9.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

##### 9.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------





```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 9.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine
|About You-Geschenkkarte." } } ] }
```

#### 9.1.6.8 Content

See [Content Service] for more information on the source of these fields.

##### 9.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 9.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit
|amet...", "button.cancel": "Abbrechen" "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

#### 9.1.6.9 Verification

See for more information on the source of these fields.

##### 9.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-
|confirmation-code": "716569" } } }
```

##### 9.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-
|attempts": 4, "remaining-expiration-time": 0 } } }
```

##### 9.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

##### 9.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

#### 9.1.6.10 Cookies

##### 9.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":
|"device_id" } } ] }
```

##### 9.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

#### 9.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

##### 9.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 9.1.6.11.2 Documentation response

Complete Response is omitted because of size , here is just a part :

```
|HTTP/1.1 200 OK
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",
|"voucherStatus", "voucherValue" ] }
```

#### 9.1.6.12 i18 internationalization

# Retrieves i18next json based on requested language

##### 9.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



## 10 UC3 Just testing

### 10.1 Edge Service

The Edge Service provides the interface between the public REST API and internal AMQP API.

#### 10.1.1 TODO

##### 10.1.1.1 TODO version 1.0

- # [x] Test environment and credentials
- # [x] specify voucher content fields
- # [x] specify voucher pricing fields
- # [x] specify payment method fields

##### 10.1.1.2 TODO version 1.0-next

- # [ ] refactor entities and apply relationships
- # [ ] provide full resource schemas
- # [ ] enforce validation of resource schemas

#### 10.1.2 Test environment and credentials

TODO

Username	Password	Description
<a href="mailto:test@test.org">test@test.org</a>	test	just protected
<a href="mailto:test@gmail.com">test@gmail.com</a>	test	just testing
testtest	test	qa

#### 10.1.3 Edge Service Registry

The Edge Service Registry is responsible to maintain an index of all currently available Edge Services and configure all its known [Load-Balancers] accordingly.

*As of writing no hosting solution has been chosen yet. Therefore the actual API which is used to configure the load-balancers remains unspecified for now.*

All Edge Service Instances **must** register themselves on the registry on startup and unregister on shutdown.

#### 10.1.4 Edge Service Relay

Every Edge Service will be provided with a local relay connecting its instances to the central Message Broker cluster. The message exchange routing of the relay is configured in such a way, that only messages relevant to its connected Edge Services is routed to it from the broker cluster.

*See [Message Relay] for more information.*

#### 10.1.5 Edge Service Client

Each Service that is to be served by the Edge Service is represented by a so-called Edge Service Client. It is responsible to provide the implementation of the public REST API for that given service.

#### 10.1.6 ReST API

The Edge Service API acts as translation layer between the Services and the Frontend. The actual logic is implemented in separate [Edge Service Client]s for each individual Service consumed by the API or API endpoint provided by the API, respectively.

All public-facing endpoints **must** adhere to the [JSONAPI] specification and be subject to strict [Access Control].

### 10.1.6.1 Login

#### 10.1.6.1.1 Login request

Variables	Description	Example
ICP_SHOP_ID	see [Test environment and credentials]	
ICP_SHOP_PASSPHRASE	see [Test environment and credentials]	
ICP_SHOP_DIGEST	Derived from \${ICP_SHOP_ID} and \${ICP_SHOP_PASSPHRASE}	MzAwMDAwMTY6dG9wLXNIY3JldC1wYXNzcGhyYXNl

```
POST /api/rest/v1/auth/login HTTP/1.1 Authorization: Basic ${ICP_SHOP_DIGEST} Accept: application/vnd.api+json
```

#### 10.1.6.1.2 Login response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json
```

### 10.1.6.1.3 Cookies

Name	Value	Domain	Path	Expires	HttpOnly	Secure
SESSION	Mm05ZjkxOGItMjA5LWVlYXN0eS8wUW85bnR1ZDY5	mit.edu	/api/v1/mocks	Session	true	false

### 10.1.6.2 Logout

#### 10.1.6.2.1 Logout request

Variables	Description	Example
-----------	-------------	---------

[POST /api/rest/v1/auth/logout HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json]

#### 10.1.6.2.2 Logout response

|HTTP/1.1 204 No Content

### 10.1.6.3 Voucher list

*See [VoucherWebList] method in the [Mimas integration] documentation for the source of these fields.*

#### 10.1.6.3.1 Voucher list request

```
|GET /api/rest/v1/vouchers HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 10.1.6.3.2 Voucher list response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```
[{"data":{ "id":"f634f09f-9a06-4297-a326-0d703938b702", "type":"voucher", "attributes":{"code":"LEBALLINNL10", "currency":"EUR", "ean-code":"8717472242211", "encryption-type":0, "kind":0, "name":"Lebara All-in NL 10 EUR", "provider-code":"LEBARA", "provider-name":"Lebara", "short-name":"All-in NL 10", "value":10.0, "price-total":11.99, "price-tax":0.00, "price-fee":1.99, "payment-methods":{"wirecard-creditcard":{"name":"Credit Card", "provider-name":"Wirecard", "image-url":"https://wirecard.com/logo.png"} "wirecard-paypal":{"name":"PayPal", "provider-name":"Wirecard"} } } }, {"id":"a3473e20-19b4-44fe-8389-67a511854759", "type":"voucher", "attributes":{"code":"LEBALLINNL15", "currency":"EUR", "ean-code":"8717472242129", "encryption-type":0, "kind":0, "name":"Lebara All-in NL 15 EUR", "provider-code":"LEBARA", "provider-name":"Lebara", "short-name":"All-in NL 15", "value":15.0, "price-total":16.99, "price-tax":0.00, "price-fee":1.99, "payment-methods":{"wirecard-creditcard":{"name":"Credit Card", "provider-name":"Wirecard", "image-url":"https://wirecard.com/logo.png"} "wirecard-paypal":{"name":"PayPal", "provider-name":"Wirecard"} } } } ]
```

#### 10.1.6.4 Voucher detail

#### 10.1.6.4.1 Voucher detail request

|GET /api/rest/v1/vouchers/:voucher-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json

#### 10.1.6.4.2 Voucher detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
```

```

      "data":{
        "id":"f634f09f-9a06-4297-a326-0d703938b702",
        "type":"voucher",
        "attributes":{
          "code":"LEBALLINNL10",
          "currency":"EUR",
          "ean-code":"8717472242211",
          "encryption-type":0,
          "kind":0,
          "name":"Lebara All-in NL 10 EUR",
          "provider-code":"LEBARA",
          "provider-name":"Lebara",
          "short-name":"All-in NL 10",
          "value":10.0,
          "price-total":11.99,
          "price-tax":0.00,
          "price-fee":1.99,
          "payment-methods":{
            "wirecard-creditcard":{"name":"Credit Card",
              "provider-name":"Wirecard",
              "image-url":"https://wirecard.com/logo.png"},
            "wirecard-paypal":{"name":"PayPal",
              "provider-name":"Wirecard"}
          }
        }
      }
    }
  }
}

```

#### 10.1.6.5 Voucher order

See [VoucherWebReserve] method in the [Mimas integration] documentation for the source of these fields.

#### 10.1.6.5.1 Voucher order request

Variables	Description	Example



```
POST /api/rest/v1/voucher-orders HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "voucher-code": "VODADE15",
"payment-method": "Wirecard VISA", "notification-type": "email", "notification-target": "me@my-email.com", "provider-text-url": "https://
provider.texts", "order-success-redirect-url": "/success", "order-failed-redirect-url": "failed", "order-canceled-redirect-url": "/cancel" } } }
```

field name	type	constraints	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my- email.com] (mailto:me@my- email.com)"
order-success- redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect- url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled- redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### 10.1.6.5.2 Voucher order response

```
HTTP/1.1 201 Created Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 0.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "0", "batch-number": "1234" } } }
```

#### 10.1.6.6 Voucher order detail

##### 10.1.6.6.1 Voucher order detail request

```
GET /api/rest/v1/voucher-orders/:order-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 10.1.6.6.2 Voucher order detail response

```
HTTP/1.1 200 OK Content-Type: application/vnd.api+json
{ "data": { "id": "c91feaf3-5968-4b60-aa5b-62fe7fdd905c", "type": "voucher-order", "attributes": { "notification-  
status": "pending", "confirmation-status": "pending", "notification-type": "email", "notification-target": "me@my-email.com",  
"payment-provider": "wirecard", "payment-redirect-url": "https://wpp-test.wirecard.com/?wPaymentToken=y93bki675x2CdKP8-  
h0mLD2zDgf26ptjxSNRiKFilM", "payment-session-id": "4b7c0aec-3db3-4cd2-9b22-4d41fb964fdc", "payment-status": "pending",  
"payment-method": "creditcard", "voucher-code": "LEBALLINNL10", "voucher-currency": "EUR", "voucher-value": 10.0 "voucher-  
status": "pending", "order-price-total": 11.99, "order-tax-total": 0.00, "order-fee-total": 1.99, "order-status": "pending", "serial-number":  
"1234", "confirmation-date": "1611313953175" } } }
```

##### 10.1.6.7 Provider Text

See [GetProvicerTexts] method in the [Mimas integration] documentation for the source of these fields.

##### 10.1.6.7.1 Provider Text request

Variables	Description	Example
-----------	-------------	---------



```
|GET /api/rest/v1/provider-texts/ HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json  
|GET /api/rest/v1/provider-texts/:provider-id HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

#### 10.1.6.7.2 Provider Text response

```
|HTTP/1.1 201 Created Content-Type: application/vnd.api+json  
|{ "data": [ { "id": "f74bb480-d6df-47ad-8a17-8d7b1b176661", "type": "voucher-text", "attributes": { "provider-code": "ABOUTYOU",  
|"kind": "title", "title": "Produktname", "body": "About You-Geschenkkarte" } }, { "id": "a598bf3b-abe0-4fc4-80fa-135a84510c81", "type":  
|"voucher-text", "attributes": { "provider-code": "ABOUTYOU", "kind": "subtitle", "title": "Slogan", "body": "Hol Dir per E-Mail eine  
|About You-Geschenkkarte." } } ] }
```

#### 10.1.6.8 Content

See [Content Service] for more information on the source of these fields.

##### 10.1.6.8.1 Content request

Variables	Description	Example
-----------	-------------	---------

```
|GET /api/rest/v1/content/i18next.json HTTP/1.1 Authorization: No Auth Accept: application/json
```

#### 10.1.6.8.2 Content response

```
|HTTP/1.1 200 OK Content-Type: application/json  
|{ "en": { "world.hello": "Hello, World!", "example.text": "Lorem ipsum dolor sit amet...", "button.cancel": "Cancel", "radio.options": {  
|"option-1": "Selection 1", "option-2": "Selection 2", } }, "de": { "world.hello": "Hallo, Welt!", "example.text": "Lorem ipsum dolor sit  
|amet...", "button.cancel": "Abbrechen" "radio.options": { "option-1": "Auswahl 1", "option-2": "Auswahl 2", } } }
```

#### 10.1.6.9 Verification

See for more information on the source of these fields.

##### 10.1.6.9.1 Verification request by phone number

```
|POST /api/rest/v1/auth/phone-number-verification HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":  
|"38f4dfef-9baa-4302-831f-e41df4ce4084", "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "sms-  
|confirmation-code": "716569" } } }
```

##### 10.1.6.9.2 Verification by phone number response

```
|HTTP/1.1 200 OK Content-Type: application/json  
|{ "data": { "type": "phone-number-verification", "attributes": { "phone-number": "+381691994655", "ok": false, "remaining-number-of-  
|attempts": 4, "remaining-expiration-time": 0 } } }
```

##### 10.1.6.9.3 Verification request by sms

```
|POST /api/rest/v1/auth/sms-verification-code HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": { "id":  
|"48f4dfef-9baa-4302-831f-e41df4ce4084", "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655" } } }
```

##### 10.1.6.9.4 Verification by sms number response

```
|HTTP/1.1 200 OK Content-Type: application/vnd.api+json  
|{ "data": { "type": "sms-verification-code", "attributes": { "phone-number": "+381691994655", "ok": true, "remaining-number-of-attempts":  
|2, "remaining-delay-time": 20, "remaining-expiration-time": 1800 } } }
```

#### 10.1.6.10 Cookies

##### 10.1.6.10.1 Cookies request

```
|POST /api/rest/v1/cookies HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json { "data": [ { "type": "cookie", "id": "shopId",  
|"attributes": { "name": "shopId", "value": "1234" } }, { "type": "cookie", "id": "ns_dev_id", "attributes": { "name": "ns_dev_id", "value":  
|"device_id" } } ] }
```

##### 10.1.6.10.2 Cookies response

```
|HTTP/1.1 200 OK
```

#### 10.1.6.11 Documentation

Returns list of Json Schemas for request and response for requested rest endpoint. Use exact endpoint plus schema url parameter. For example, /api/rest/v1/vouchers?schema will return json schemas for /api/rest/v1/vouchers endpoint.

##### 10.1.6.11.1 Documentation request

```
|GET /api/rest/v1/vouchers?schema HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```

##### 10.1.6.11.2 Documentation response

Complete Response is omitted because of size, here is just a part :

```
|HTTP/1.1 200 OK  
|{ "required": [ "createdDate", "notificationStatus", "notificationTarget", "notificationType", "orderFeeTotal", "orderPriceTotal",  
|"orderStatus", "orderTaxTotal", "paymentMethod", "paymentProvider", "paymentStatus", "shortId", "voucherCode", "voucherCurrency",  
|"voucherStatus", "voucherValue" ] }
```

#### 10.1.6.12 i18next internationalization

# Retrieves i18next json based on requested language

##### 10.1.6.12.1 i18 request

```
|GET /api/rest/v1/content/i18next.json/de HTTP/1.1 Authorization: No Auth Accept: application/vnd.api+json
```



this is single line of backticks

Tis is text which contains `text under backticks`

several text lines under single backticks several text lines under single backticks several text lines under single backticks several text lines  
under single backticks several text lines under single backticks several text lines under single backticks several text lines under single  
backticks several text lines under single backticks several text lines under single backticks several text lines under single backticks several  
text lines under single backticks several text lines under single backticks several text lines under single backticks

[illegible]

## test

test



this is single line of backticks

this is backticks **this is regular text**

### 13.1.1 Backticks in heading

## 13.2 End of file

test





## 14 Just checking tables - heading 1

### 14.1 Tables are under heading 2

field name	type	constrains	description	example
id	UUID	globally unique	globally unique UUID	c91feaf3-5968-4b60-aa5b-62fe7fdd905c
type	string	n/a	type of request, must be "voucher-order", "voucher-order"	
voucher-code	string	n/a	code of the voucher gathered from voucher list	"VODADE15"
payment-method	string	n/a	on of the allowed methods for the voucher, denoted in voucher list response	"Wirecard VISA"
notification-type	string	currently only "email" is supported	type of the notification target	"email"
notification-target	string	n/a	target adress	"[me@my-email.com] (mailto:me@my-email.com)"
order-success-redirect-url	string	valid URL	Where the wirecard should redirect if payment was successfull	protect
order-failed-redirect-url	string	valid URL	Where the wirecard should redirect if payment fails	protect
order-canceled-redirect-url	string	valid URL	Where the wirecard should redirect if payment was canceled	protect

#### Table

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

#### Table



## 15 test2

### 15.1 Markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2ma

#### 15.1.1 Formatted Text Examples


Below is an illustration of the Format toolbar used to format text:


---

Here are some examples of the effects different options have on text:


##### 15.1.1.1 Font buttons:

As well as the standard Font drop down box showing a list of all the fonts on your system and the **Point** size box that allows you to set the font size, two shortcut buttons have been added that allow you to increase the selected text or group of text objects at the press of a button:

 Will increase the font size by 2 points every time you press the button.

 Will decrease the font size by 2 points every time you press the button.

##### 15.1.1.2 Text Format:

The standard text format options are also available for text i.e. **bold**, *italic*, underline and .



*Note: You can combine any of these formats together, as in the last example above which is a combination of the bold, underline and outline formats.*

##### 15.1.1.3 Text Justification:

# Text can be aligned to the

1. left,
2. right,
3. centre

# or one of the three full justifications: Full Justification, Density Justification and Aspect Justification.

Note: The Full justification spreads the words across the page but does not change the size of them. The Density Justification also spreads the words and does not change their size but puts spaces between the characters in a word. The Aspect Justification spreads the words but stretches the words to fill the space as well.

The Density and Aspect methods can provide some visually interesting effects.

---

[Go back to the top](#)

#### 15.1.2 Useful markdown links:

# [Link 1](#)

1. This is link 1

# [Link 2](#)

1. This is link 2

# [Link 3](#)

1. This is link 3

# [Link 4](#)

# This is link 4 ordered under link 3



**15.1.2.1 I just have to store some code here, if you don't mind**

**15.1.2.1.1 I'll put it here**

**LoGiC iS rEaL !!!**

```
|if(a == 0){ a = 0; }
```

**15.1.2.1.2 And also here**

**It's getting better**

```
|if (false == true) { // log some message }
```

**15.1.2.1.3 You know the process...**

---

**I'll just assert and finish this...**

```
|public void justAssert(){ boolean checkTrue = true; Assert.assertTrue(checkTrue); } //let me return true he he public boolean trueStatement()  
|{ return true; }
```

**15.2 Markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2markdown2-2ma**

**15.2.1 Formatted Text Examples**


Below is an illustration of the Format toolbar used to format text:


---

Here are some examples of the effects different options have on text:

**15.2.1.1 Font buttons:**





As well as the standard Font drop down box showing a list of all the fonts on your system and the **Point** size box that allows you to set the font size, two shortcut buttons have been added that allow you to increase the selected text or group of text objects at the press of a button:

 Will increase the font size by 2 points every time you press the button.

 Will decrease the font size by 2 points every time you press the button.

**15.2.1.2 Text Format:**

**The standard text format options are also available for text i.e. bold, italic, underline and outline:**

 **Text**  
 *Text*  
 Text  
 **Text**

*Note: You can combine any of these formats together, as in the last example above which is a combination of the bold, underline and outline formats.*

**15.2.1.3 Text Justification:**

# Text can be aligned to the

1. left,
2. right,
3. centre

# or one of the three full justifications: Full Justification, Density Justification and Aspect Justification.

Note: The Full justification spreads the words across the page but does not change the size of them. The Density Justification also spreads the words and does not change their size but puts spaces between the characters in a word. The Aspect Justification spreads the words but stretches the words to fill the space as well.

The Density and Aspect methods can provide some visually interesting effects.

---

**Go back to the top**

**15.2.2 Useful markdown links:**

# [Link 1](#)

1. This is link 1



# [Link 2](#)

1. *This is link 2*

# [Link 3](#)

1. *This is link 3*

# [Link 4](#)

# *This is link 4 ordered under link 3*

**15.2.2.1 I just have to store some code here, if you don't mind**

15.2.2.1.1 *I'll put it here*

**LoGiC iS rEaL !!!**

|if(a == 0){ a = 0; }|

15.2.2.1.2 *And also here*

**It's getting better**

|if (false == true) { // log some message }|

15.2.2.1.3 *You know the process...*

---

**I'll just assert and finish this...**

|public void justAssert(){ boolean checkTrue = true; Assert.assertTrue(checkTrue); } //let me return true he he public boolean trueStatement()  
|{ return true; }|

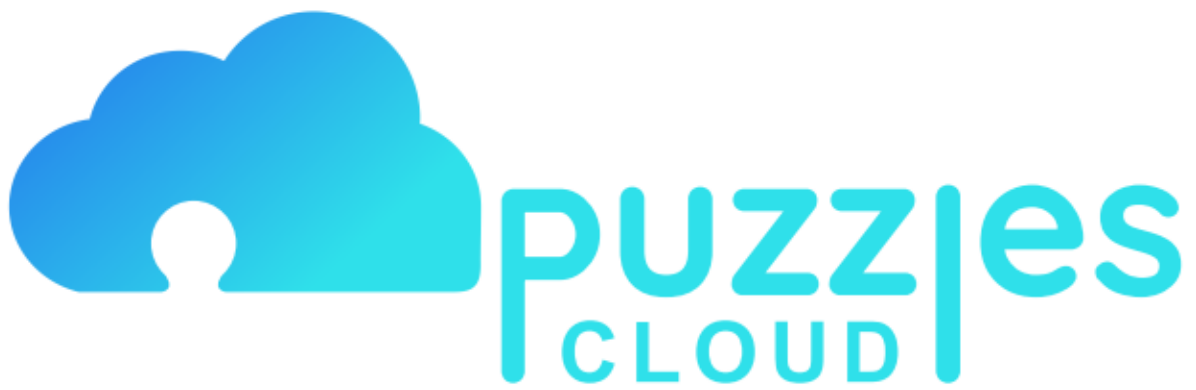


Figure 1: Last Page