

IdentityIQ Technical Overview

IdentityIQ Essentials

IdentityIQ Technical Overview


Overview

- Reading data
- Business modeling
- Governance process
- Provisioning process

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Process – Reading Data

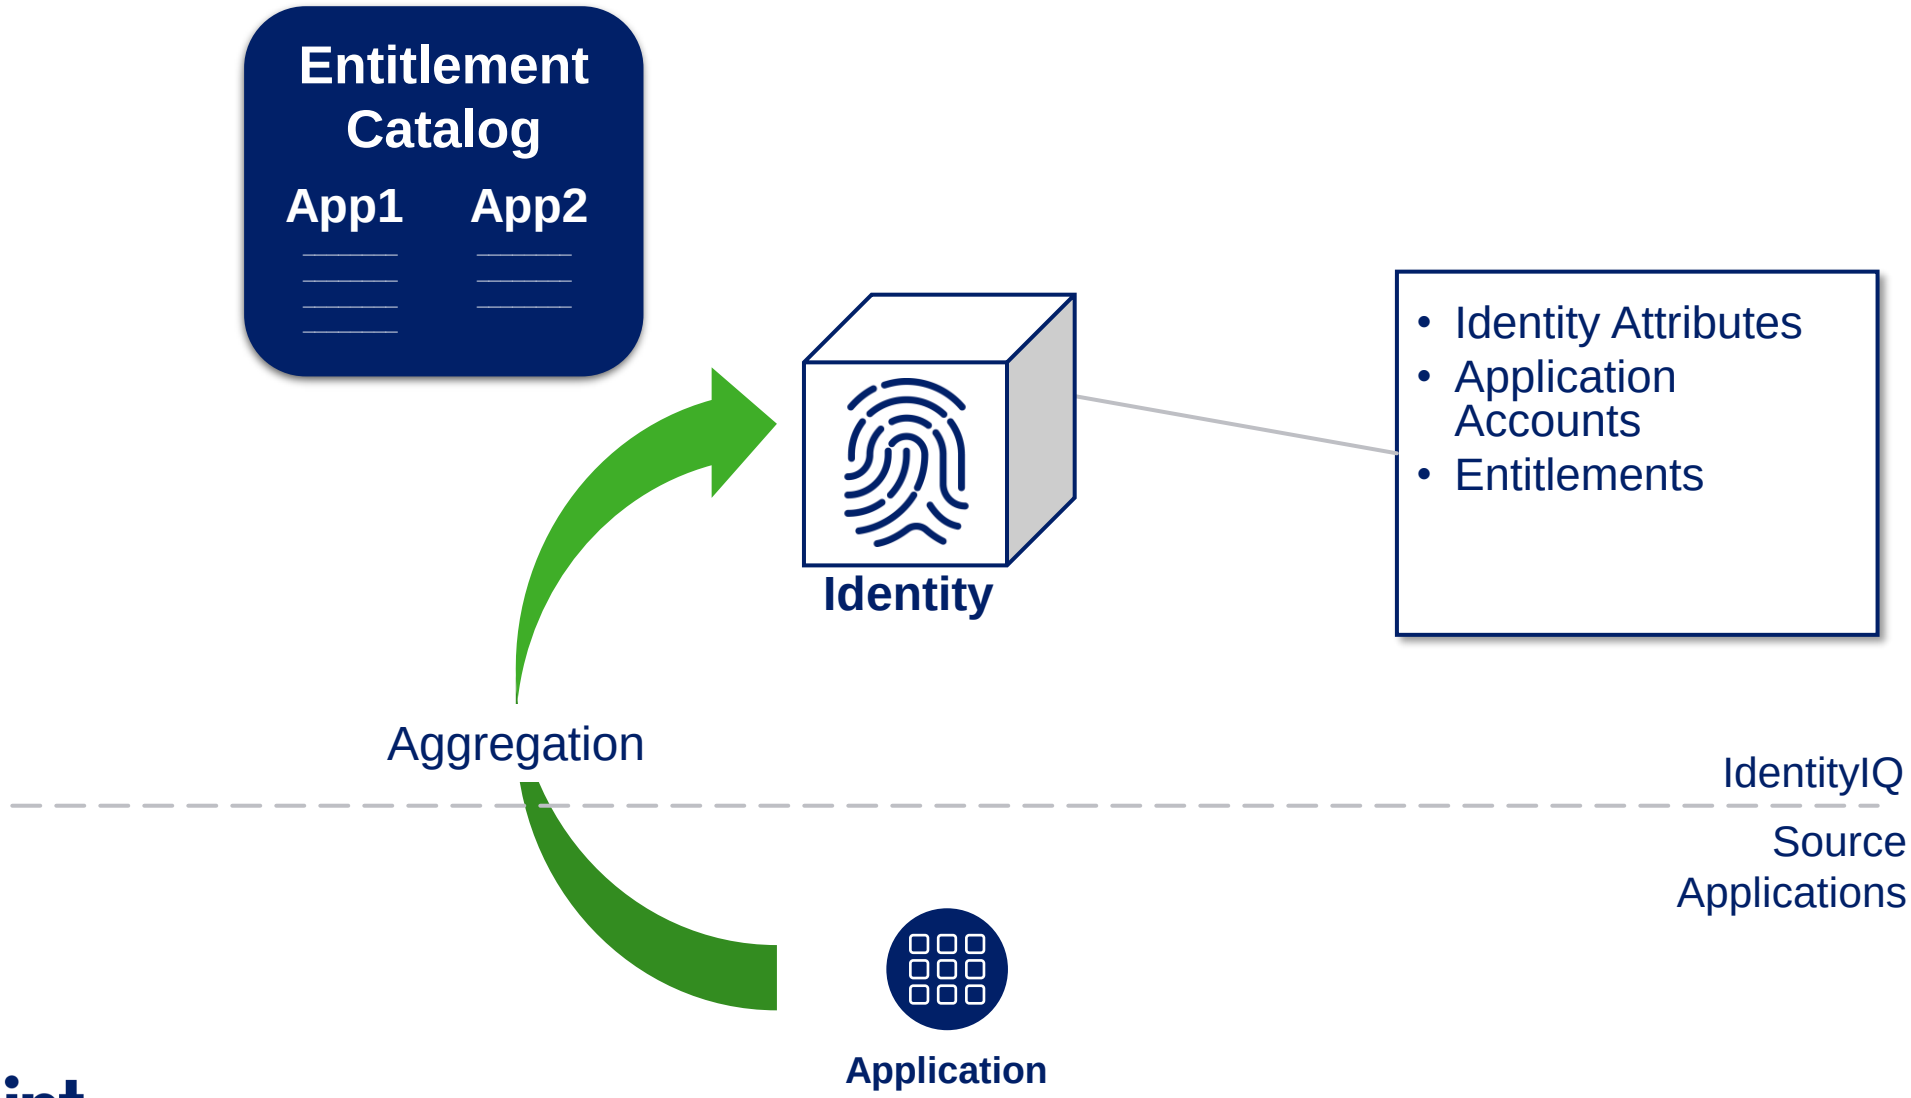


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Process – Business Modeling

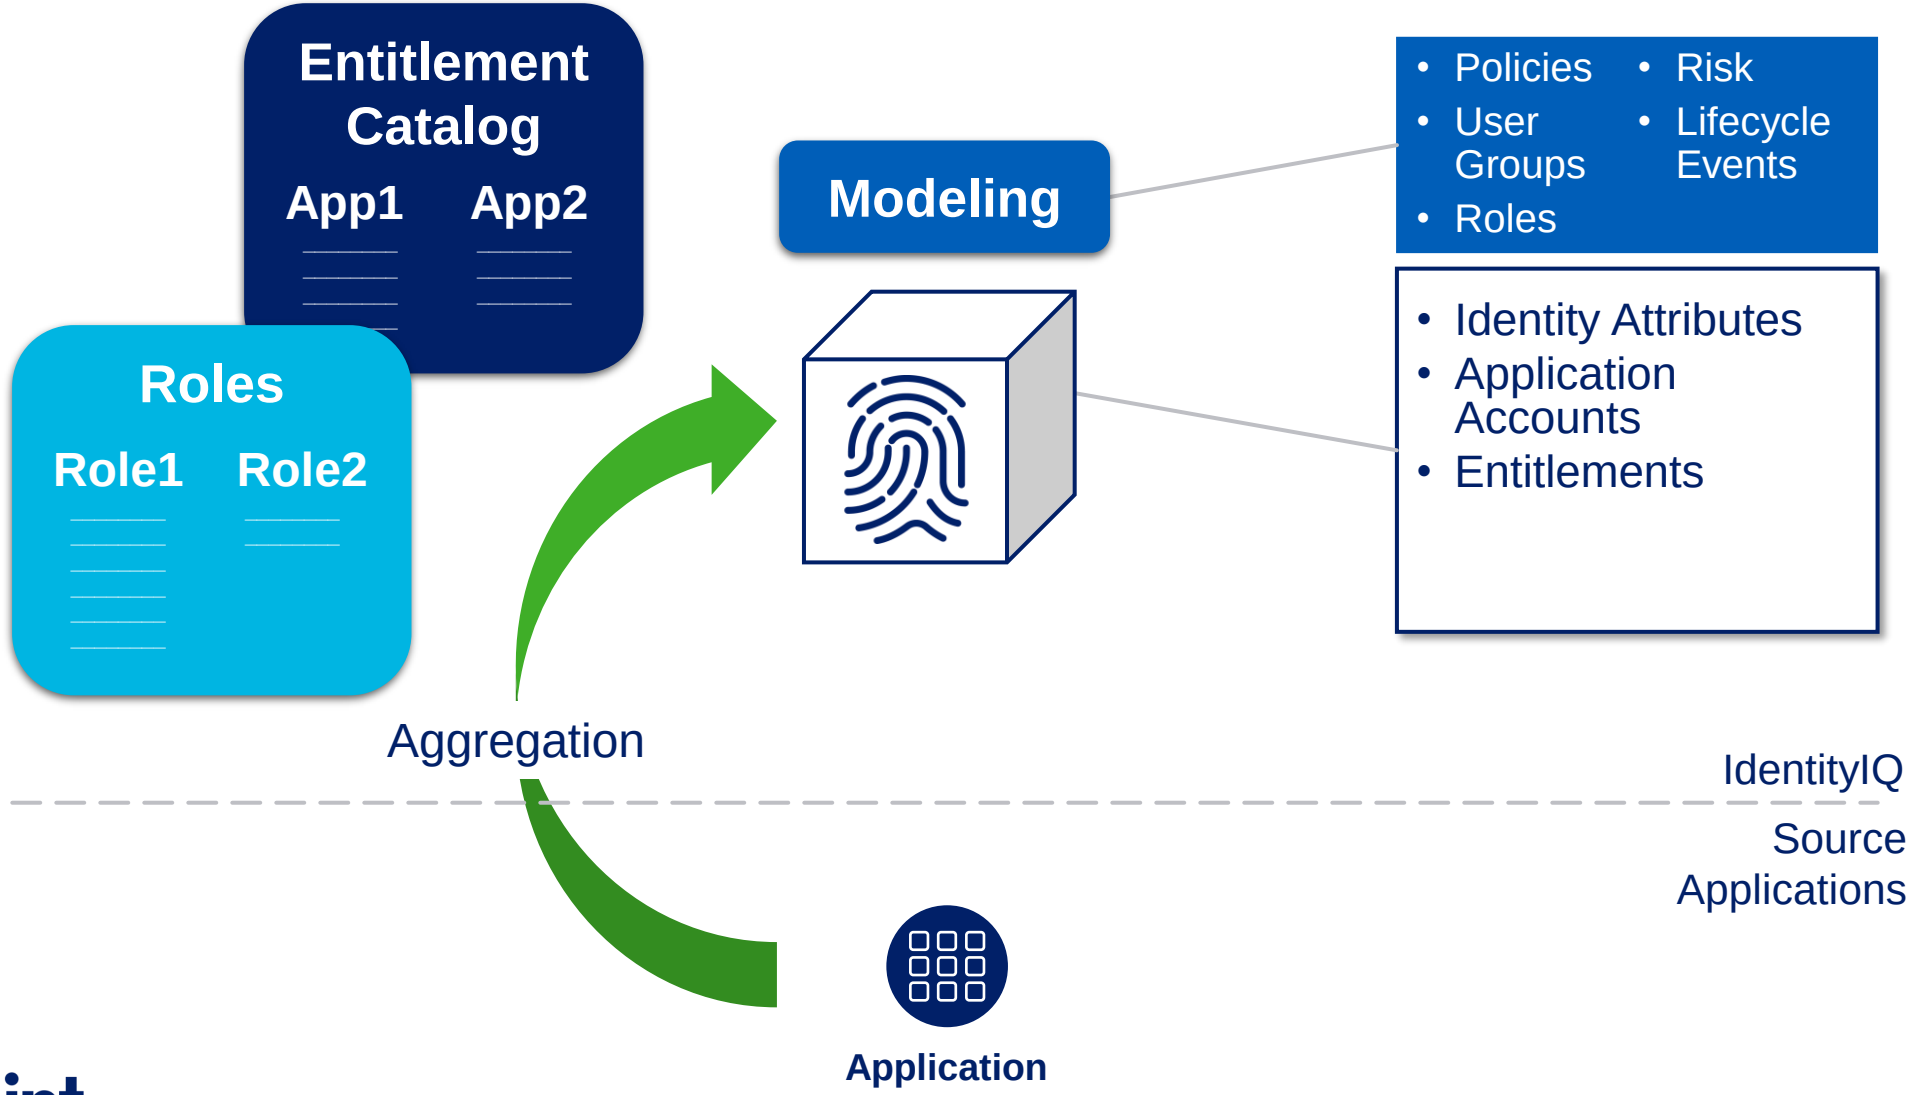


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Governance Process

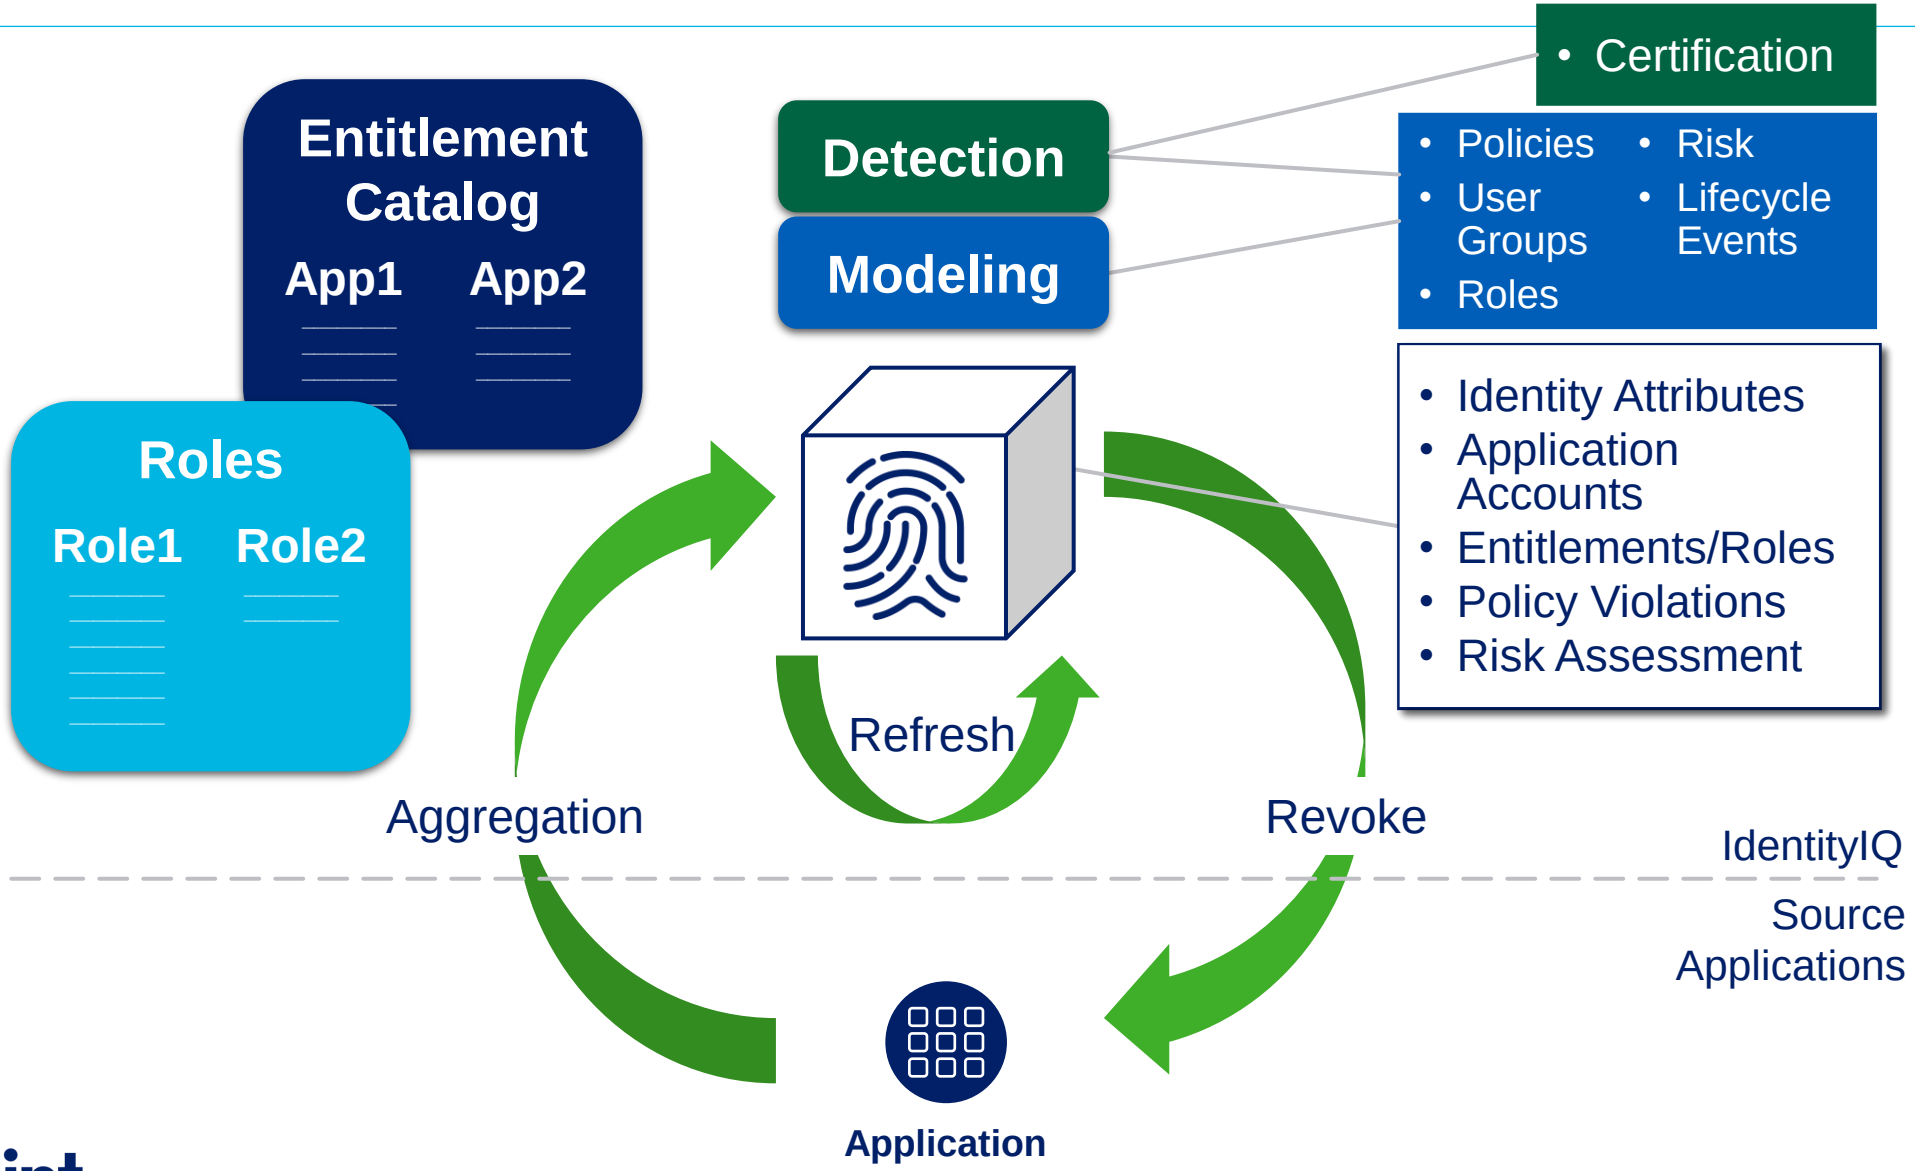


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Provisioning Process – User Request

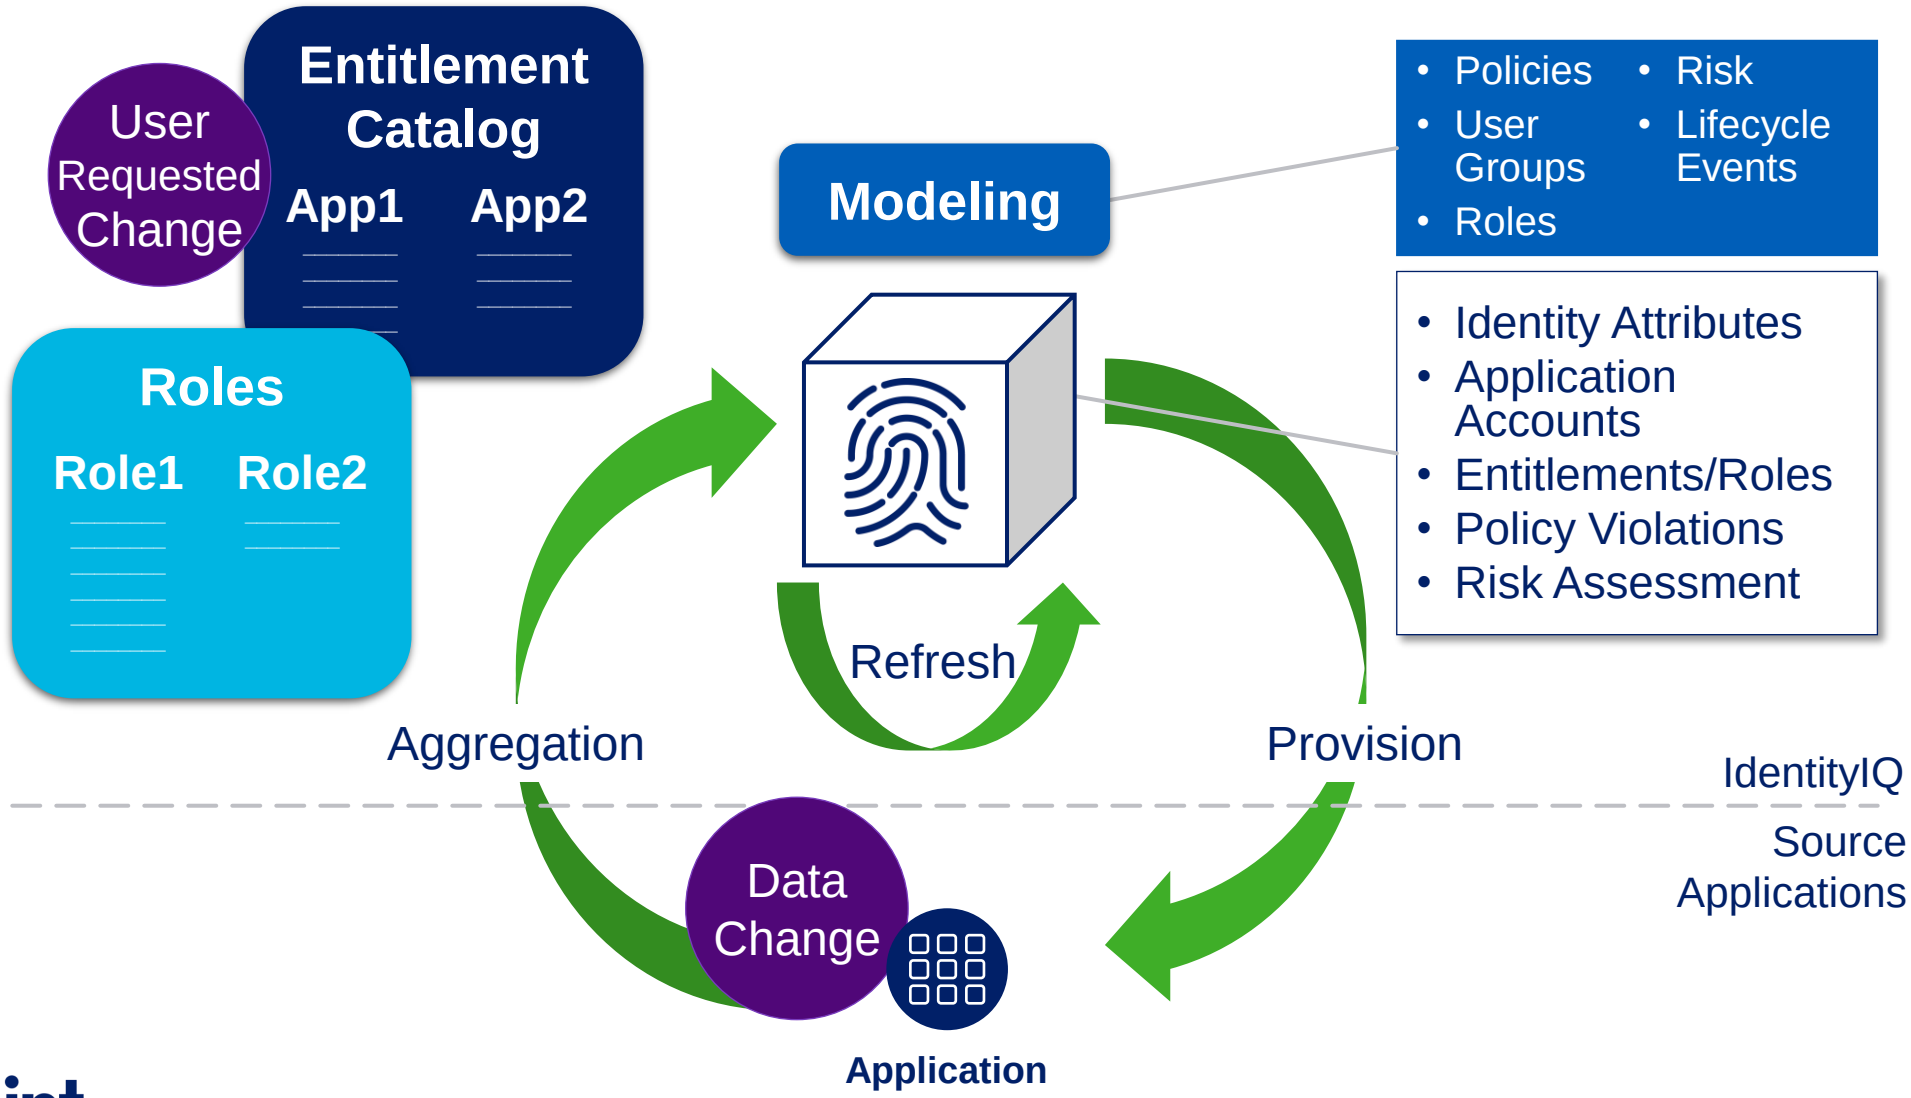

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Provisioning Process – Lifecycle Event

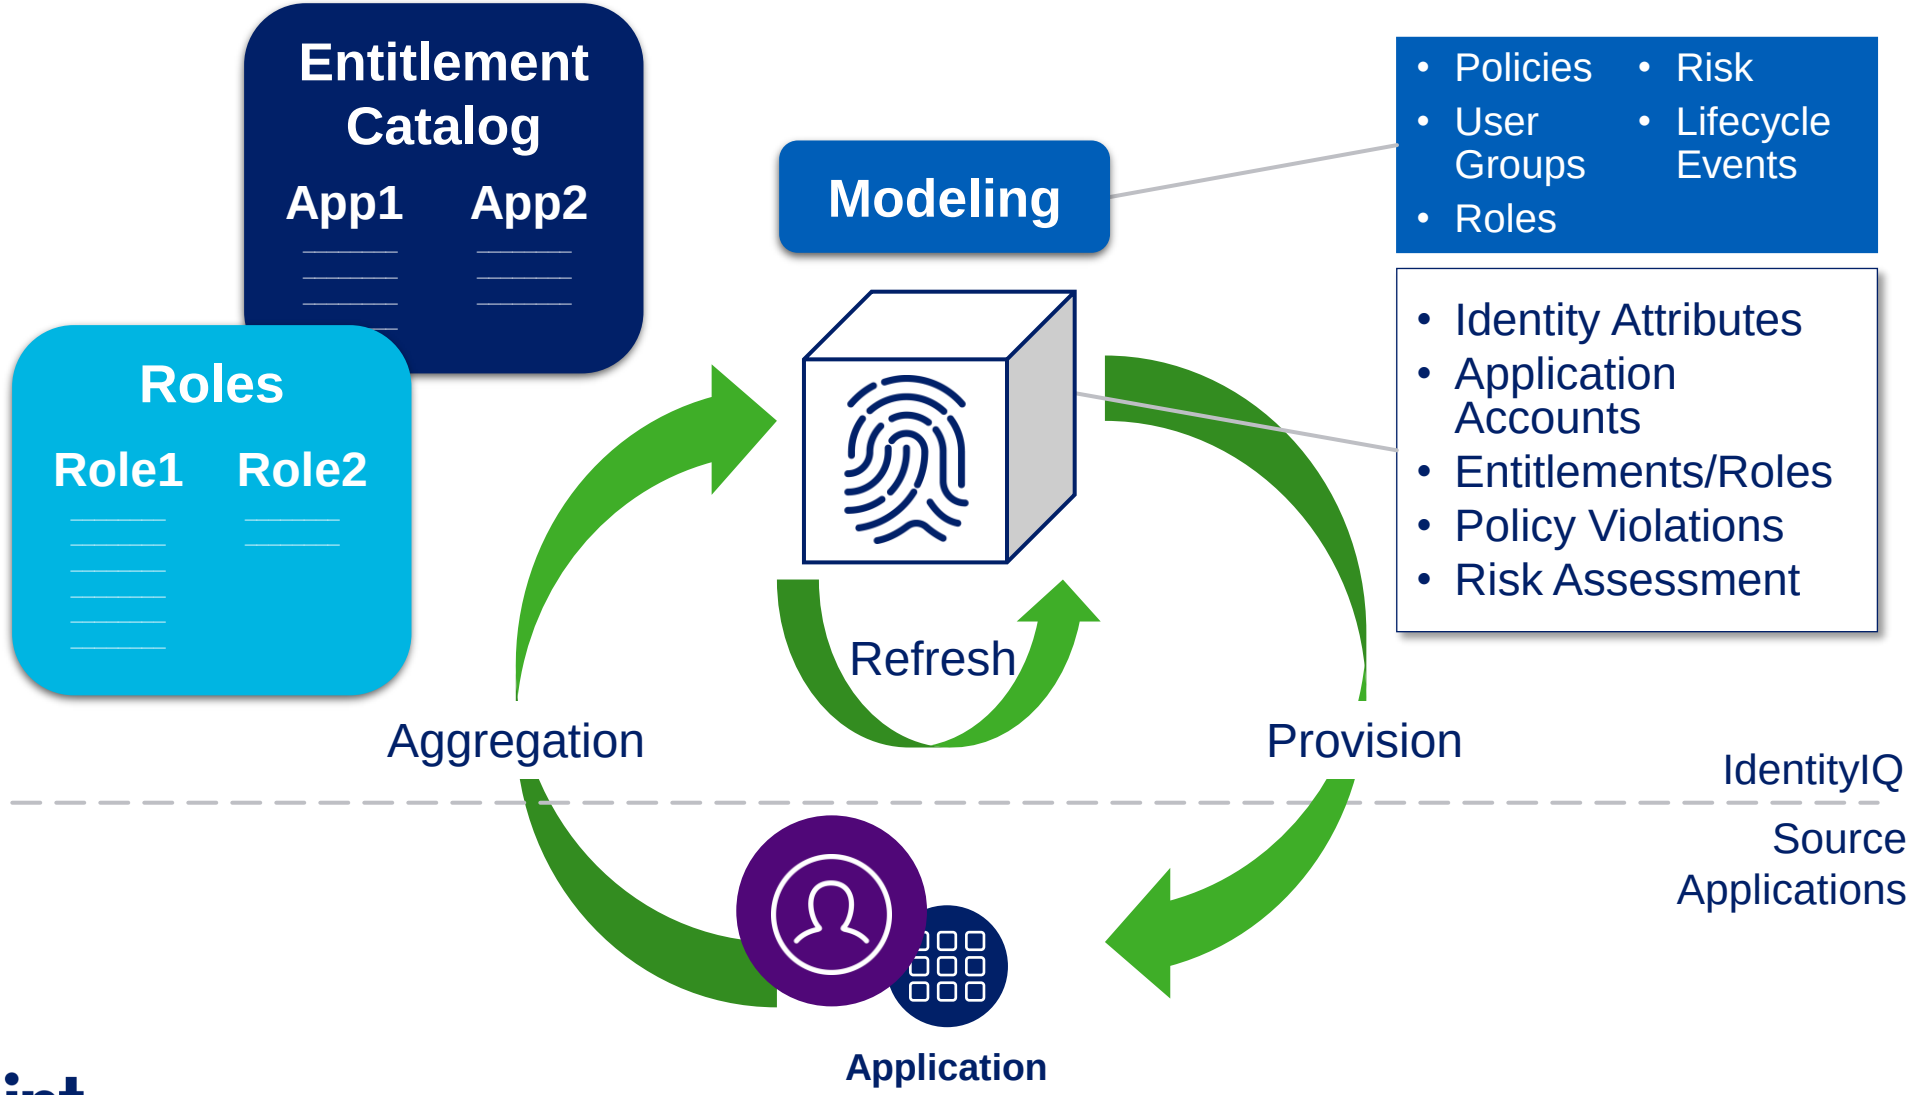

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



IdentityIQ Functional Elements

IdentityIQ Essentials

IdentityIQ Functional Elements


- Tasks
- Business Processes (workflows)
- Rules

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Objects: Data and Actors

Tasks and Business Processes


- All data is stored in IdentityIQ as objects
- Tasks are batch jobs that act on objects
  - Scheduled or manually run
  - No user interaction
- Business processes are a set of executable steps that act on objects
  - Respond to actions in the system
  - Often interact with a user

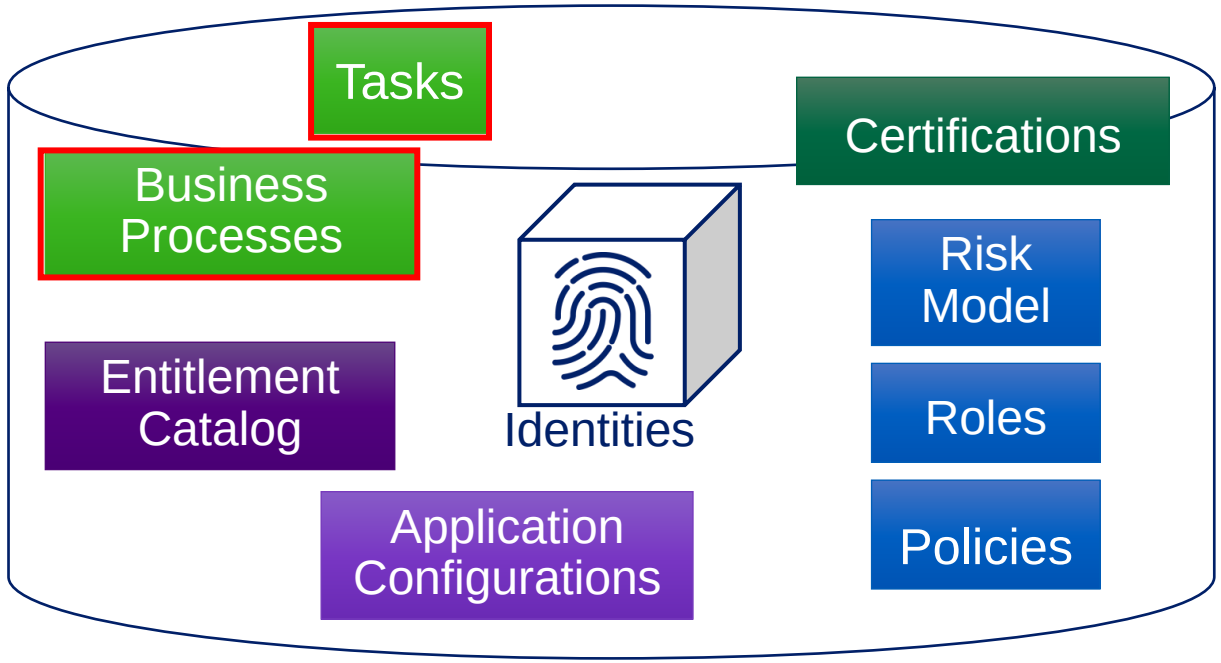

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Example Task and Business Process

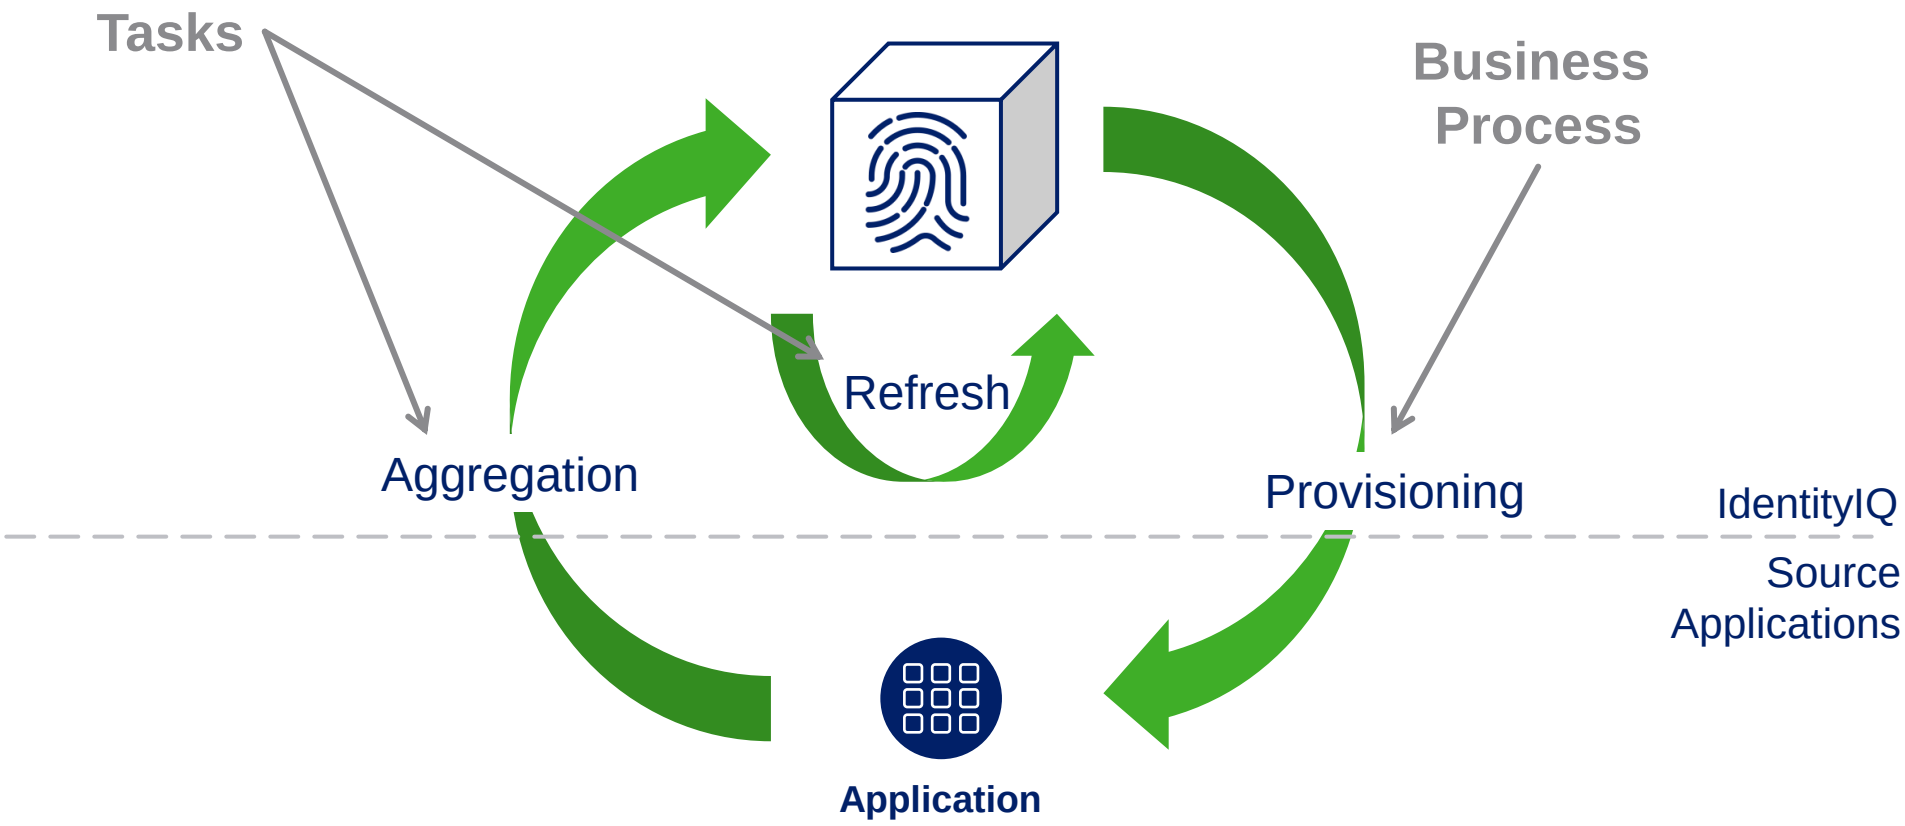

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Tasks


- Many standard tasks are pre-configured
- Many task templates are provided
- Implementation team
  - Configures tasks
  - Can develop tasks specific to your environment
- System administrator
  - Responsible for monitoring tasks

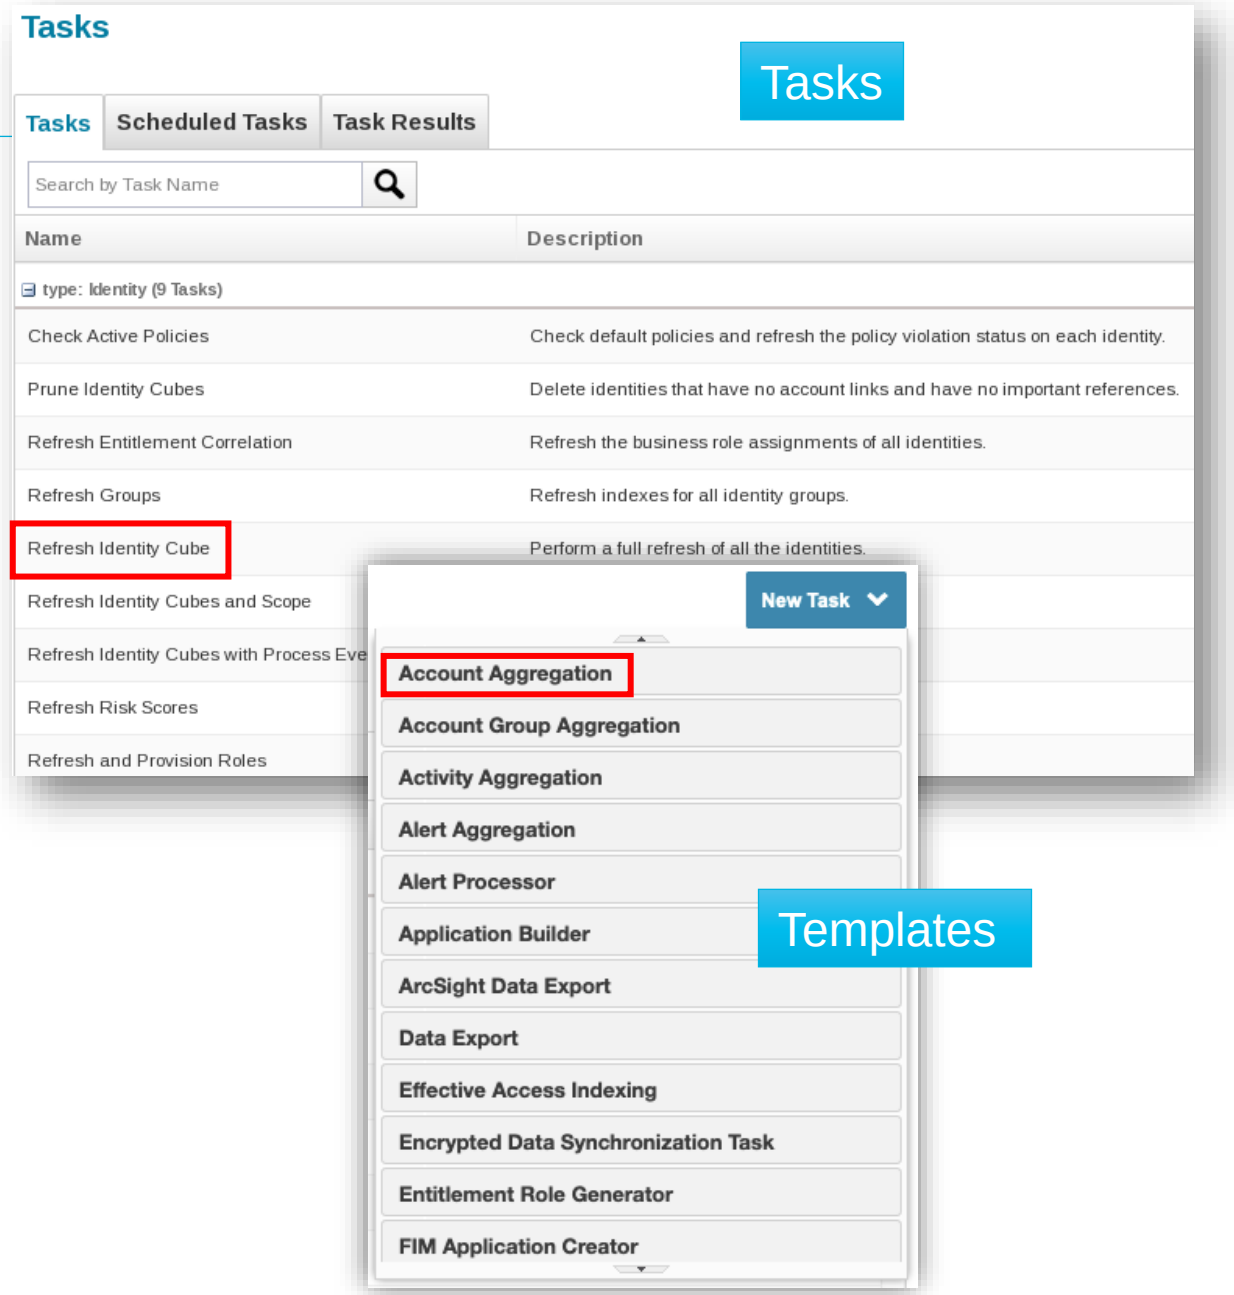

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Business Processes (Workflows)

- A runnable repeatable set of steps to perform work
- Triggered by system events or a user request

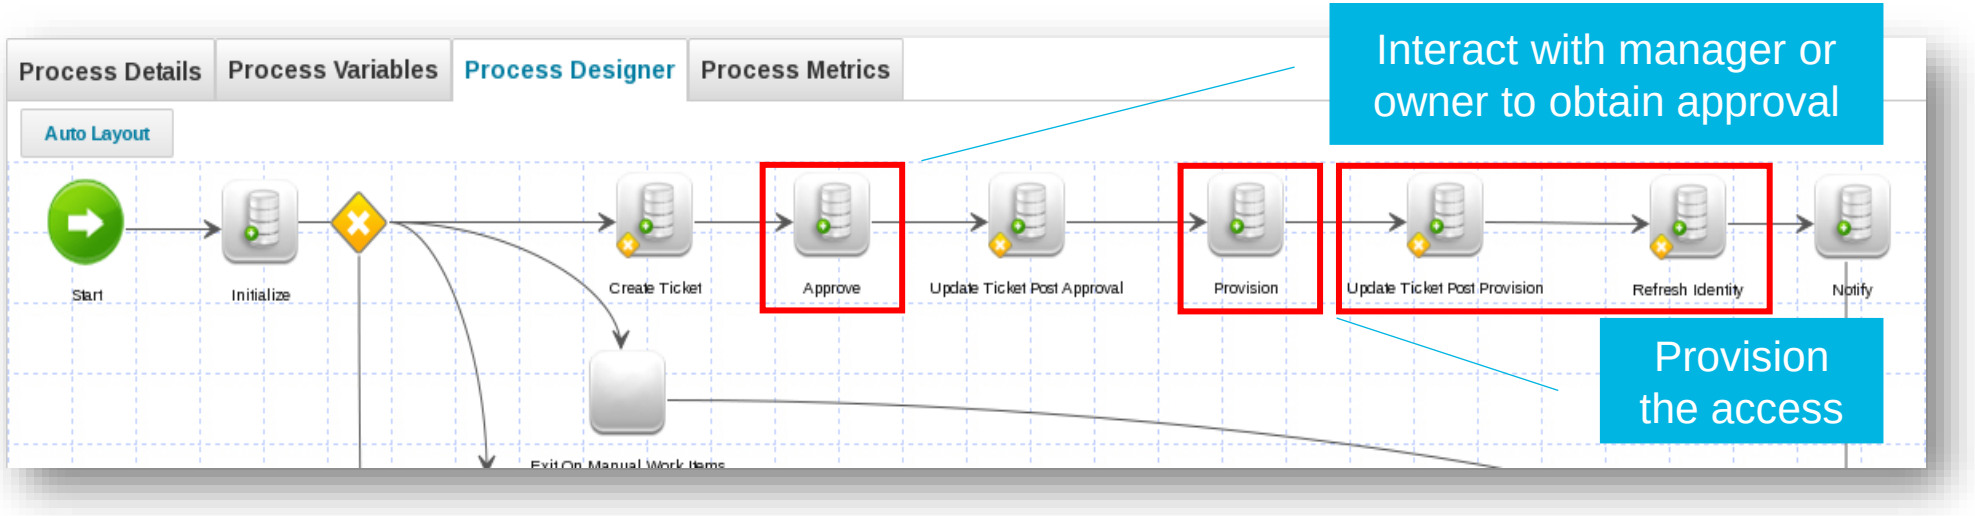

- Business processes are pre-defined in IdentityIQ
- Implementation team responsibilities
  - Configure business processes
  - Can develop business processes specific to your environment


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Incorporating Business Logic

BeanShell Rules

- Snippets of user code written to inject business logic
- Common uses
  - Control certification behavior
  - Customize data during aggregation
  - Define unique business policies
  - Provide application provisioning logic
  - …and many more!
- Rule “hooks” provided throughout IdentityIQ
- Stored as reusable objects in the database

Quicklink Example

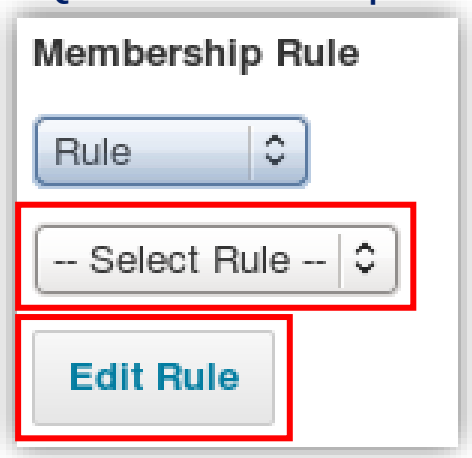

Certification Example



Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint




IdentityIQ Implementation Overview

IdentityIQ Essentials

Implementation Projects

Key Considerations

- Phased Approach
  - By application
  - By functionality
- Clean-up Data
  - User accounts/entitlements
  - Entitlement catalog
  - Identity attributes

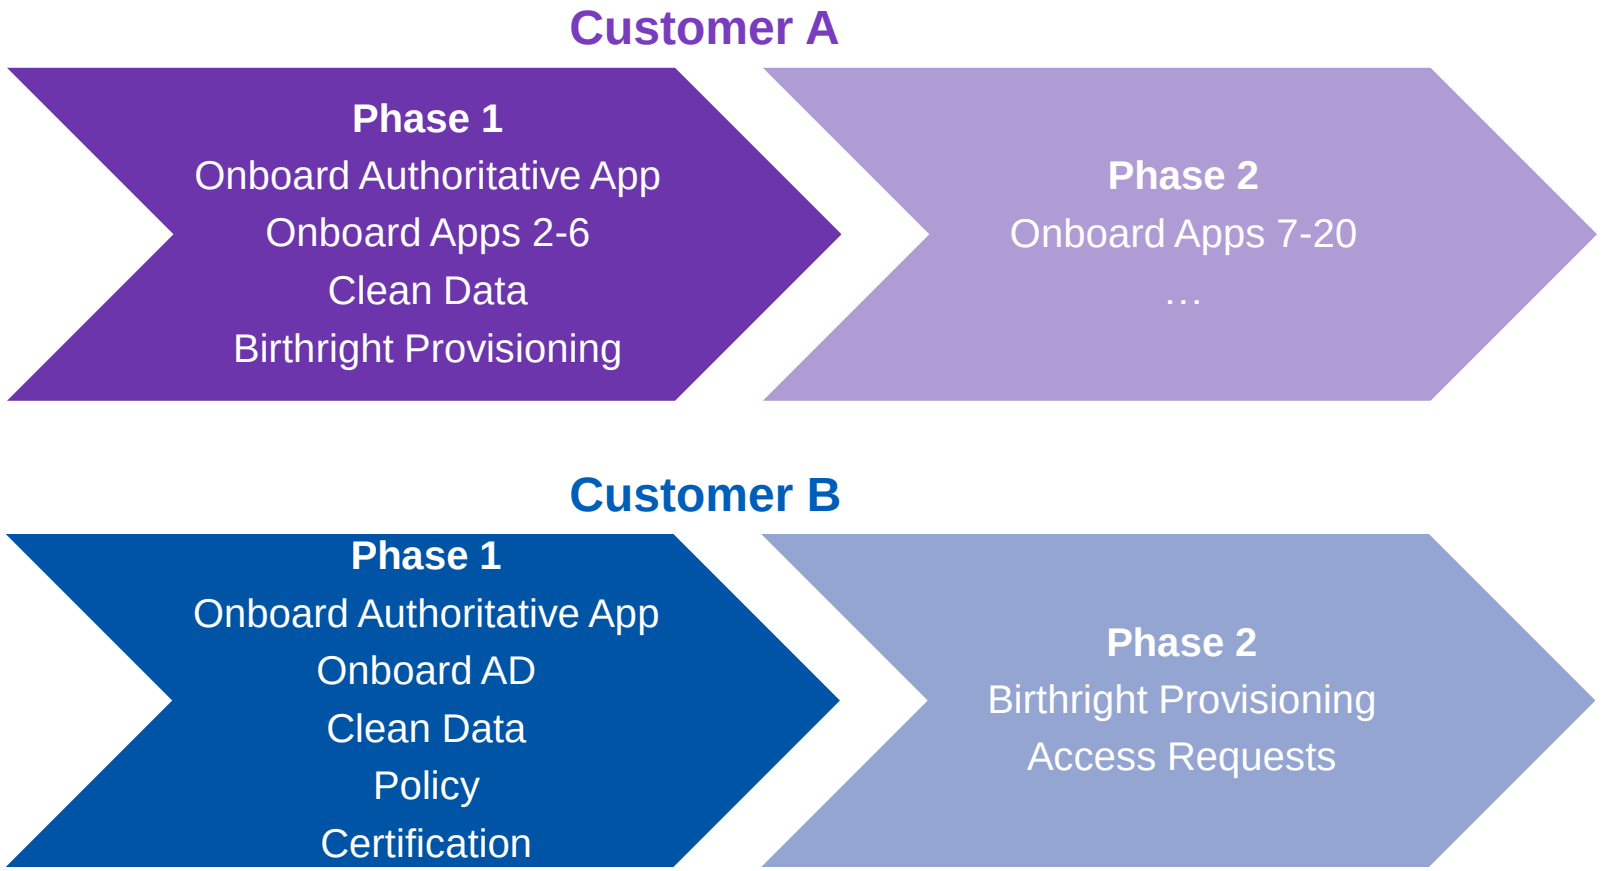

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Implementation Options

Rapid Setup

- Allows a broad team of people to participate in deployment
- Supported by core product data structure
- Framework for quick configuration of common scenarios
- Available since IdentityIQ 8.1
- Preferred option

Standard IdentityIQ Configurations

- Options for all configurations needs
- Available in all versions of IdentityIQ
- Leveraged by technical team

Accelerator Park

- Same technical goal as Rapid Setup
- Leverages IdentityIQ extension options
- Available since IdentityIQ 7.3

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Implementation Project from Class Exercises

Phased Implementation

- Phase 1
  - Onboard identities
  - Organize identities and grant IdentityIQ capabilities
  - Aggregate account and entitlement data into IdentityIQ
  - Manage account and entitlement data
- Phase 2
  - Implement compliance
  - Define access model (roles)
- Phase 3
  - Set up for provisioning
  - Enable provisioning based on data changes
  - Enable provisioning based on user requests

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Next Step?

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 1, Exercise 1

- Exercise 1: Configure IdentityIQ
  - Confirm installation of IdentityIQ
    - Manual installation instructions
      - Included in appendix
      - Useful for reference and later practice
  - Redirect email
  - Update object expiration
  - Configure auditing

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Product Architecture

IdentityIQ Essentials

IdentityIQ Platform Modules




Foundational Modules
- Focus of this class

Extension Module
- Identity and Access Management for Files

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Detailed Architecture Overview

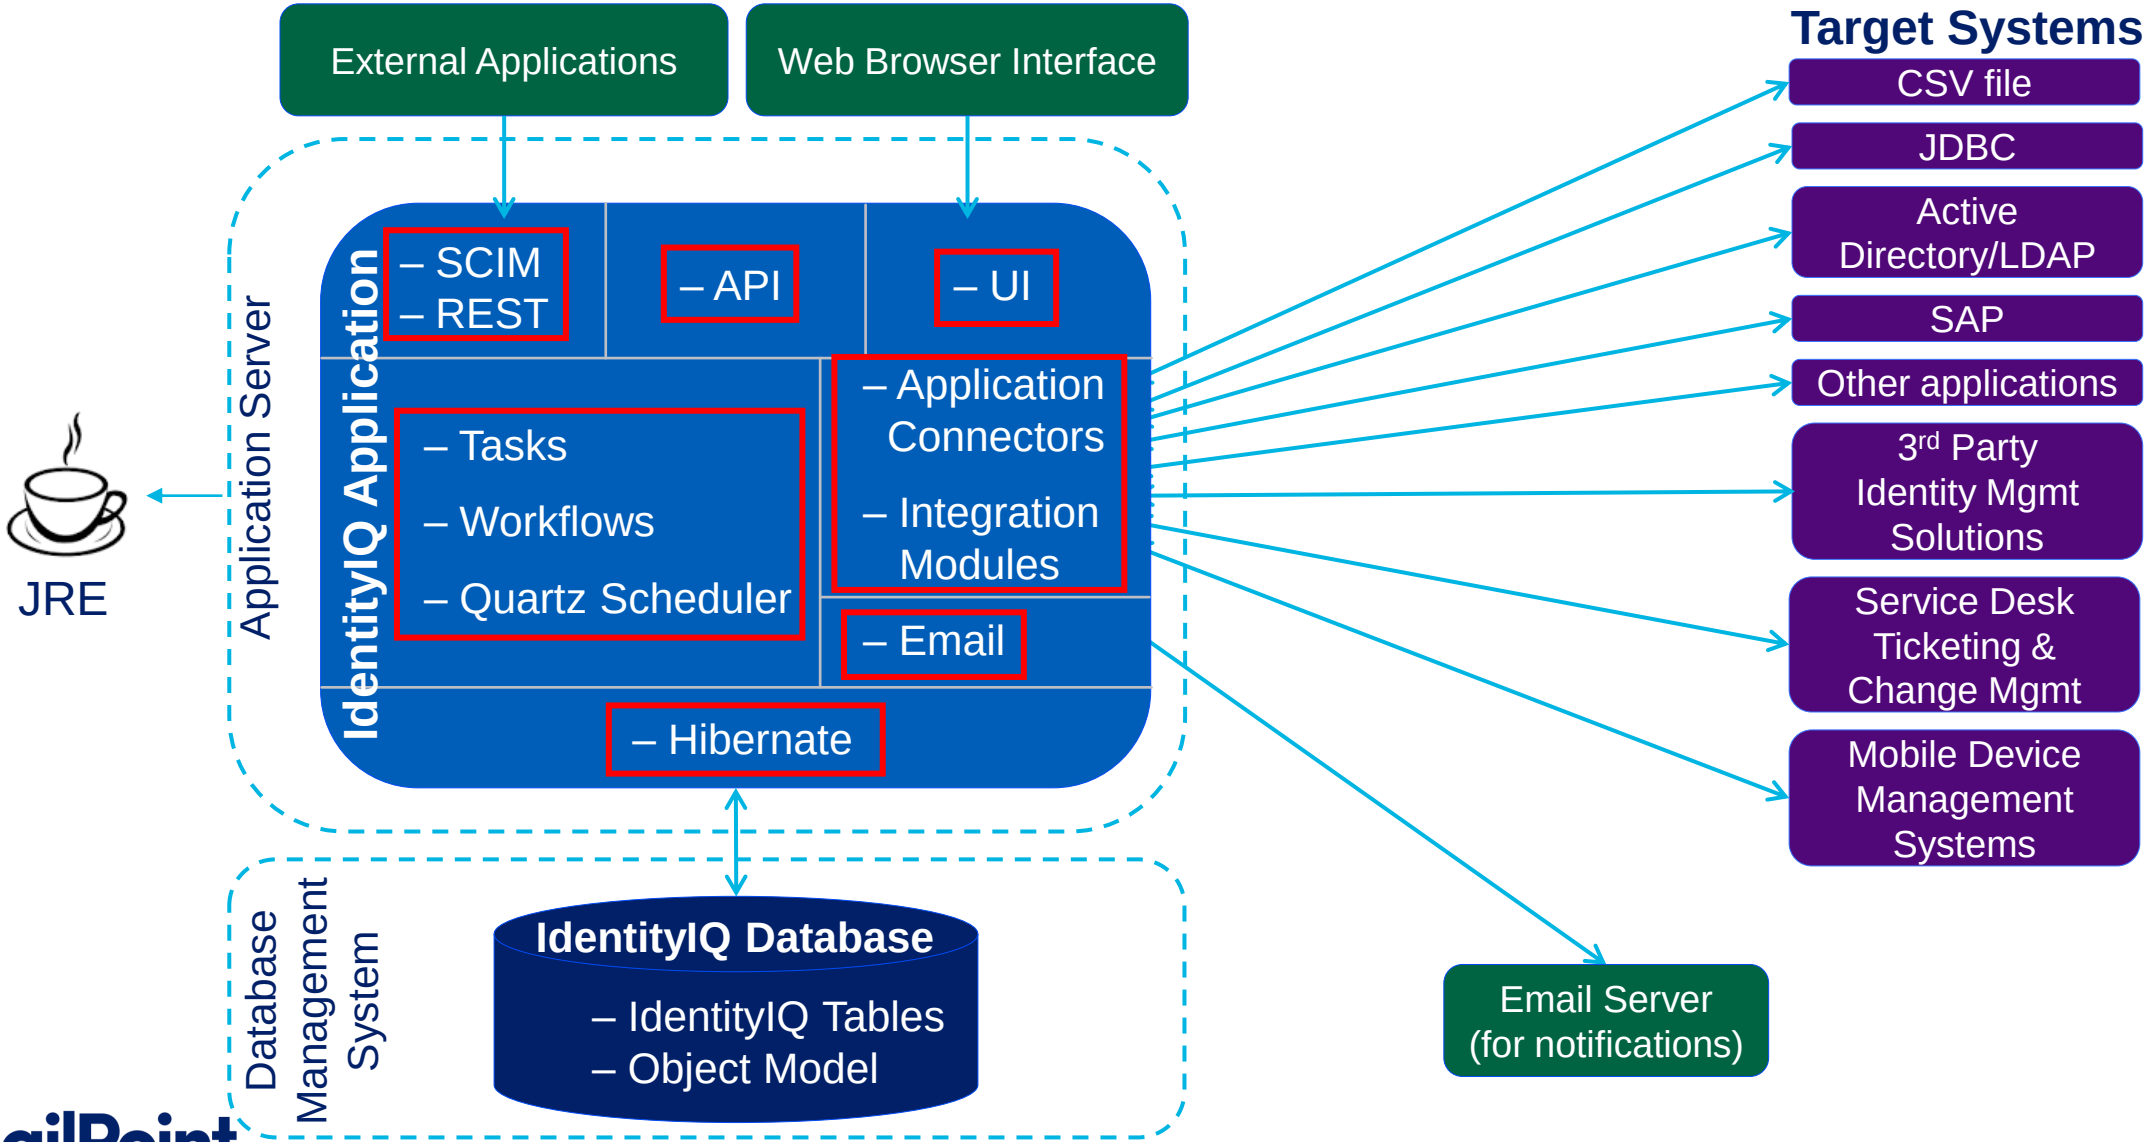

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

System Choices

Supported Platforms

- Application Servers
  - Tomcat
  - WebSphere & WebSphere Liberty
  - WebLogic
  - JBoss
- Databases
  - MySQL
  - Oracle
  - MS SQL Server
  - DB2
  - AWS Aurora (cloud)
  - Azure SQL (cloud)
- Java Platform
  - Oracle JDK
  - Red Hat OpenJDK (Linux)
  - AdoptOpenJDK (Windows)
- Supported Cloud Platforms
  - AWS EC2
  - Azure VM
- Browsers
  - Firefox
  - Internet Explorer and Edge
  - Google Chrome
  - Safari

Deploy what you are most comfortable maintaining!!!!

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.



SailPoint



IdentityIQ Installation

IdentityIQ Essentials

IdentityIQ Installation Process

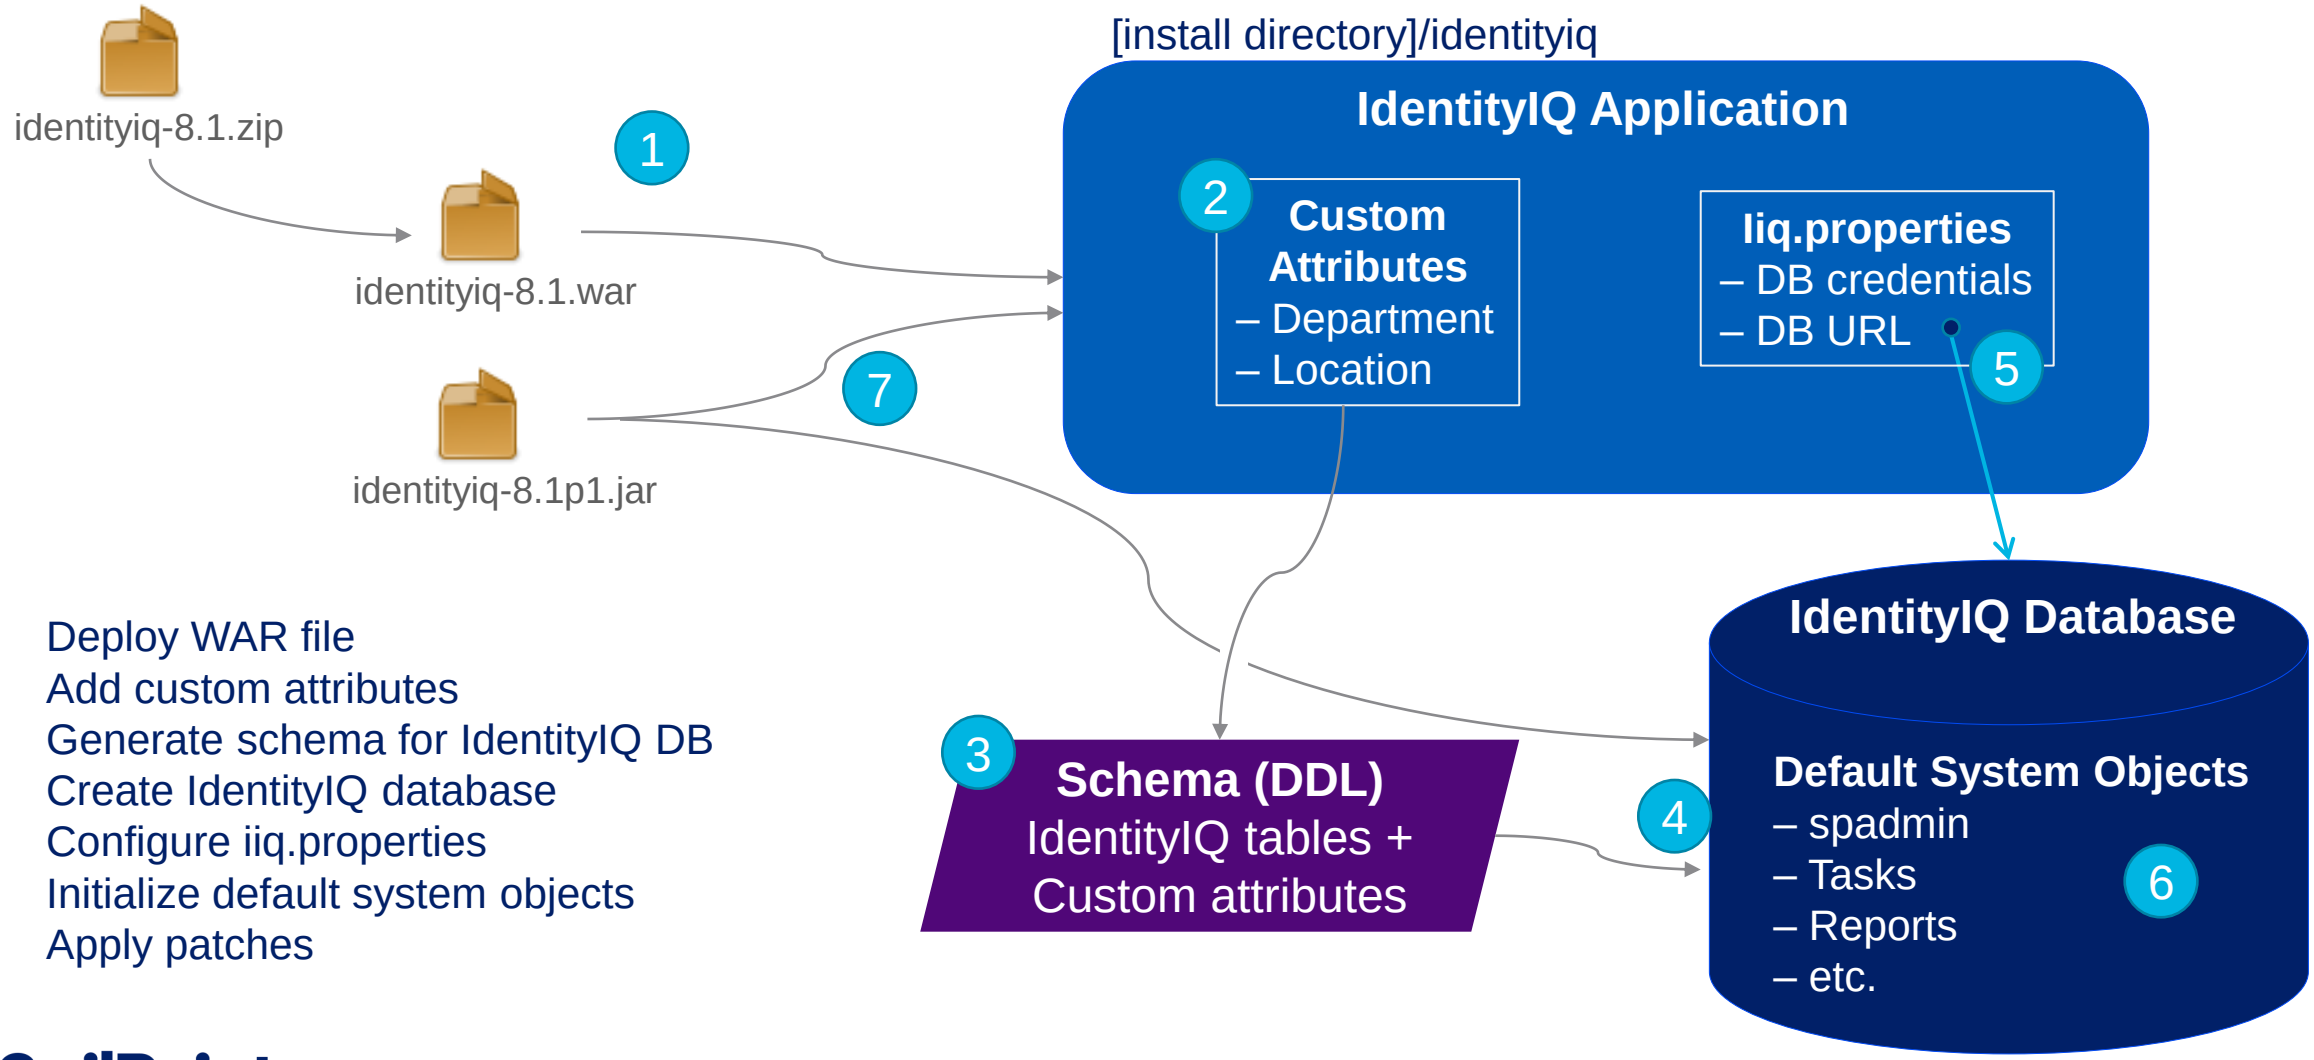

1. Deploy WAR file
2. Add custom attributes
3. Generate schema for IdentityIQ DB
4. Create IdentityIQ database
5. Configure iiq.properties
6. Initialize default system objects
7. Apply patches

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


IdentityIQ Extended Attributes

Storage

- Several objects can be extended
  - Applications
  - Roles (bundle)
  - Certification Items
  - Identities
  - Accounts (link)
  - Entitlements (managed attributes)

- Created through GUI
  - Not marked searchable
    - Stored in a CLOB
    - Efficient loading and storage
  - Marked searchable
    - Stored in their own column
    - Efficient for searching
    - Supports ad hoc queries, correlating accounts to identities, etc.

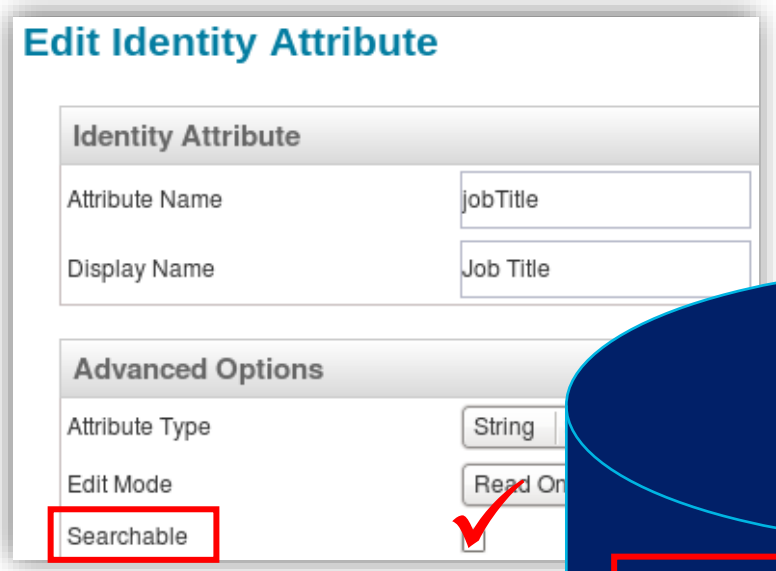

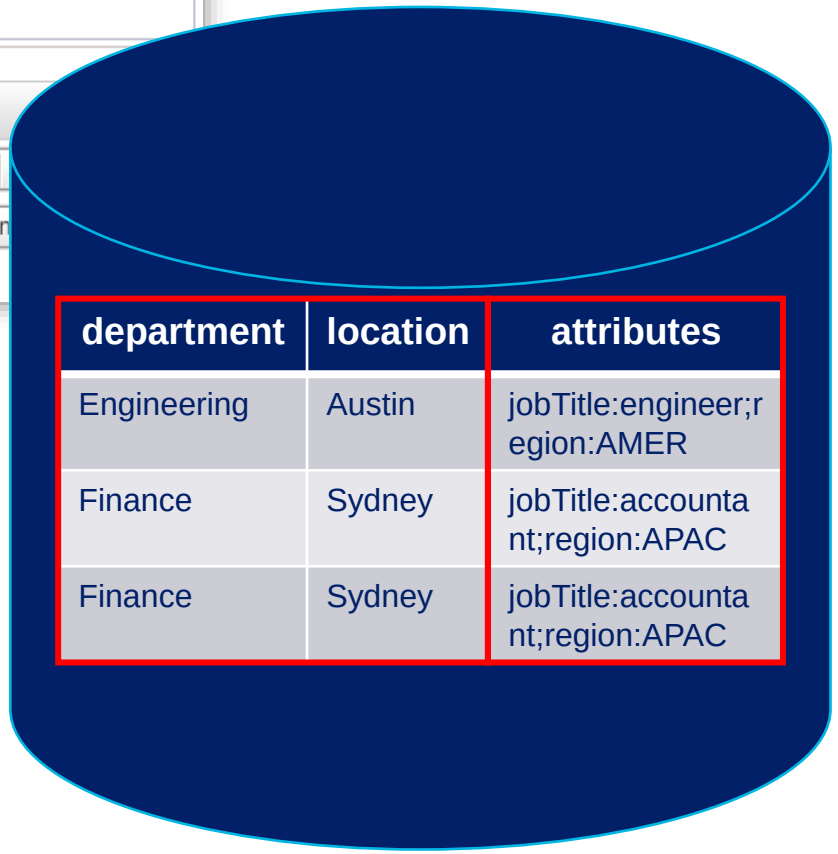


department	location	attributes
Engineering	Austin	jobTitle:engineer;region:AMER
Finance	Sydney	jobTitle:accountant;region:APAC
Finance	Sydney	jobTitle:accountant;region:APAC

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Database Schema Configuration

3 Types of Searchable Attributes

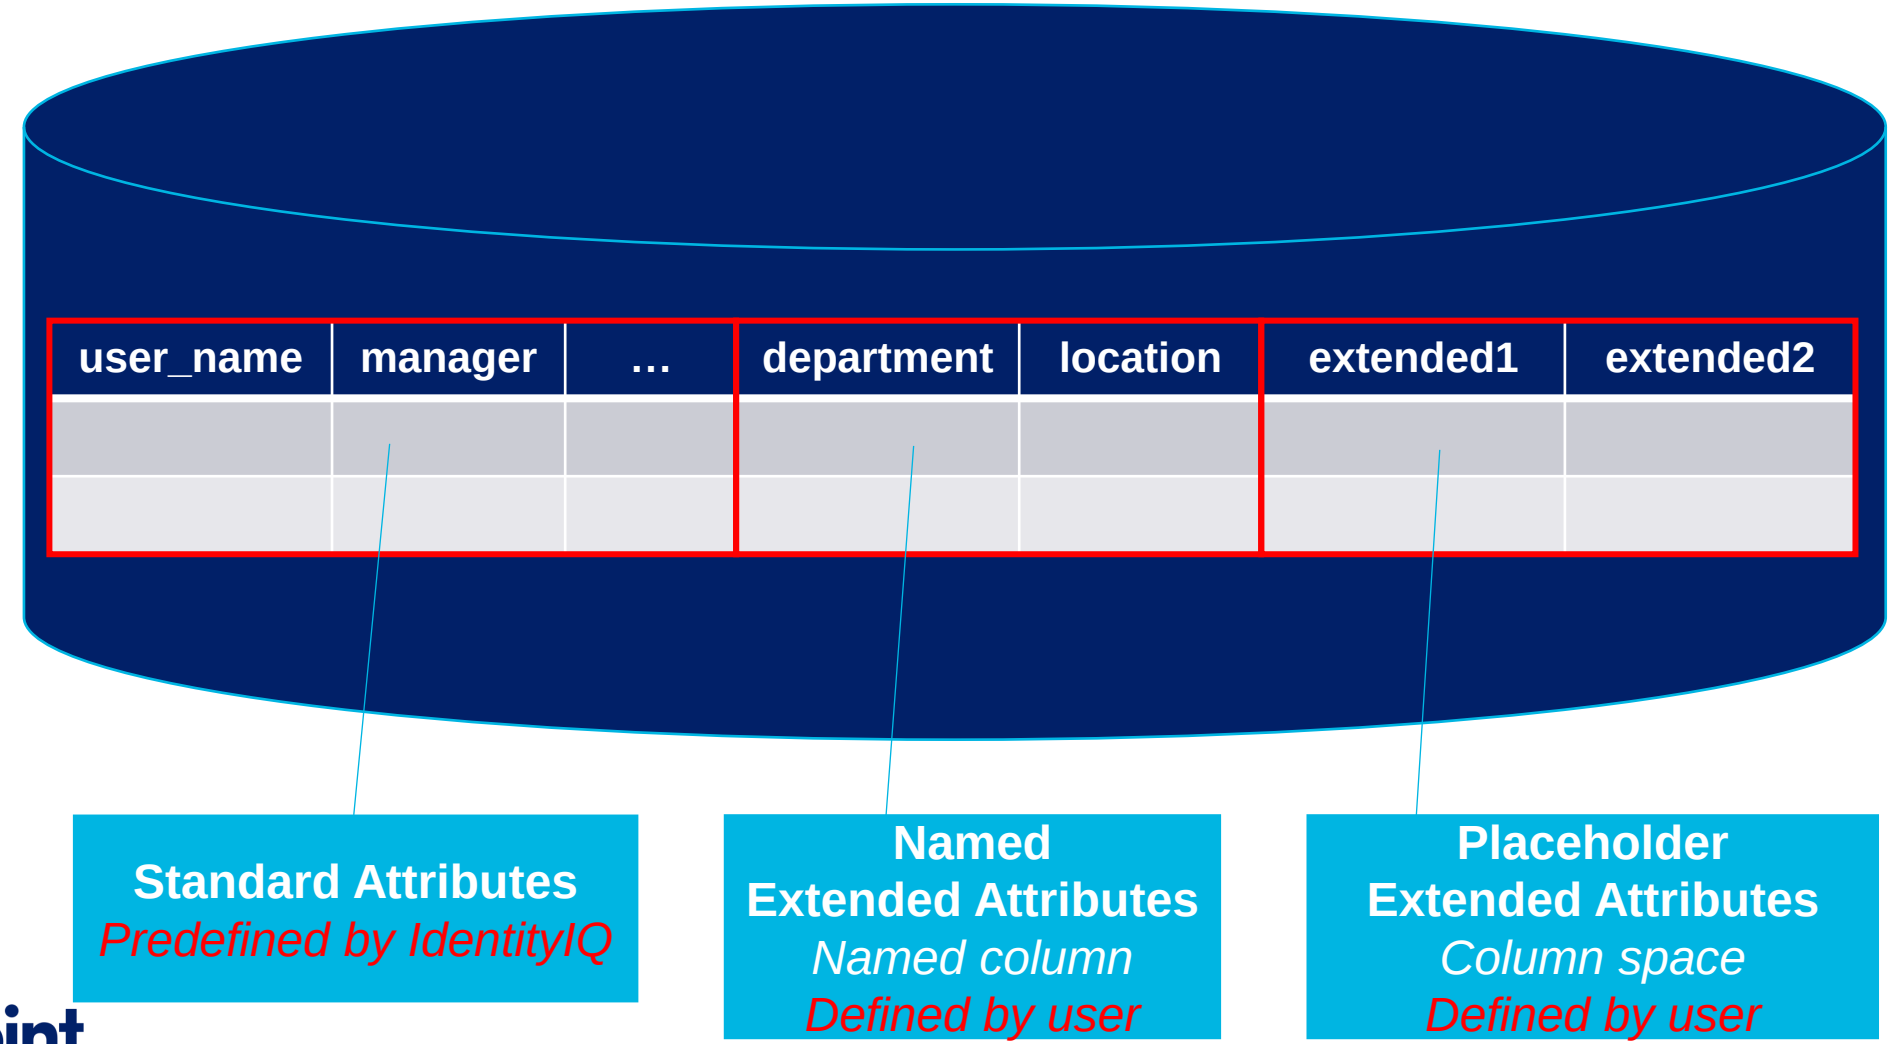


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configure Database Schema

Adding Database Columns for Extended Attributes

- Edit the appropriate Hibernate XML files
  - Add columns
  - Optionally specify indices

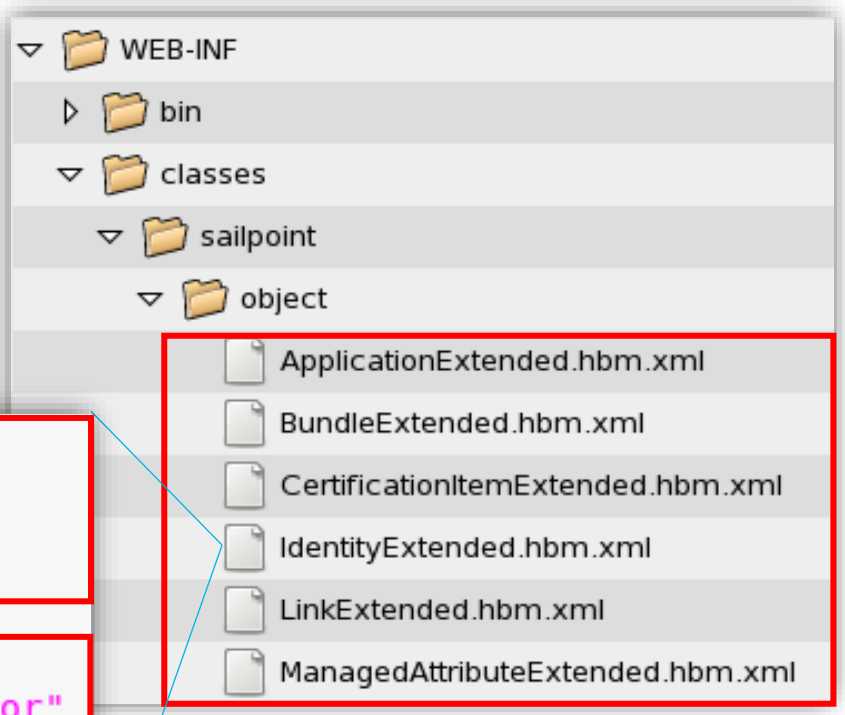

IdentityExtended.hbm.xml

```
<property name="extended1" type="string" length="450"
              index="spt_identity_extended1_ci"/>
<property name="extended2" type="string" length="450"
              index="spt_identity_extended2_ci"/>

<property name="department" type="string" length="450"
        access="sailpoint.persistence.ExtendedPropertyAccessor"
        index="spt_identity_department_ci"/>
<property name="location" type="string" length="450"
        access="sailpoint.persistence.ExtendedPropertyAccessor"
        index="spt_identity_location_ci"/>
```

Placeholder (max 20 per object)


Named (up to DB limit)

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Generate Database Schema (DDL)

- Create IdentityIQ database
  …/WEB-INF/bin/iiq schema

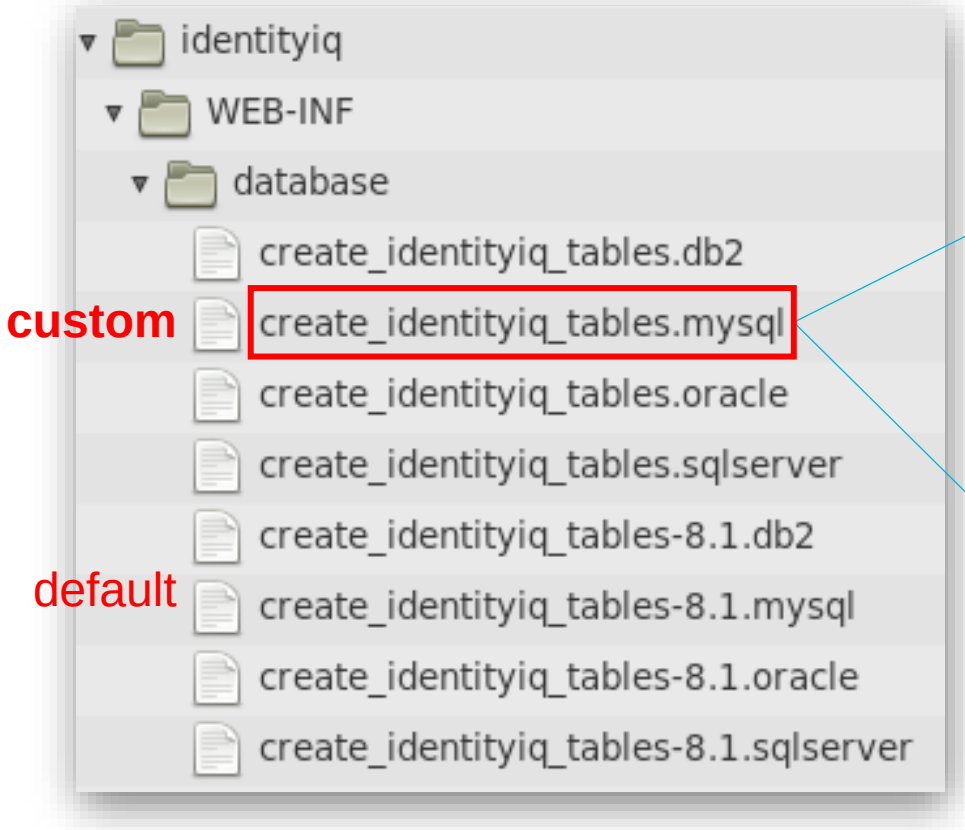

create_identityiq_tables.mysql

```
create table identityiq.spt_identity
       id varchar(32) not null,
       extended1 varchar(450),
       extended2 varchar(450),
       department varchar(450),
       location varchar(450),
       manager varchar(32),
       display_name varchar(128),
       firstname varchar(128),
       lastname varchar(128),
       email varchar(128),
       inactive bit
       …
```


SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Create IdentityIQ Database

create_identityiq_tables.mysql

```
create table identityiq.spt_identity
       id varchar(32) not null,
       extended1 varchar(450),
       extended2 varchar(450),
       depar
       locat
       ...
```

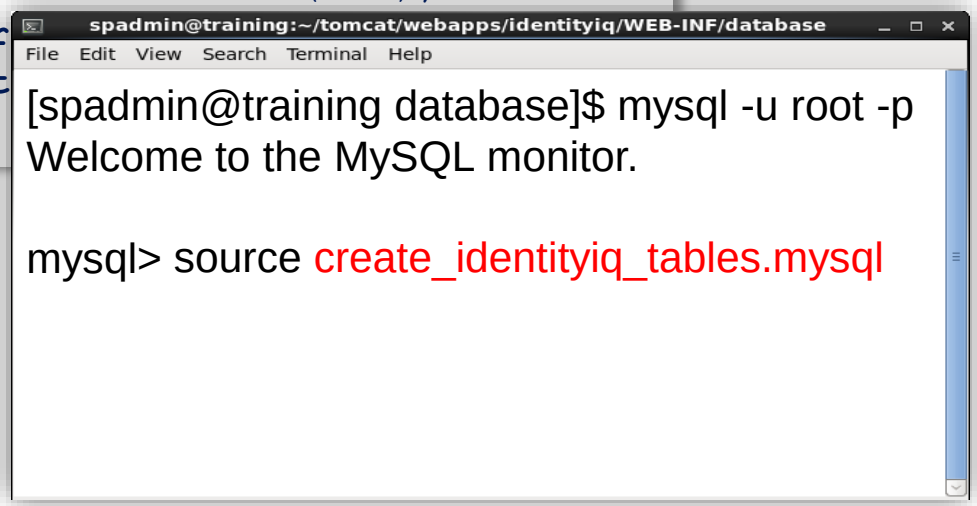


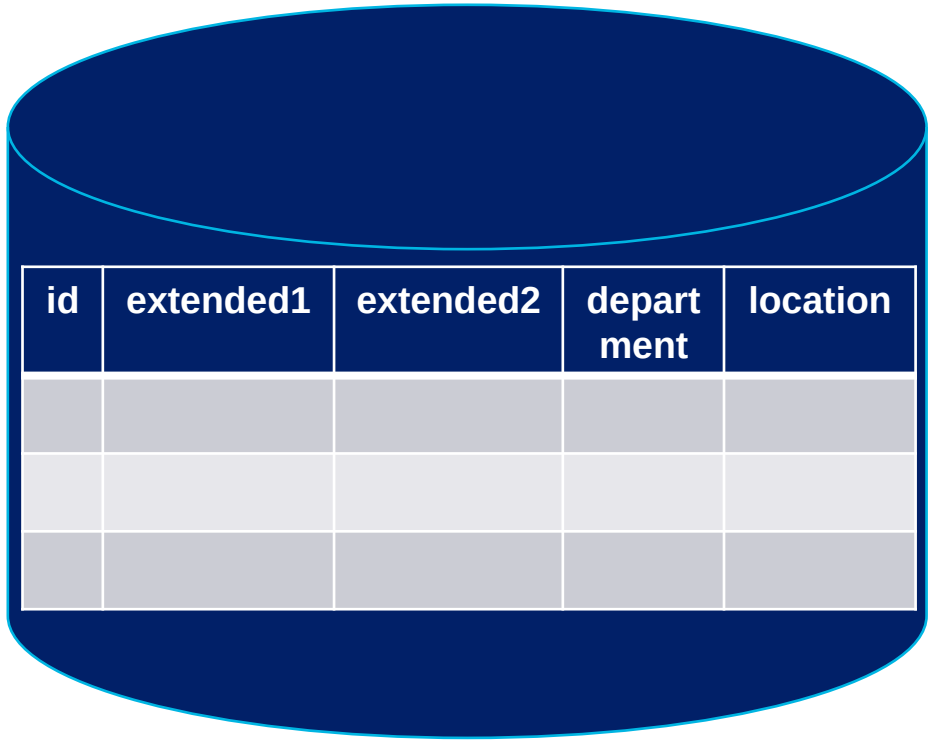


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Using New Database Columns

Searchable Attributes

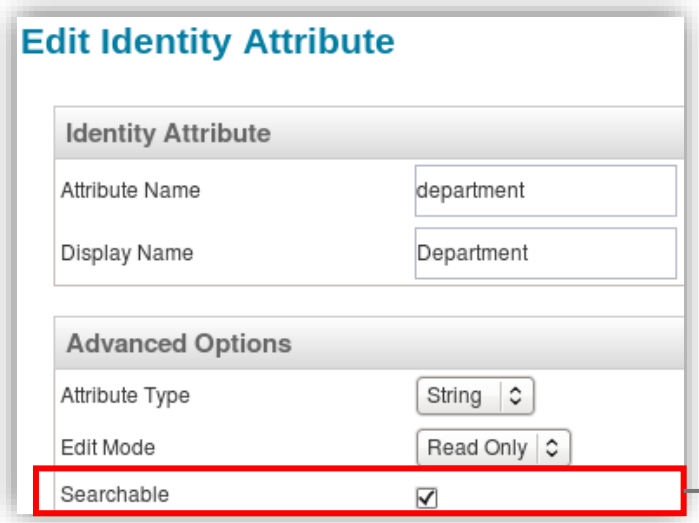

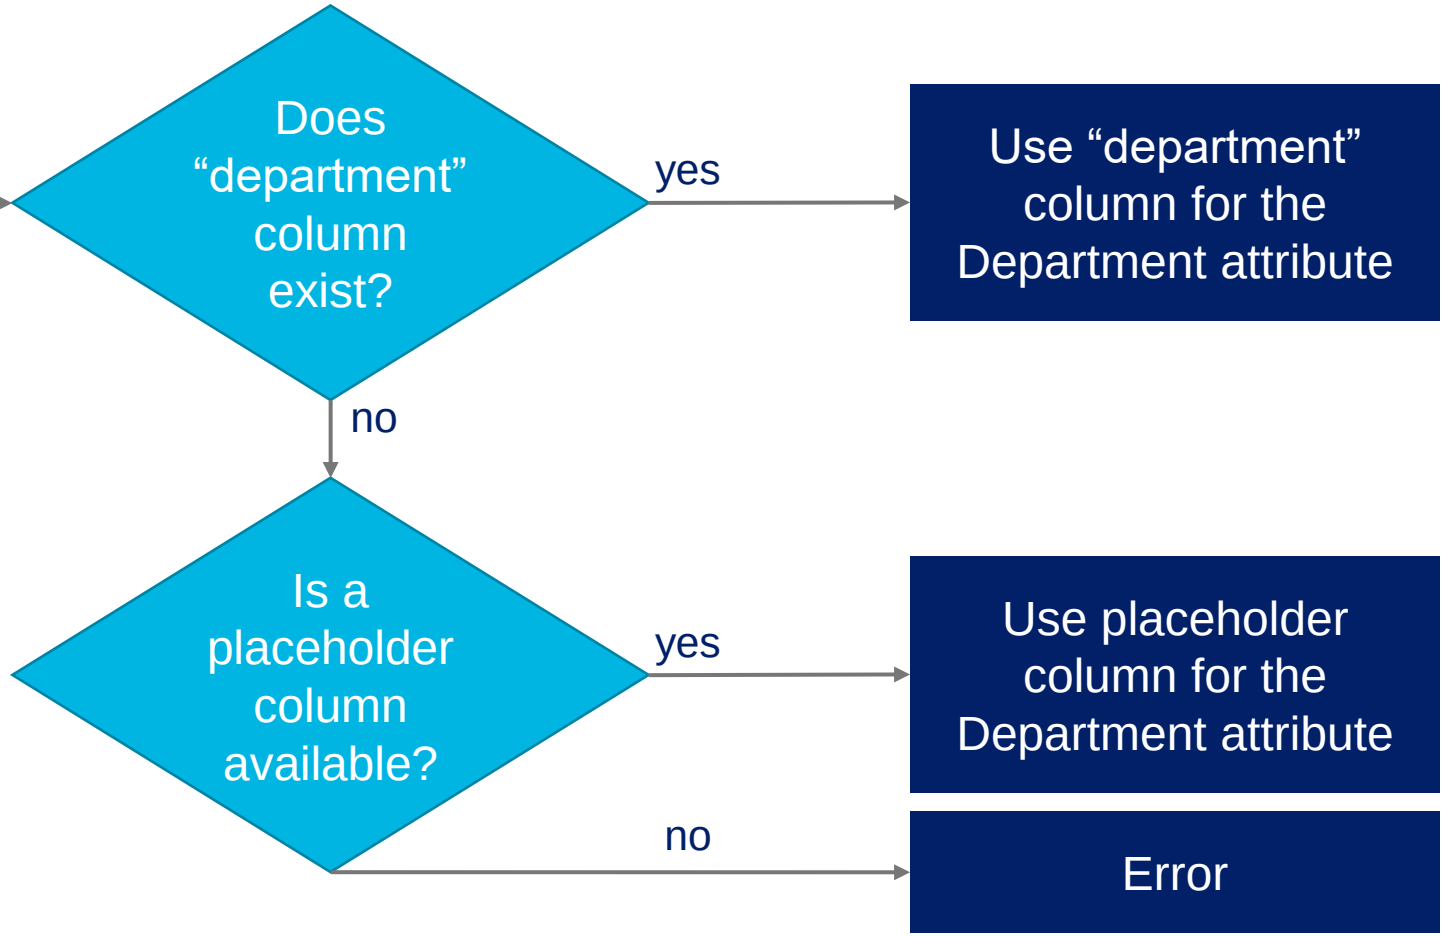

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Extend Database

Reusing Placeholder Columns

- Add named columns to hibernate file
- Create delta DDL

  …/WEB-INF/bin/iiq extendedSchema
- Locate new database schema files (DDL) in database directory

  …/WEB-INF/database
- Use delta DDL to update existing IdentityIQ database
- Move data from placeholder columns to named columns
  - See whitepaper *Managing Extended Attributes* for details

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configure IdentityIQ Properties

Identify Database to IdentityIQ

- **/WEB-INF/classes/iiq.properties**

```
dataSource.username=IdentityIQ
dataSource.password=1:iCAlakm5CVUe7+Q6hVJIBA==

##### MySQL/Aurora (without SSL) #####
dataSource.url=jdbc:mysql://localhost/identityiq?useServerPrepStmts=true&tinyInt1isBit=true&useUnicode=true&
characterEncoding=utf8&useSSL=false&serverTimezone=UTC
dataSource.driverClassName=com.mysql.cj.jdbc.Driver
sessionFactory.hibernateProperties.hibernate.dialect=org.hibernate.dialect.MySQL57Dialect
```

Database Username

Database Password
Encrypt using *iiq encrypt* command

Data Source URL specifying host/port/database


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Initialize IdentityIQ Default Objects

- Initializing IdentityIQ
  …/WEB-INF/bin/iiq console
  > import init.xml

- Initializing IdentityIQ Lifecycle Manager
  …/WEB-INF/bin/iiq console
  > import init-lcm.xml

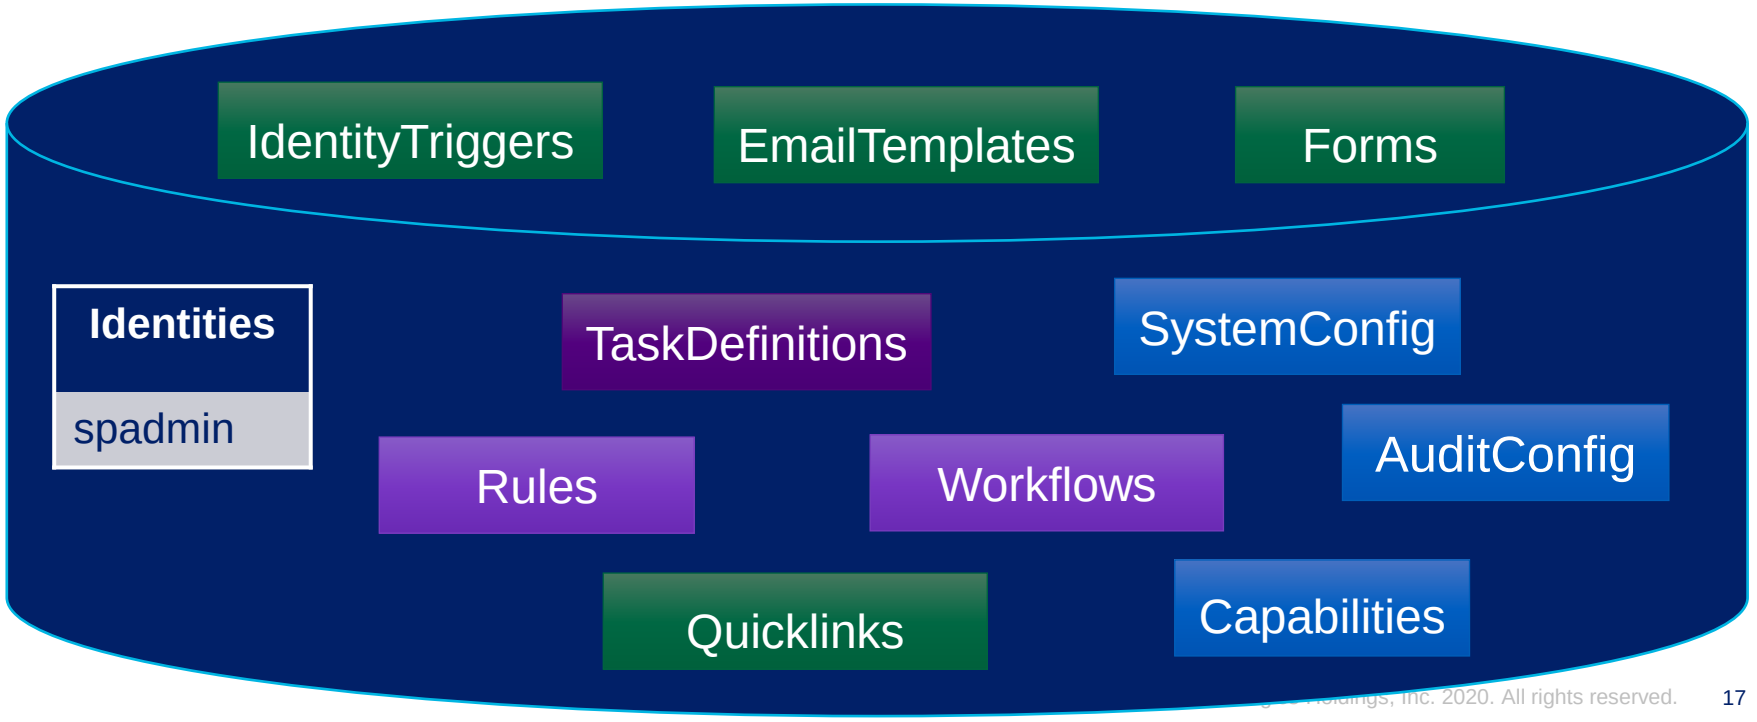

SailPoint

SailPoint Technologies, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Creating Identity Cubes

IdentityIQ Essentials

Overview

Creating Identity Cubes

- Identity Cube overview
- Authoritative application configuration
- Aggregation task

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Cubes

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Cube

- Term to refer to all information we have collected in IdentityIQ about any given identity (e.g. person or access-holding entity)
- Stores all information known about an identity

  Examples:
  - Identity Attributes
  - Application Accounts
  - Entitlements/Roles
  - Risk Score
  - Policy Violations
  - User Rights
- Information on the cube is
  - Discovered
  - Requested
  - Assigned
  - Calculated




SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

How are Identity Cubes Created?

- Automatically through account aggregation
  - Mark “system of record” application as authoritative
  - Process creates authoritative Identity Cube for each account
  - Identity Attributes populated from authoritative applications

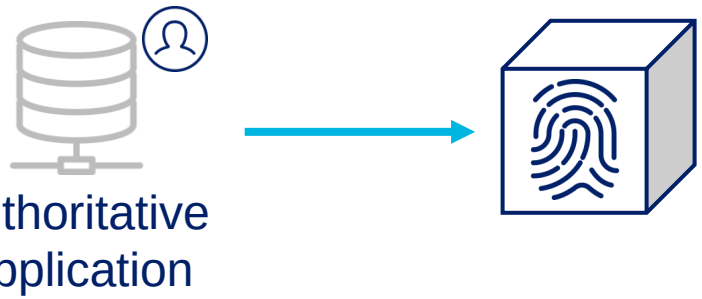


- Manually using Lifecycle Manager
  - Form presented to user to enter Identity Attributes

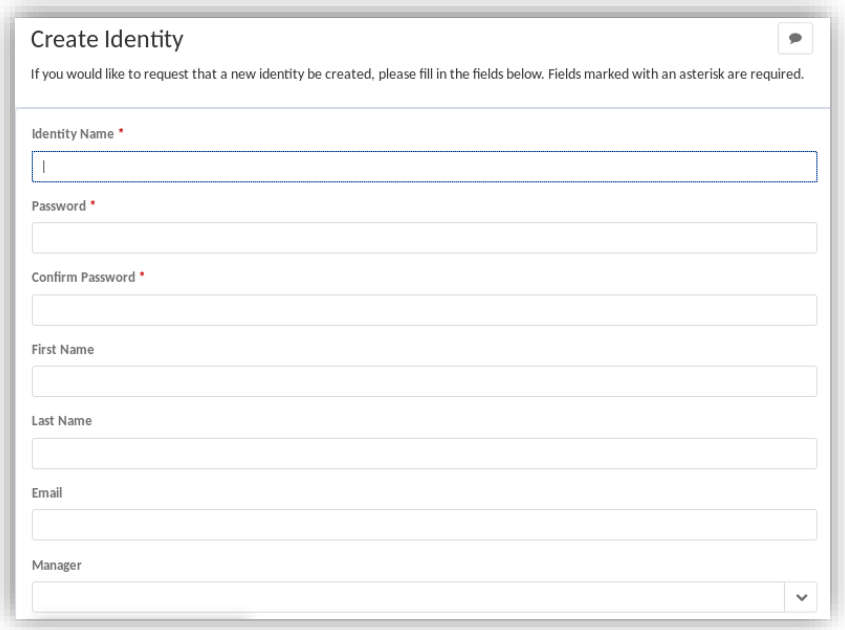

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Cube – User Interface

Identity Attributes

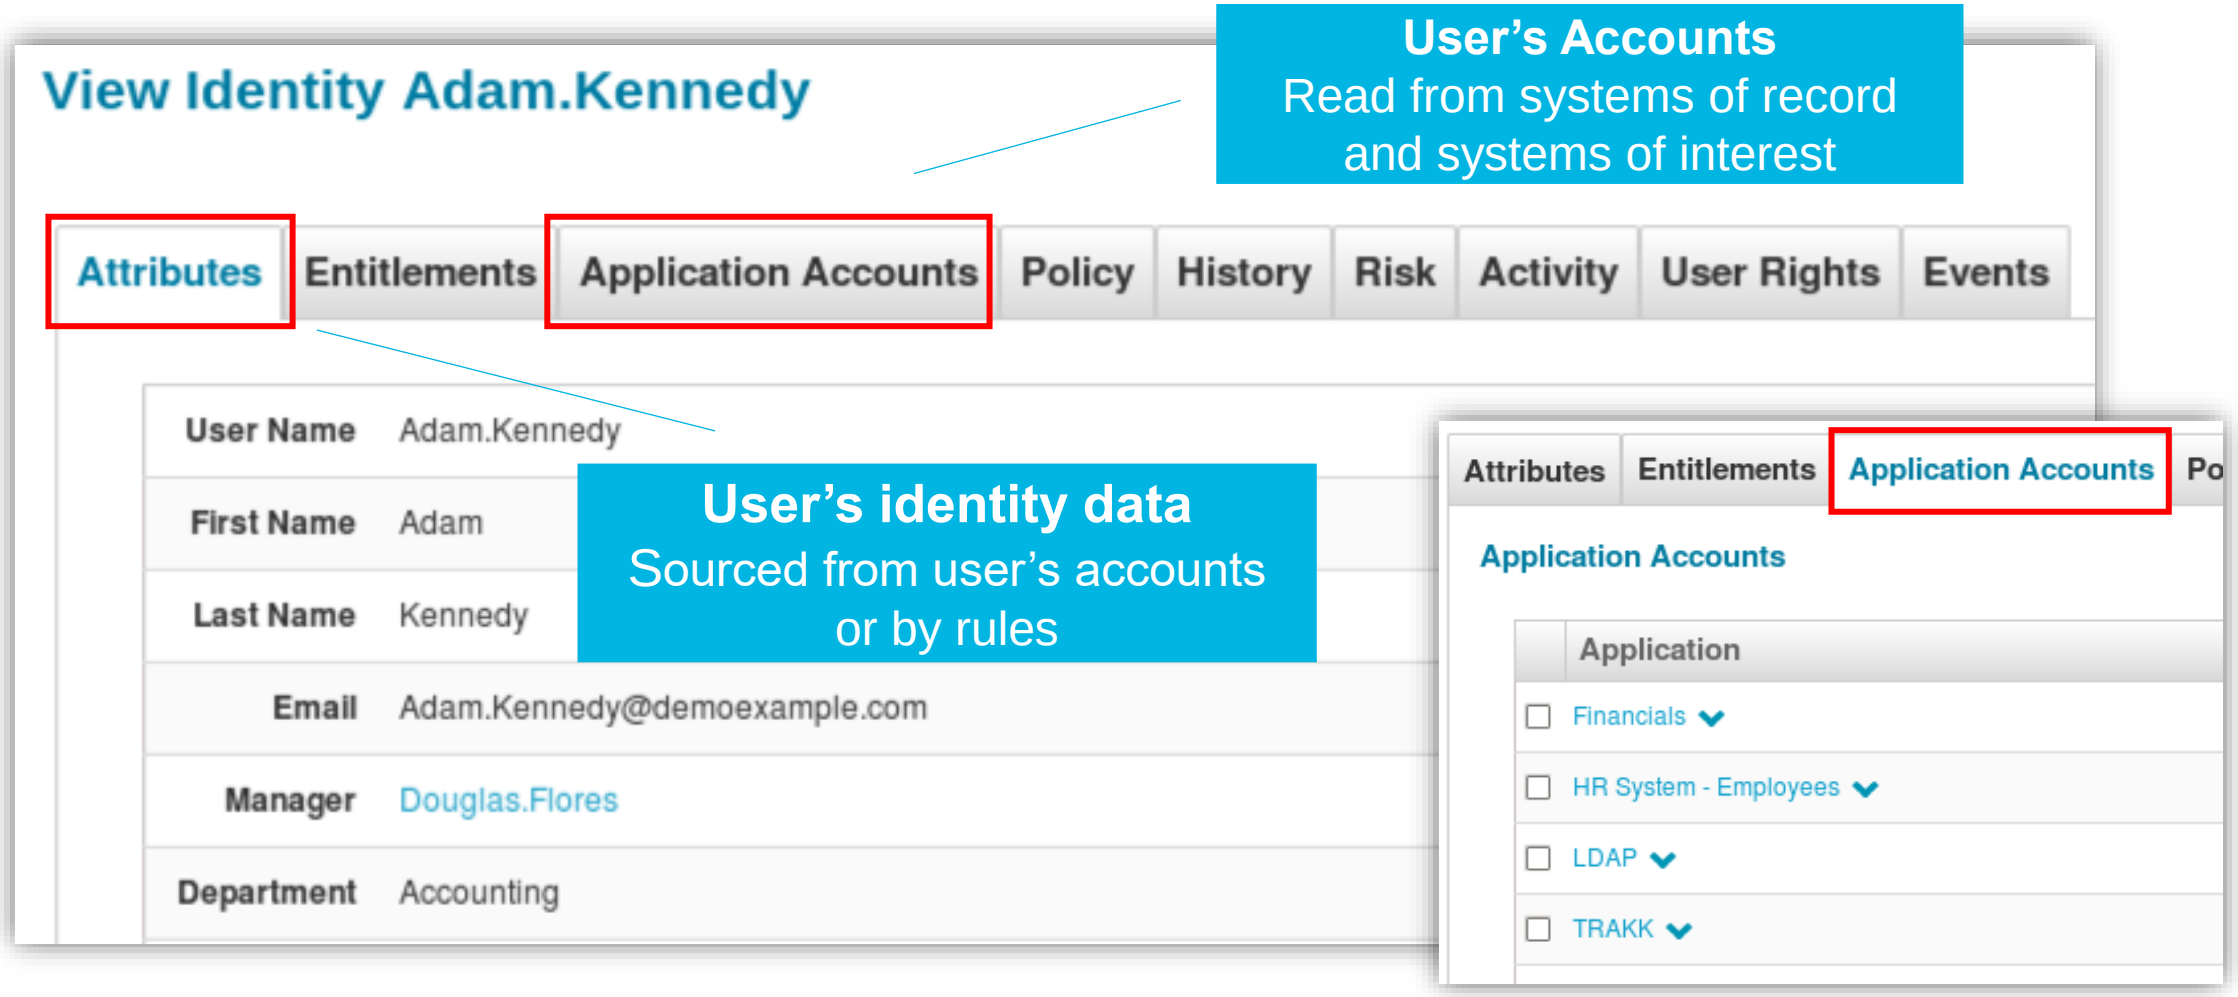


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configuring Authoritative Applications

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Application/Connector Configuration

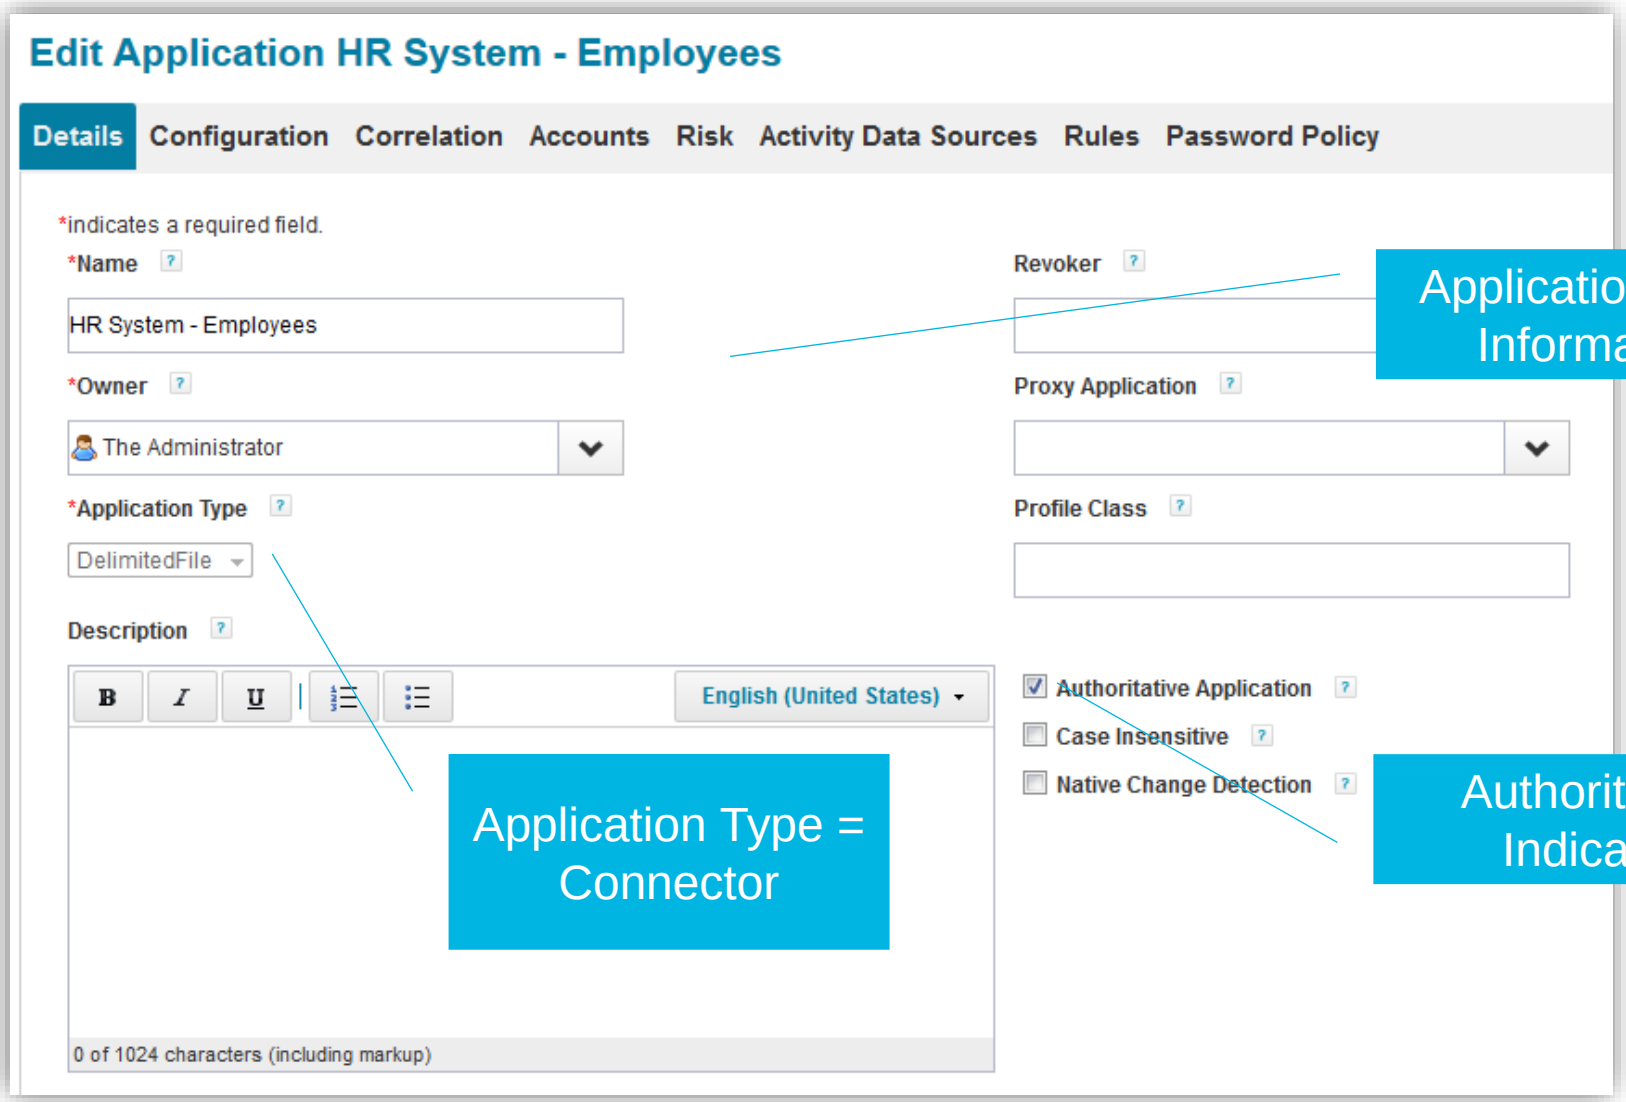


Applications → Application Definition → Add New Application

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Schema

- Represents application account
- Defines which account attributes to read
- Often pre-defined
- Required for each application

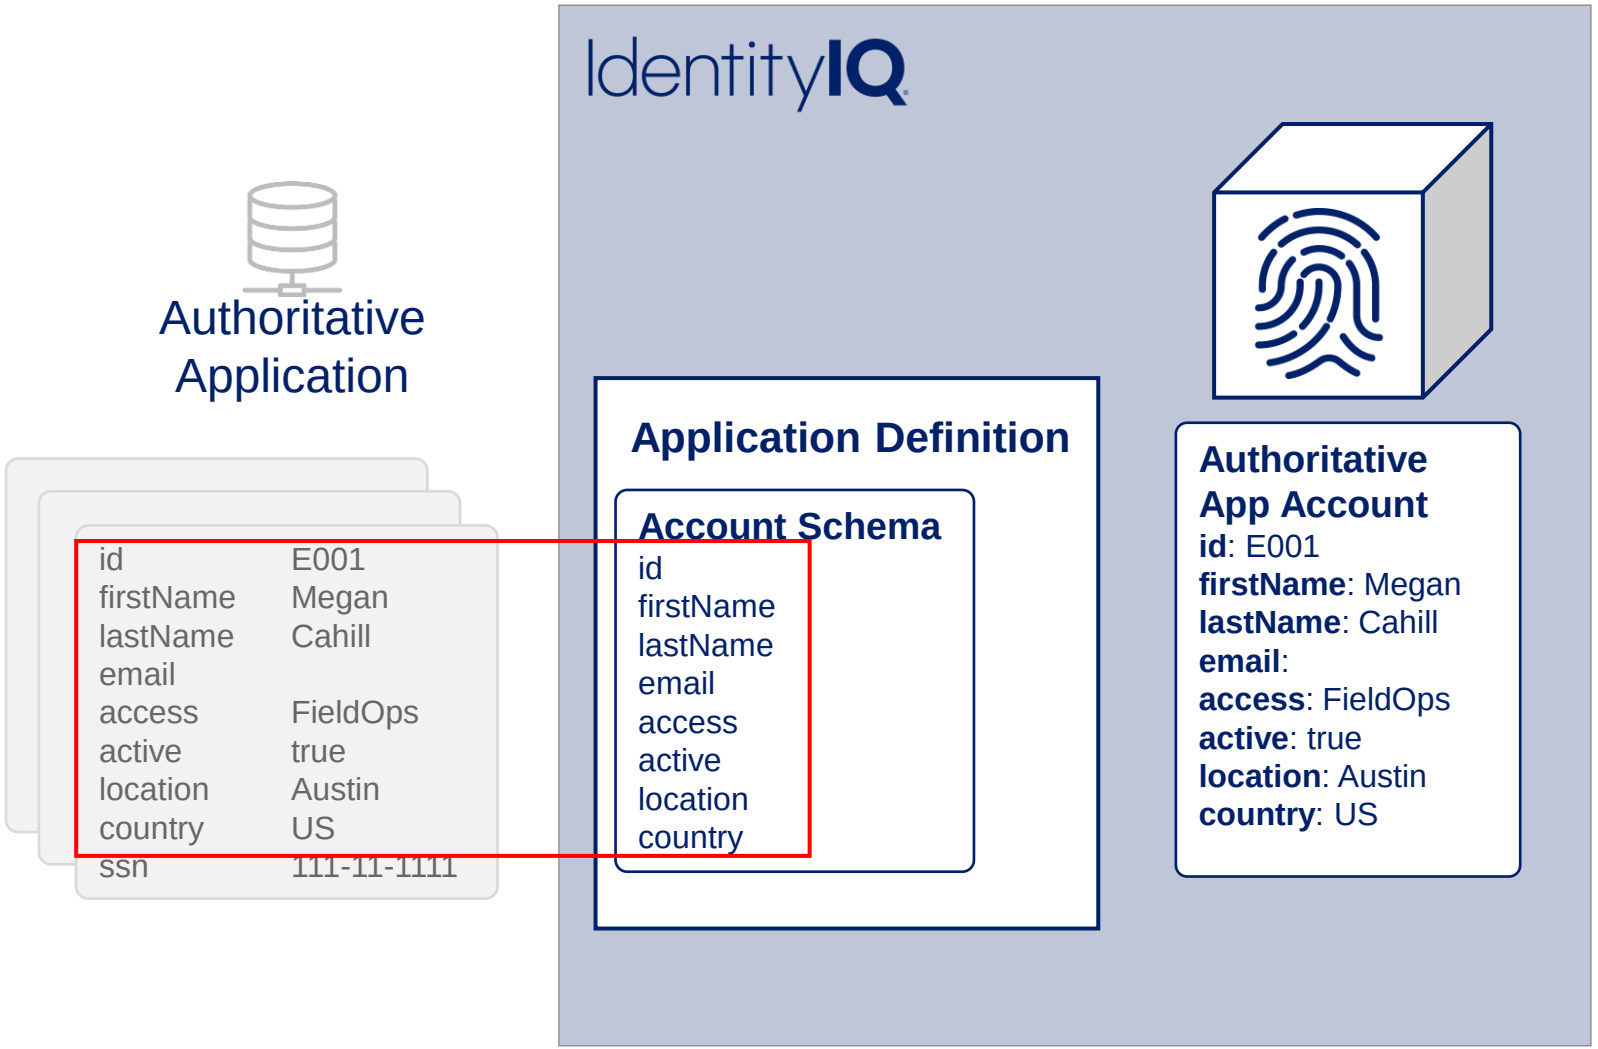

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Rapid Setup

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup

Additional Configuration Settings


- Correlation Configurations
- Data Categorization
  - Account Status
  - Identity Type

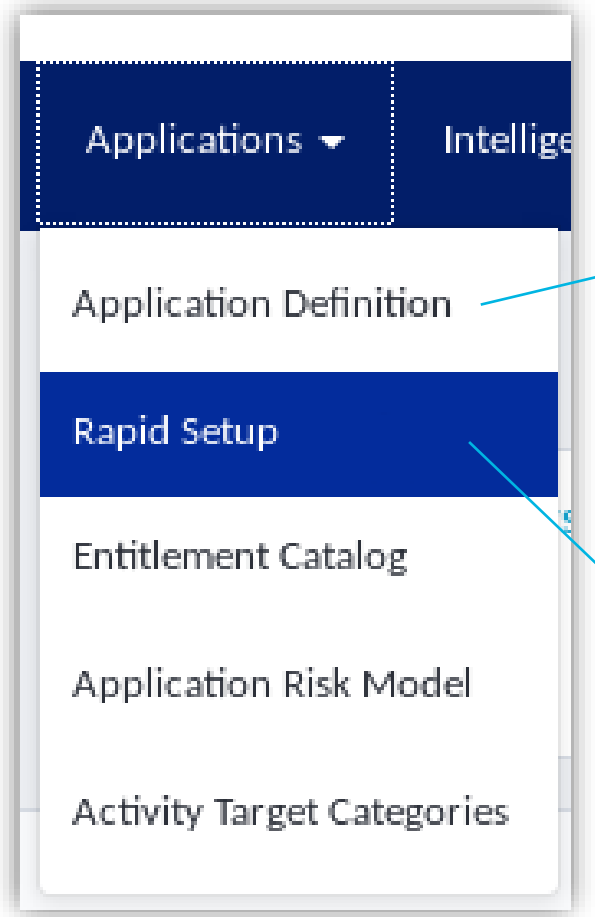

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Aggregation Configuration

Correlation

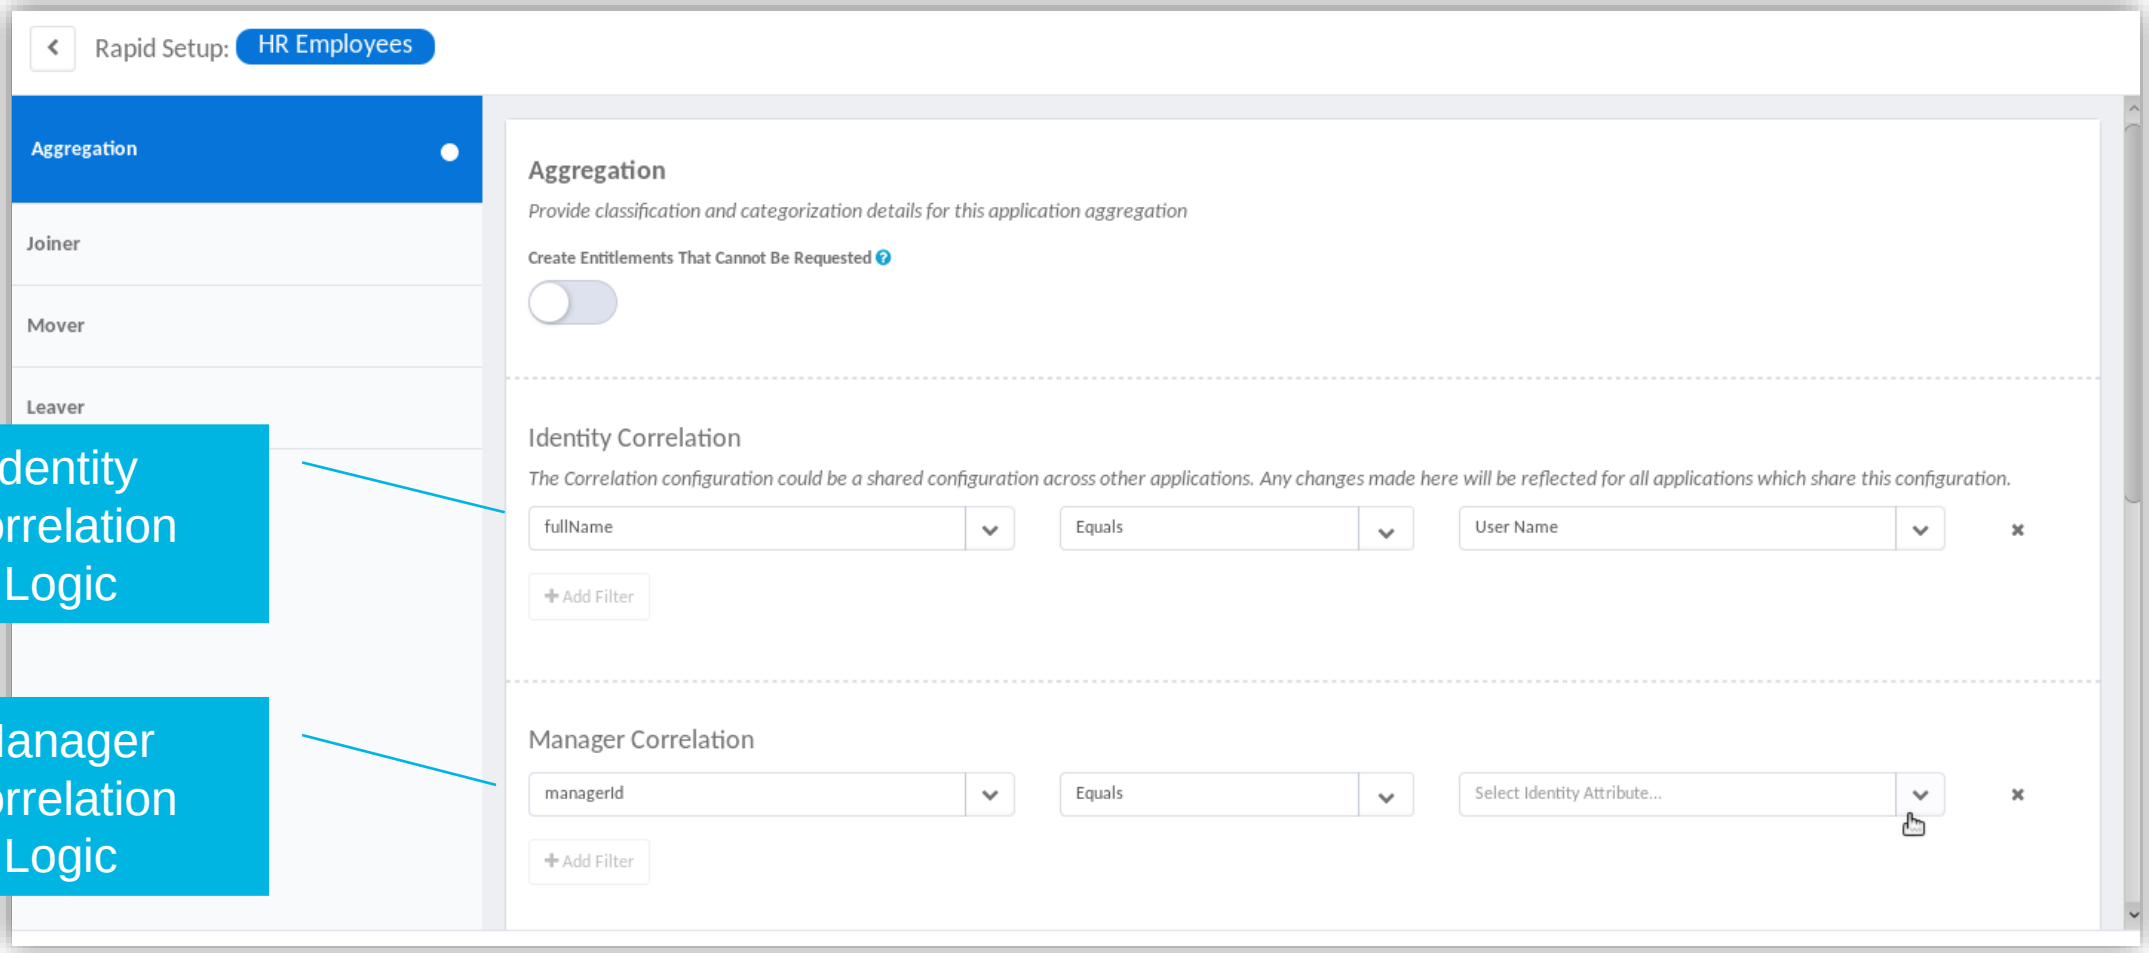

Identity Correlation Logic


Manager Correlation Logic

Applications → Rapid Setup

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Aggregation Configuration

Categorization

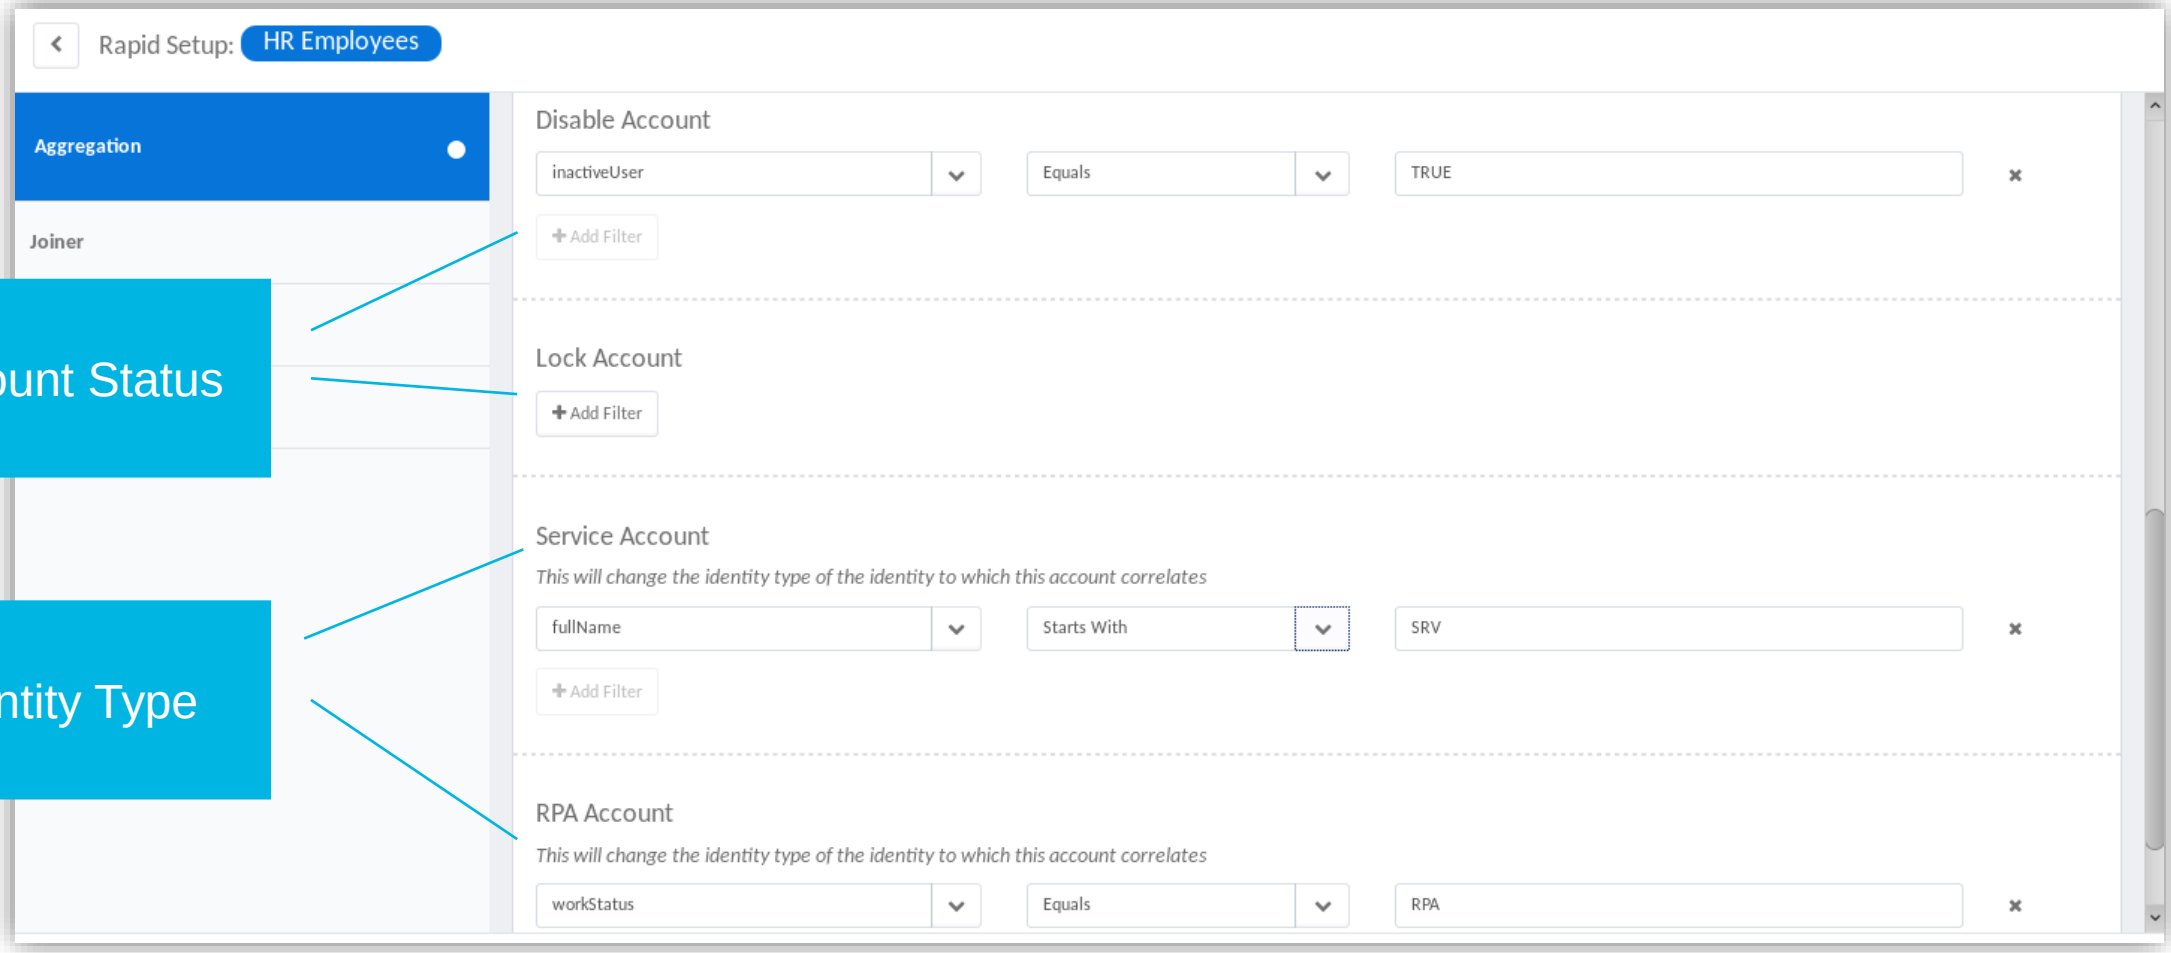

Account Status

Identity Type

Applications → Rapid Setup


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Aggregation

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Account Aggregation Tasks

- Many configuration options
  - Which Applications to Aggregate (required)
  - Detect Deleted Accounts (best practice)
  - And many more…
- Use Application/Connector/Schema information

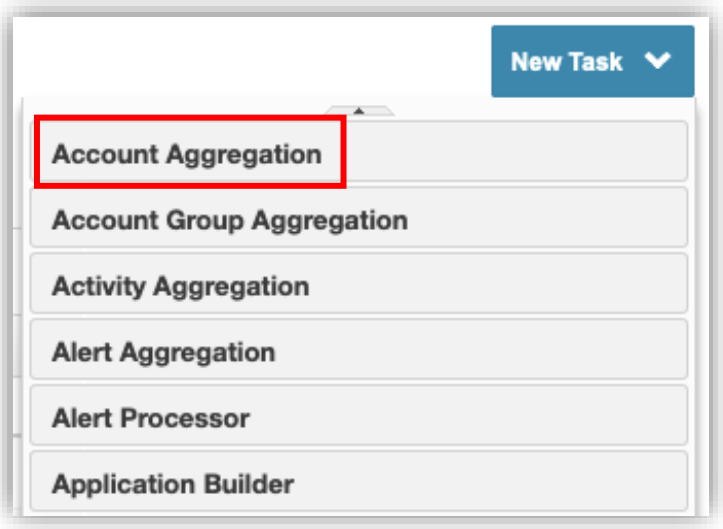

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Identity Cube Creation Process

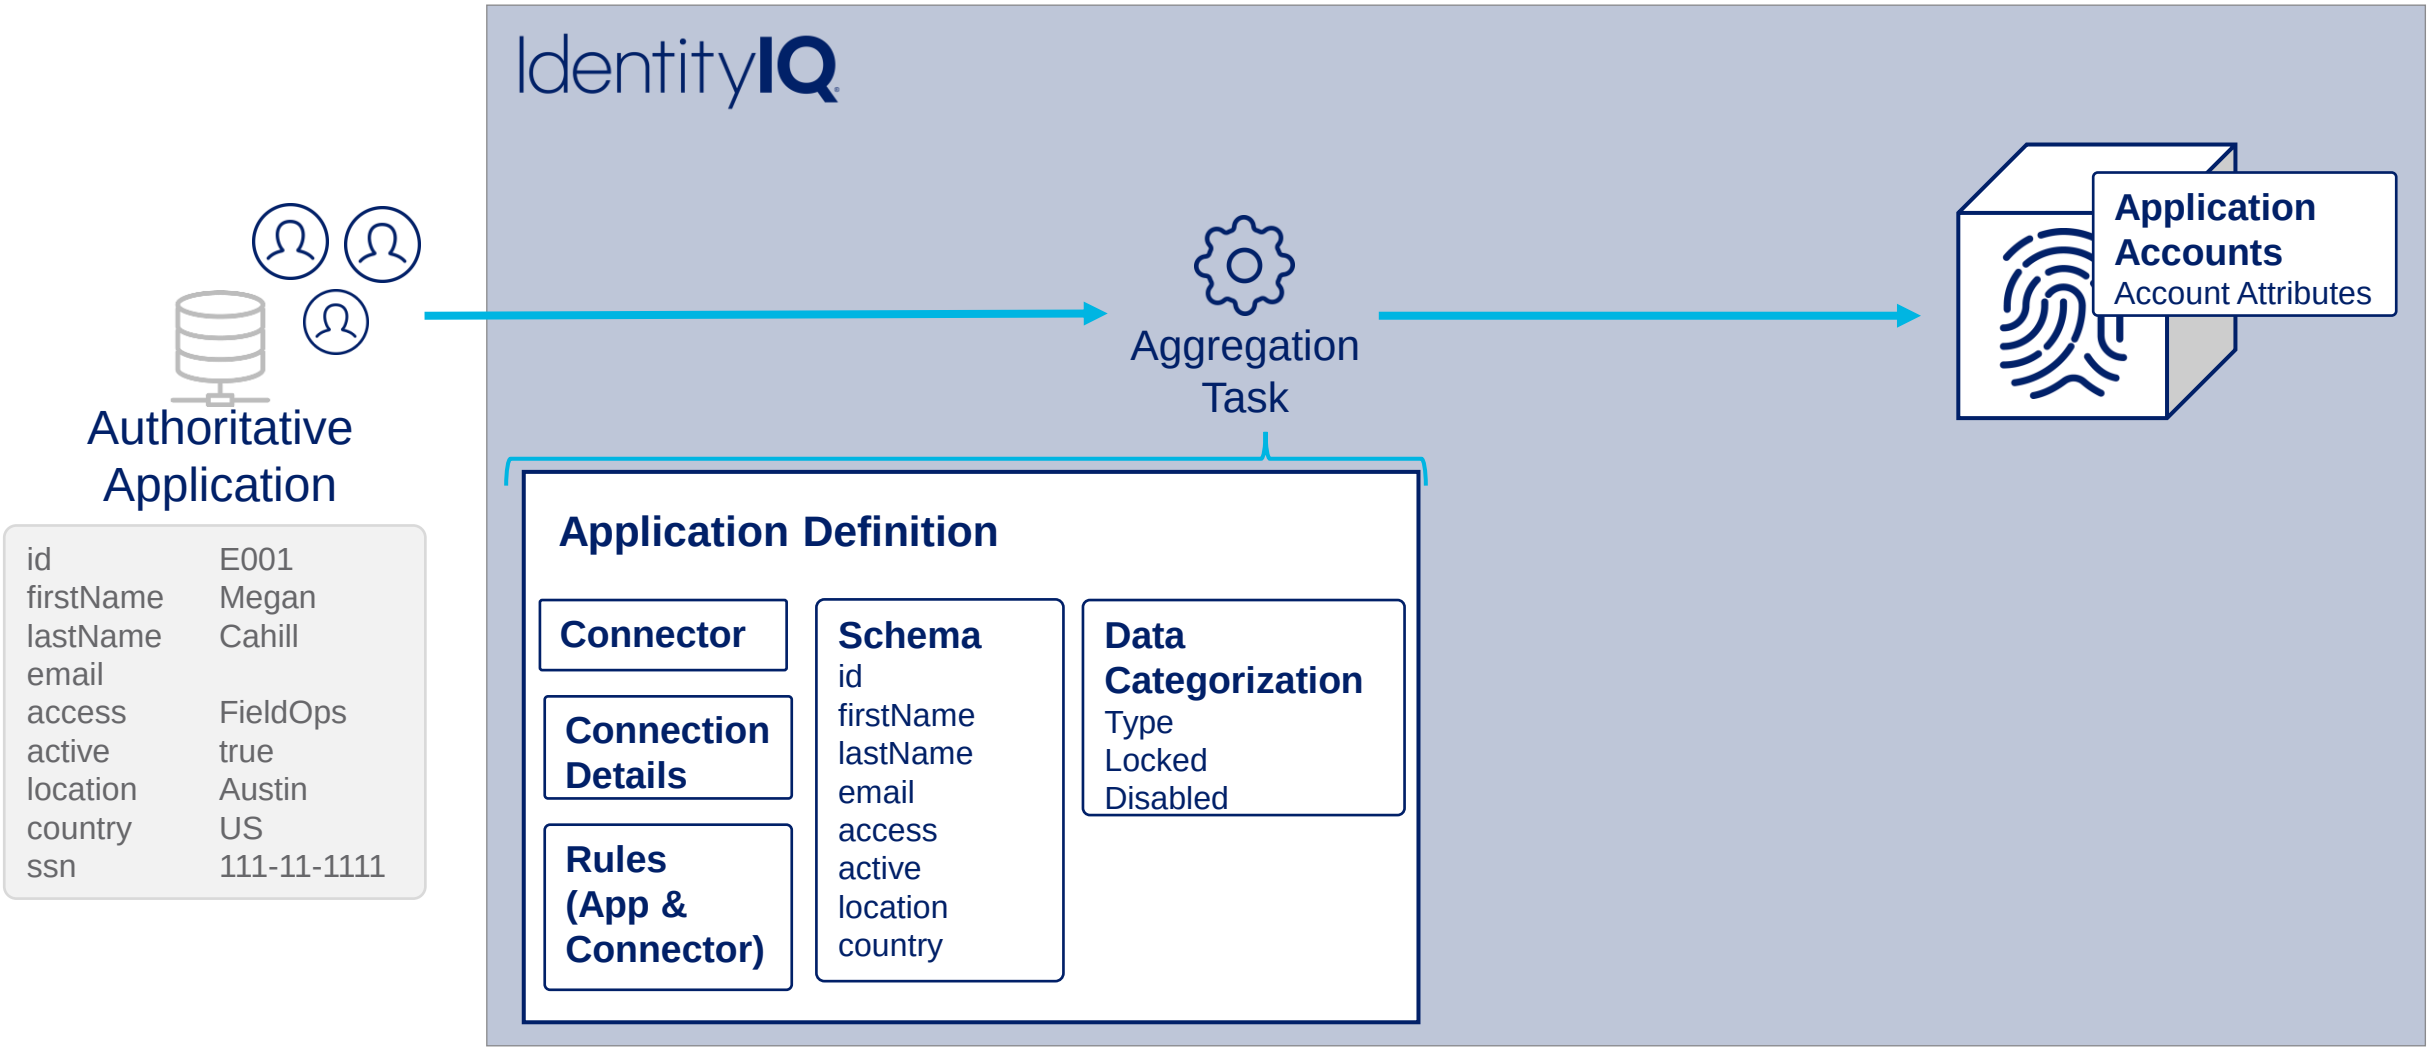

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Aggregation Tasks

Purpose: Read Application Accounts

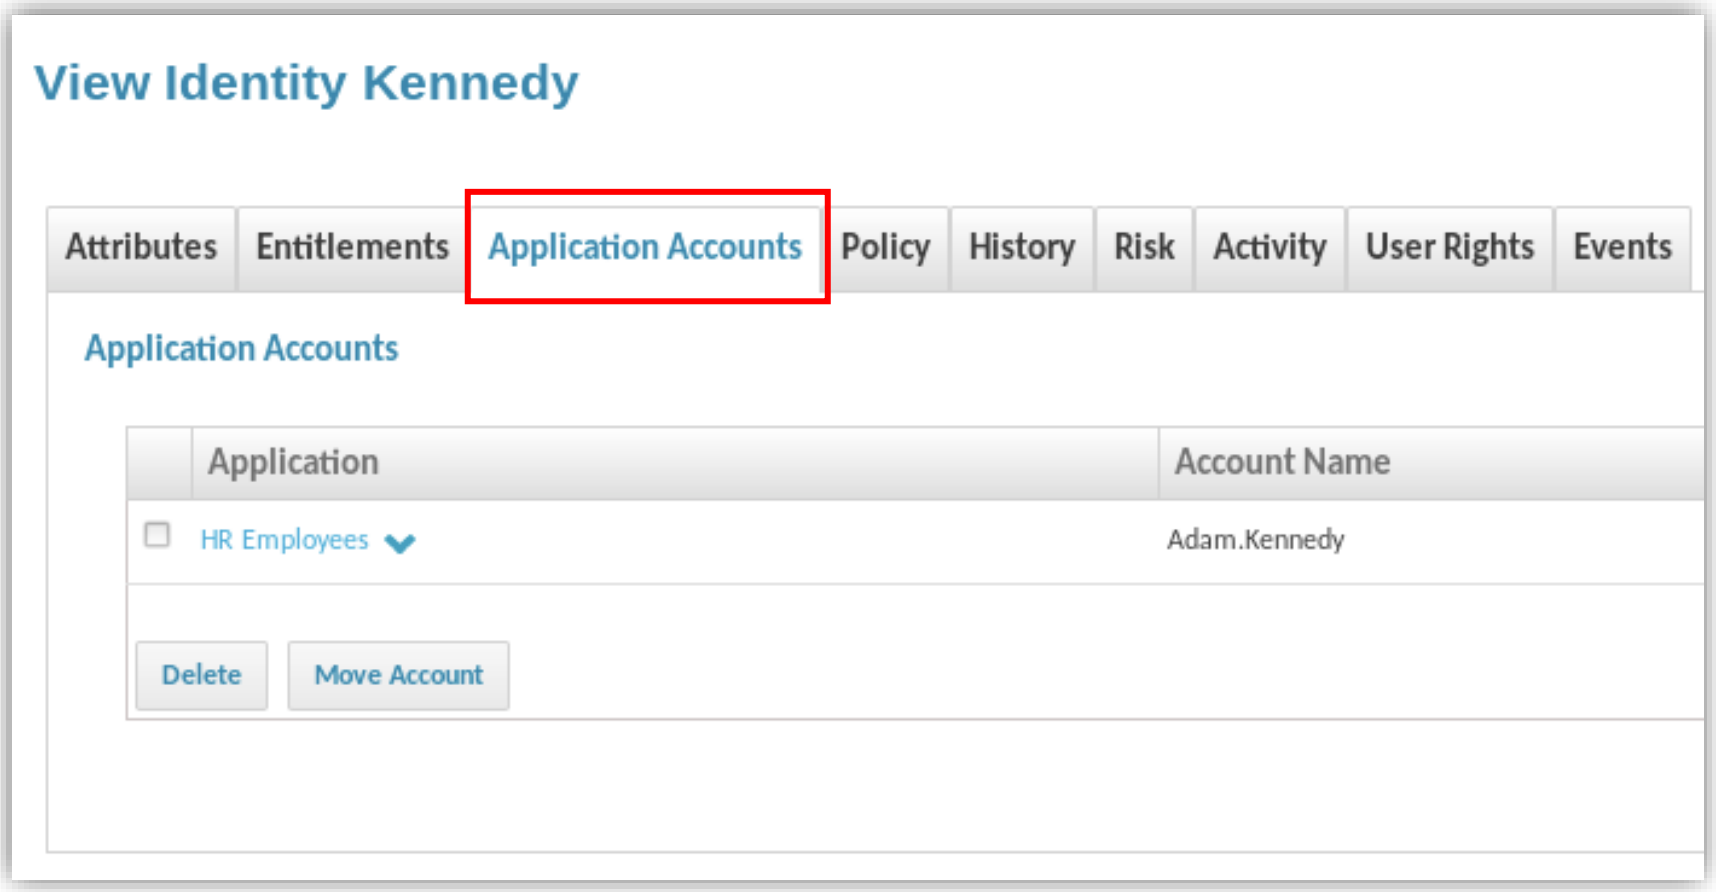

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 1, Exercise 2

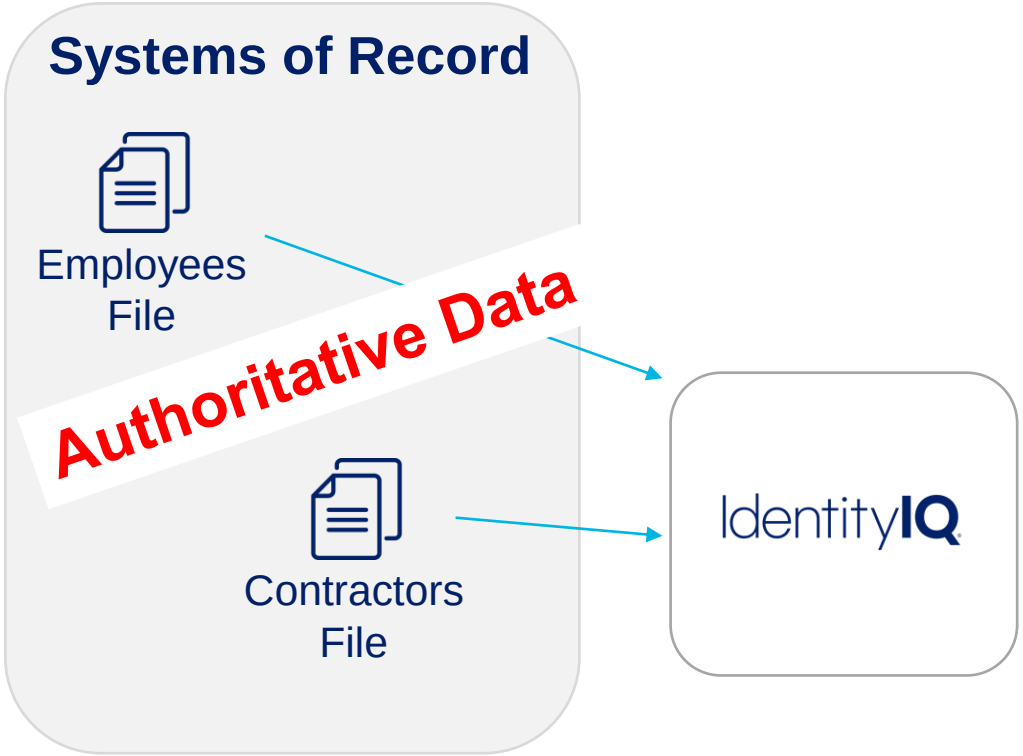

- Create Identity Cubes
  - Define authoritative applications
  - Set default passwords
  - Rapid Setup classification
  - Aggregate accounts to create Identity Cubes

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Identity Attributes and Mappings

IdentityIQ Essentials

Overview

Identity Attributes and Mappings

- Identity Mappings: Identity attribute configuration
- Identity Refresh tasks

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Attributes and Mappings


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Attributes

- Identity data used to drive processes in IdentityIQ
  Examples:
  - Searching
  - Assigning roles

- Standard Attributes
  - Support basic system functionality
  - Searchable by default

- Extended Attributes
  - Identity Attributes defined specifically for an installation
  - Add as many as required to support implementation needs
  - Searchable attributes can be specified
    - Limited by number of searchable extended attributes defined in DB

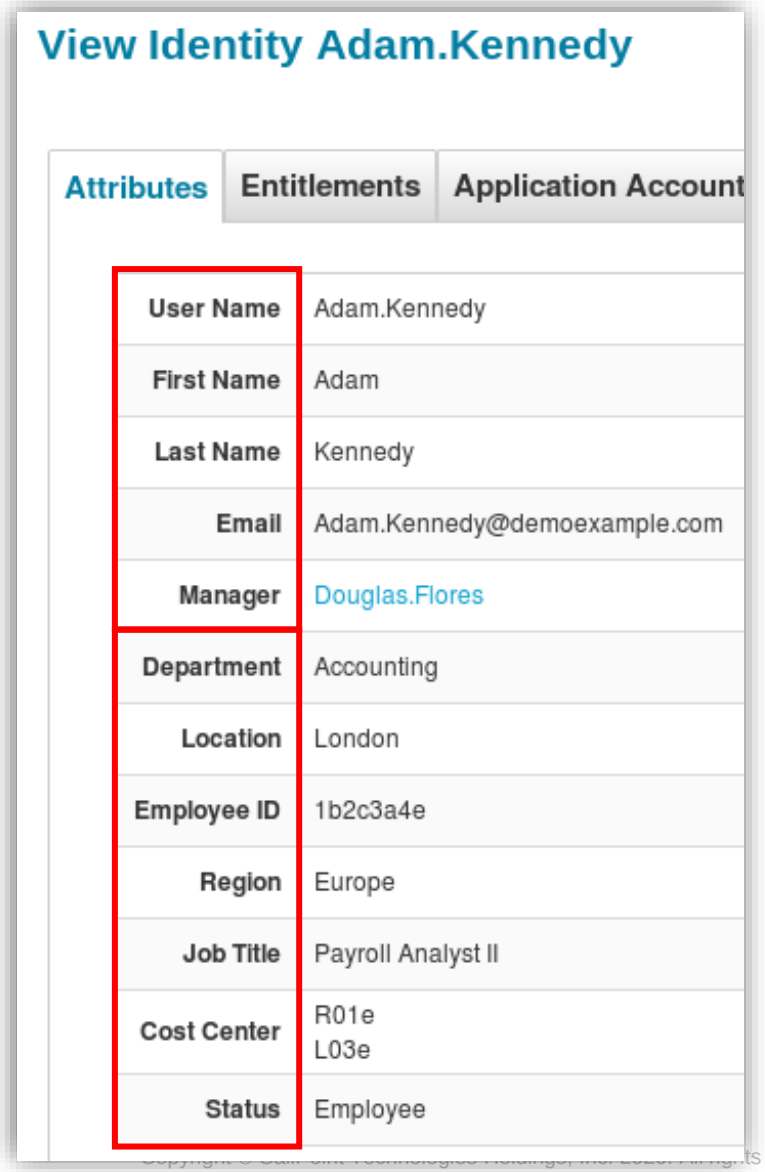


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020 All rights reserved.

Standard Identity Attributes

RPA/Bot Support

- Employee
- Contractor
- RPA/Bots
- External/Partner
- Service Account
- Custom

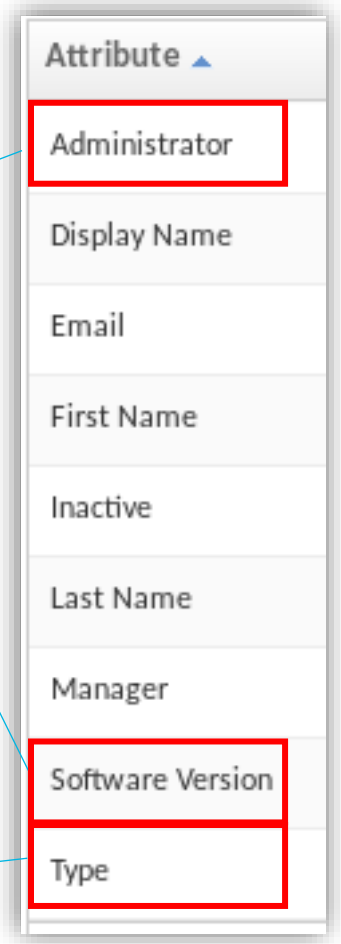


Global Settings → Identity Mappings

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configuring Identity Attributes

Identity Mappings

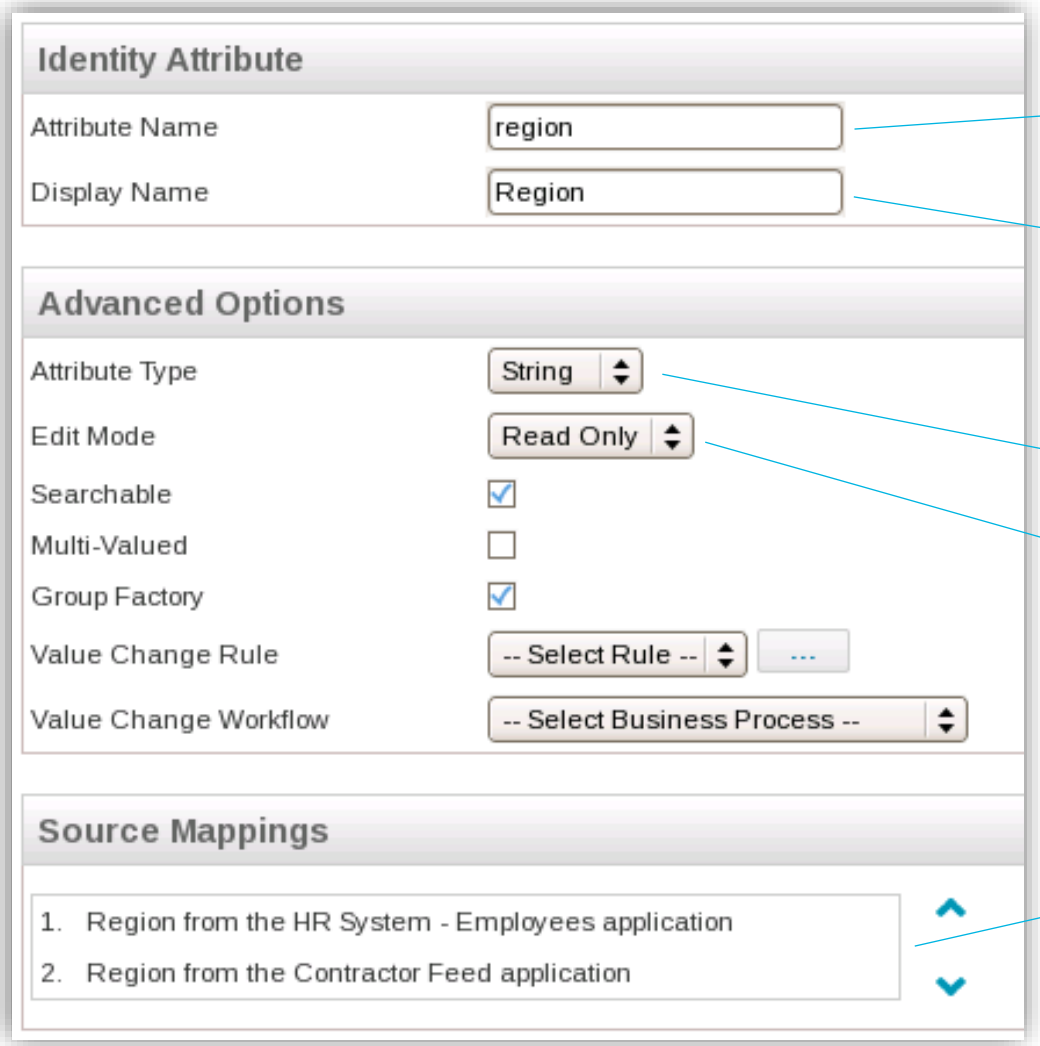

Property name for the attribute

Display value – can be a message key for localization support

String or Identity

Read only or editable attribute


Source of Attribute: application account attribute or Rule

Global Settings → Identity Mappings

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configuring Identity Attributes

Utilizing the Data

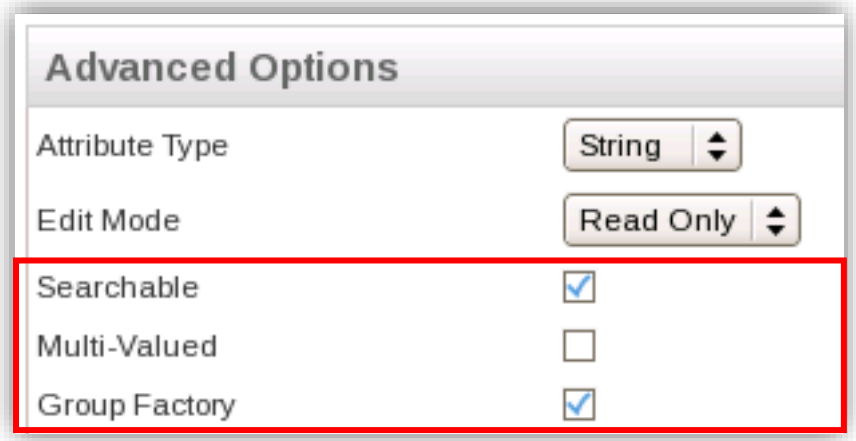

- Searchable
  - Correlation
  - Analytics, Reporting, etc.
- Multi-Valued

  Example: *User may belong to more than one cost center*
- Group factory
  - Support dynamically generated groupings of identities based on the attribute

    Example: Region attribute – *all users are grouped by their region*
  - Groups used to filter identities included in actions


    Example: *Run report for identities with region: Europe*


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configuring Identity Attributes

Identity Datatype

- Supports one to many identity relationship
- Max 5 many-to-one extended attributes

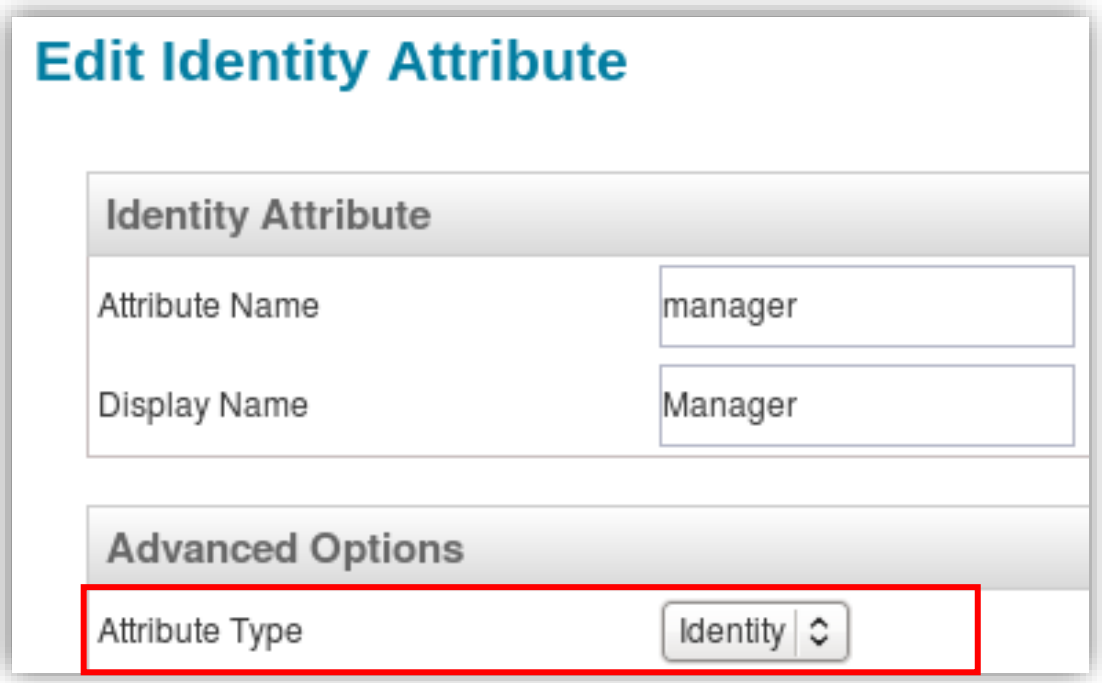

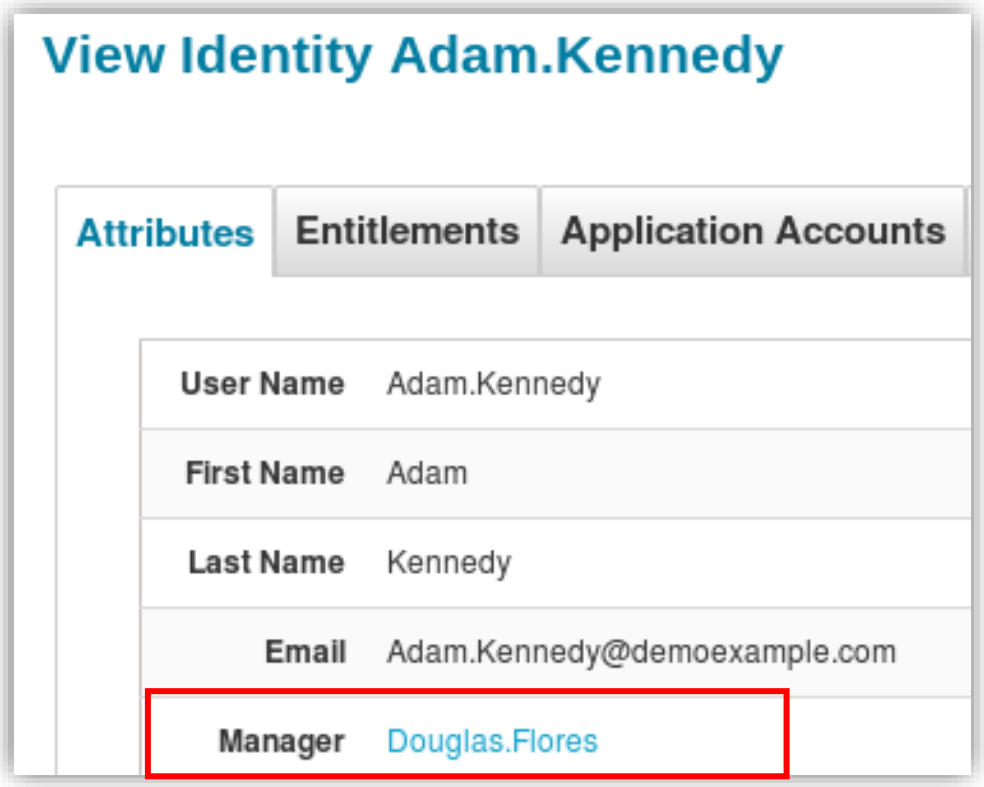


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Manager Correlation

Definition

- Define which application attribute defines a user's manager
- Map the application attribute to the manager's Identity Attribute
- Application Definition or Rapid Setup

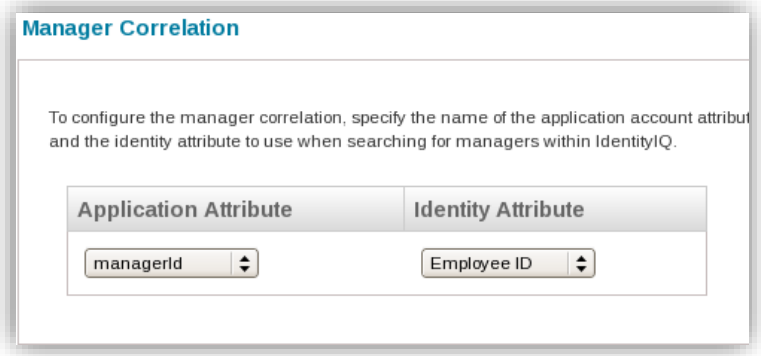

Applications → Application Definition

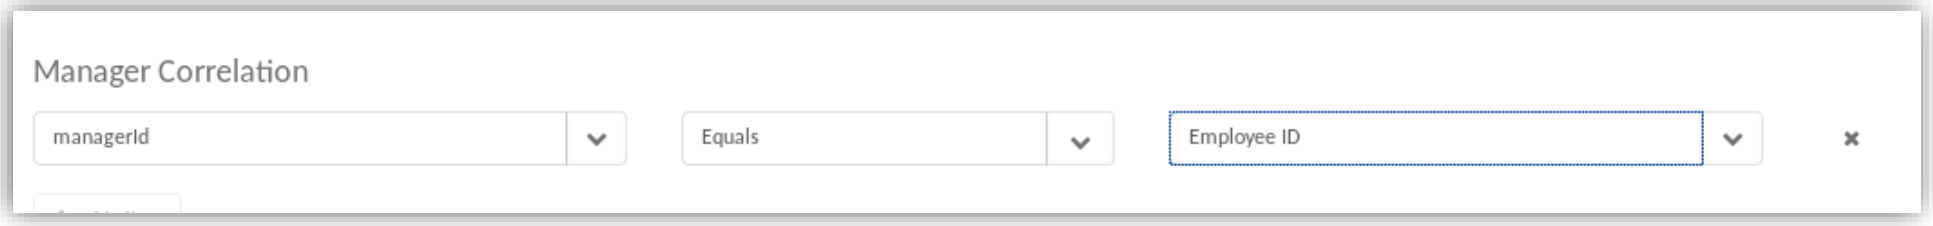

Applications → Rapid Setup

- Alternative: Manager Correlation Rule


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Refresh Tasks

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Refresh Tasks


- Many configuration options
  - Mark manager status for each identity
  - Promote account attributes to identity attributes
  - Promote entitlements to a certifiable state
  - Update role assignments/detections
  - Process lifecycle events
  - Look for policy violations
  - And many more…
- Run against all identities (default)
  - Optional: filter by attributes, population, date

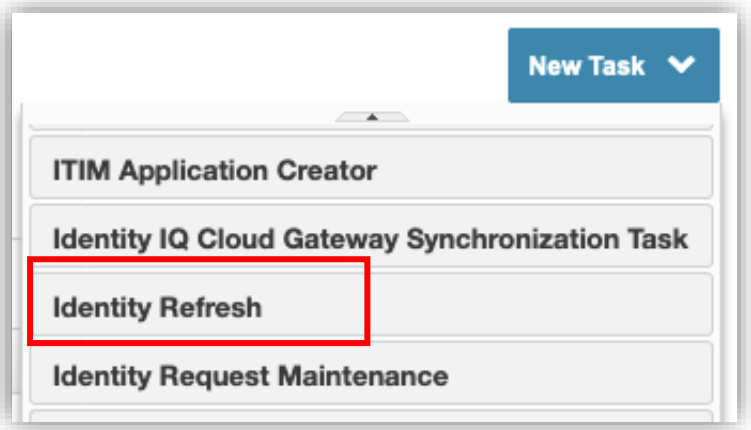

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Attribute Population

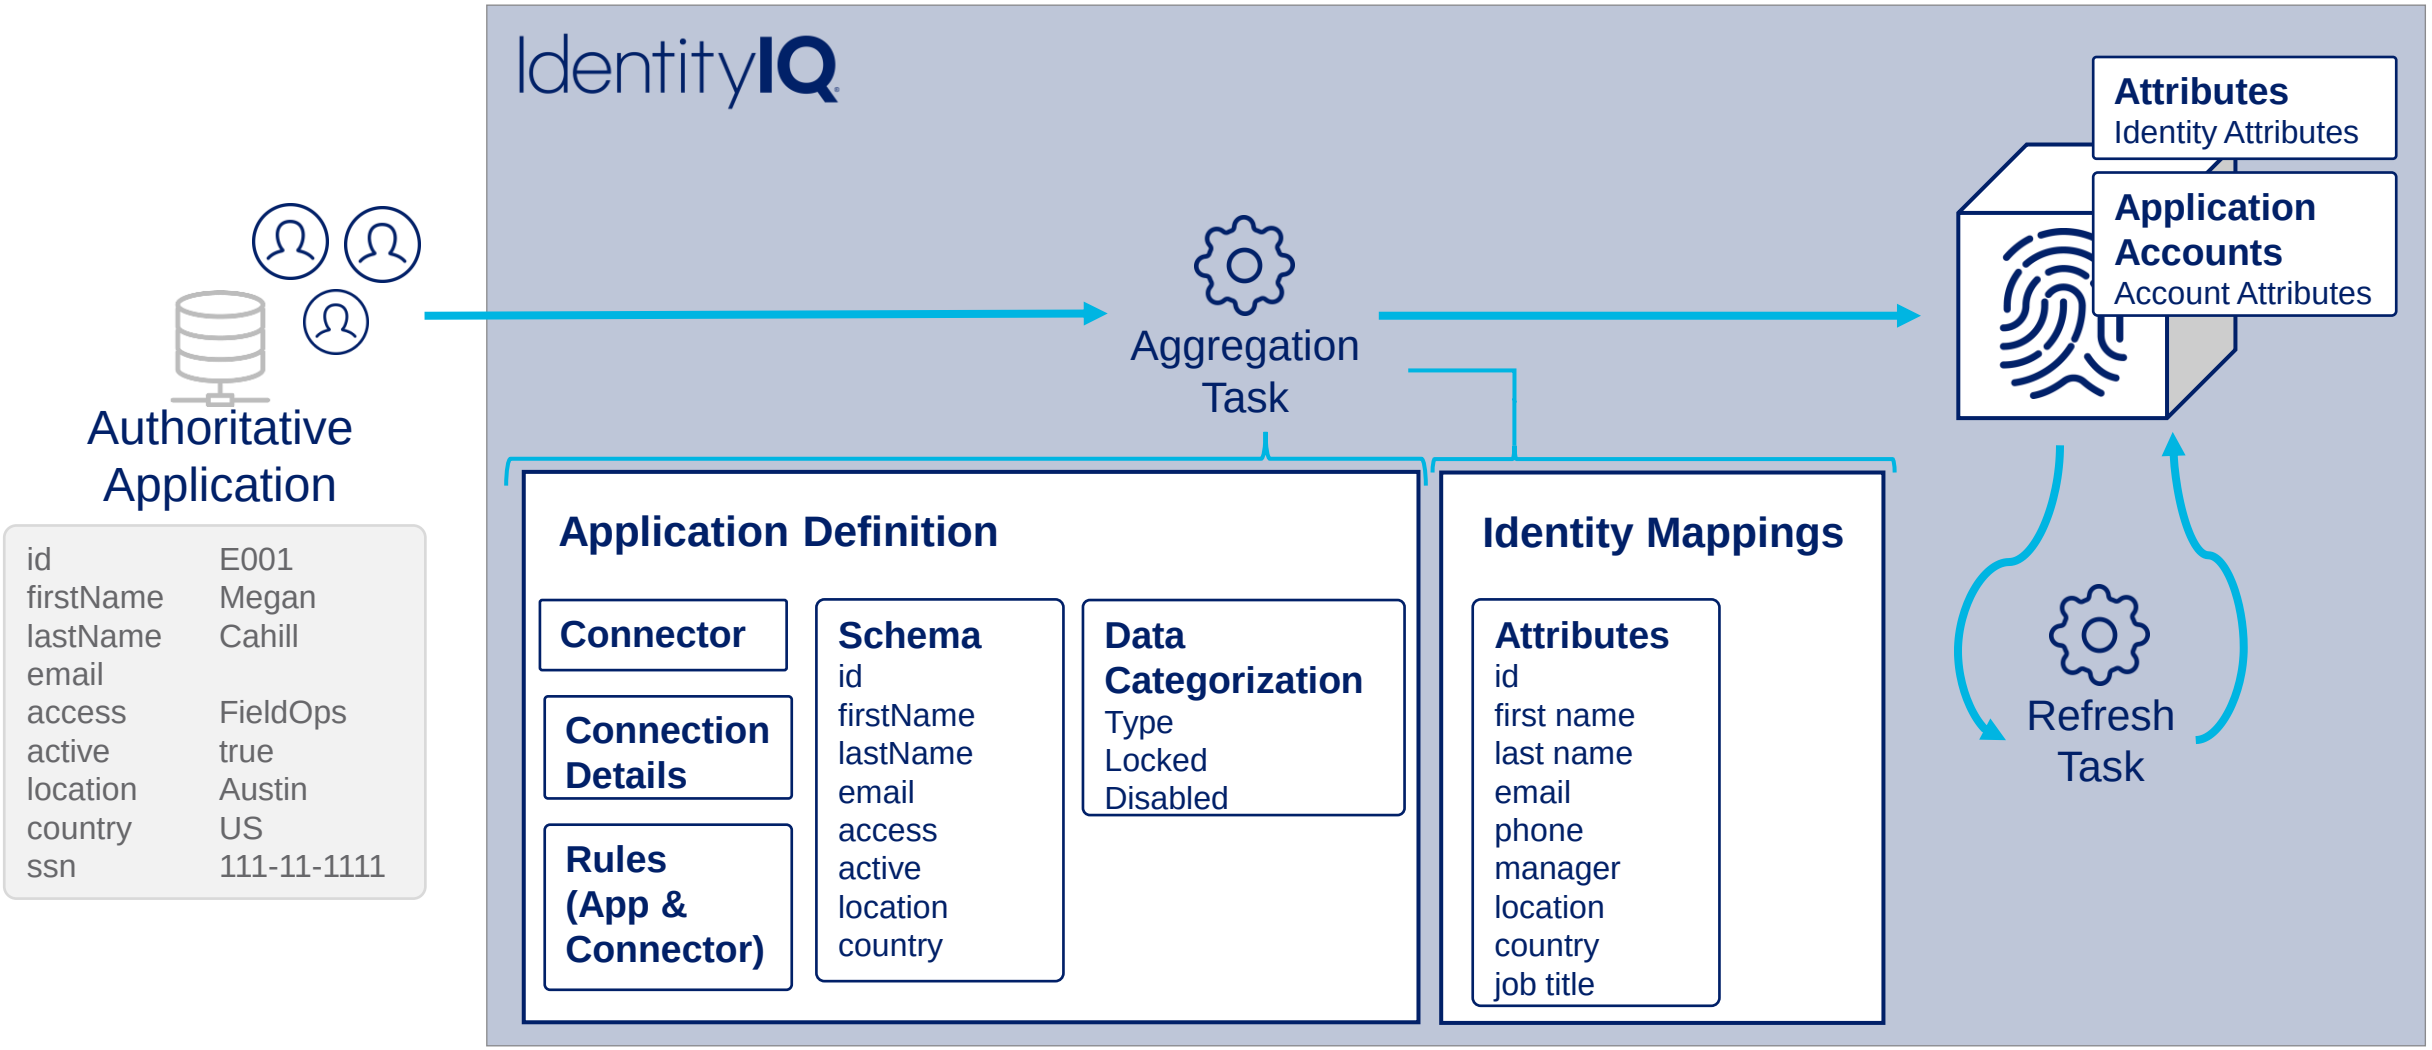



SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Manager Correlation

Making the Connection

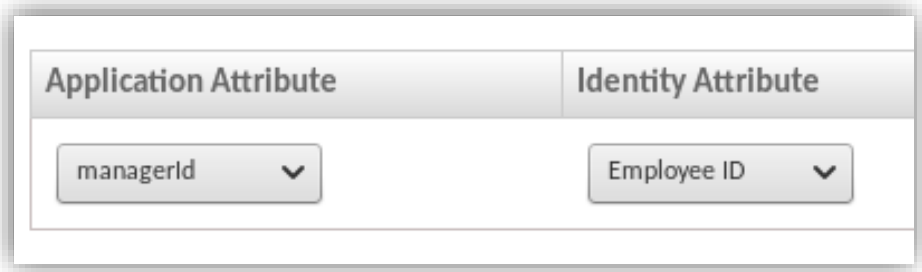

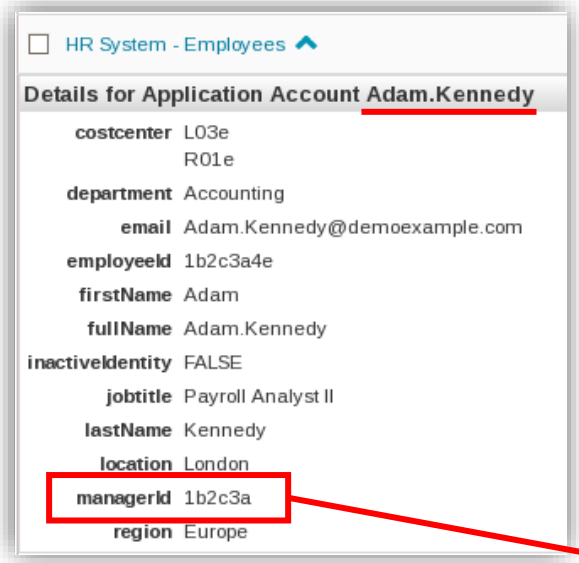

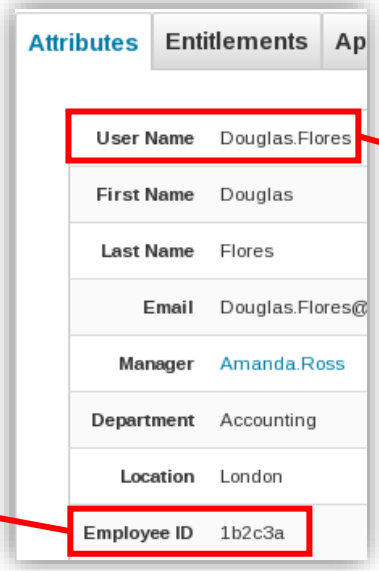


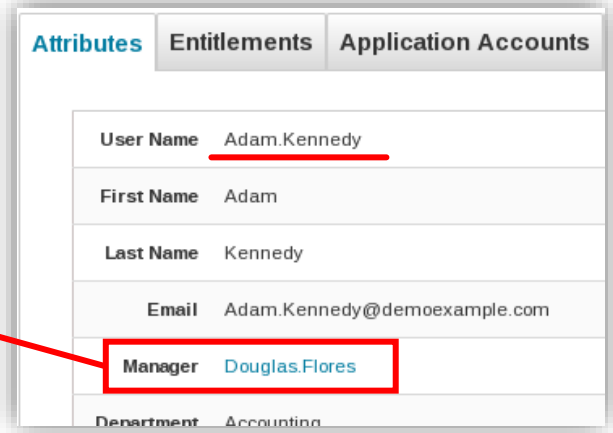

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Refresh Tasks

Purpose: Update Identity Attributes and Perform Calculations

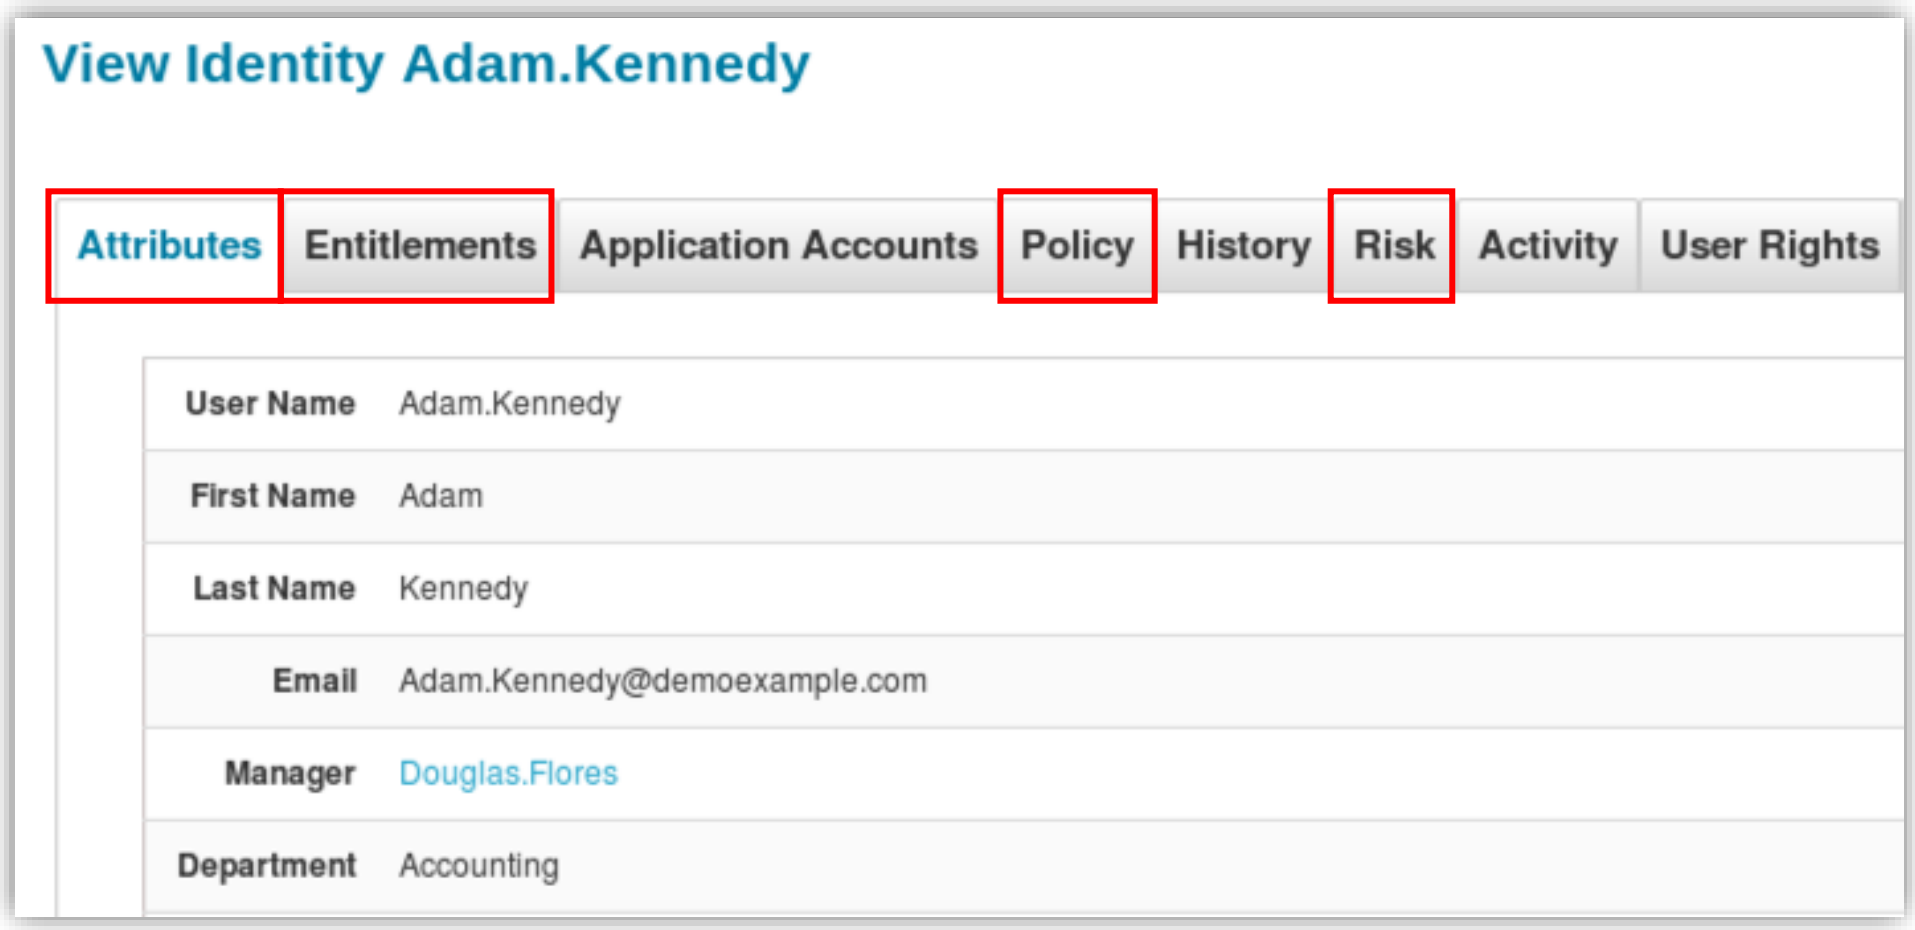

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Task Scheduling

Aggregation and Refresh

- **Aggregation** schedule frequency depends upon
  - Use case
    - Compliance – prior to certification campaign (i.e. quarterly)
    - Provisioning – often daily
  - Importance of source application (i.e. authoritative, sensitive/risky)

- **Refresh** schedule frequency depends upon
  - Aggregation schedules
  - Data calculation needs
  - Best Practice: execute the various options as needed, in a just-in-time manner

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Next Step?

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 1, Exercise 3

- Exercise 3: Populate Identity Cubes
  - Define/populate identity attributes
  - Define account and manager correlation logic
  - Refresh identity cubes
  - Update UI to display new identity attributes
  - Investigate identity cubes

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Authentication and Authorization

IdentityIQ Essentials

Overview

Authentication and Authorization

- Authentication Options
- Authorization Options
  - Capabilities
  - Scopes
  - Workgroups
  - Quicklink Populations

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Authentication Options

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Authentication

Supported Options

- Native IdentityIQ authentication
- Pass through authentication
  - Active Directory
  - LDAP
- Single Sign On (SSO)
  - Rule-based (passed in header, and validated in rule)
  - SAML
- Multi-factor authentication (MFA)
  - RSA
  - DUO

See Compass*:*

IdentityIQ Administration guide; IdentityIQ SAML Support guide; IdentityIQ Login Configuration whitepaper

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Capabilities and Scope

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Access Rights for Identities


- Identities can possess Capabilities and Scope (if configured)
- Together, these define what a user can do and see in IdentityIQ

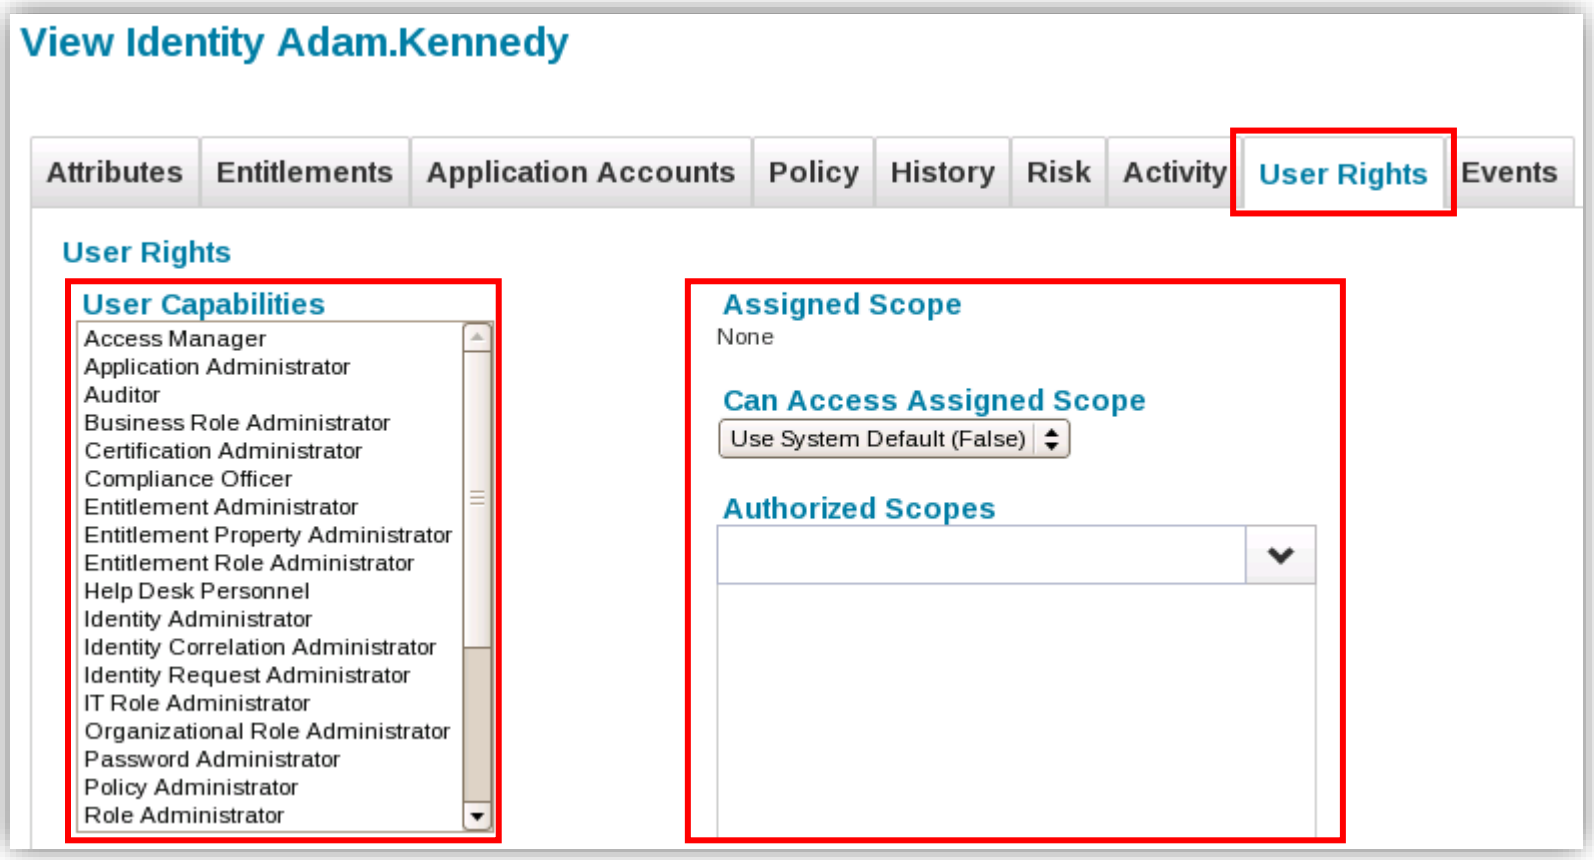

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Capabilities


- Default user rights include
  - Home page
  - Quicklinks
  - My Work

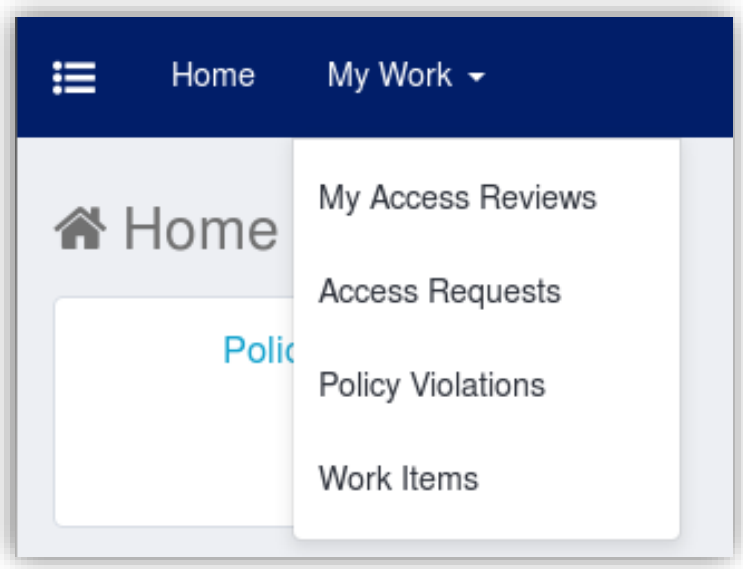

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Capabilities


- Default User Rights include
  - Home page
  - Quicklinks
  - My Work
- Capabilities
  - Define what additional rights a user has within IdentityIQ
  - Control which menu options are available
- See Compass documents
  - *IdentityIQ Capabilities Matrix*
  - *IdentityIQ Rights and Capabilities - Definitions*

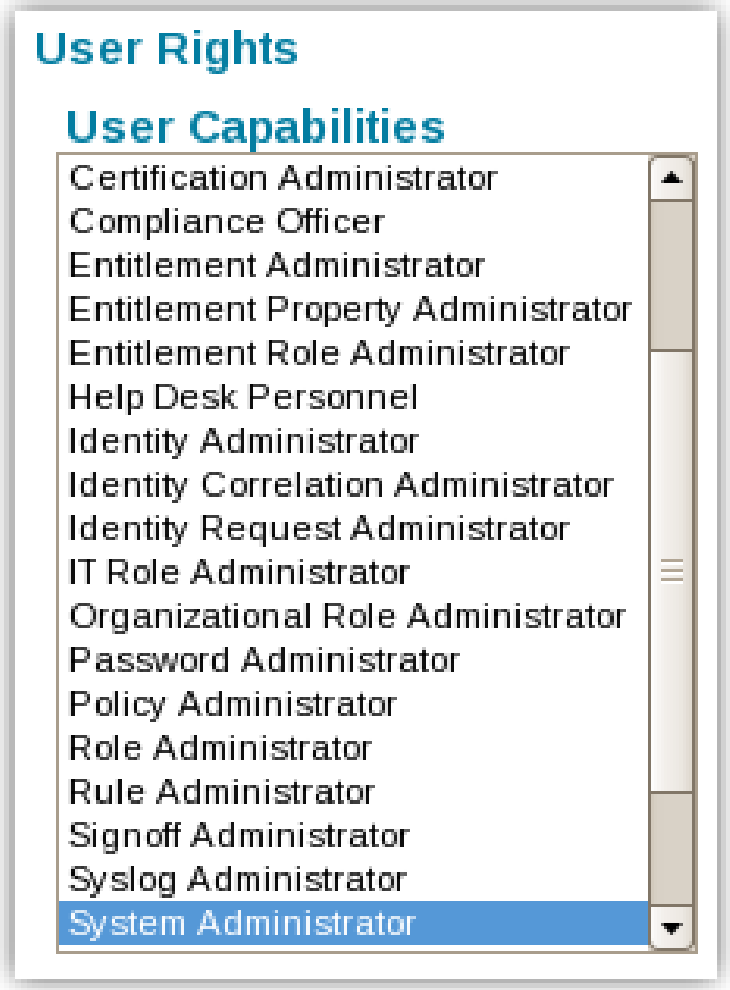

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Scoping – Definition

- Scoping
  - The act of subdividing data into logical groups and granting access based on those subdivisions
  - Scopes control the objects a user can see and act upon

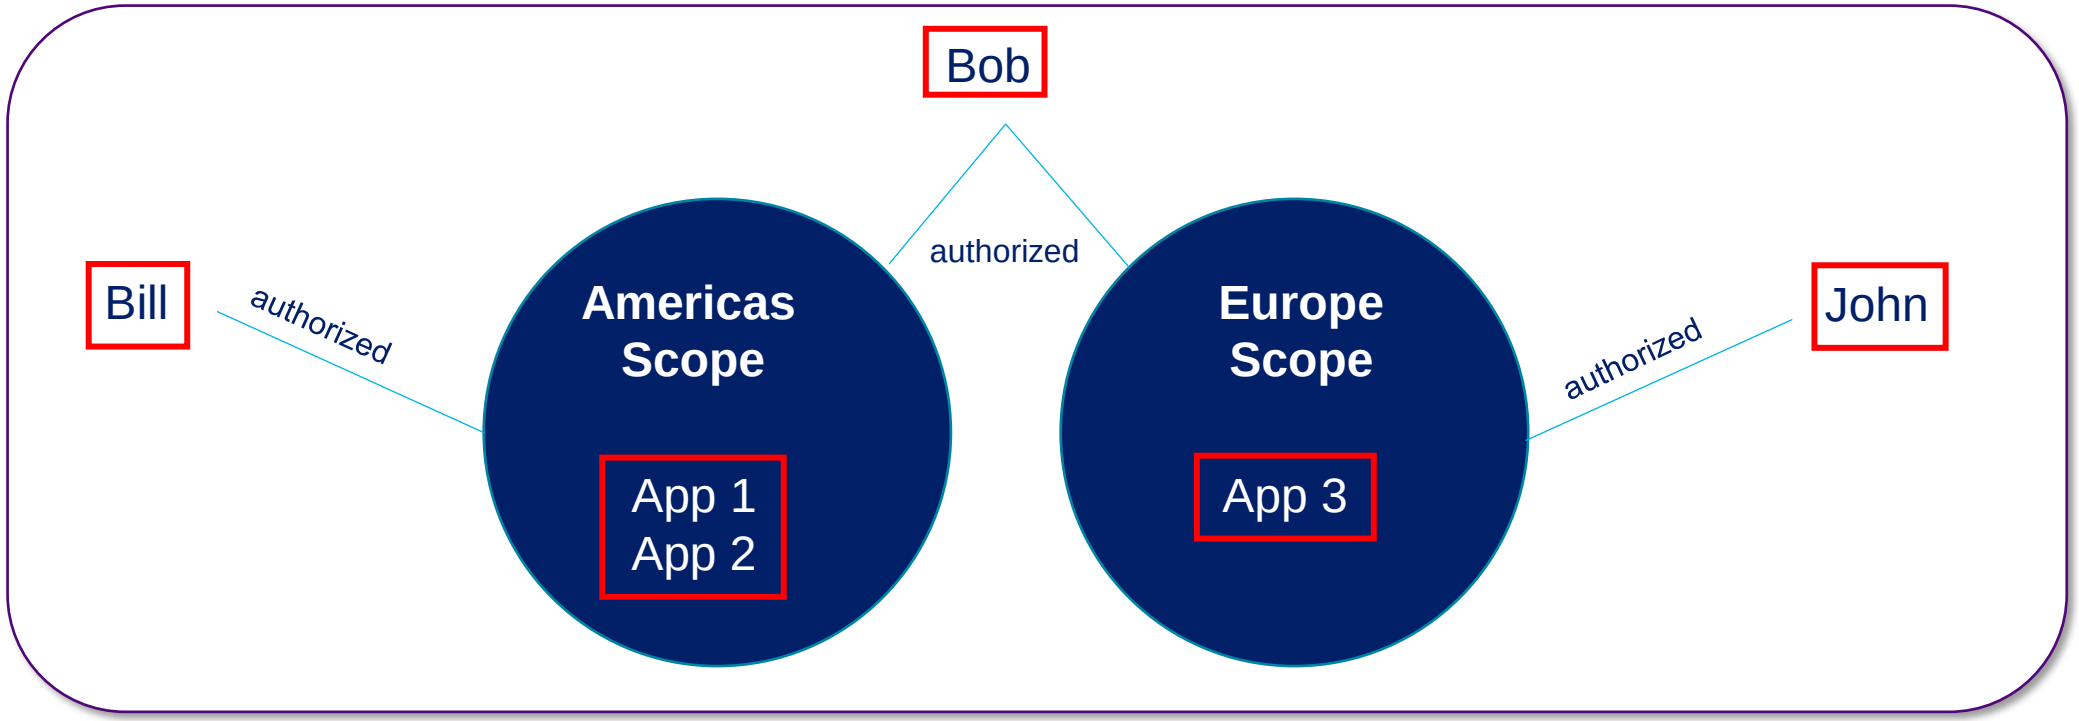

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Workgroups

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Workgroups

Definition

- Workgroup
  - Set of identities treated as a single IdentityIQ identity

    Example:

    Work Group: Active Directory Application Owners
    Members: John Smith, Sue Jones
- Workgroups are used for
  - Assigning access to IdentityIQ
    - Capabilities
    - Scopes
  - Sharing IdentityIQ responsibilities
    - Team-assigned work items
    - Object ownership (best practice)
      - Applications, Certifications, Roles, Entitlements, etc.

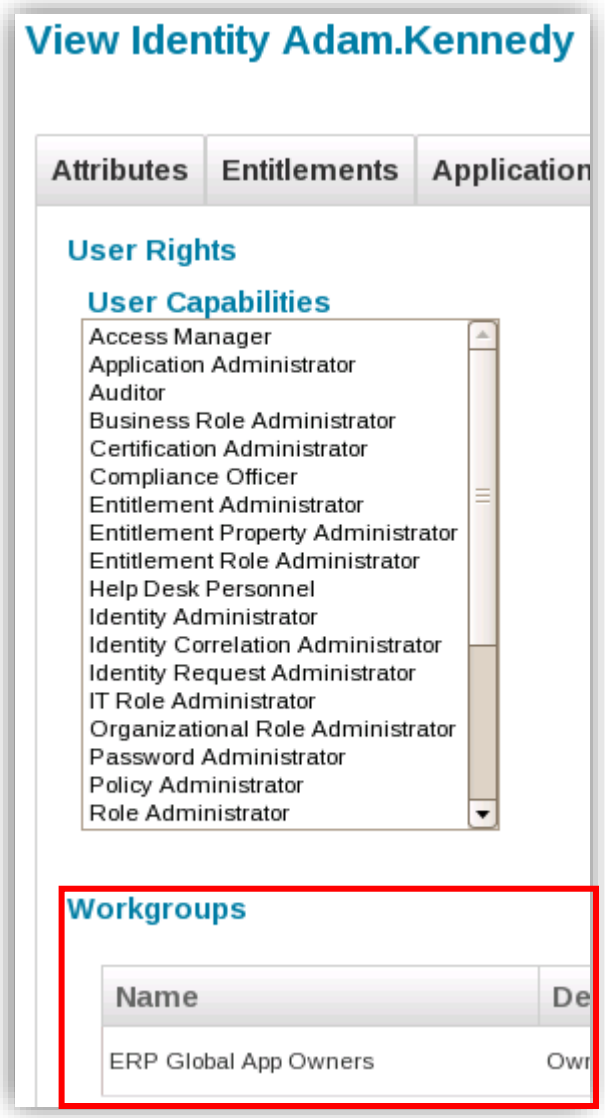

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Organizing Identities

IdentityIQ Essentials

Overview

Organizing Identities


- Populations
- Group Factories

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Populations

Definition


- Definition
  - Identity search that defines a set of Identities that share a common set of attributes
- Purpose
  - Used as a filter on the set of Identities included in a task, certification, or report

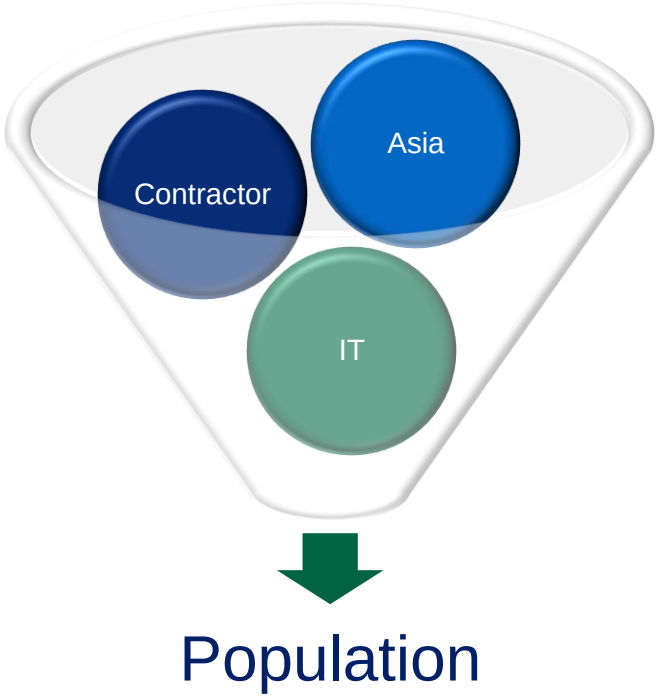

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Creating Populations

- Populations can include multiple attributes in search criteria

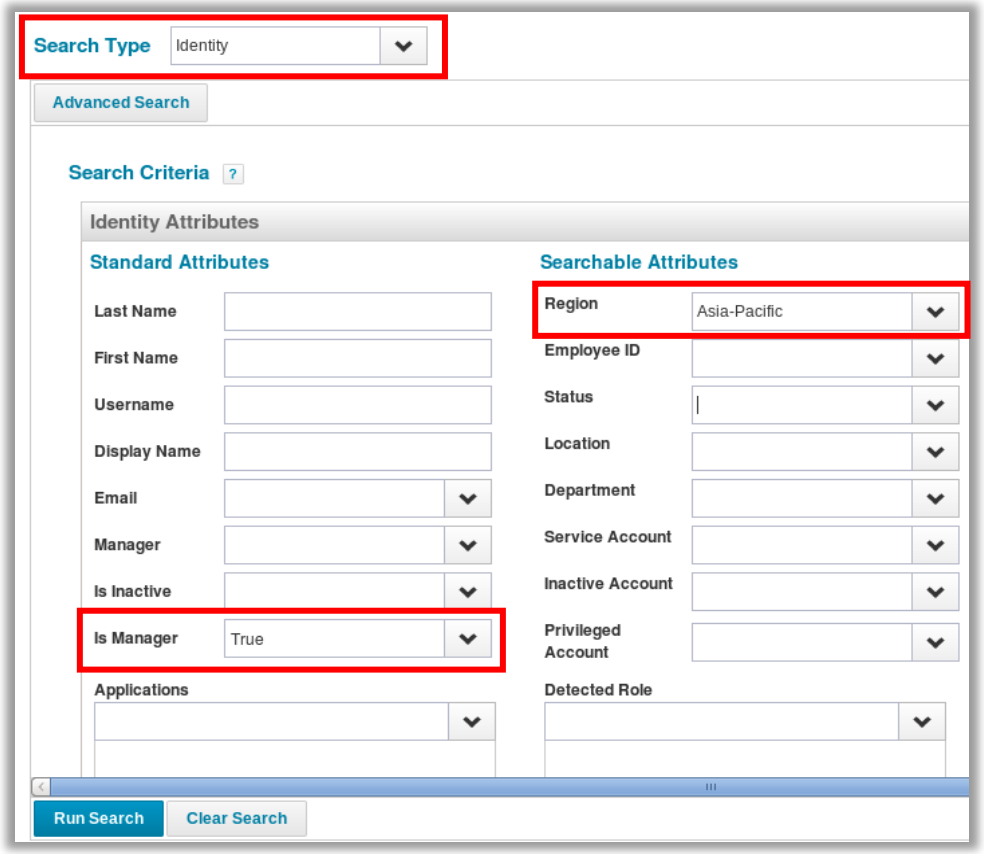

Intelligence → Advanced Analytics

- Saving a population saves the search parameters for reuse




Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage Populations

View Populations

- List populations private to you
- List populations available to all users

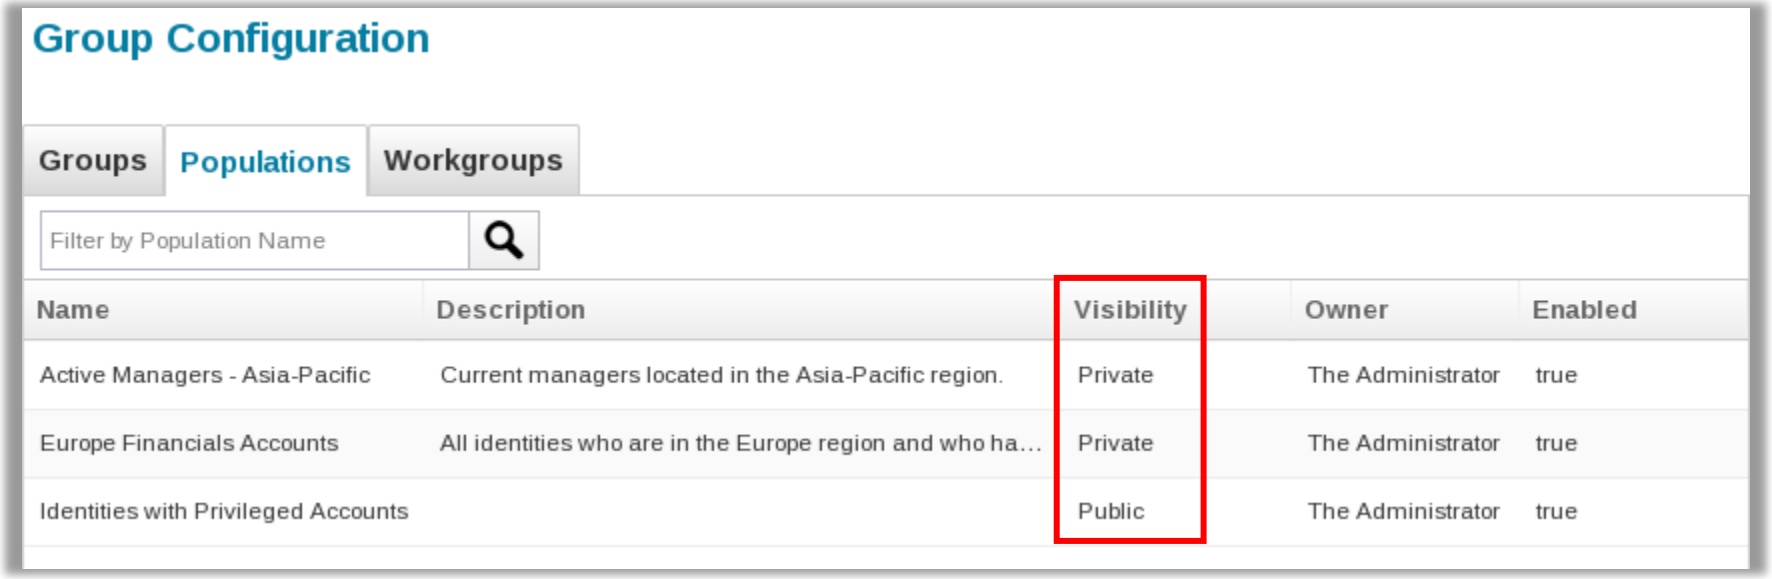


Setup → Groups

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage Populations

View/Edit Population

- Enable or disable populations
- Mark populations as public or private
- View the identities that make up the population

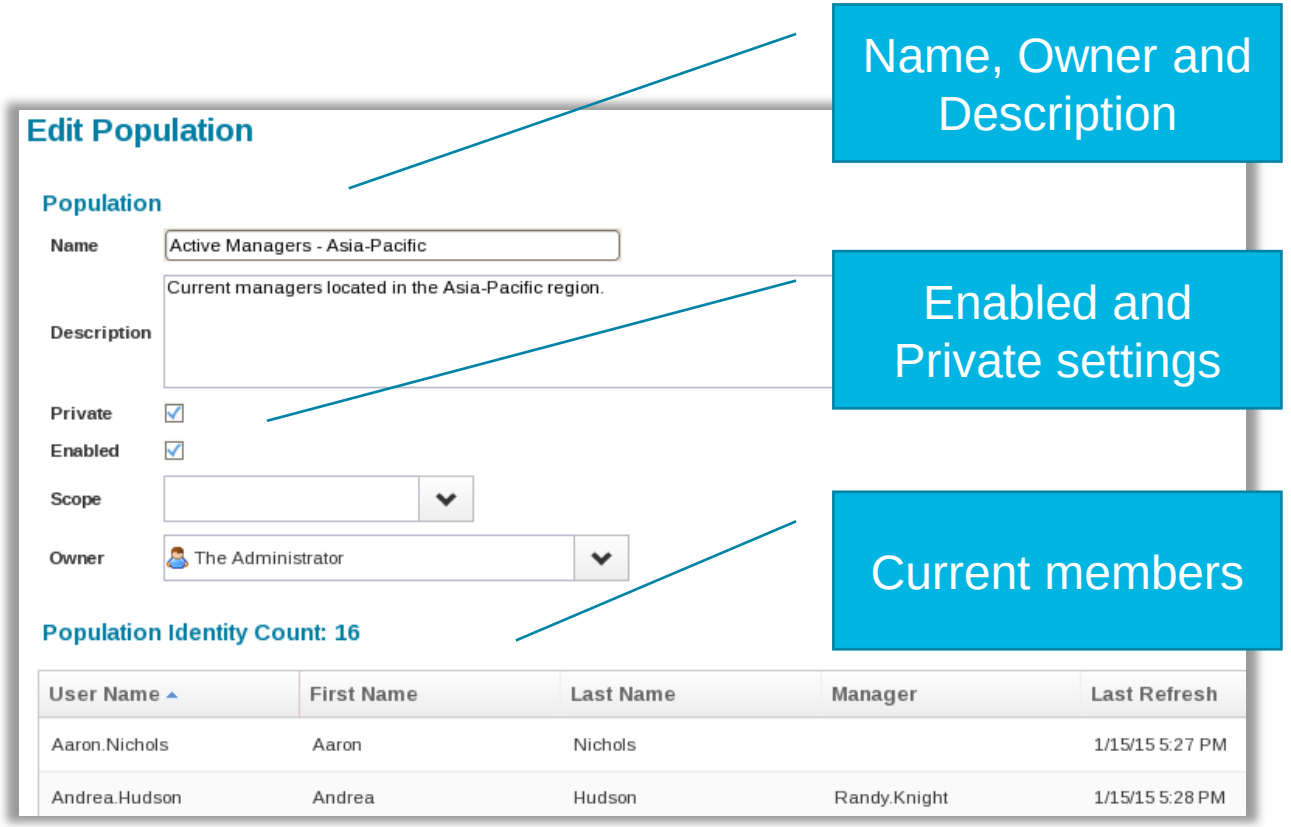


Setup → Groups

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Groups

Definition

- Sets of identities created automatically based on the values of a single identity attribute
- Used to filter identities included in a task, certification, or report

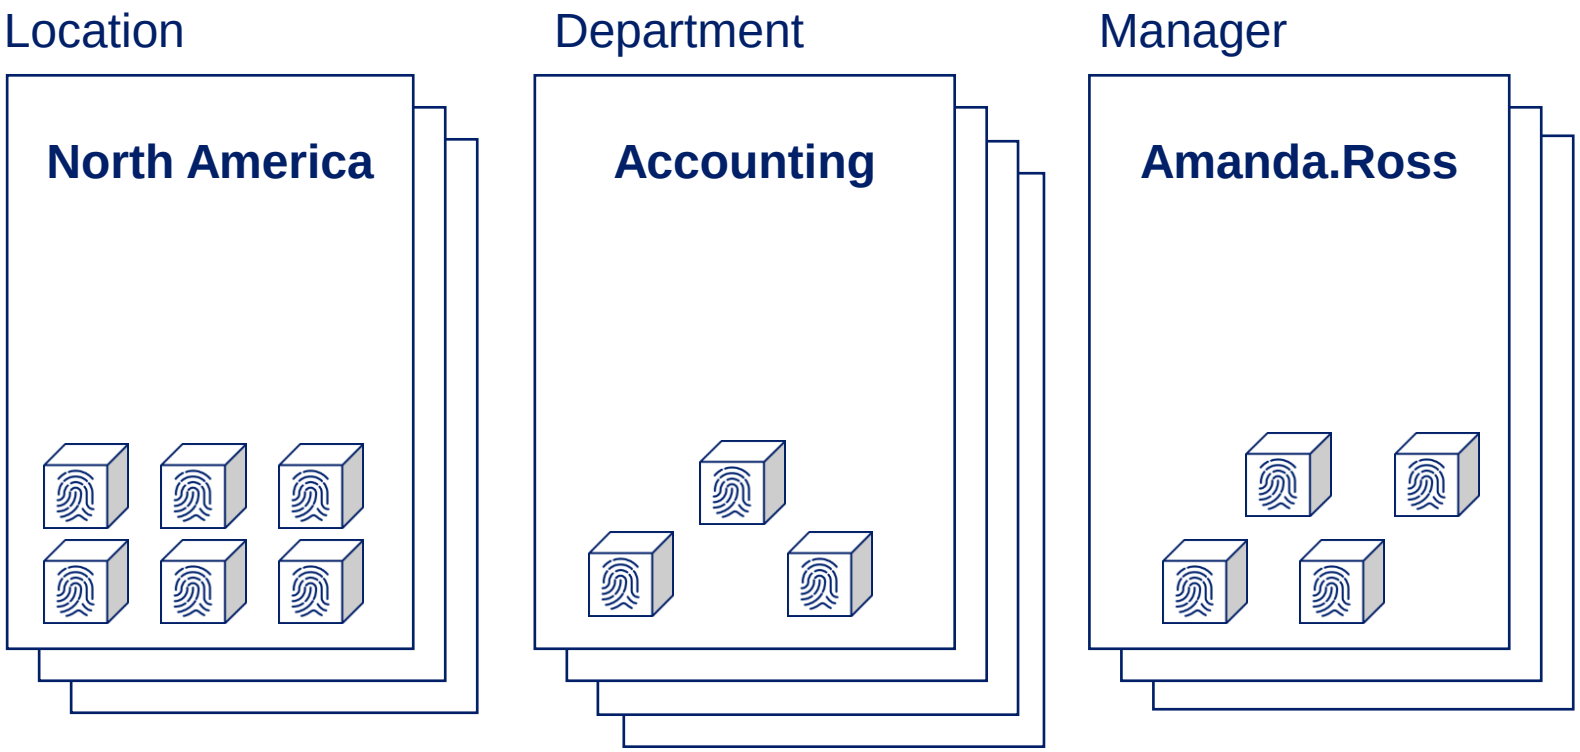


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Creating Groups

Group Factory

- Identity attributes can be marked as a group factory
- All identity attributes marked as group factory are listed in the Group Attribute menu

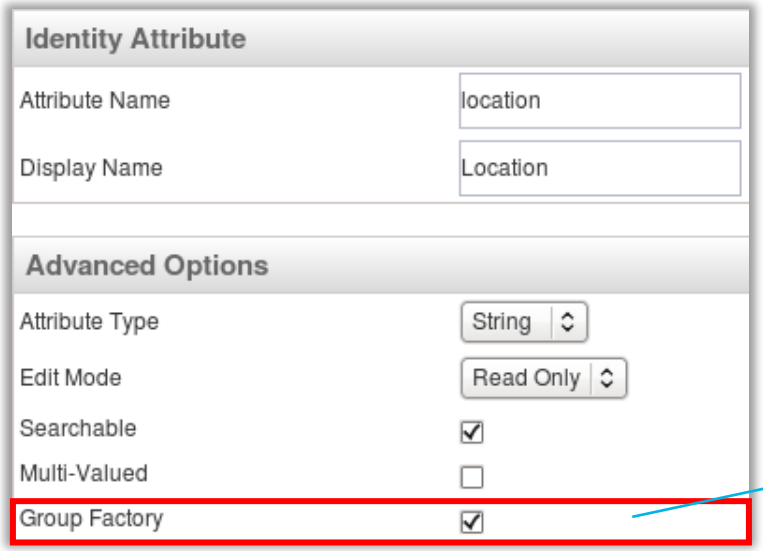

Global Settings → Identity Mappings

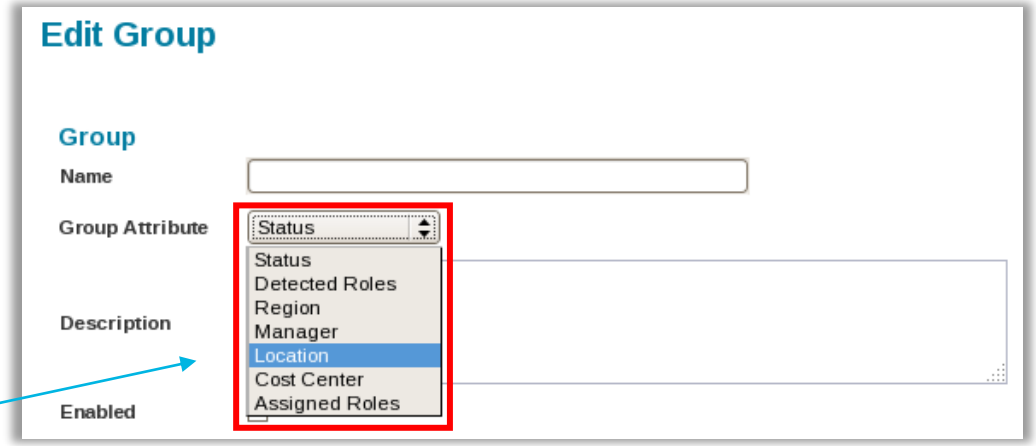

Setup → Groups → Create New Group

- The term *group factory* can also refer to the collection of sub-groups that share an attribute

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Creating Groups

- Define the group details

Identity Attribute
Sub-groups of users created for each value

Status

Optional owner for each sub-group

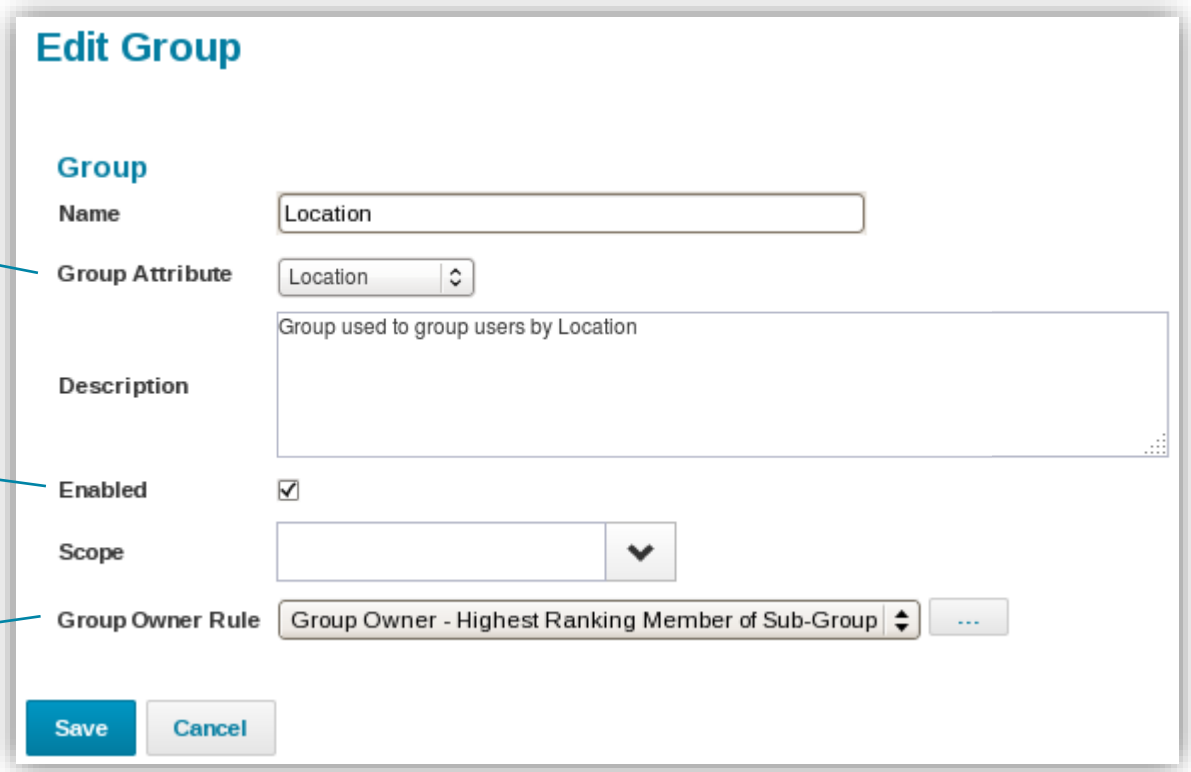


Setup → Groups → Create New Group

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Creating Groups

- Run task: *Refresh Groups*
  - Creates a sub-group for every value for the specified group attribute
    - For example
      - Group Factory: Location
      - Values found for Location = sub-groups created with members
        - Austin, London, Paris, Tokyo, Sydney

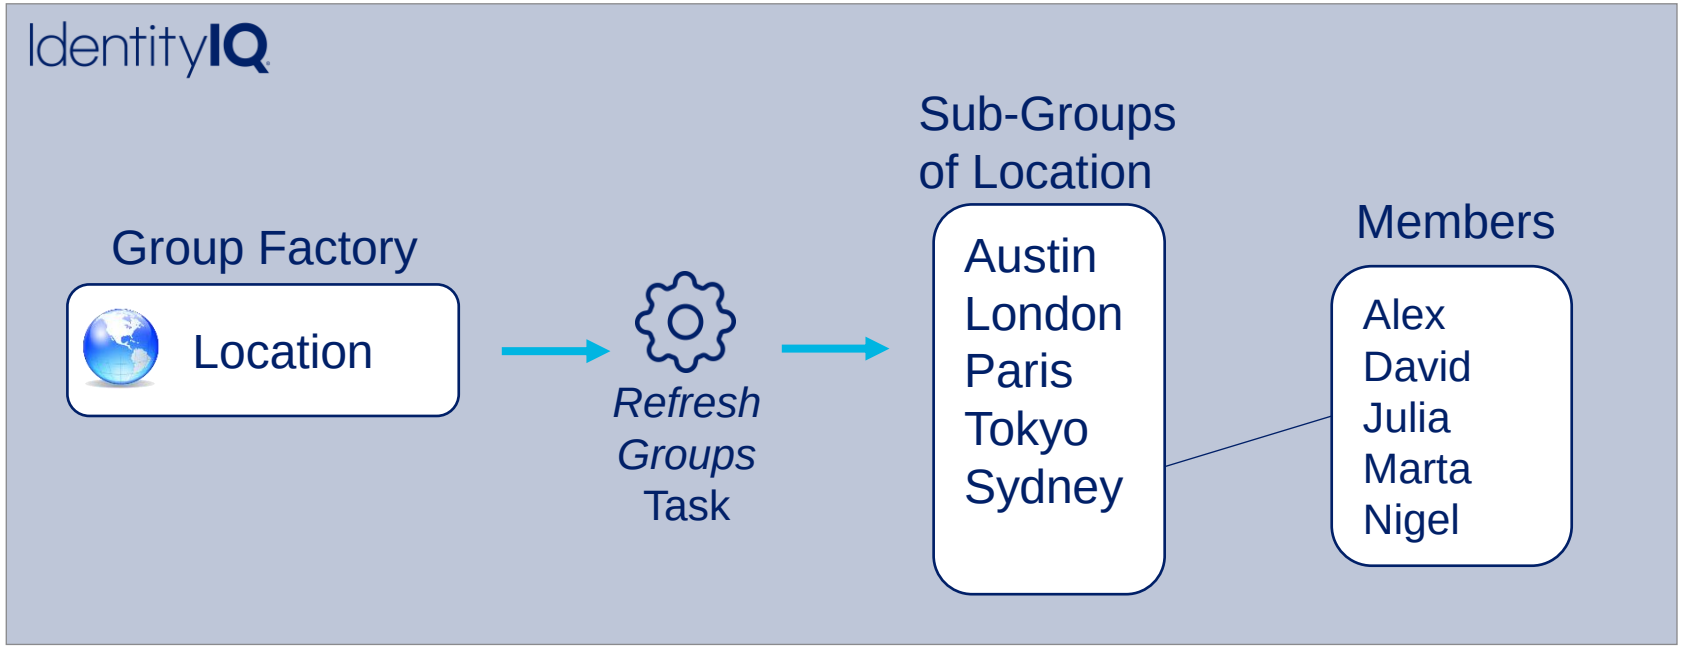

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Manage Groups

Group Definitions

- List of sub-groups is static
  - Update list with *Refresh Groups* task
    - Run regularly

Group Membership


- Members are identified when group is used
  - All identities who match group attribute at that point in time are included

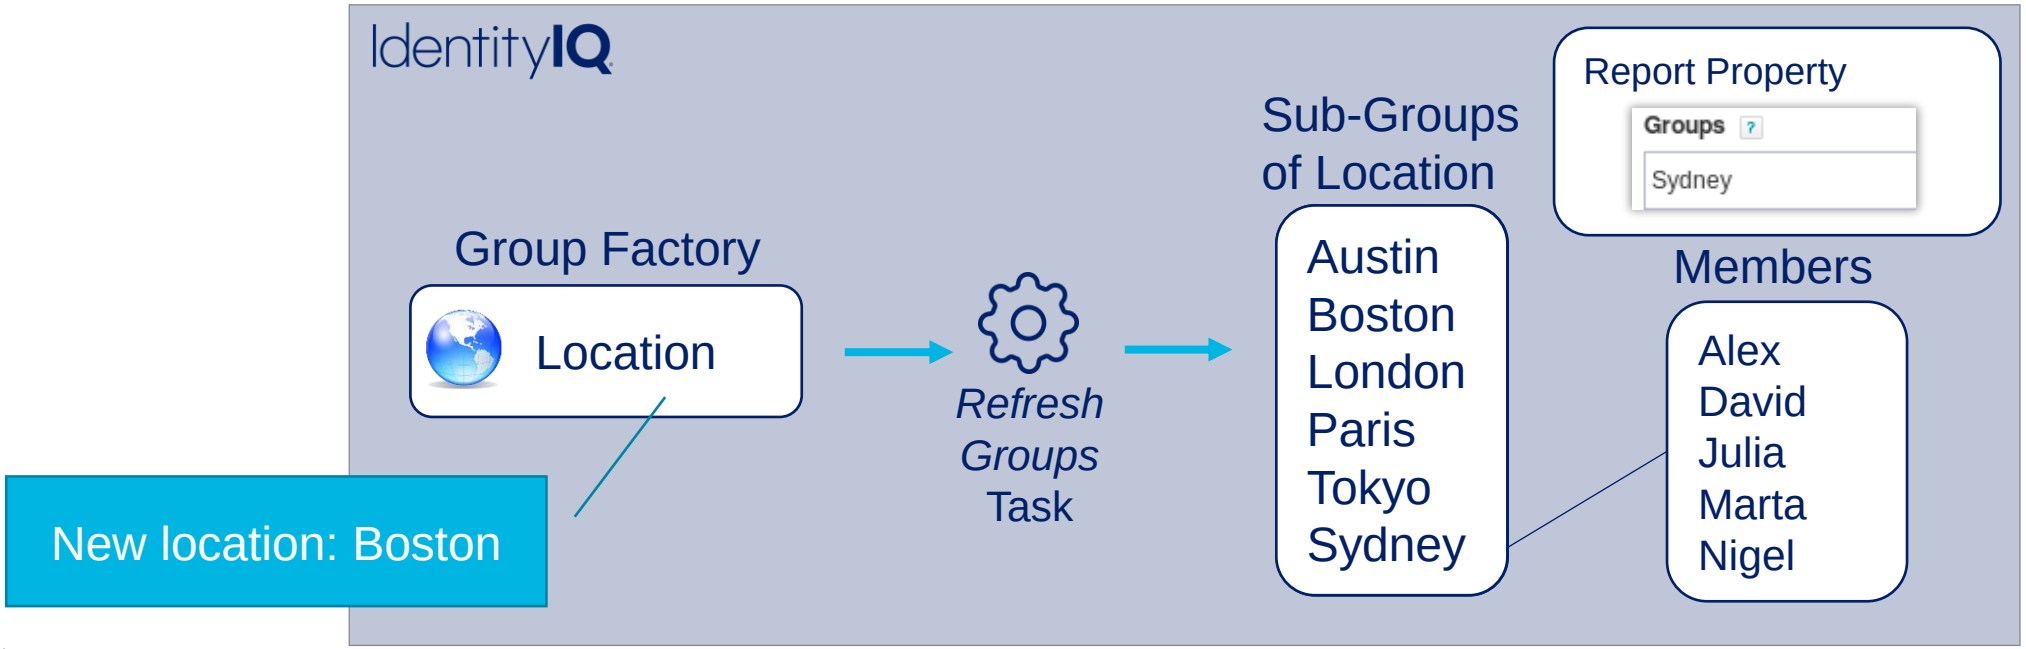

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage Groups

View Group

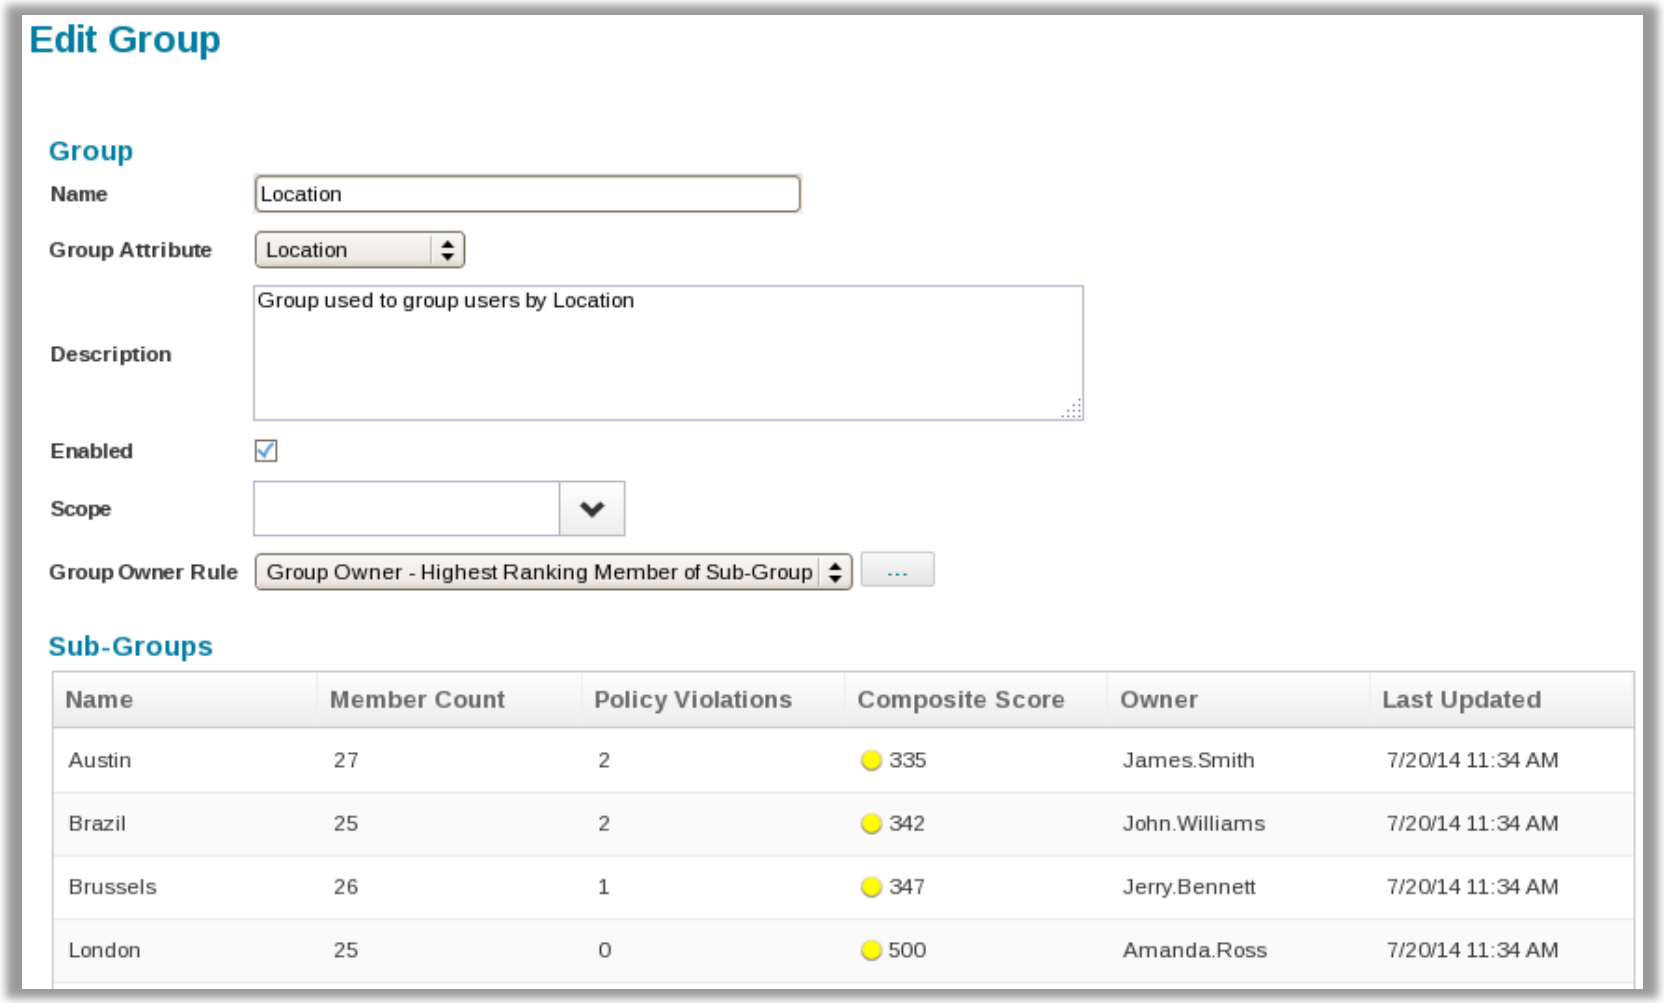

Setup → Groups

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Contrasting Populations and Groups

	Populations	Groups
Efficiency	Manual creation One by one	Task-based automatic creation In bulk
Flexibility	Allows multiple criteria	Based on one attribute value
Applicability	Certification Report filters Task filters Identity Selector criteria for • Quicklink Populations • Role assignment criteria • Policy definitions • Lifecycle event filters	Certification Report filters Task filters (limited)

Commonality: Both store only membership criteria and execute query dynamically at time of use

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 1, Exercise 4

- Exercise 4: Organize Identities
  - Create populations
  - Create group factories
  - Create and populate workgroups

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Onboarding Additional Applications

IdentityIQ Essentials

Overview

Onboarding Additional Applications

- Application and connector planning resources
- Defining non-authoritative applications

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Planning Resources for Onboarding

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Planning

Prioritizing, Defining, and Connecting

- Applications
  - Prioritize and group in phases
  - Define connectivity
- Accounts
  - Represent users who may sign into that system
- Attributes
  - Additional information associated with account
- Entitlements
  - Specify what actions a user is authorized to perform in a given application (i.e. access payroll)
- Account Groups
  - Specify set of security rights/permissions (i.e. Administrator)
  - Membership in group provides user with group's access rights

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Planning Resources

- Product Documentation
  - Installation
  - Administration
  - Direct Connectors Admin and Config Guide
- Services Standard Words (SSW)
  - IdentityIQ Job Titles & Staffing Plan
  - IdentityIQ Pre-Deployment Questionnaire
  - Application Onboarding Questionnaire
  - Go Live Migration Roll Back Plan
  - https://community.sailpoint.com/t5/Services-Standard-Deployment/tkb-p/SSD_KB

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Defining Non-Authoritative Applications

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Defining Non-Authoritative Applications

Key Configurations


- Account schema and entitlements
- Group schemas
- Classification
- Correlation
- Provisioning (especially birthright)

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Schema

Review

- Specify account attributes to read during aggregation
- Identify key data to IdentityIQ
  - Identity Attribute
  - Display Attribute

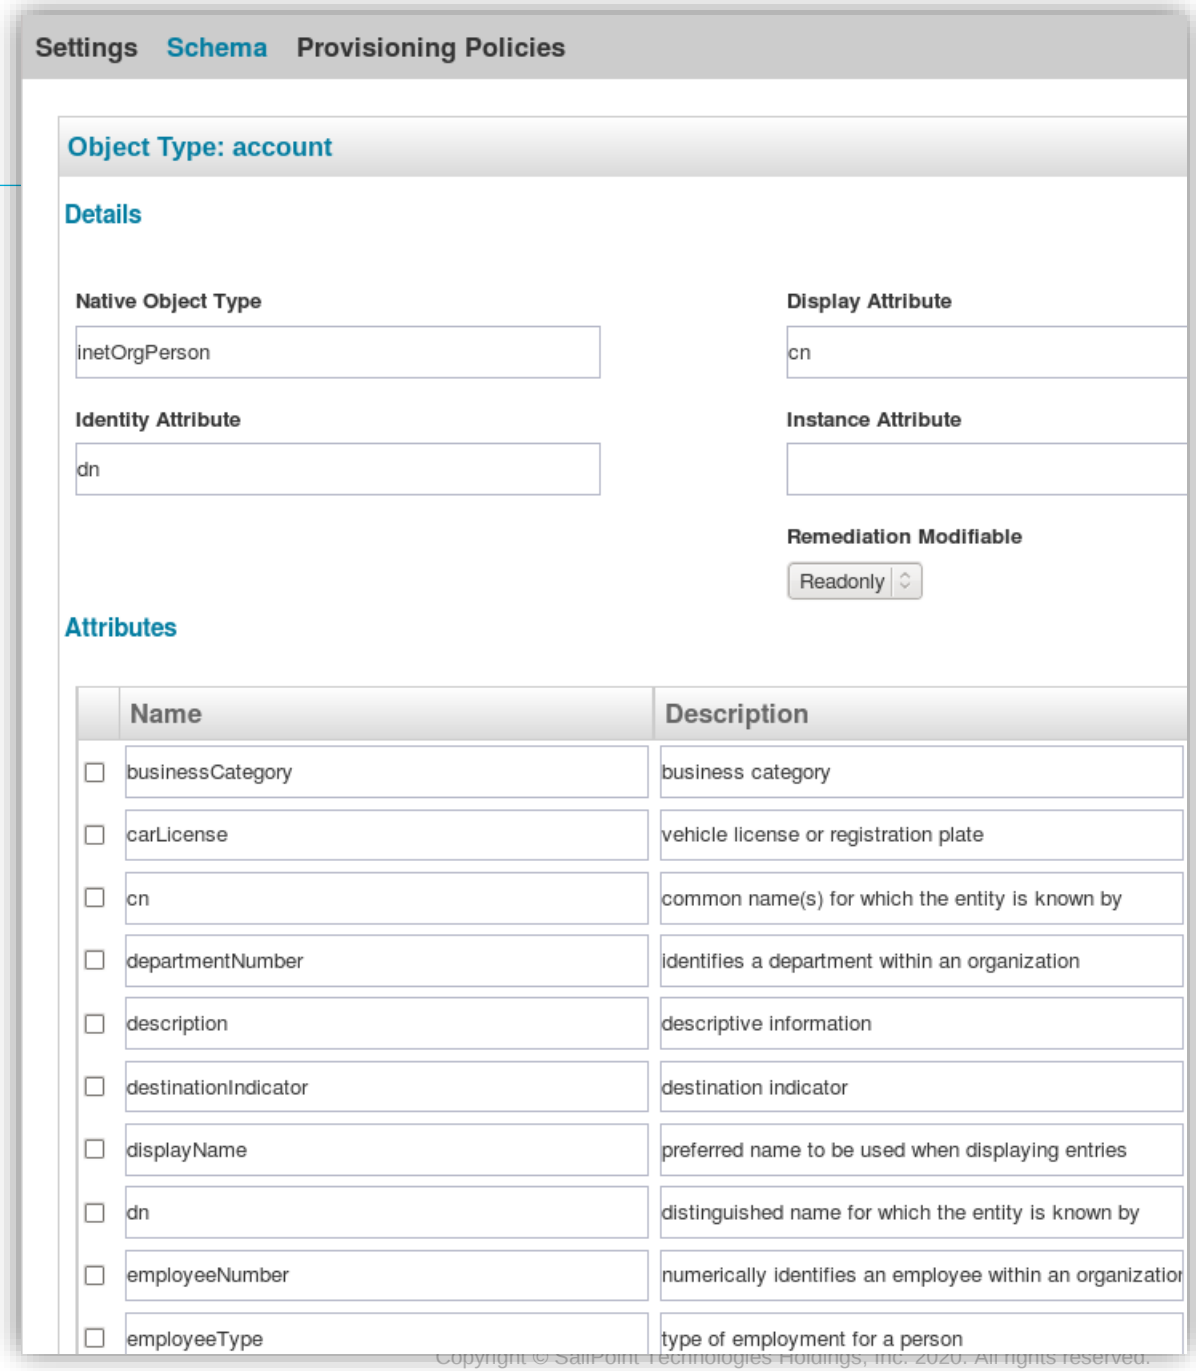


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Schema


Entitlement Designations

- Identify attribute that lists user entitlements
- **Entitlement** → Identity Cube
  - Include in certifications
  - Include in role mining
- **Managed** → Entitlement Catalog
  - Assign ownership, display name, description
  - Request through LCM
  - Use in policy and risk calculations

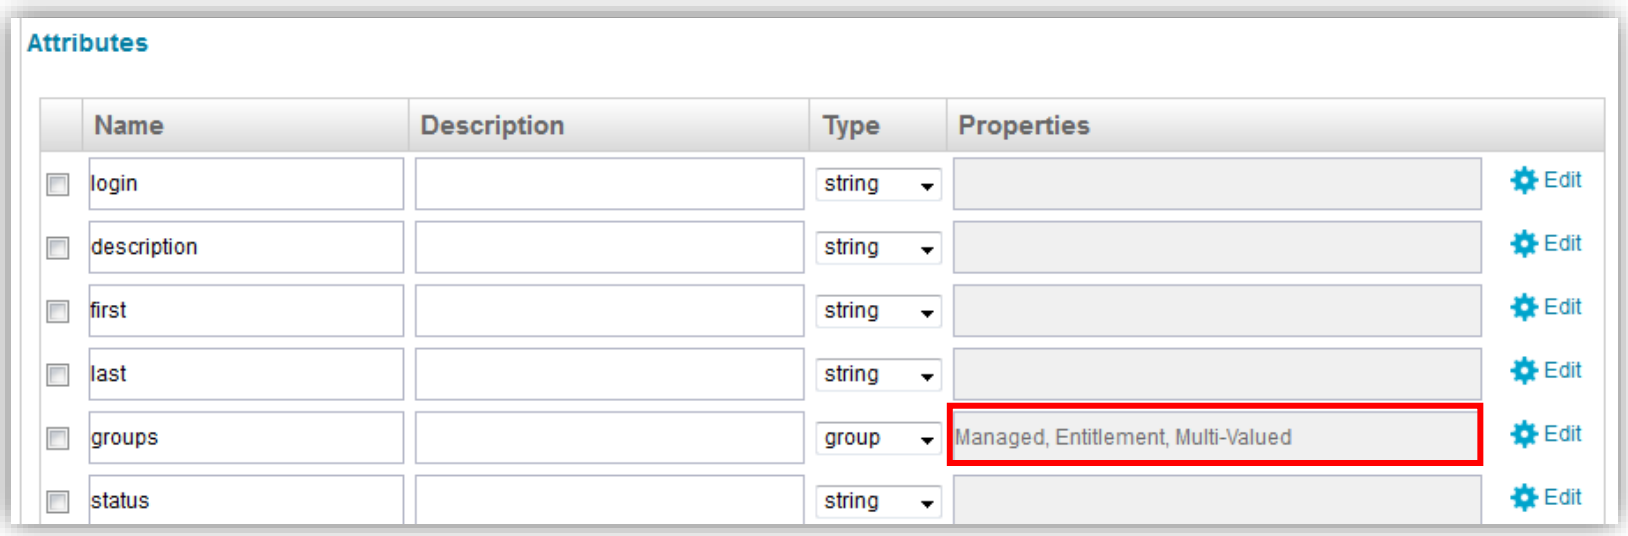


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Entitlement Catalog / Identity Cube

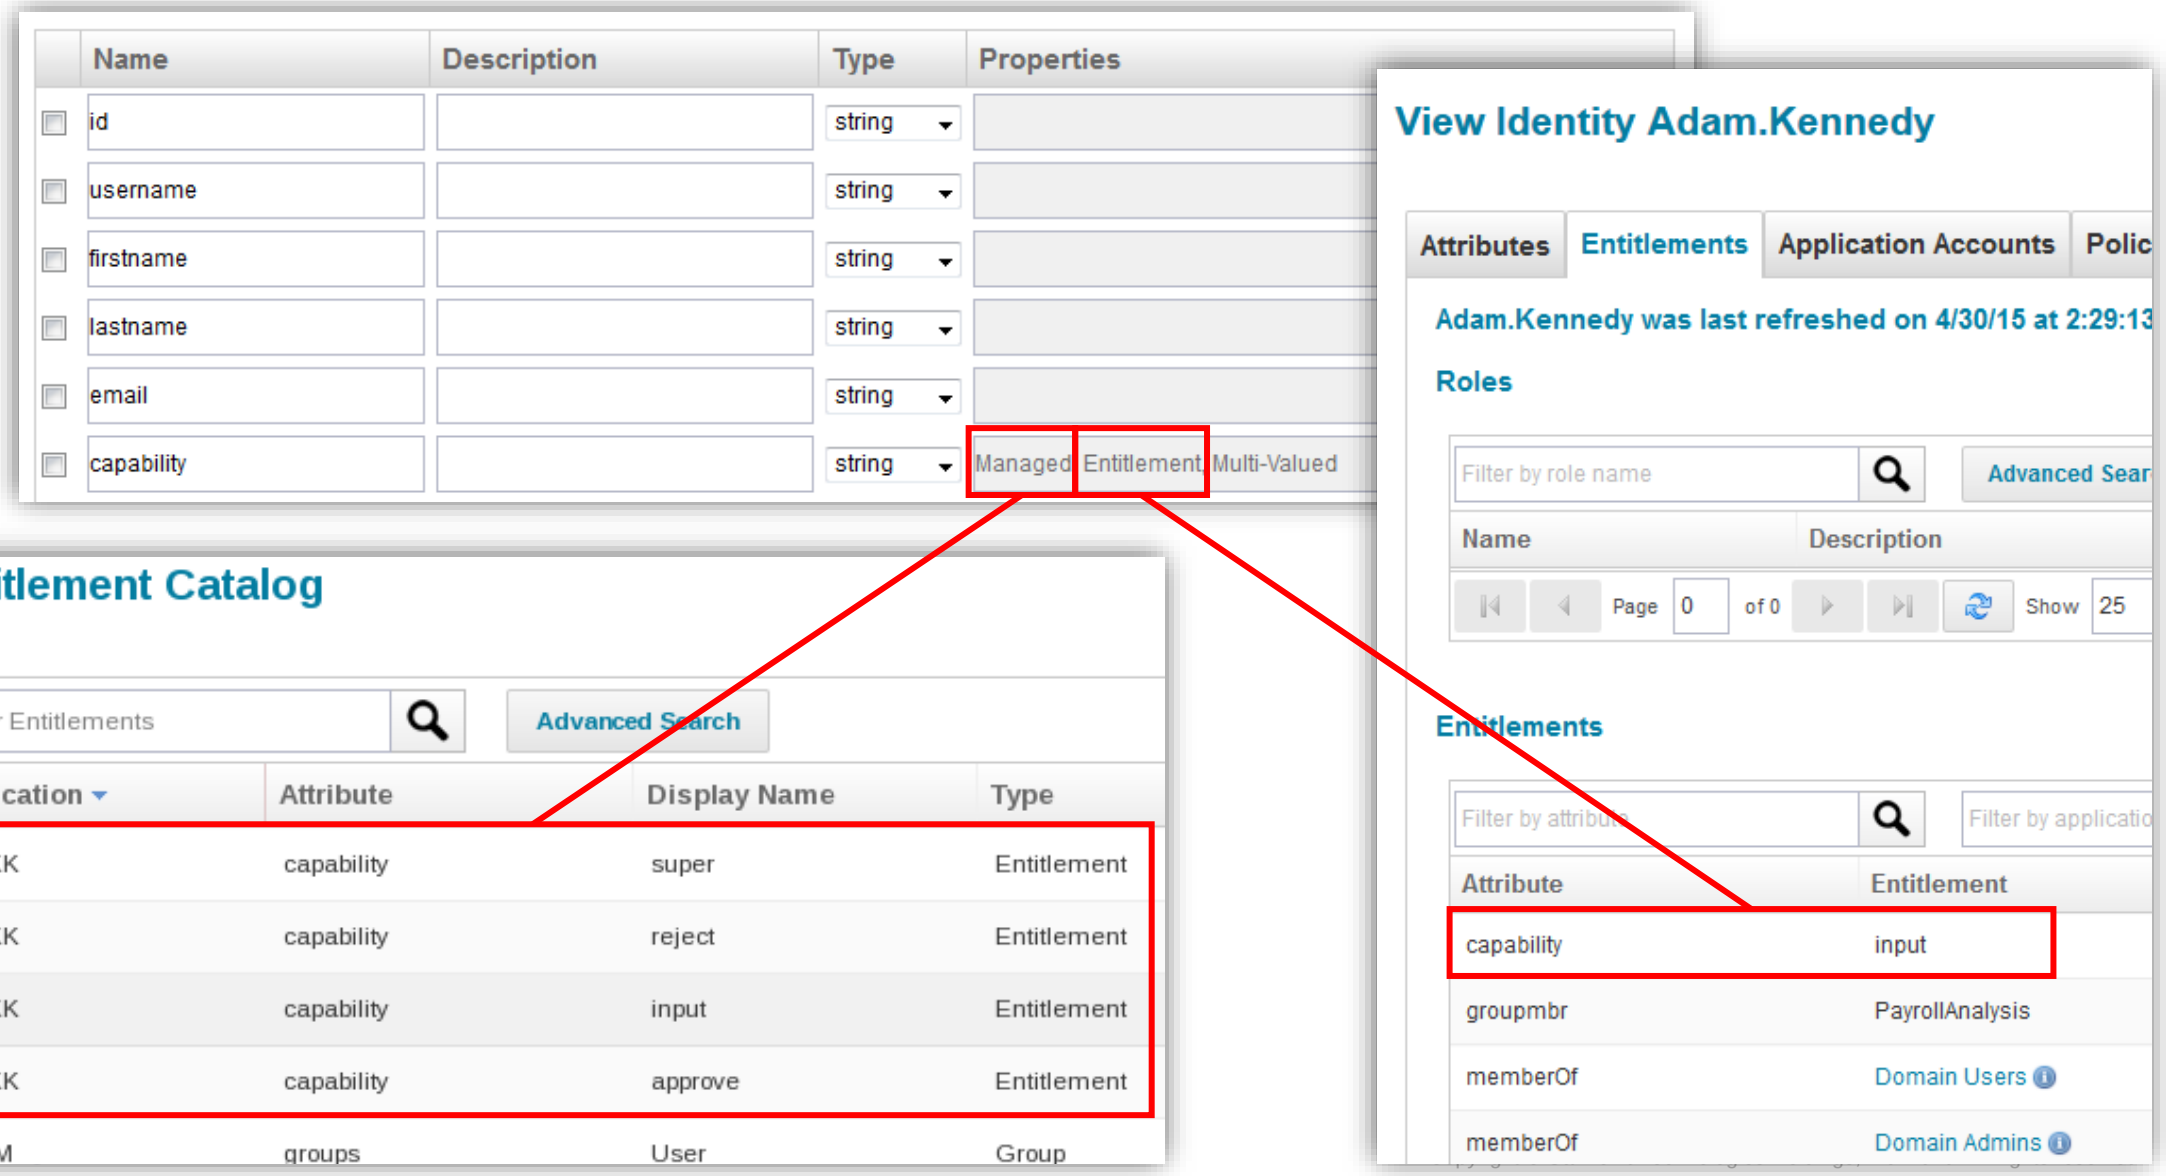

Group Schema

- Represent native account groups from target system
- Groups managed in Entitlement Catalog
- Provides framework for defining what group membership really means
  - Descriptions: Group 920-100 = industry compliance regulatory group
  - Indirect permissions: Group Financials = access to the financial planning file share
- Some connectors support multiple
  - JDBC, SQL Loader, Delimited File, Oracle EBS, etc.

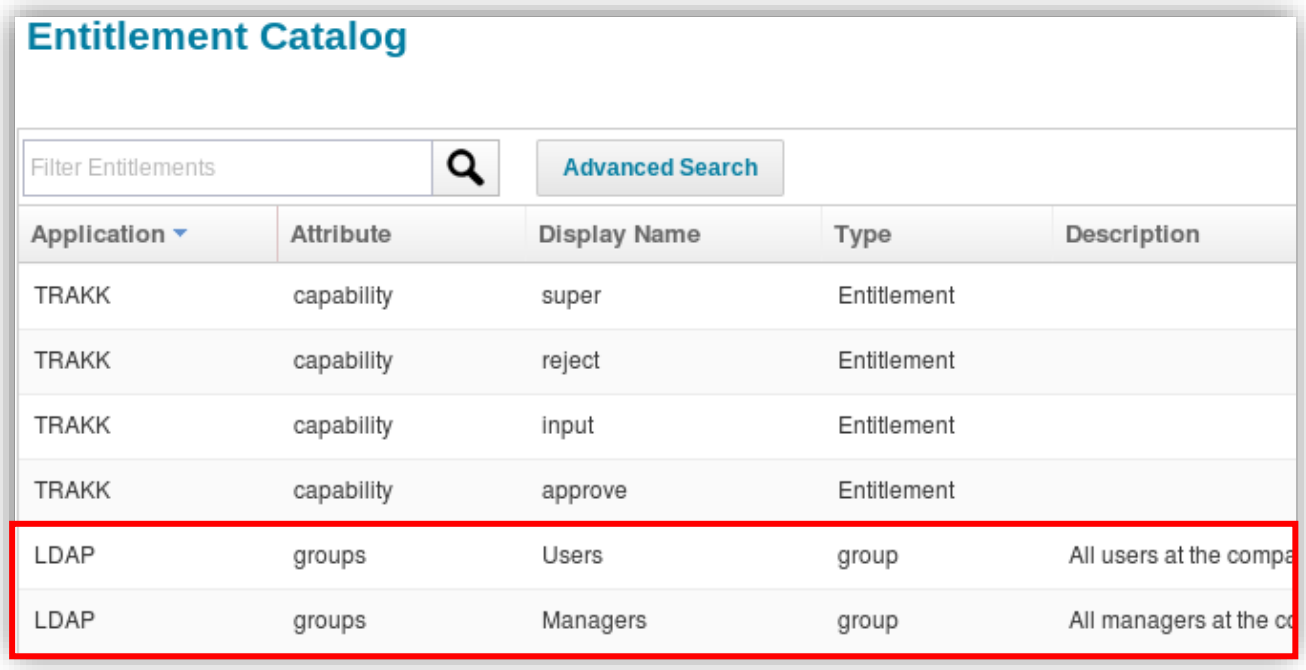

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Group Object Reference


Account Schema

- Identifies the attribute that holds groups for the account holder
- Used to identify group membership (groups, groupmbr, memberOf)
- Available after Group Object has been defined

Account Schema

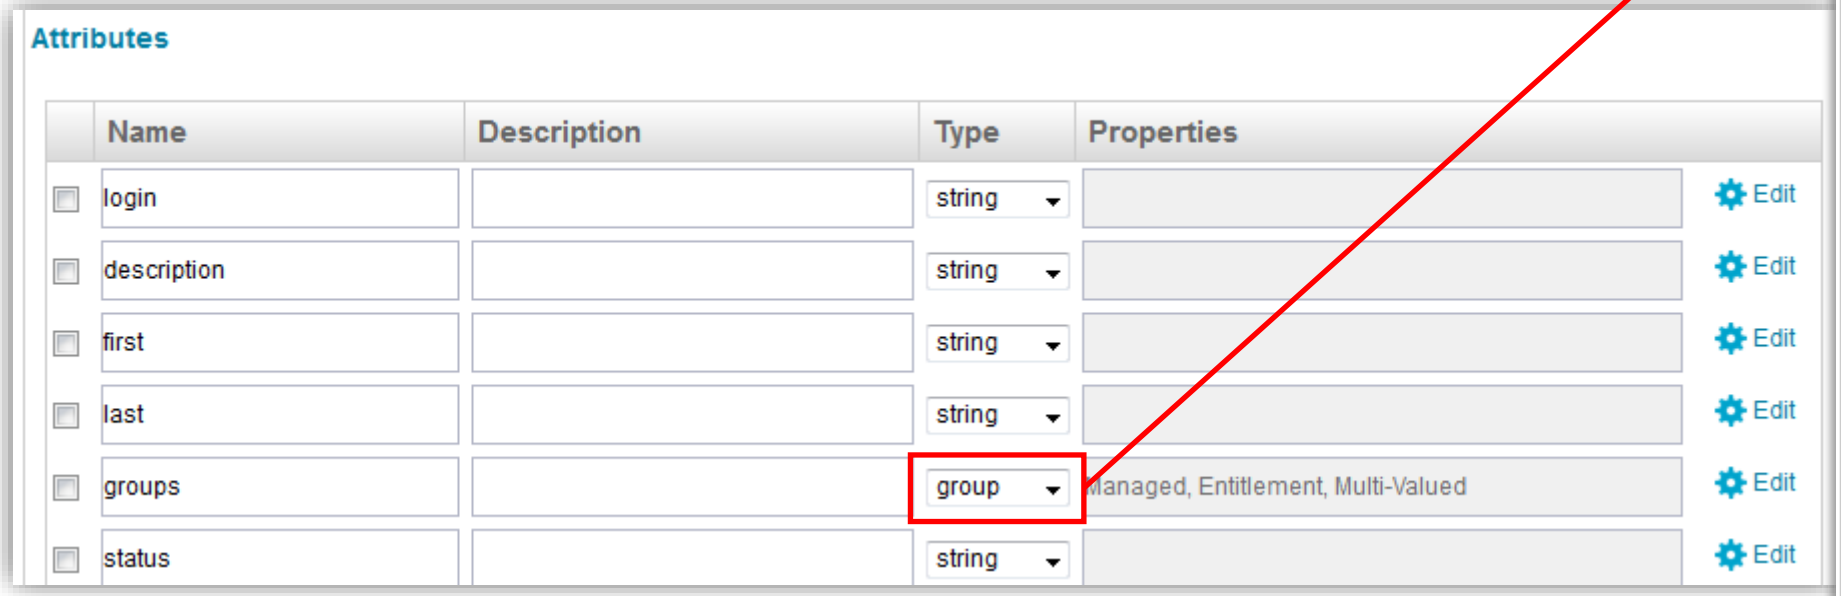


Group Schema

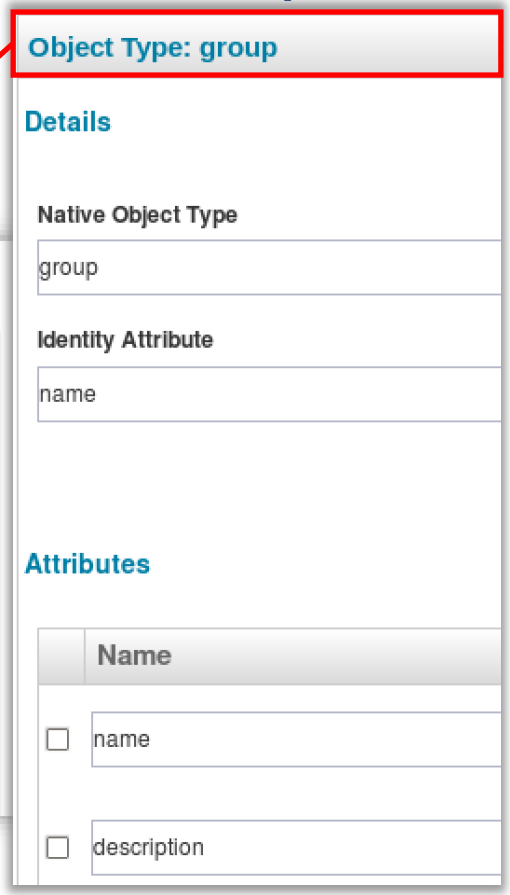

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Entitlement Requestability

Rapid Setup Configuration

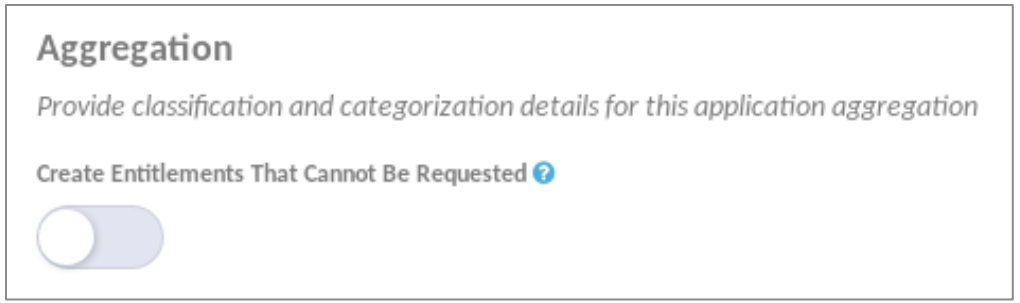

- Infrastructure Applications
  - High volumes of entitlements, most unknown to users
  - Examples: Active Directory, LDAP, Mainframe, Unix, Database servers
  - Best Practice: Entitlements *not* requestable

- Business Applications
  - Systems supporting business functions
  - Examples
    - HR applications: payroll, benefits, time tracking
    - Commerce applications: finance, accounting
    - Industry-specific business applications
  - Best Practice: Entitlements requestable


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Data Classification

Rapid Setup Configurations

- Accounts
  - Locked Account
  - Disabled Account
- Identities
  - Service
  - RPA/Bot

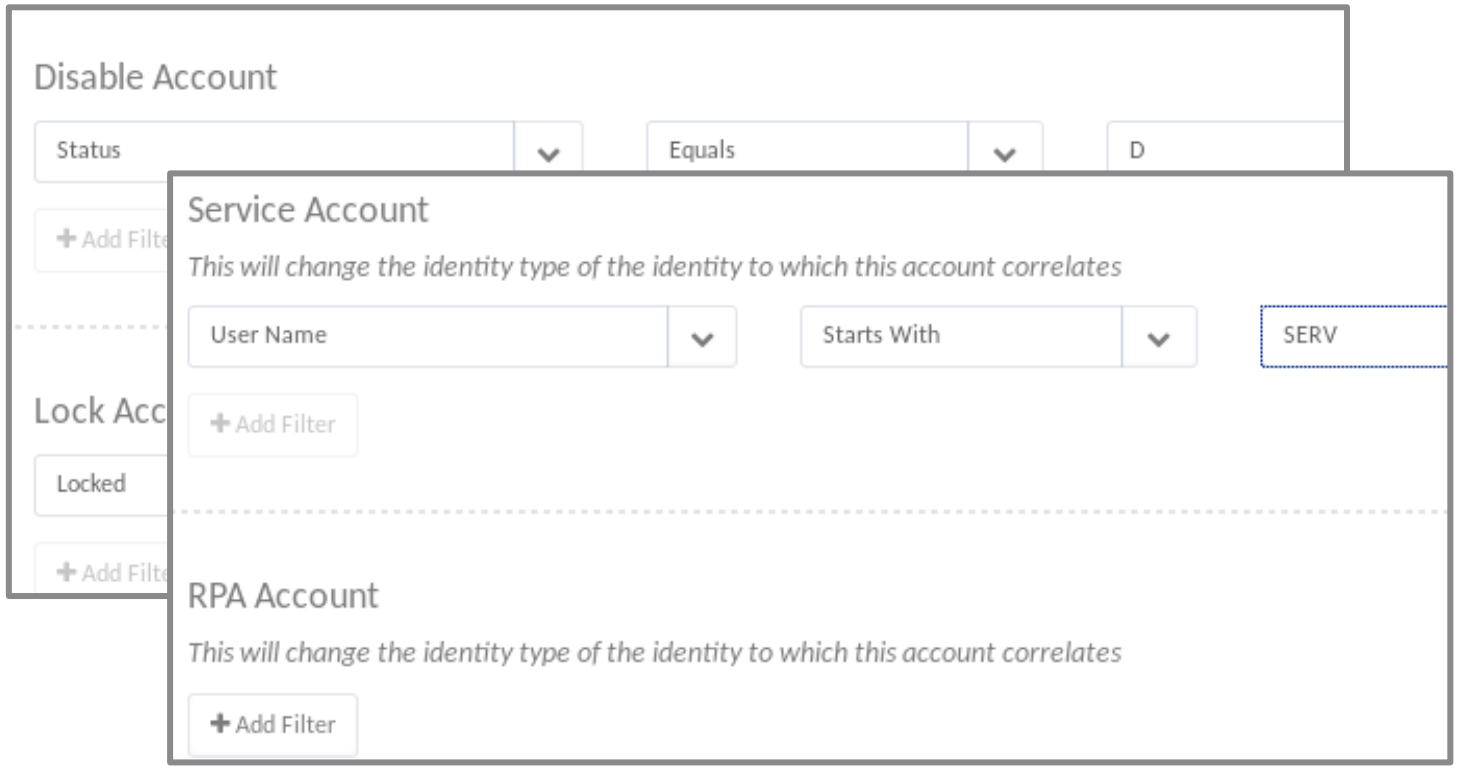


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Groups, groups, everywhere…

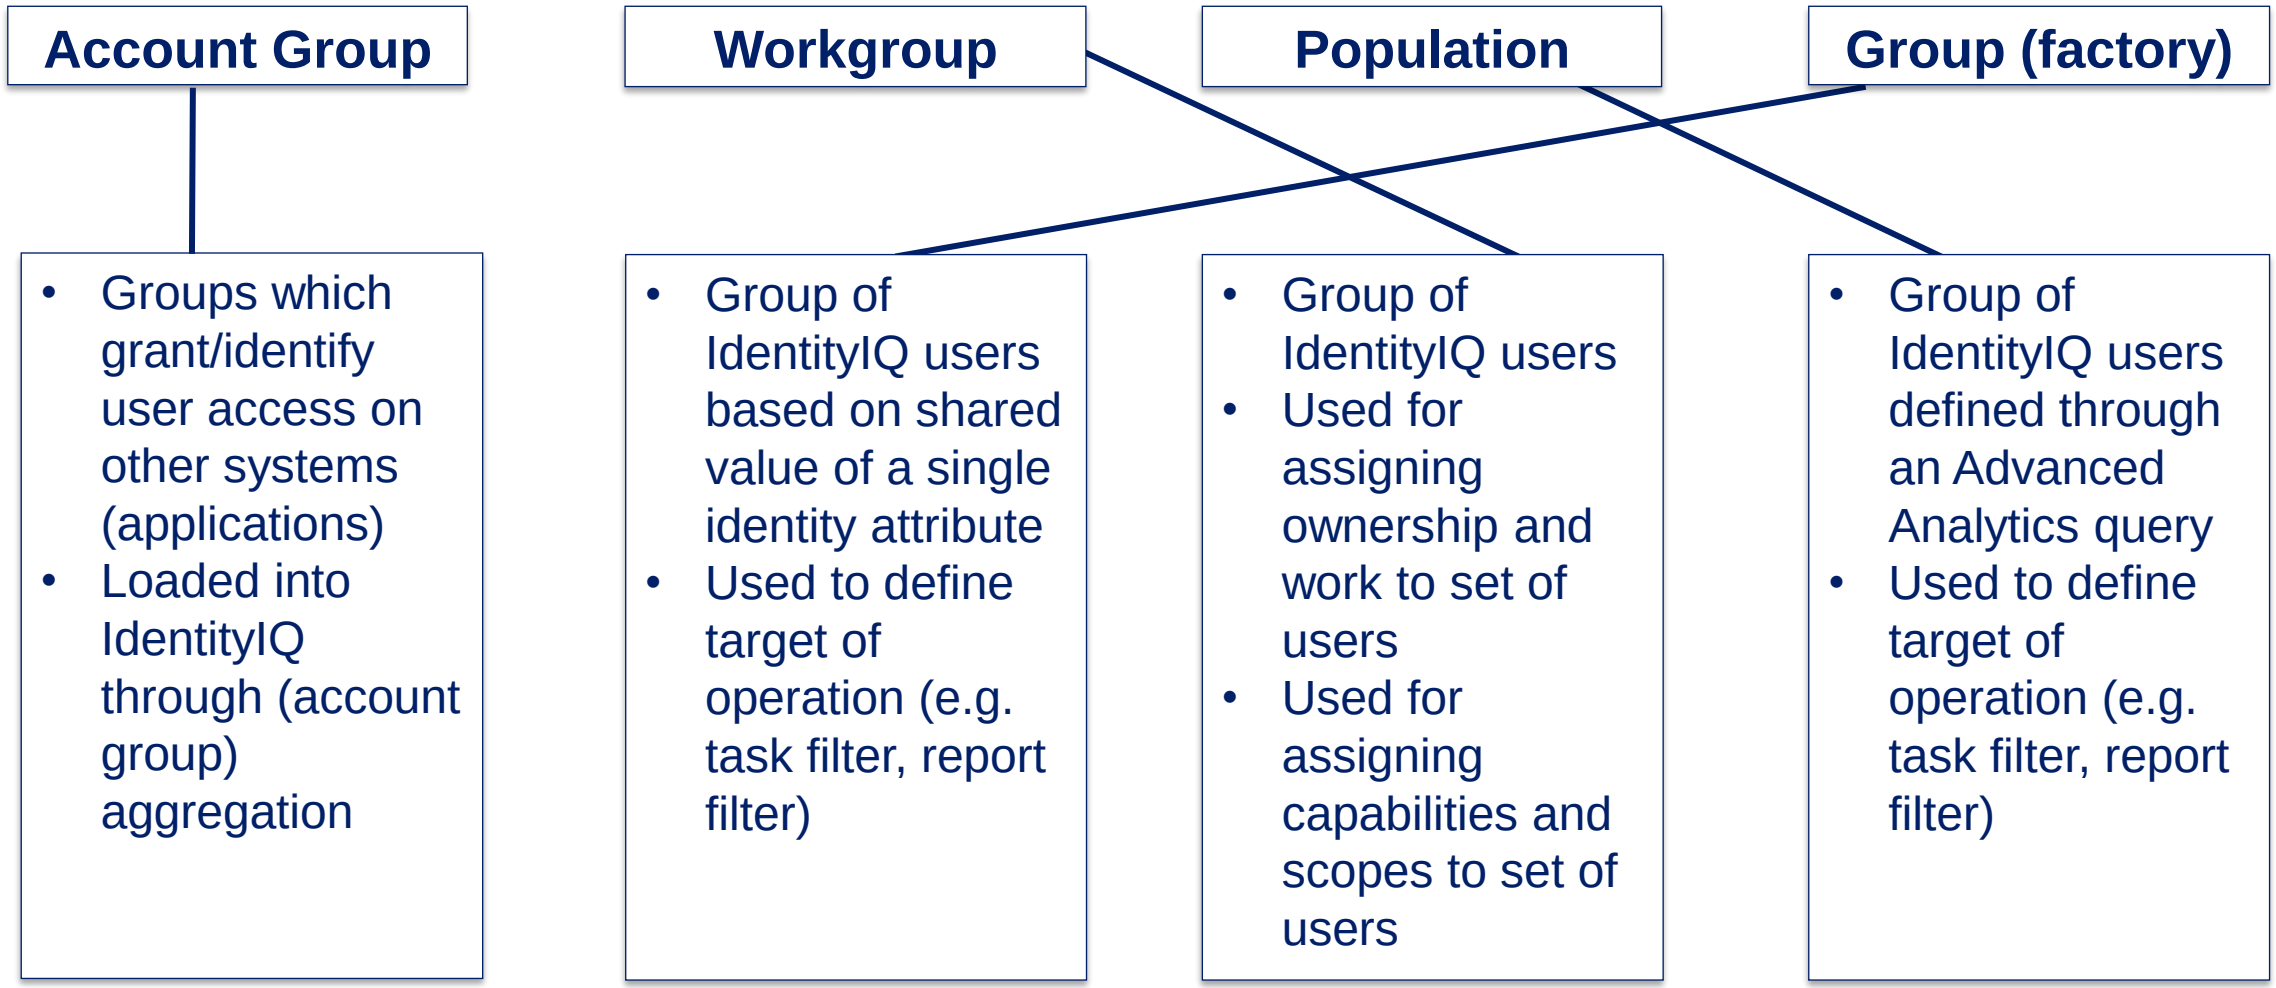

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint




Account Correlation

IdentityIQ Essentials

Account Correlation

- Matches an account to an authoritative Identity Cube
  - If no correlation, non-authoritative cube is created
- Correlation specification
  - Rapid Setup correlation
  - Correlation Wizard
  - Correlation rule
- Fallback options
  - Default logic
  - Manual
- Order of precedence
  1. Rule
  2. Correlation configuration
  3. Default logic

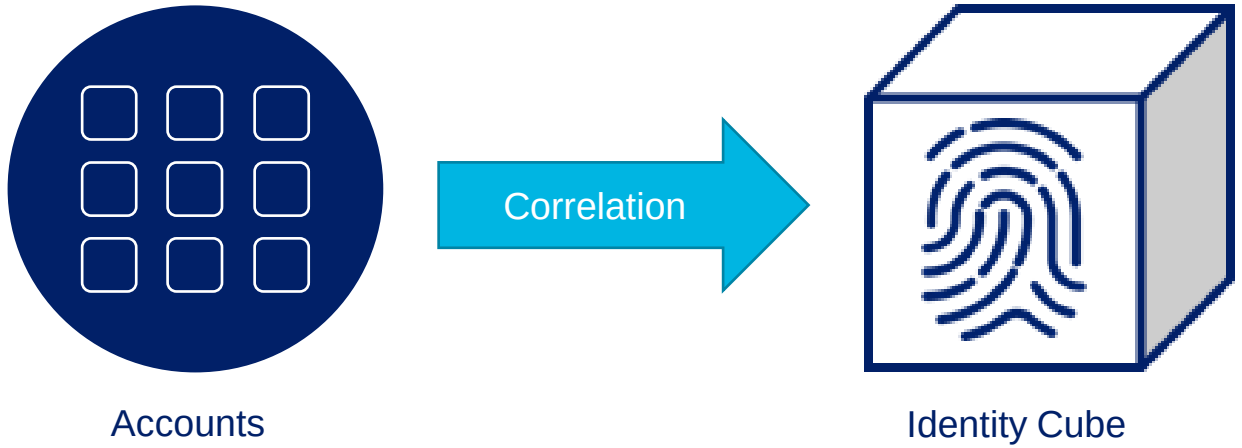


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Correlation

Rapid Setup

- Provides a simple, easy to configure UI
- Matches one application attribute with one identity attribute
- Allows responsibilities for correlation to be shared

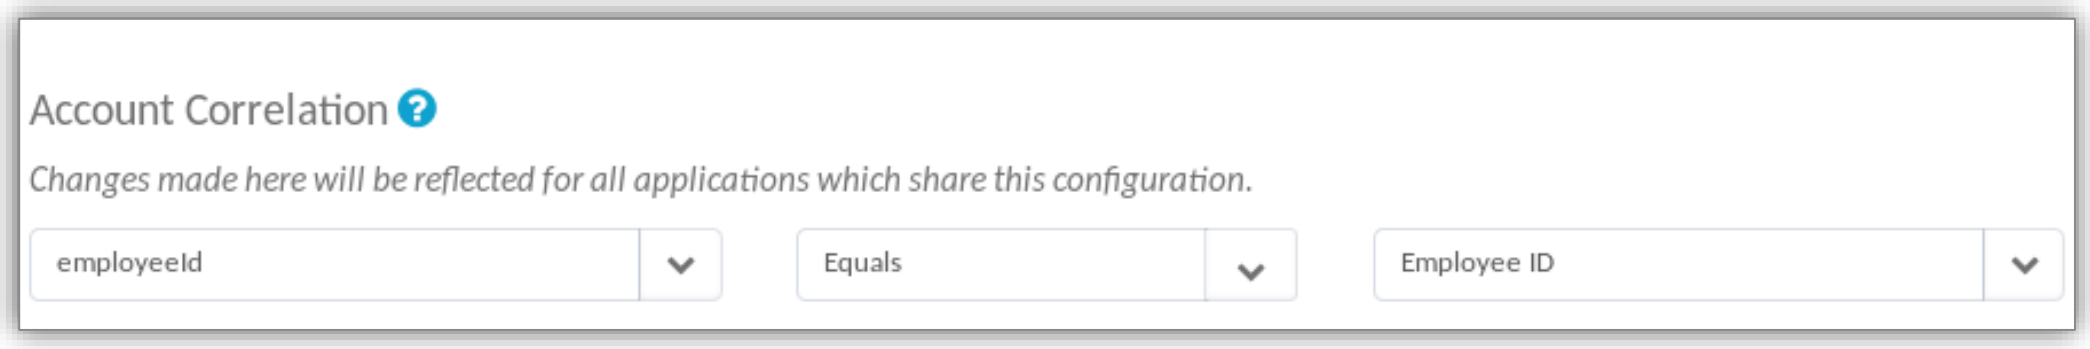


Applications → Rapid Setup

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Correlation

Correlation Wizard

- Provides a set of ordered correlations
- Result is a reusable correlation configuration
- Attribute example – correlate *account attribute* **email** with *identity attribute* **Email**
- Condition example – correlate accounts where **serviceAcct = true**

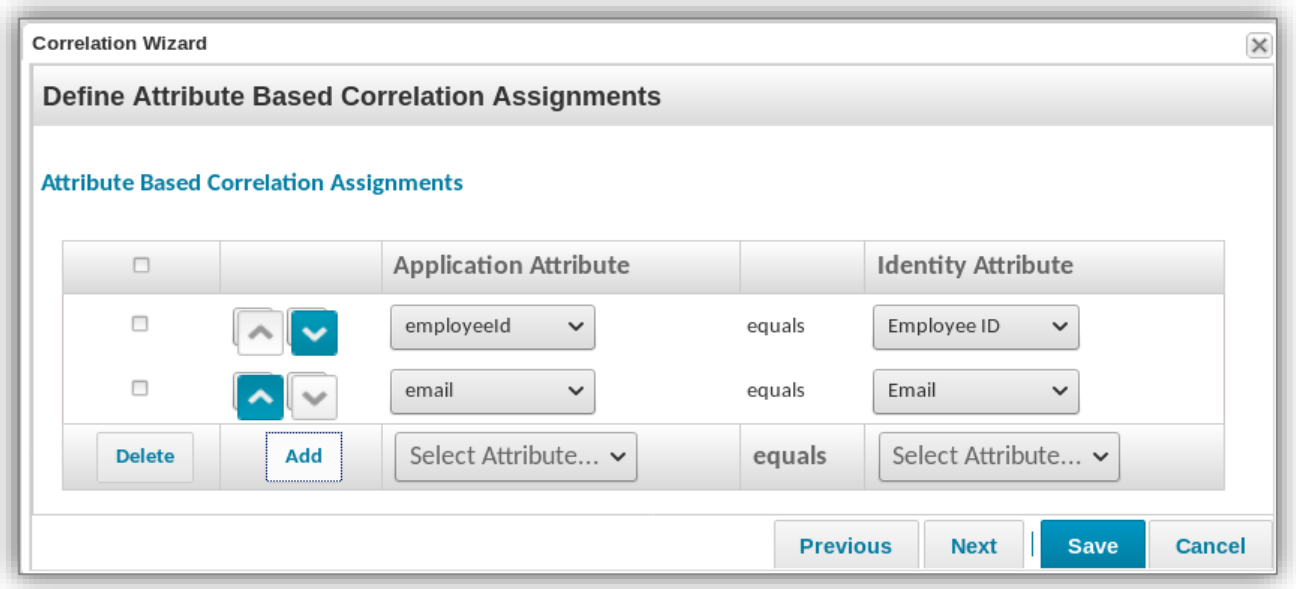


Applications → Application Definition → Correlation

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Correlation

Correlation Rule


- Used when simple matching isn’t enough
- Build and maintain account correlations
- Rule runs for every account, every aggregation

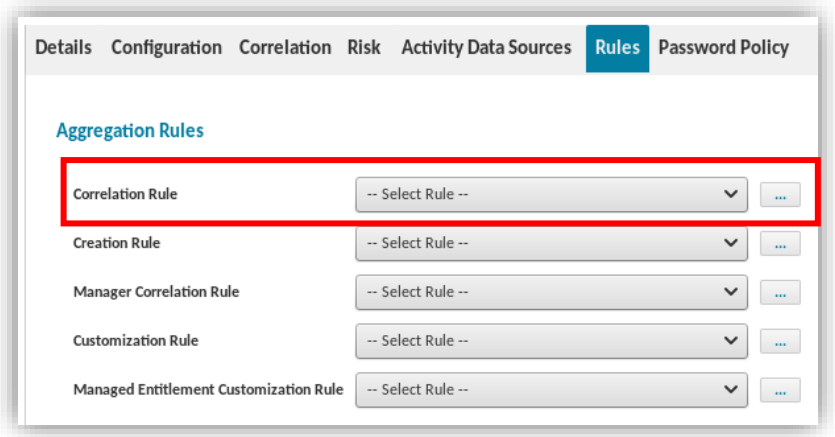

Applications → Application Definition → Rules

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Application/Connector Processing

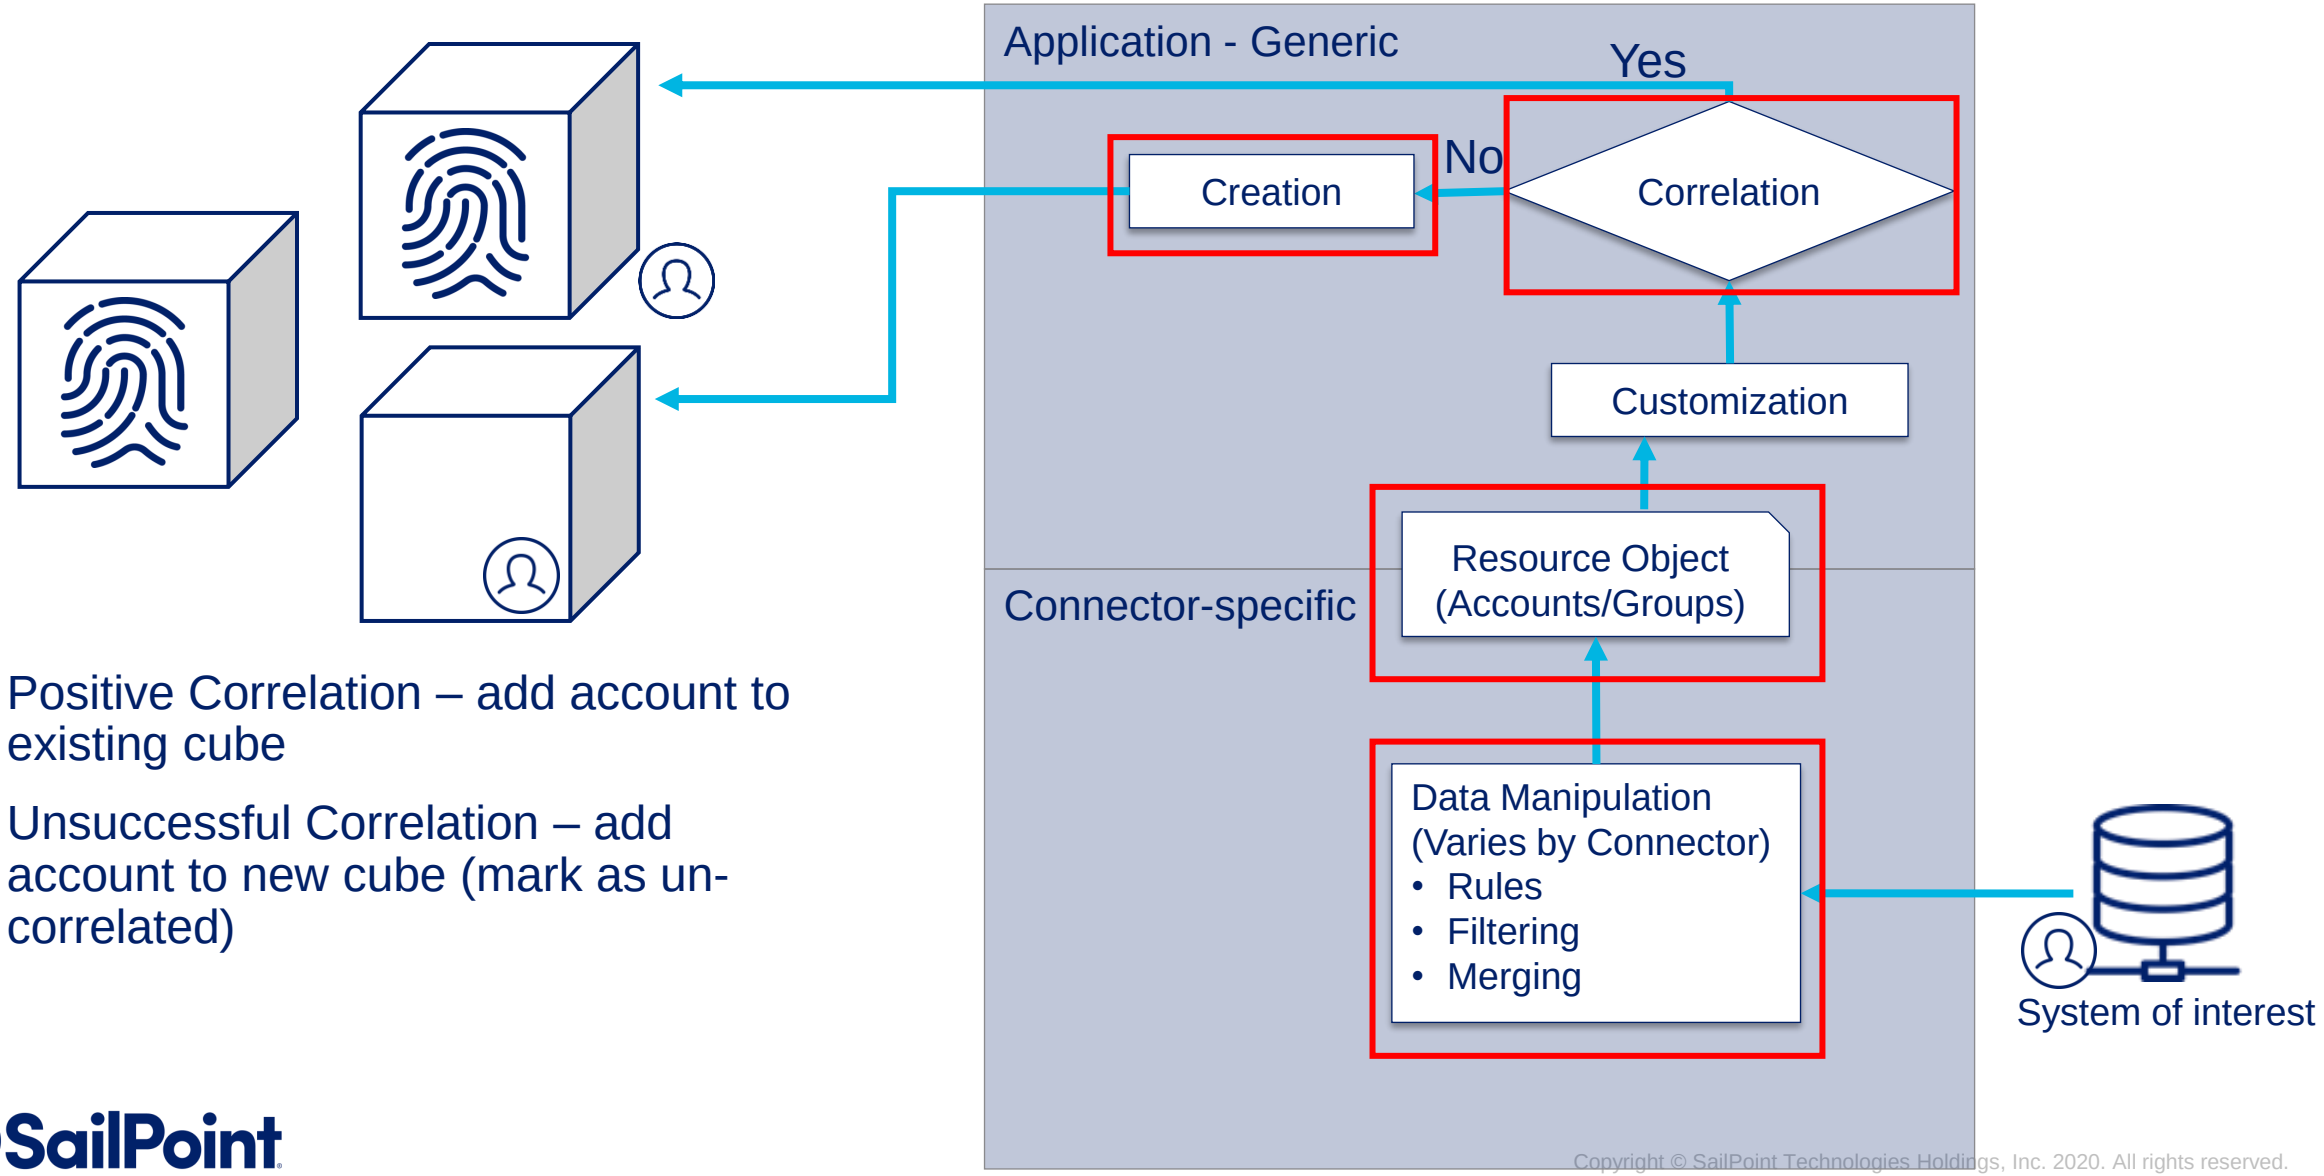

- Positive Correlation – add account to existing cube
- Unsuccessful Correlation – add account to new cube (mark as un-correlated)

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Uncorrelated Accounts


Manual Correlation

- Manually assign accounts to identities
- Correlation permanently retained

List by application

Select identity

Perform merge

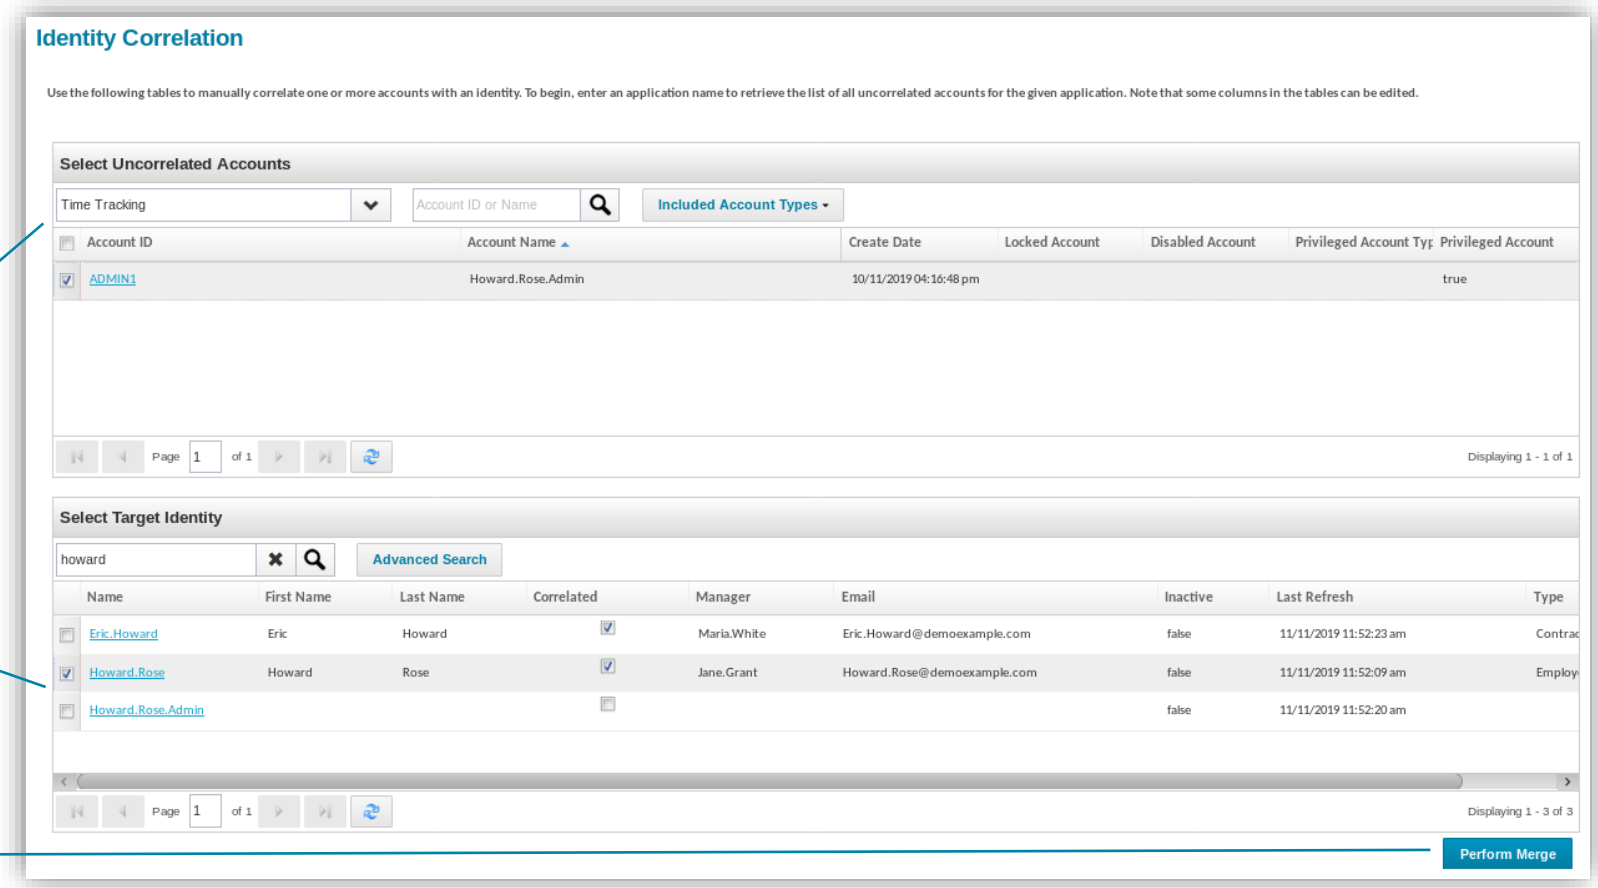


Identities → Identity Correlation

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Incorrect Account Correlation

Move Account

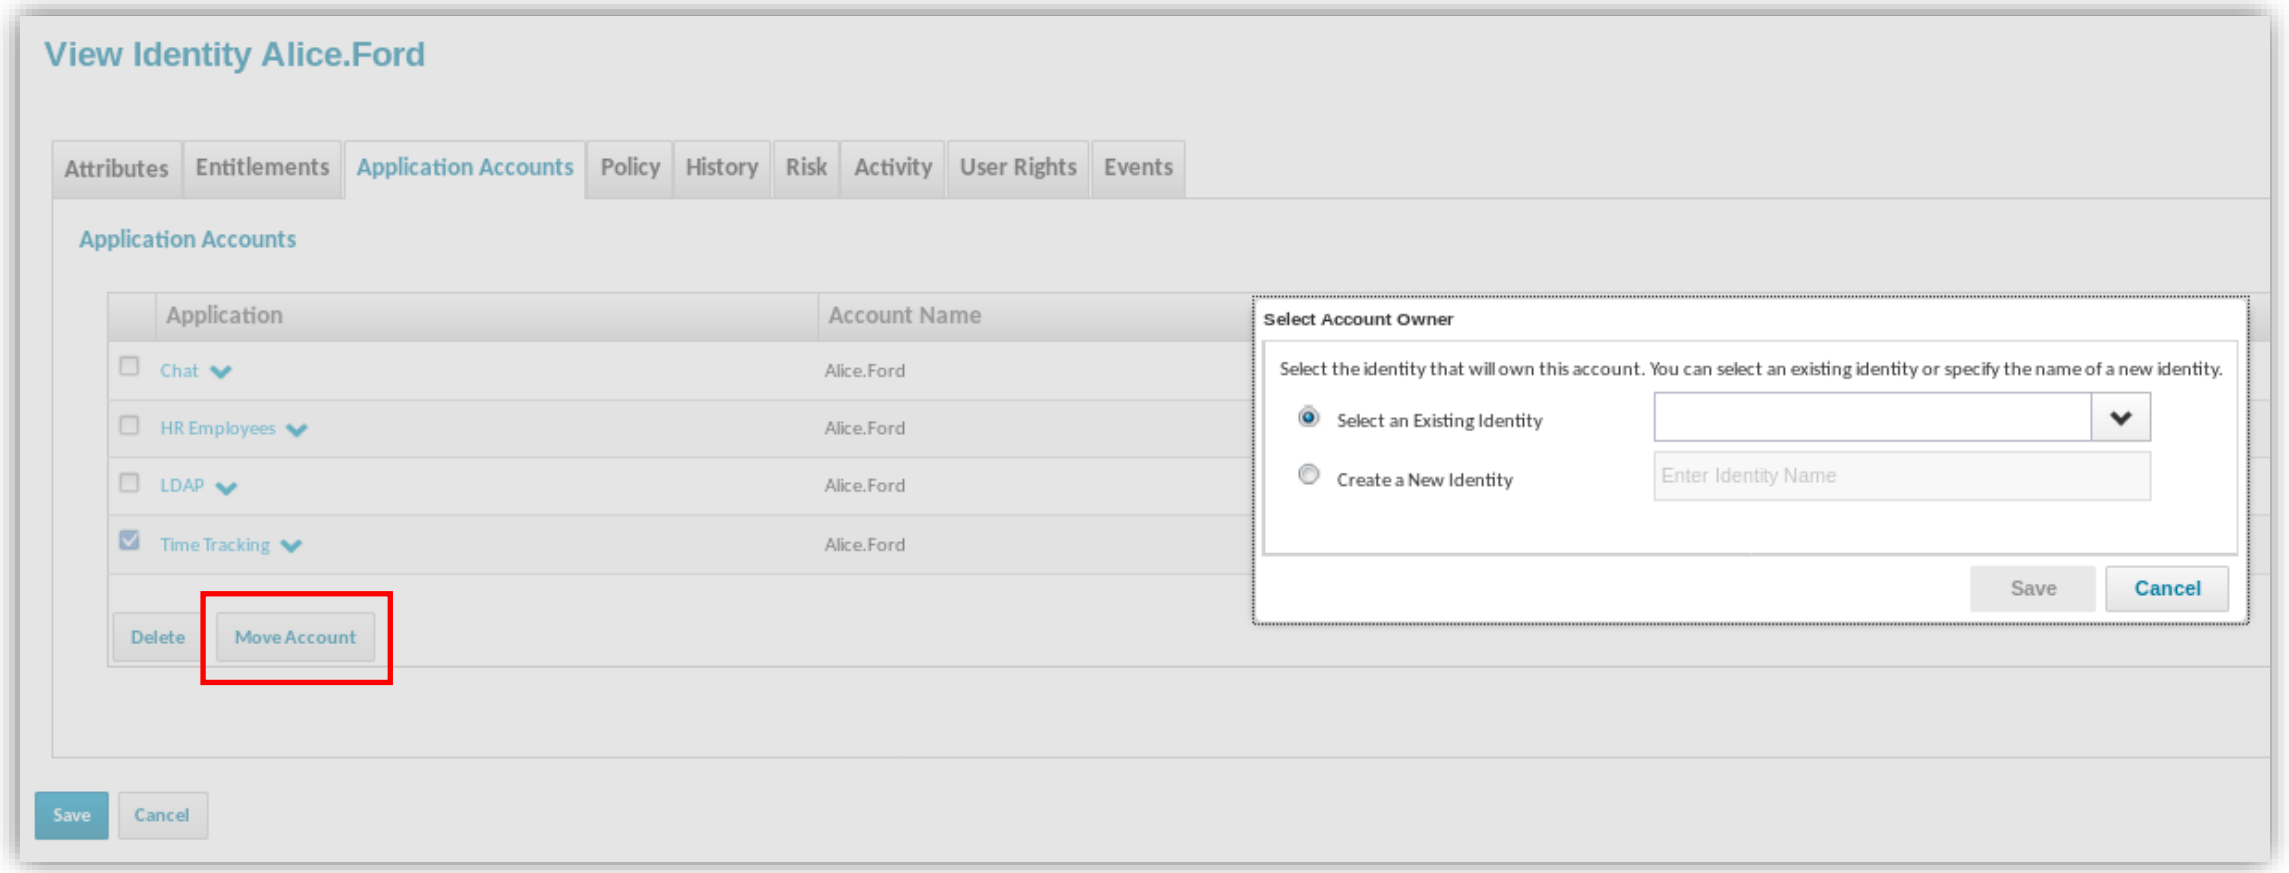


Identity Cube → Application Accounts


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Application/Connector Processing

Clean Up

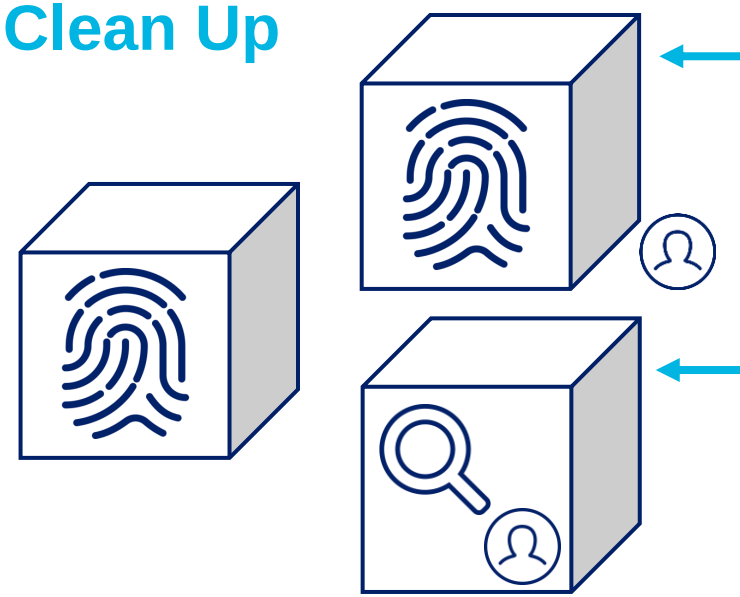

- Resolve Unsuccessful Correlation
  - Fix correlation logic and/or manually correlate
  - Run **Prune Identities** Task

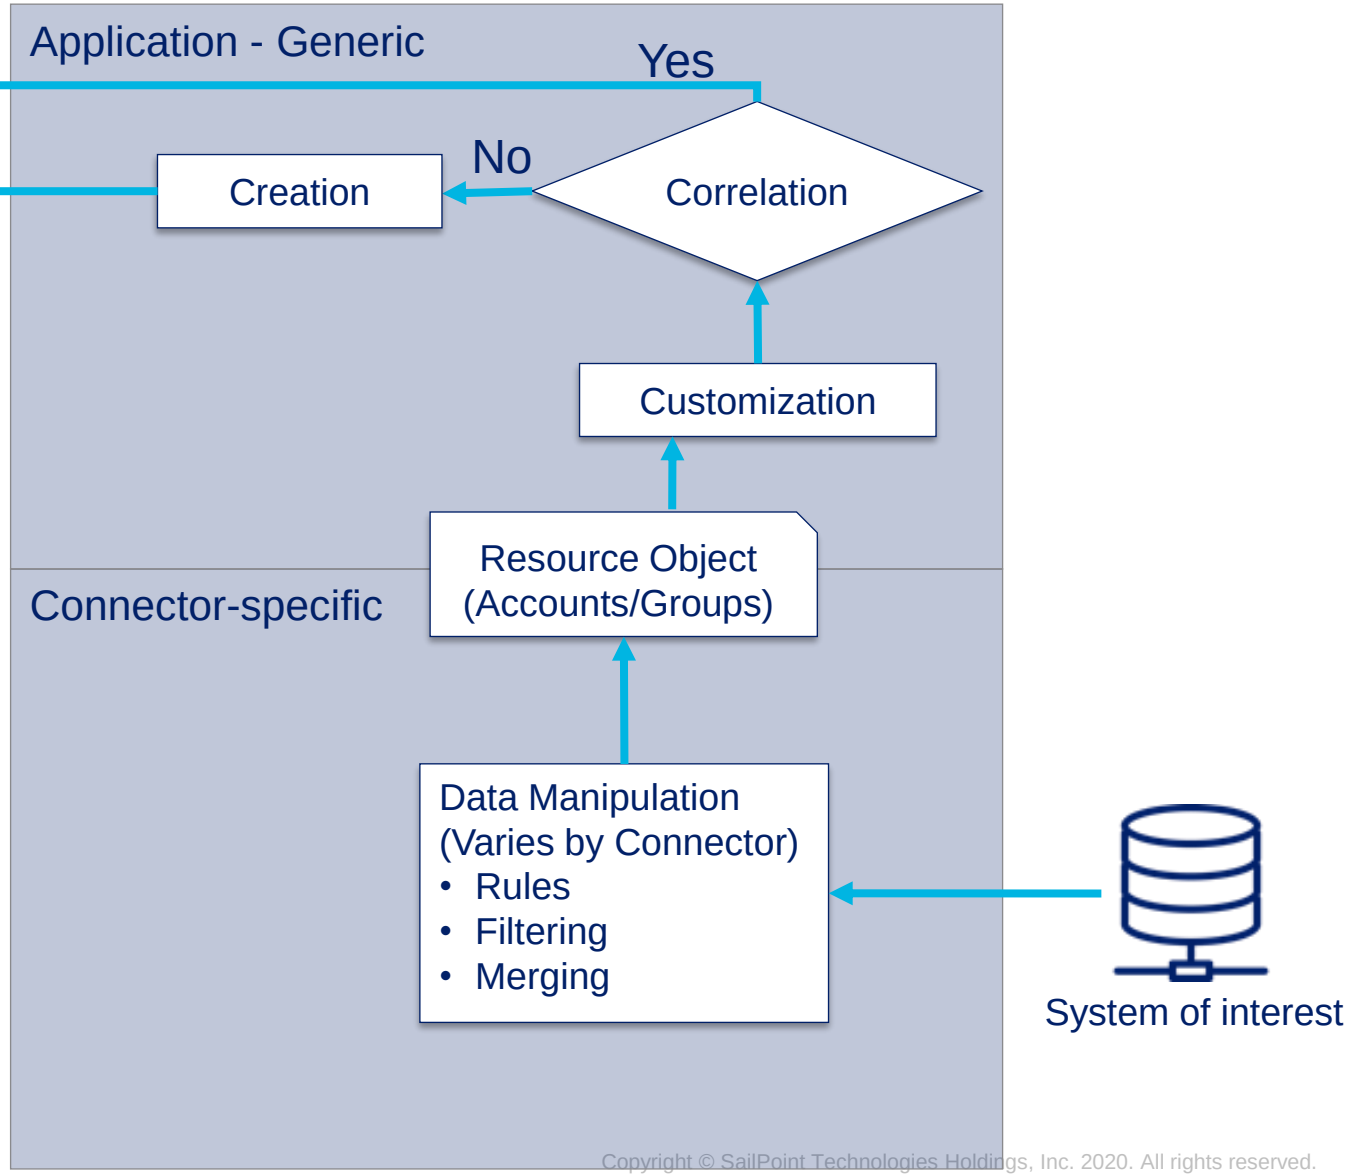


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Identity Refresh Task

- Promote entitlements to a certifiable state





Role Model

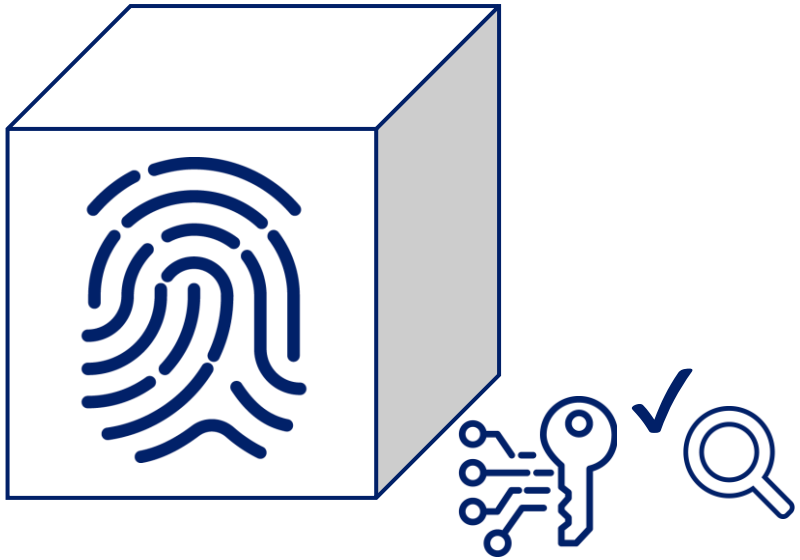

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Next Step?

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 1, Exercises 5 & 6, Extension Exercise 7

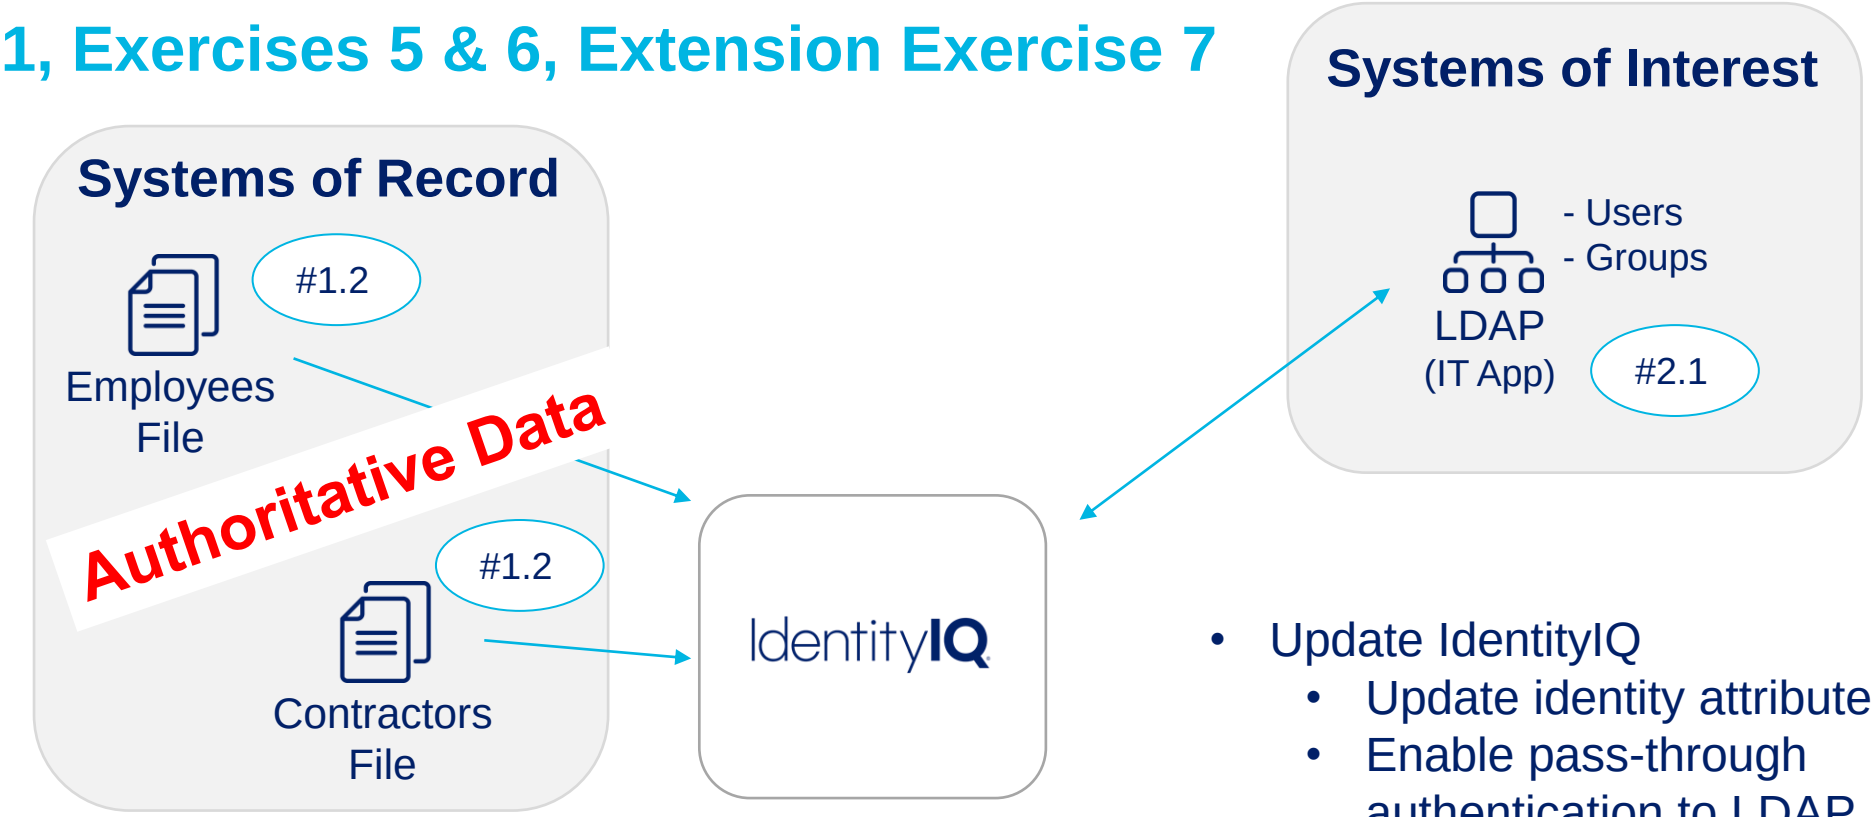

- Update IdentityIQ
  - Update identity attribute email
  - Enable pass-through authentication to LDAP
  - Configure password reset

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



IdentityIQ Connectors

IdentityIQ Essentials

Overview

IdentityIQ Connectors

- Connector Basics
- Connector Details
  - Common Connectors


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Application vs. Connector

- Connector
  - Software component to connect to a business resource and read/write data
  - Provides normalized resource object
- Application
  - Includes configuration details
    - Application name
    - Connector configuration
    - Account attributes
  - Represents a business resource

    Examples:
    - Human Resource System
    - Active Directory

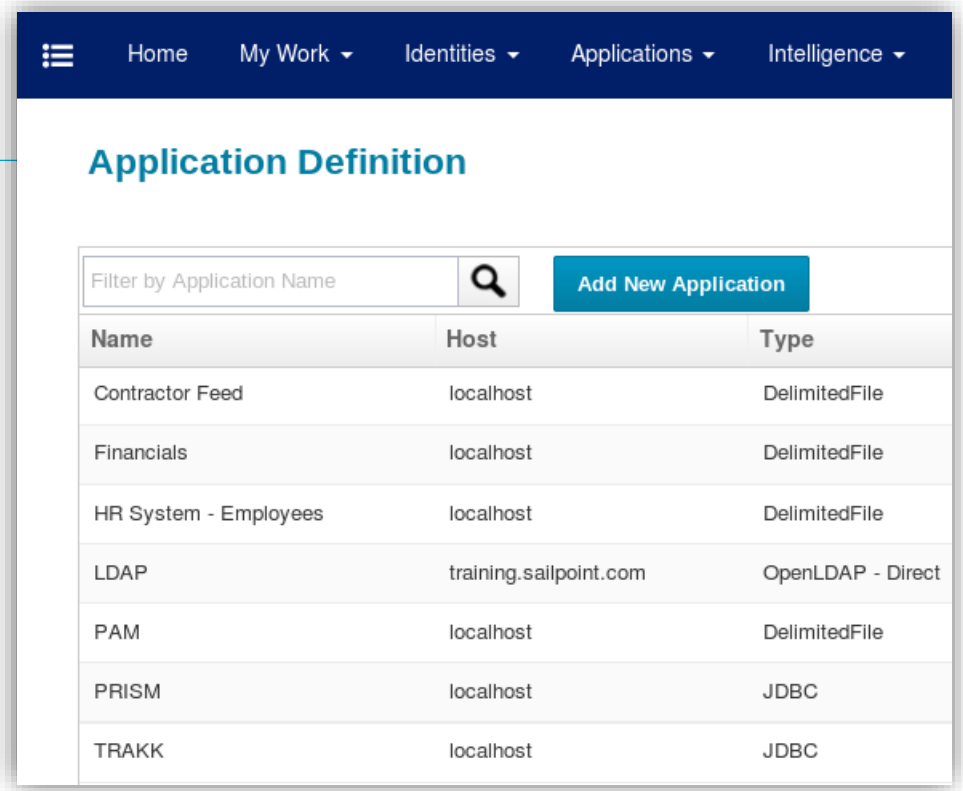


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Connectors

- Provide for reading data from applications including:
  - Files
  - Databases
  - Directories
  - Mainframes
  - Communication and collaboration tools
  - UNIX
  - …and more!
- Most provide for writing data to applications

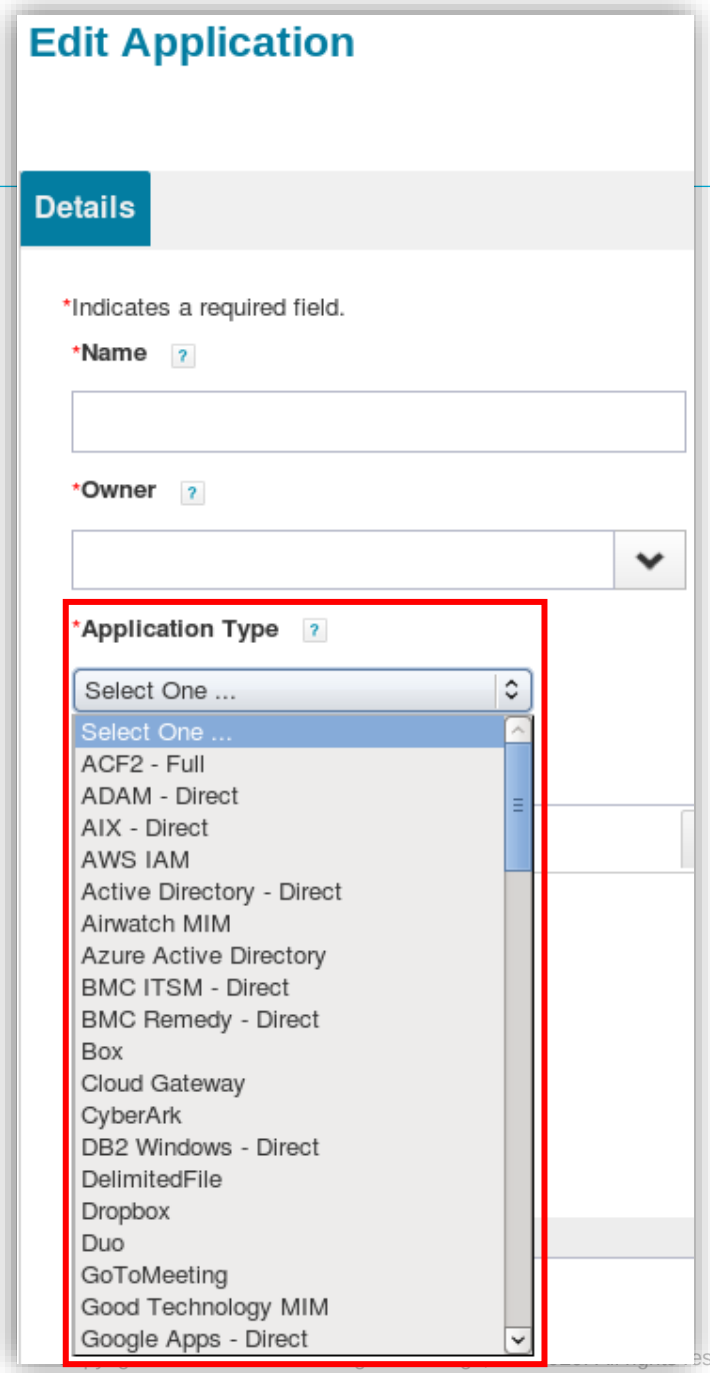

SailPoint

eserved.

Connector Configuration

Consistent Across Connectors

- Account and Group schema
- Resource Object representation
- Application-level rules

Varies per Connector

- Group schema – one vs. multiple
- Connectivity details
- Connector-specific rules

For more information on connectors, see Compass
- Connector guides (per connector)
- Services deployment documentation

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Common Connectors

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.



Delimited File

Usage

- Aggregate (read) accounts and entitlements from a delimited file

Configuration Details

- Required
  - File name and location
  - Schema
- Optional
  - Filtering
  - Merging
  - Connector-level rules

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.



JDBC

Usage

- Aggregate (read) and provision* (write) to JDBC-enabled databases

Configuration Details

- Required
  - Database connection details
  - SQL Queries
  - Schema
  - *JDBC Provisioning Rule
- Optional
  - Merging
  - Connector-level rules

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

LDAP

Usage

- Aggregate and provision to LDAP server
  - Several connectors to connect to a variety of LDAP systems, without customization

Configuration Details

- Required
  - LDAP connection credentials
  - Search DNs
  - Schema (provided)
- Optional
  - Filtering
  - Multiple groups

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Active Directory

Usage

- Aggregate and provision* to Active Directory

Configuration Details

- Required
  - Active Directory connection credentials
  - Search DNs
  - Schema (provided)
  - *IQService
- Optional
  - Filtering
  - Multiple domains or forests

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.



Web Services

Usage

- Aggregate and provision to target system using their supported web services


Configuration Details

- Required
  - URL and connection credentials for target system
- Optional
  - Supported operations (create account, enable/disable account, pass-through authentication, etc.)

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


IdentityIQ Loopback Connector

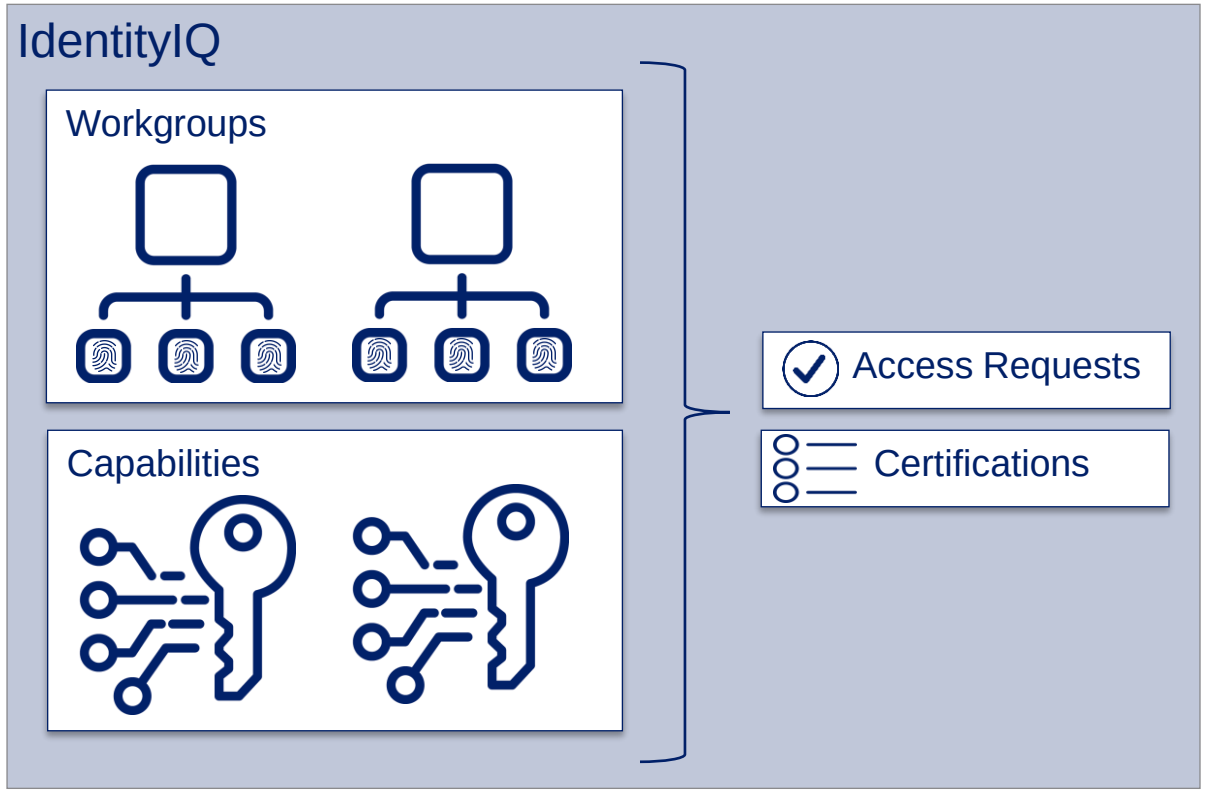

- Treats Identity Cubes as Accounts
- Treats IdentityIQ Workgroups and Capabilities as Entitlements

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

SQL Loader

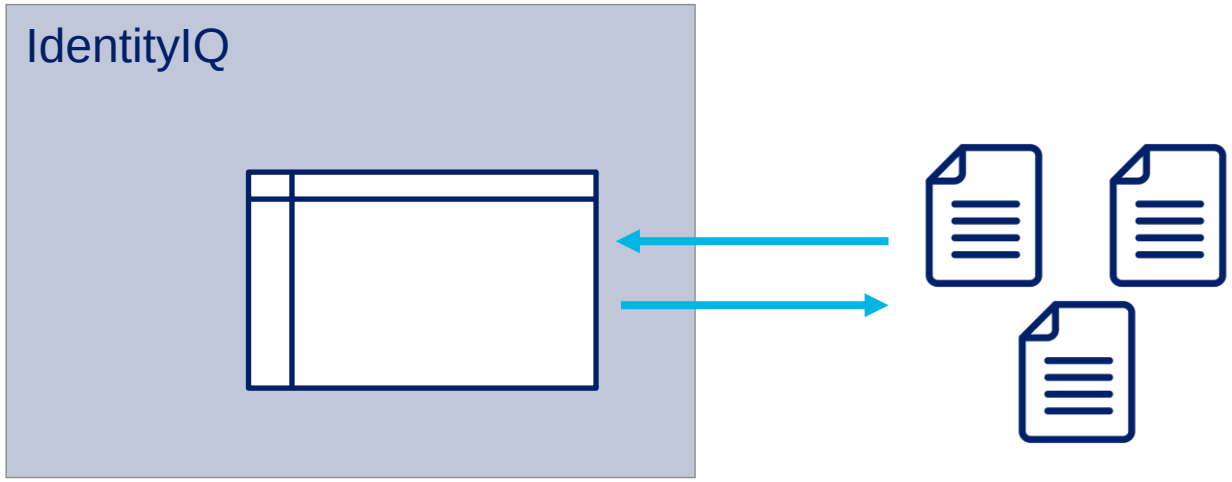

- Treats delimited files as tables in database

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 2, Exercises 1 & 2

- Explore Aggregation & Refresh Tasks
  - Define Sequential Task
  - Schedule Task
  - Constrain Identity Refresh Task

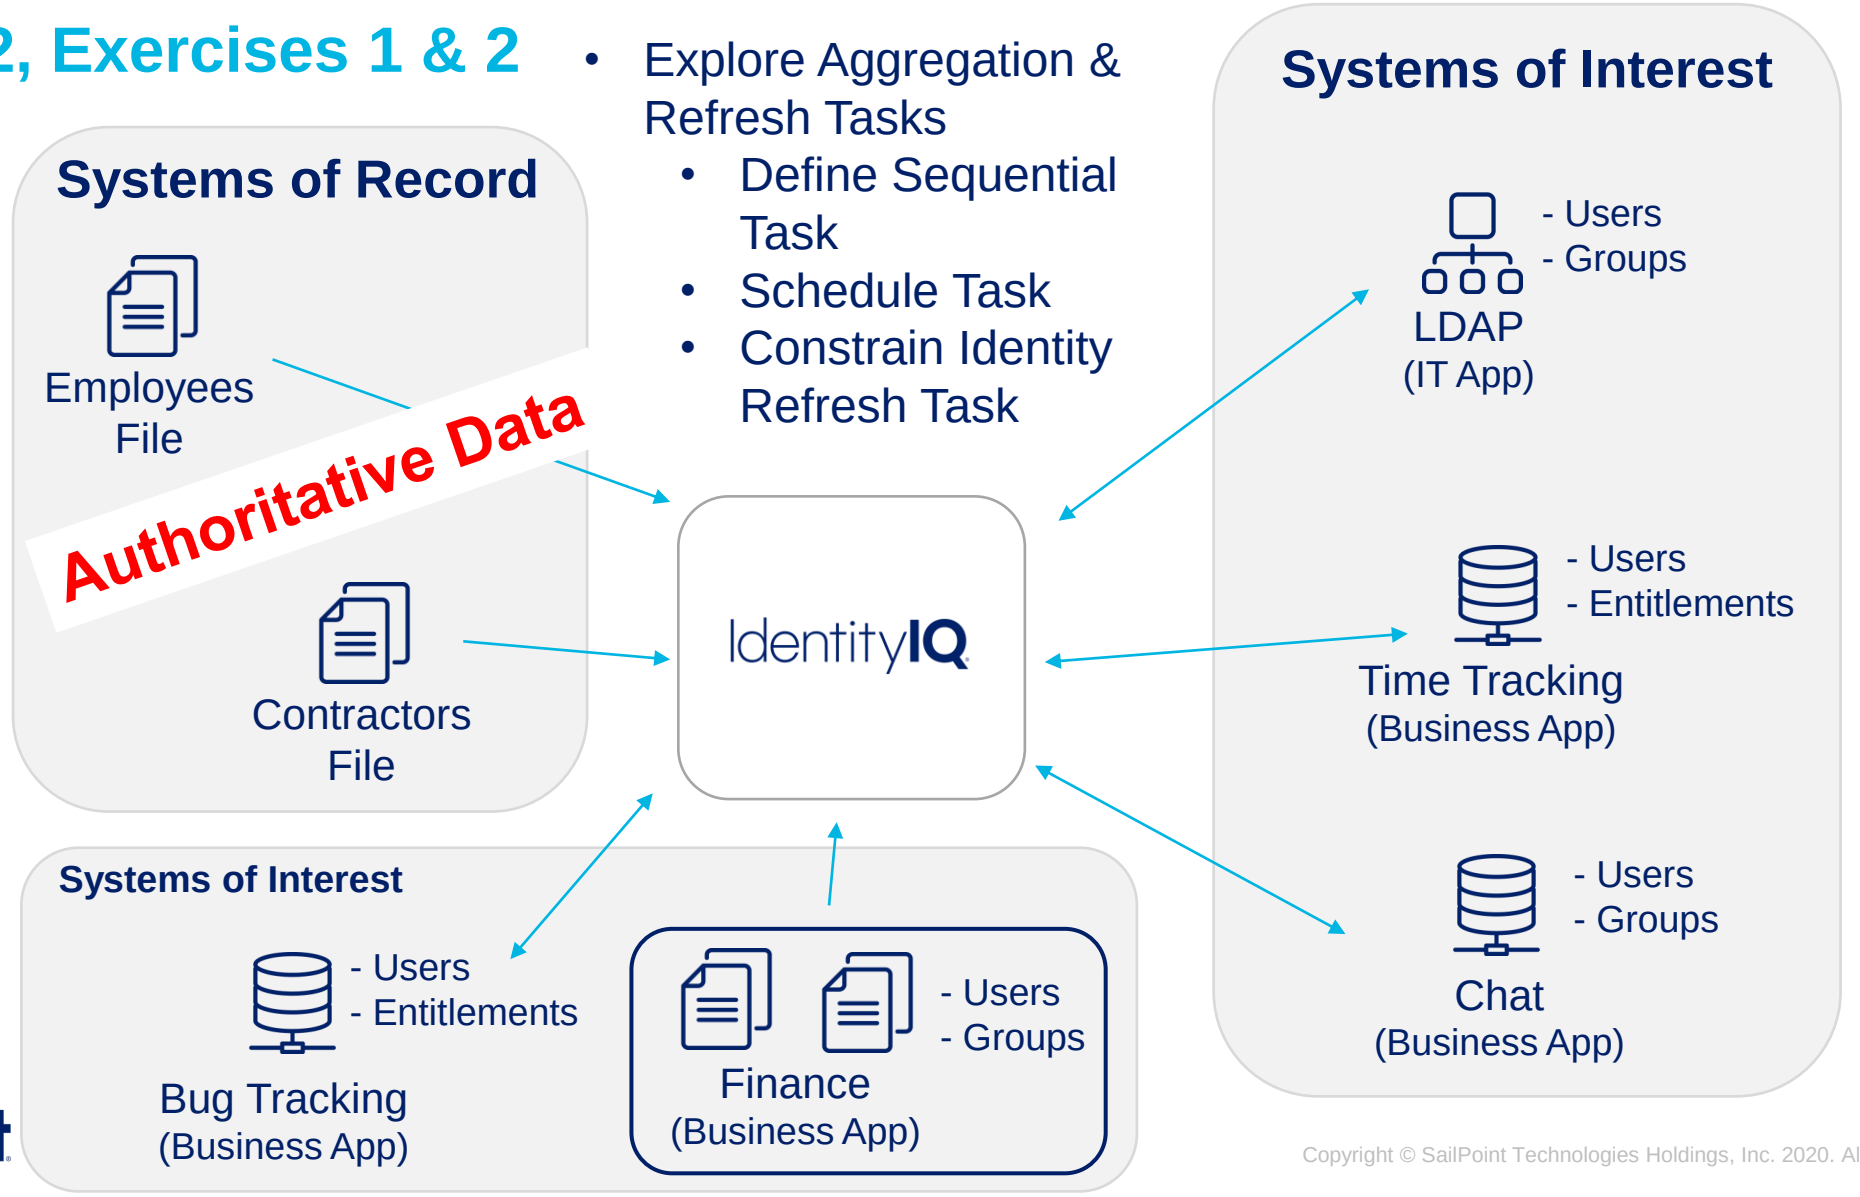

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Data and System Oversight

IdentityIQ Essentials


Overview

Data Oversight

- Connector Debug / Preview
- Account, Entitlement, Identity pages
- Querying
- Reporting

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account and Group Schema Preview

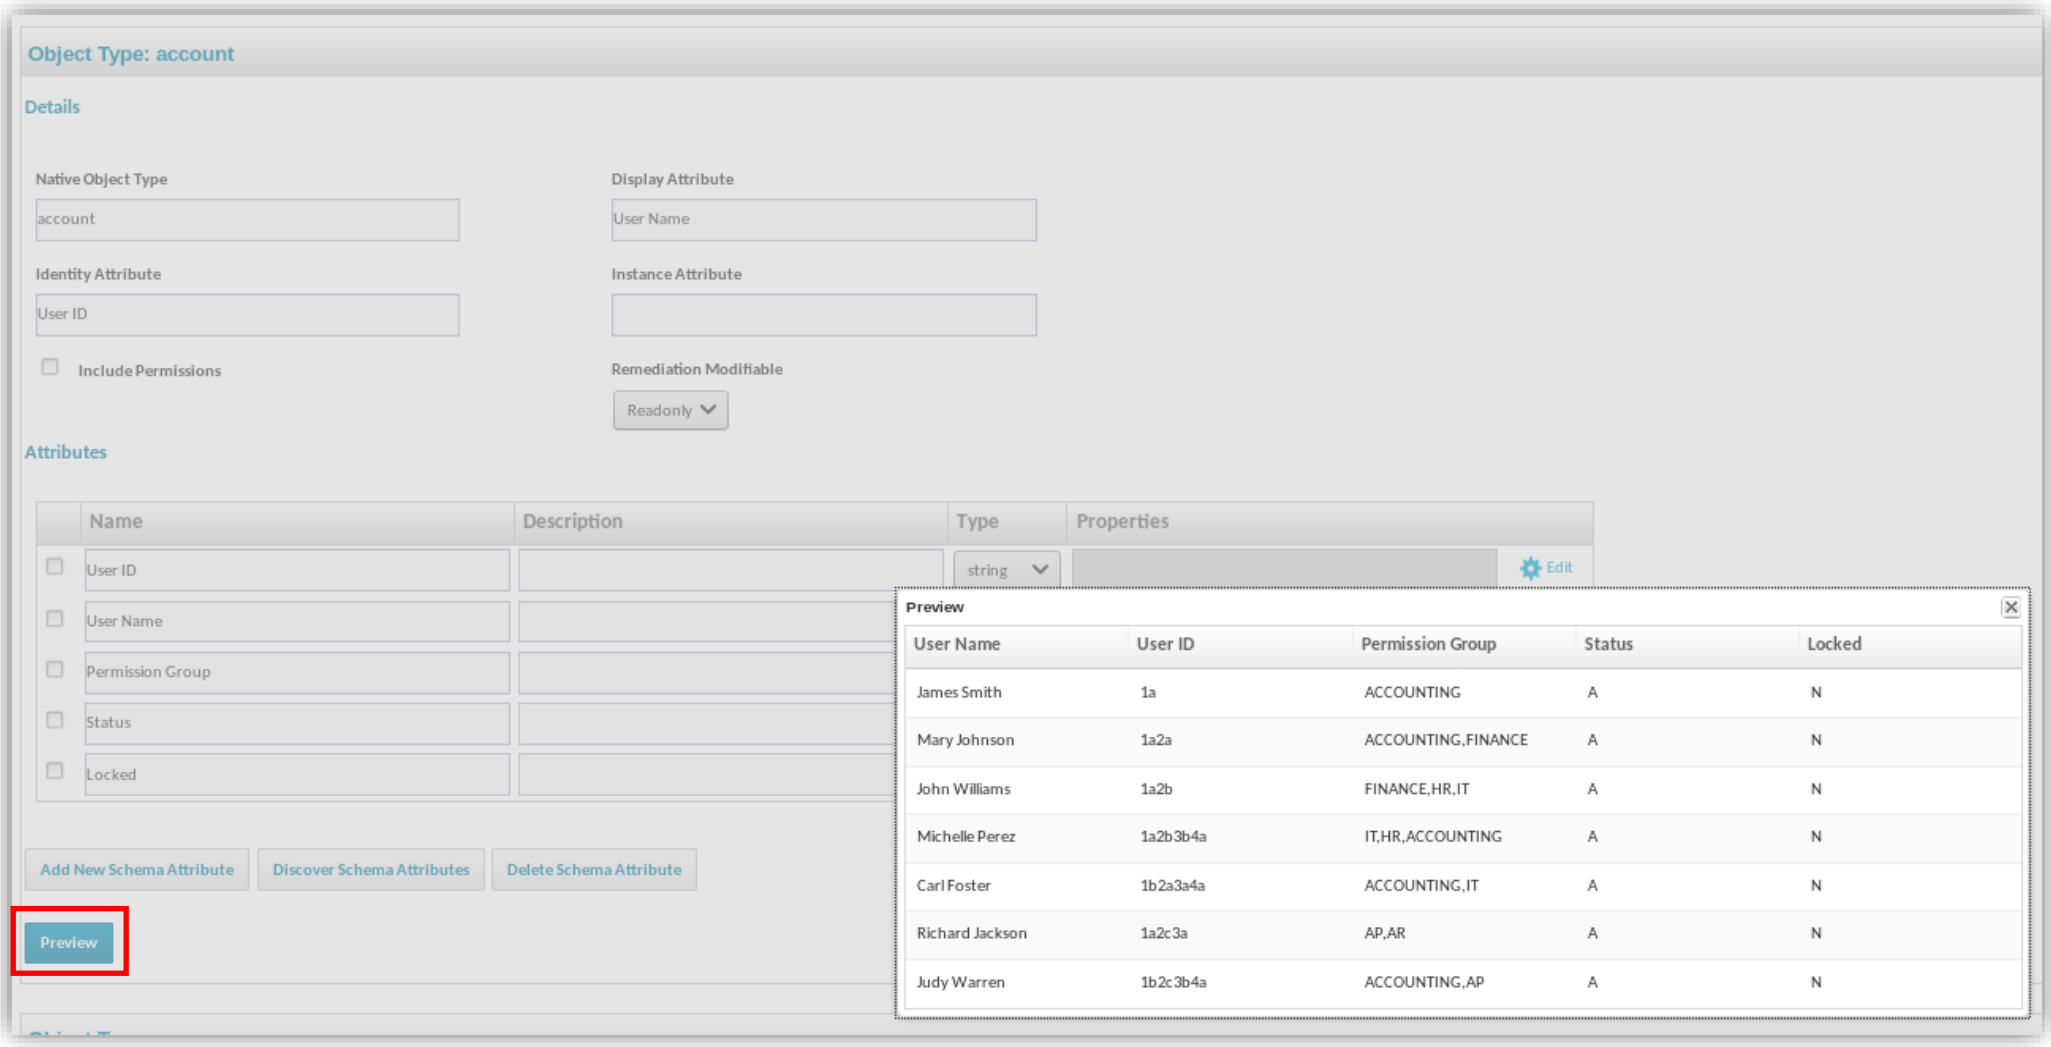

Application → Configuration → Schema

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Console – Connector Debug

Test and Troubleshoot


Feature	Command
Iteration	
	Accounts: connectorDebug <Application> **iterate account** Groups: connectorDebug <Application> **iterate group**
Connection Test	
	connectorDebug <Application> **test**
Pass-through Authentication Test	
	connectorDebug <Application> **auth** <username> <password>

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Application, Entitlement & Identity Cube

Confirm Results

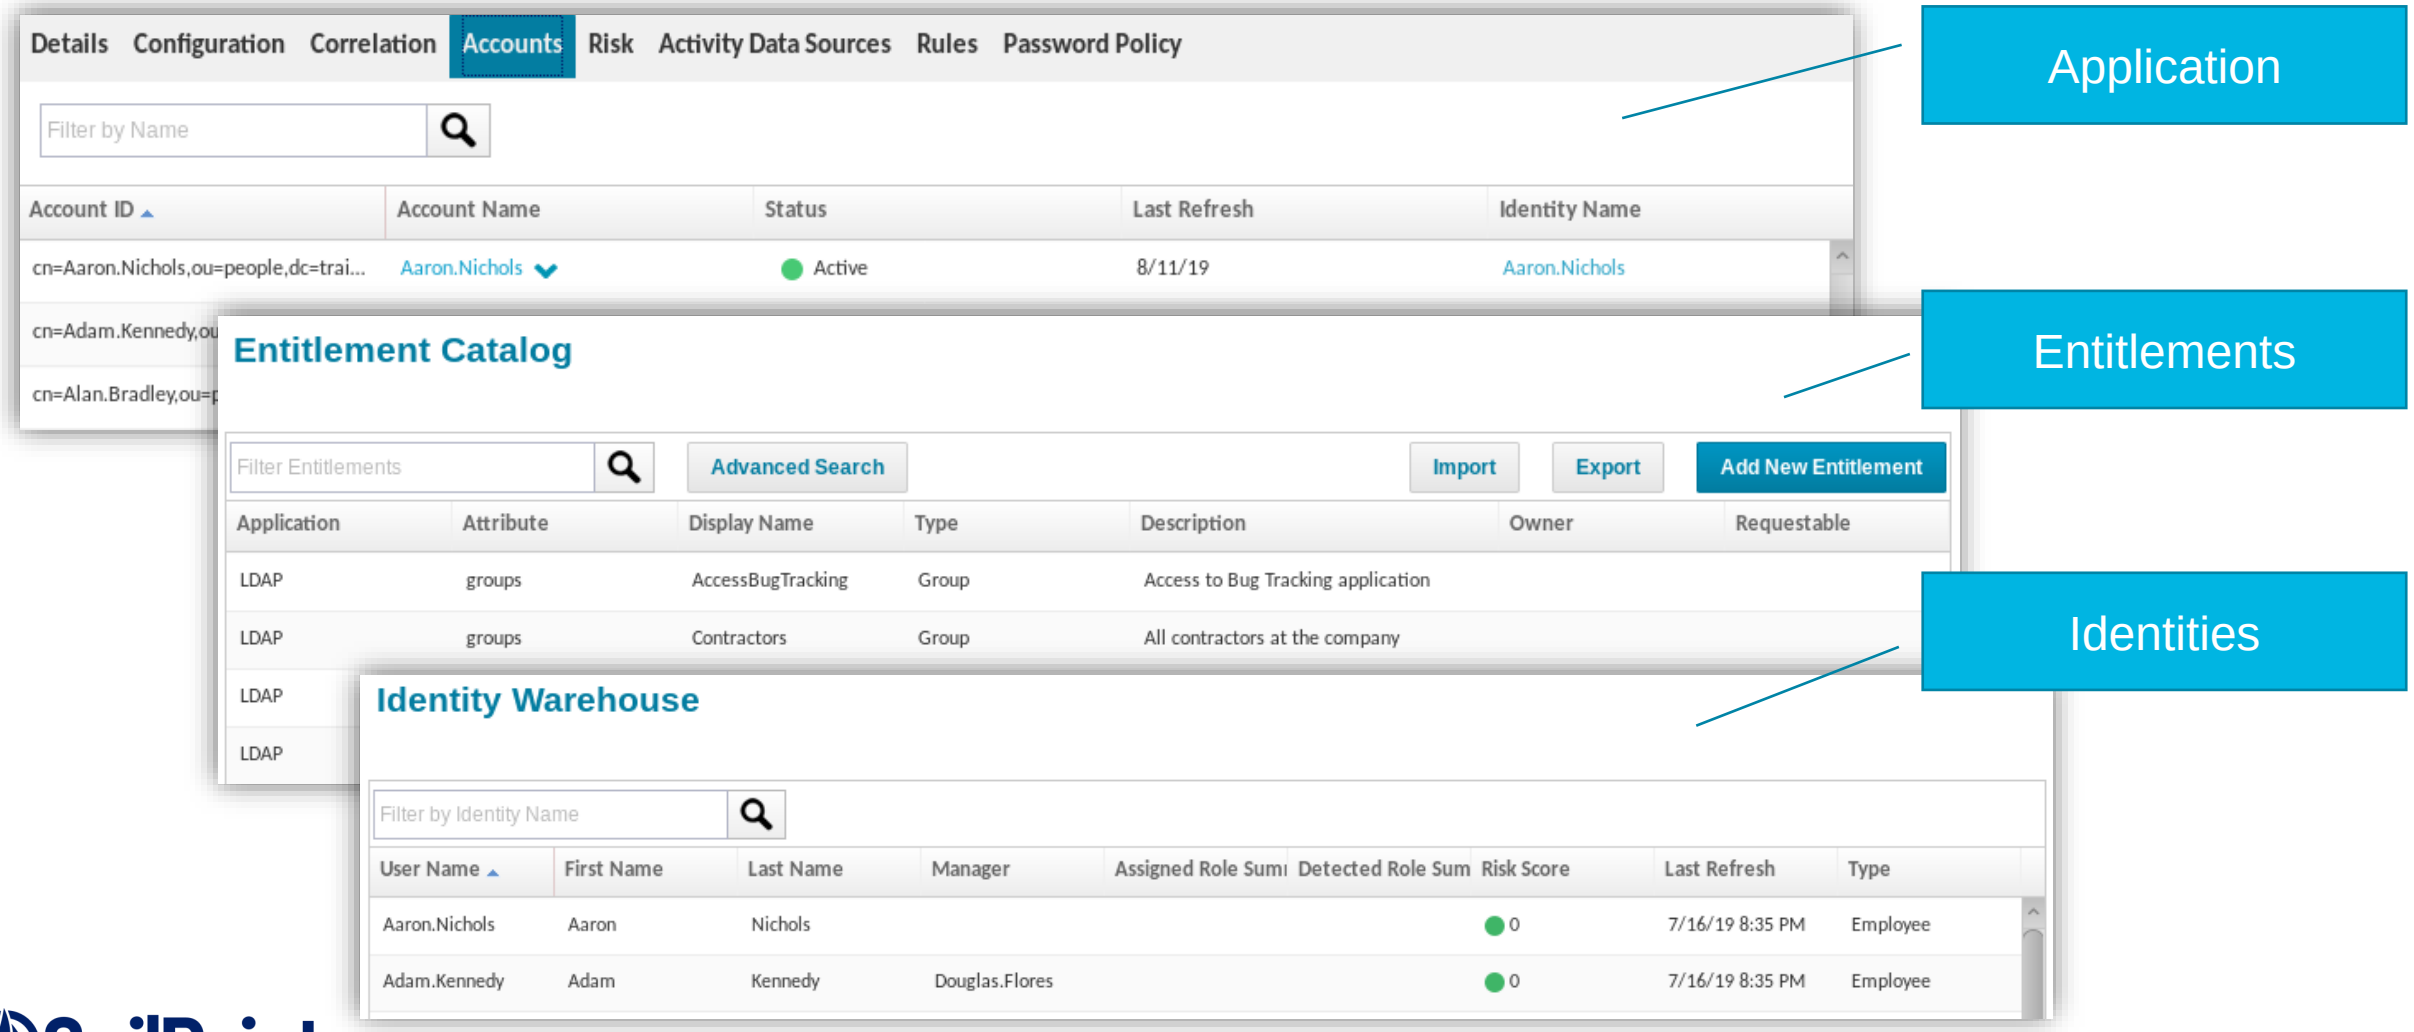


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Entitlement Catalog Editing

- Display name
- Descriptions
  - Multi-lingual (optional)
- Owners
- Requestable
- Extended attributes

- UI vs. Export/Import

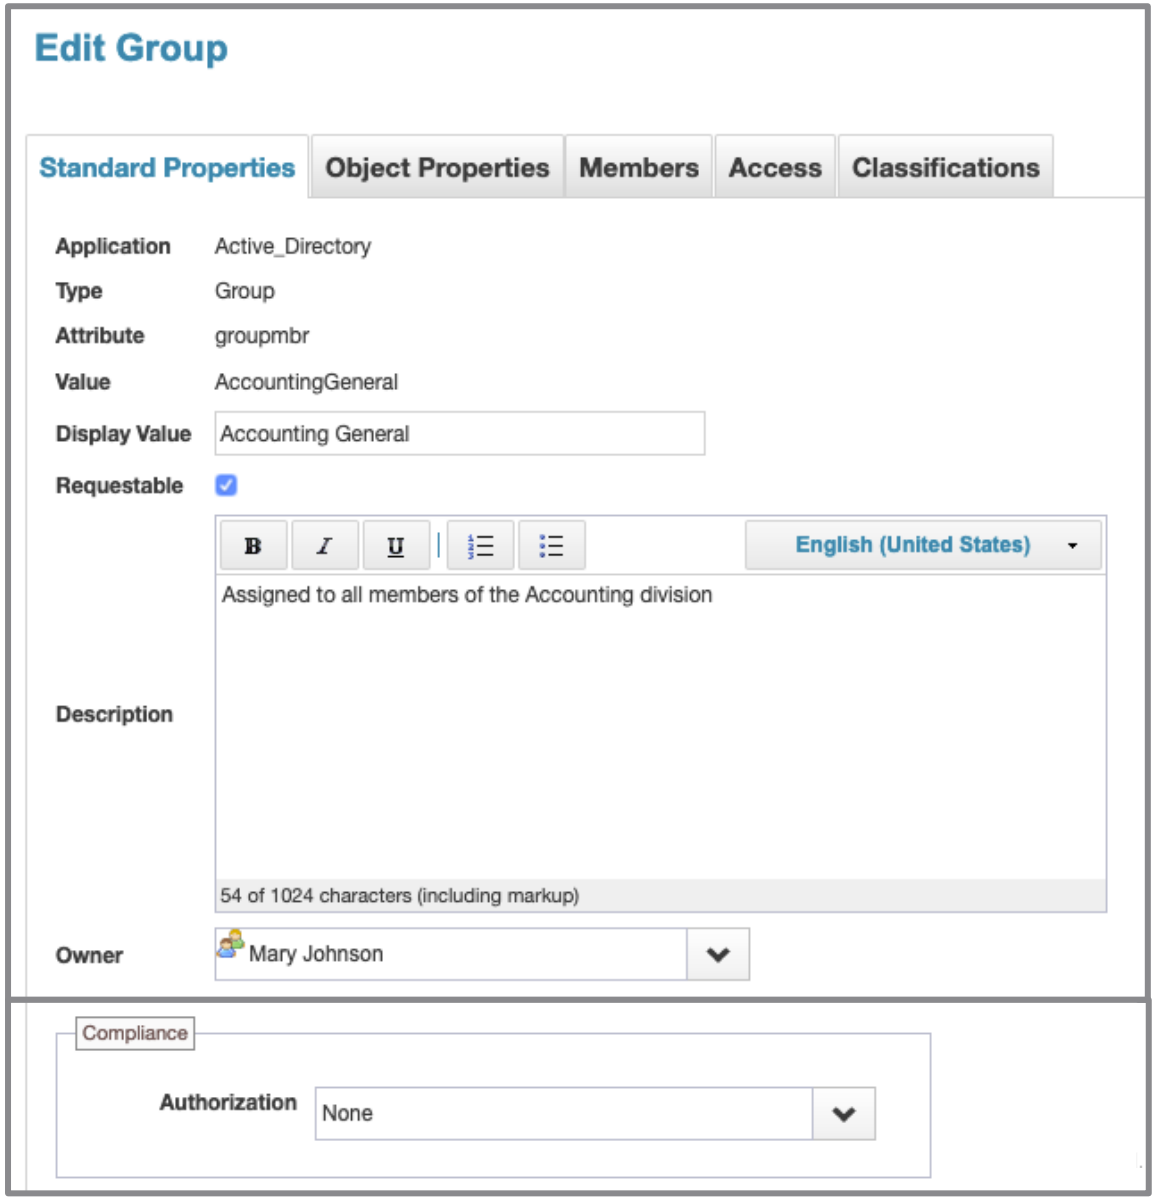


Advanced Analytics

Confirm Results

Identity search

Entitlement search

Account search

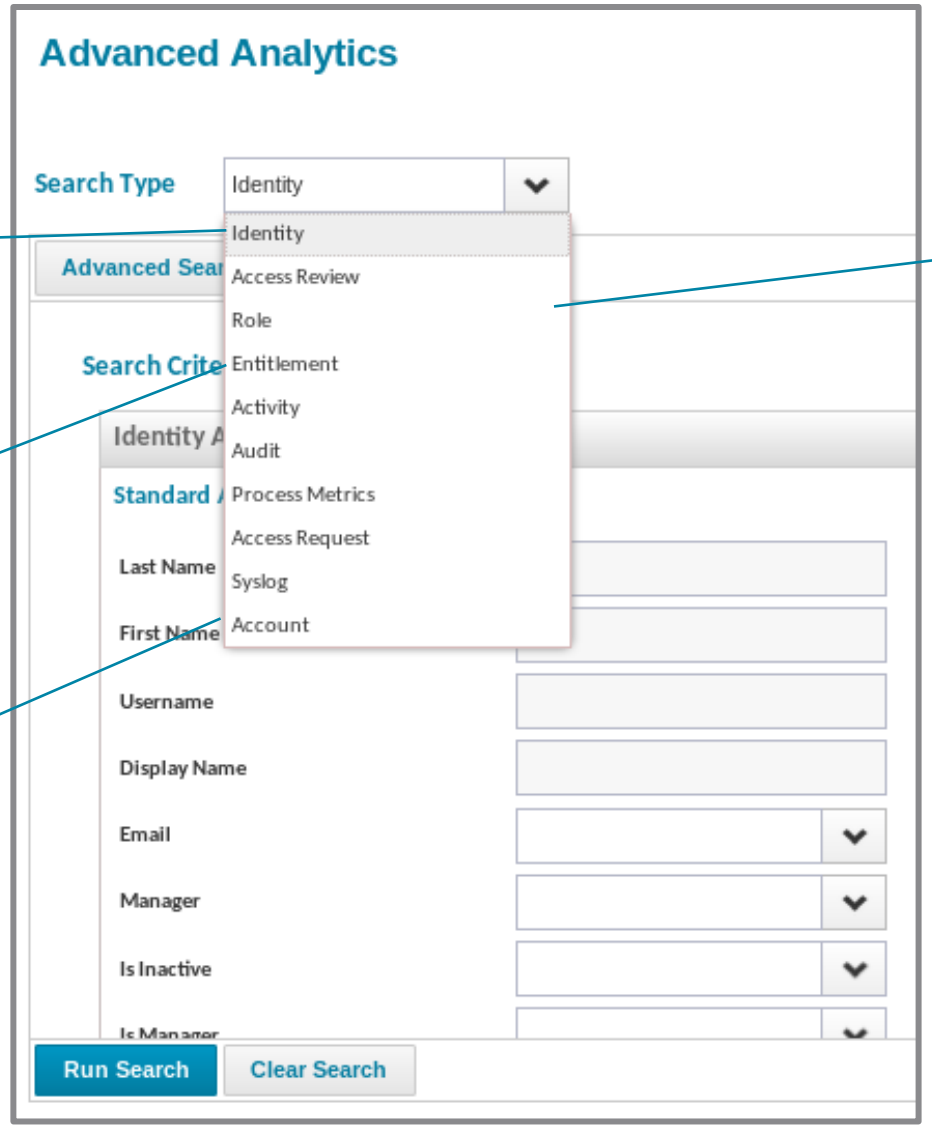

Types of searches


Search Results
- View
- Export
- Save as report
- …and more

Intelligence → Advanced Analytics

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Reports

Categories

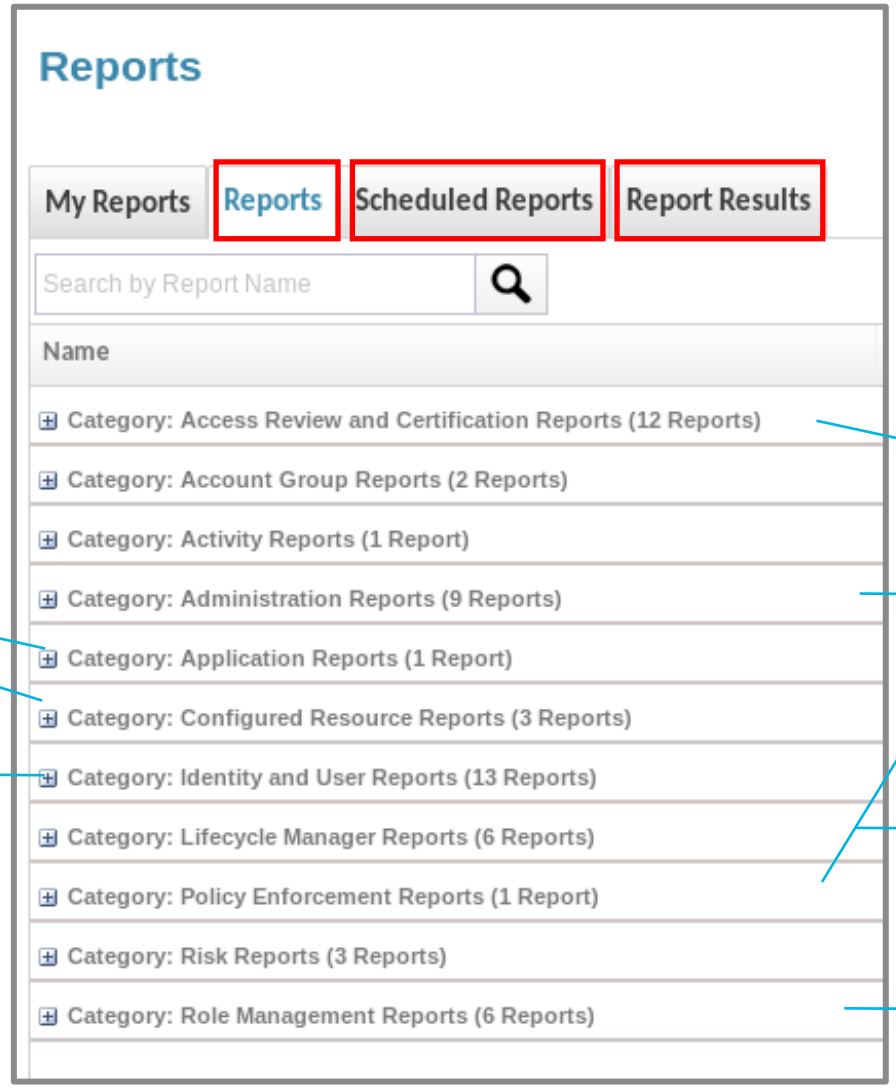

Application Data
- Statistics
- Configurations

Identity Data

Compliance

IdentityIQ Admin

Request Processes

Roles
- Definitions
- Assignments

Intelligence → Reports

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 2, Exercise 3

- Fix Uncorrelated Accounts
  - Identify uncorrelated accounts
  - Manually correlate an account to an Identity Cube
  - Remove empty Identity Cube

- Edit Entitlements
  - Export/import

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



System Oversight

IdentityIQ Essentials

Overview

System Oversight

- Terminology Review
- Task Performance Strategies
- Monitoring Tasks
- Administrator Console
  - Tasks
  - Environment

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Terminology Review

- EL – interactive drag & drop slide (match terms to definitions)

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.







Tasks

- Tasks perform periodic operations such as
  - Aggregation
  - Identity Refresh
  - Running Rules
  - System Maintenance
    - Moving Certifications along and finishing them
    - Checking for remediations
    - Pruning or archiving old objects
  - Running ordered set of tasks (Sequential Task Launcher)
- Performance of regularly scheduled tasks is critical to health of installation
  - Aggregation
  - Refresh
  - Others dependent upon environment

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Aggregation Performance Strategies

	IdentityIQ	Application
IdentityIQ-based Optimization (default) • Every account read • Only those with changes are processed • Task option *Disable optimization of unchanged accounts* = false		
Process All • Every account read and processed • Task option *Disable optimization of unchanged accounts* = true		
Custom Delta Processing • Manage own change (i.e. write changed accounts to a flat file and process flat file) • Task option *Detect deleted accounts* = false		
Connector-based Delta Aggregation* • Read and process only accounts with changes that have taken place after benchmark • lastModData, DirSync, usnChanged, etc. • Task option *Enable Delta Aggregation* = true		

*Not supported by all connectors

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Aggregation Performance Strategies

Partitioning

- Connector level
  - Supported connectors
    - LDAP, AD, JDBC, Delimited File, PeopleSoft, SAP, etc.
  - Limit partitions to less than 250
- All at application level
  - Specify loss limit

- More information
  - Compass→IdentityIQ Whitepapers→Partitioning Best Practices

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Refresh Performance Strategies

- Split Refresh into different tasks
  - Attribute Refresh/Role/Entitlement Processing/Provisioning multiple times a day
  - Policy Checking/Risk Scoring at less frequent intervals
- Refresh only Identities that have changed
  - Delta refresh – aggregation marks cubes with changes for refresh processing
  - Controllable with task options
    - Filters, time stamp
- Divide and Conquer
  - Multi-threading
    - Runs on multiple threads on a single server
  - Partitioning
    - Runs on multiple threads on multiple servers
    - Specify loss limit

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Maintenance Tasks


Required for IdentityIQ Functionality

- Five tasks are pre-scheduled

Task	Purpose	Default Schedule
Perform maintenance	Keeps core processes working (certification phases, background processes, etc.)	Every 5 minutes
Check expired mitigations daily	Scans for policy & certification exceptions that have expired	Daily
Check sunset requests for notifications daily	Controls timing of email notifications and sunset reminders of expiring items	Daily
Check expired work items daily	Scans for incomplete work items that have expired	Daily
Perform Identity Request Maintenance	Checks for provisioning completeness	Daily

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Monitoring Tasks

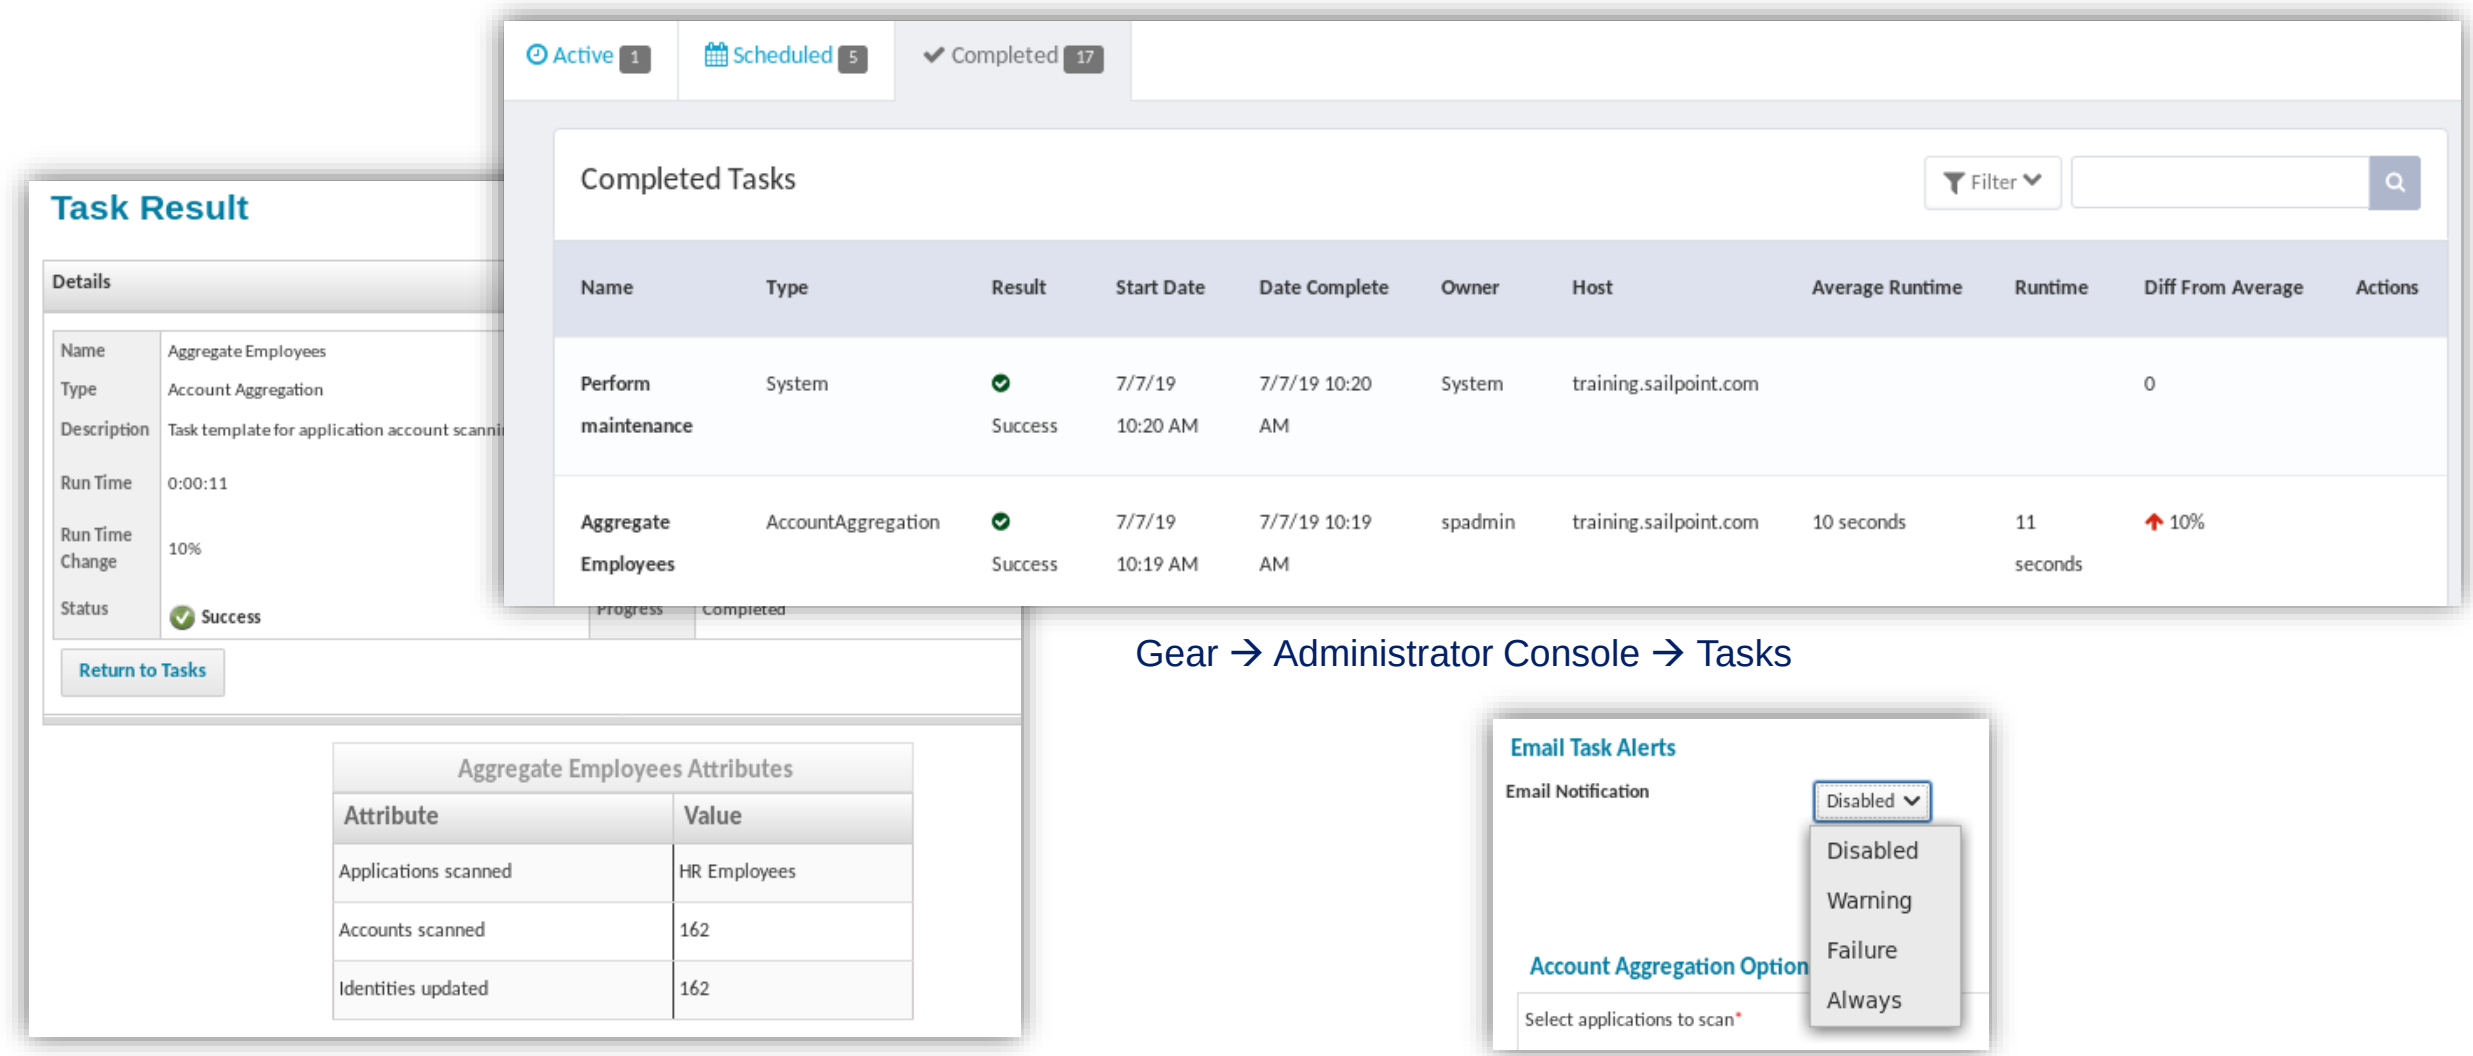

Gear → Administrator Console → Tasks

Setup → Tasks → Task Results

Task Notifications

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Administrator Console Tasks & Environment

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Administrator Console

Manage Tasks, Provisioning and Environment

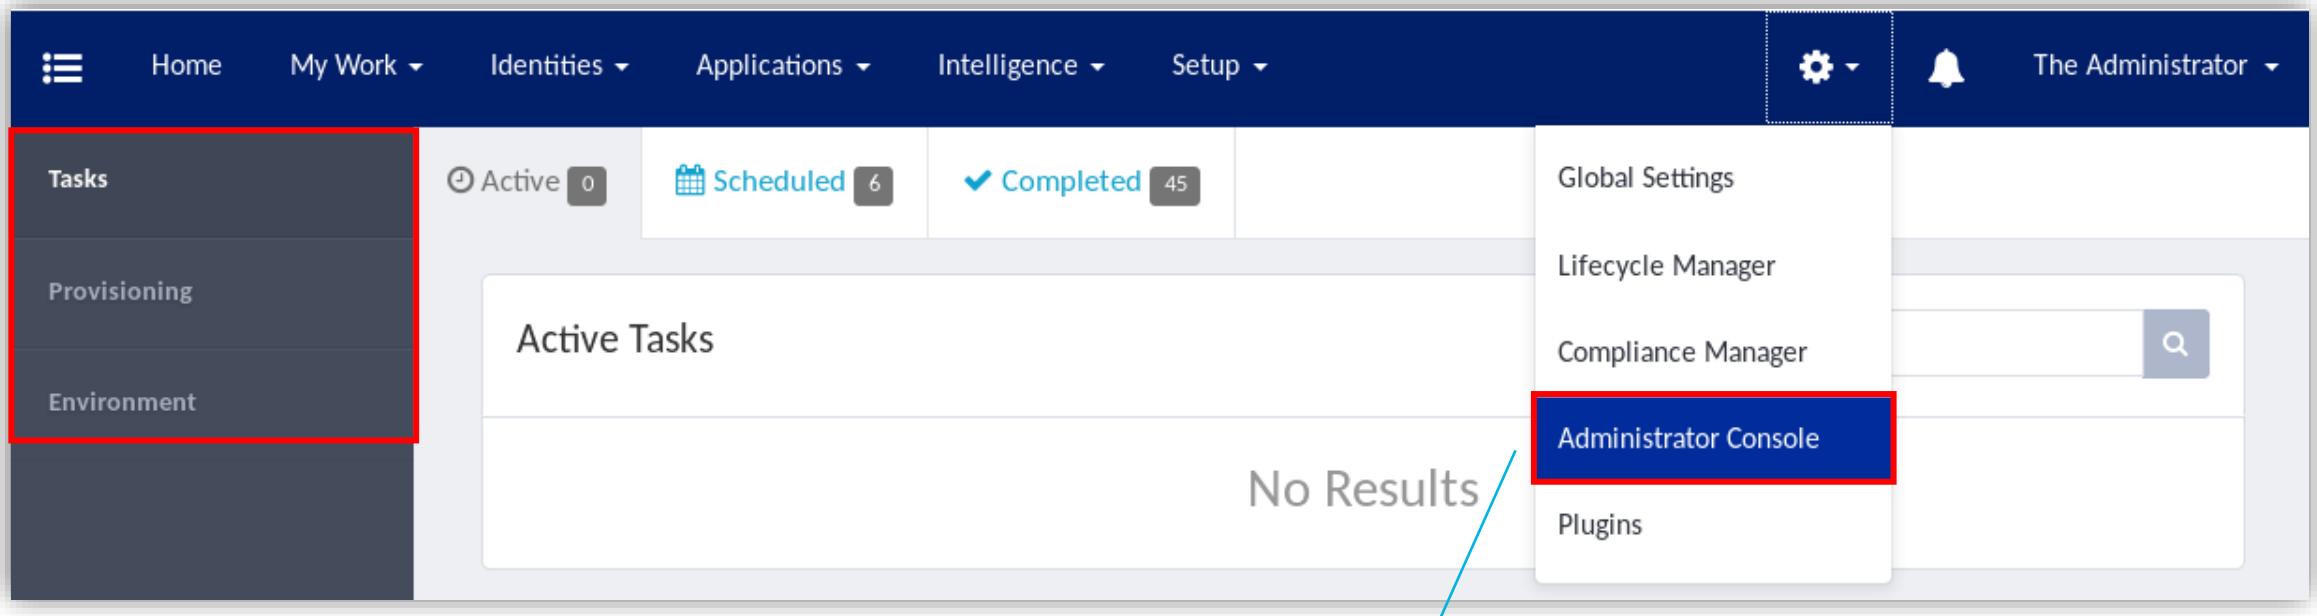

Requires System Administrator or FullAccessAdminConsole capabilities


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Tasks Page

- View or terminate running tasks
- Dump a stack trace

- View, postpone, or delete scheduled tasks

- View completed tasks, including run statistics

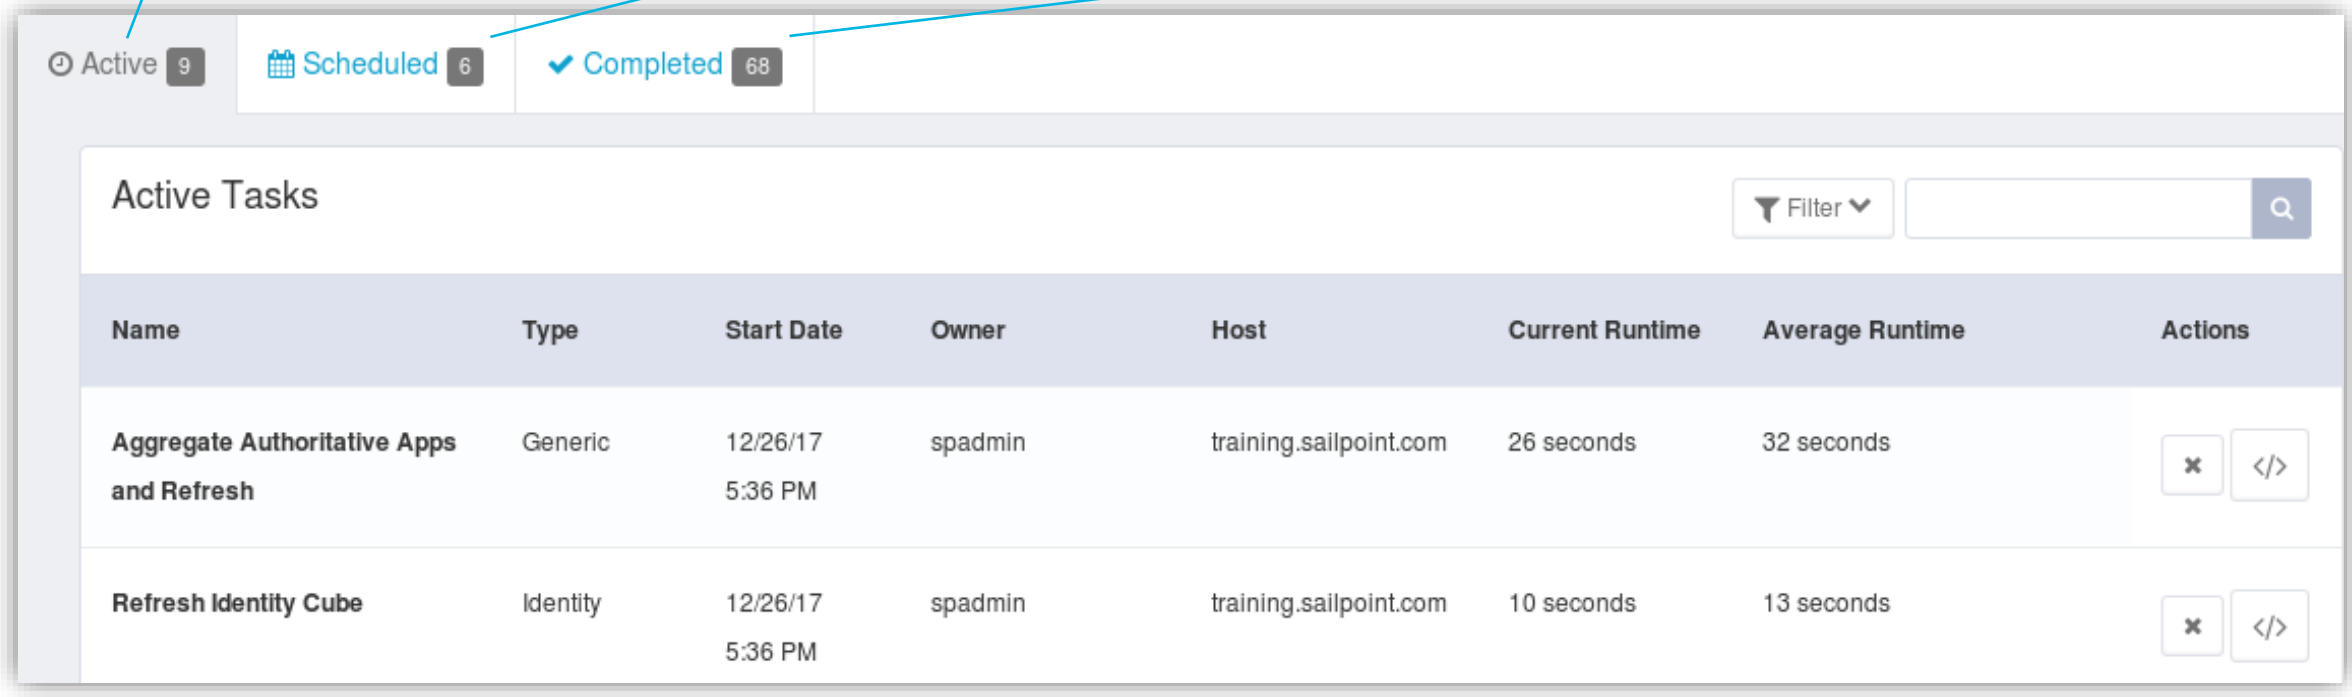


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Environment Page

- Statistics on the state of your environments
- Configure globally, or per host

- Status of applications


- Status of installed modules and extensions

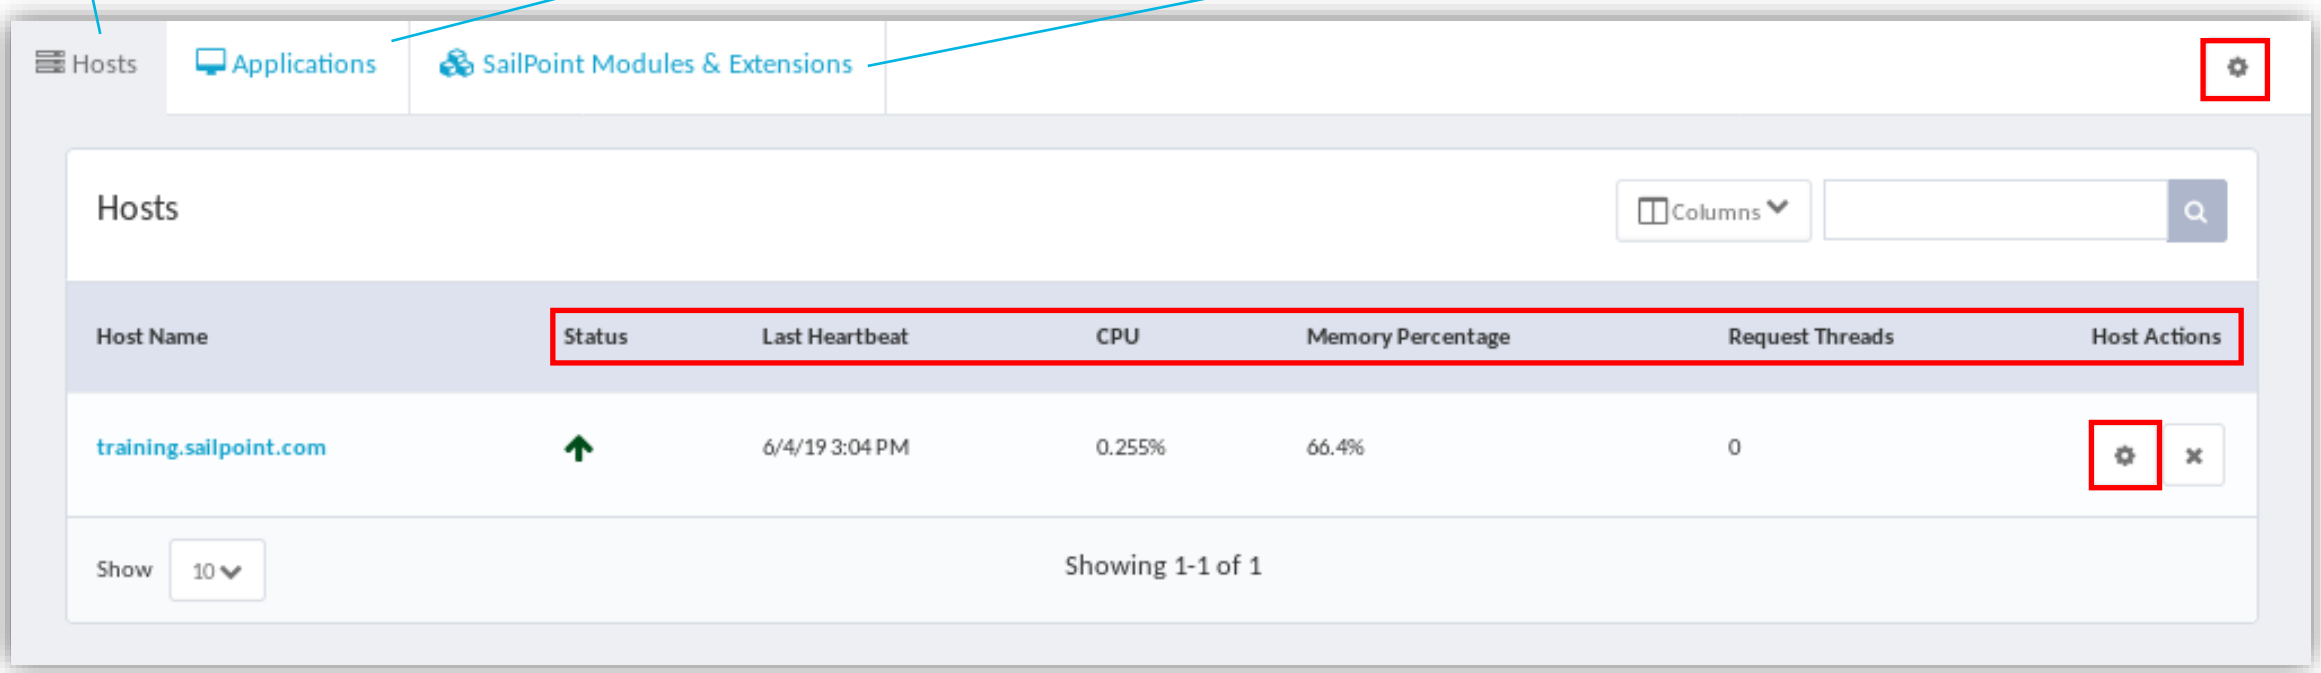

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Environment Page

Applications

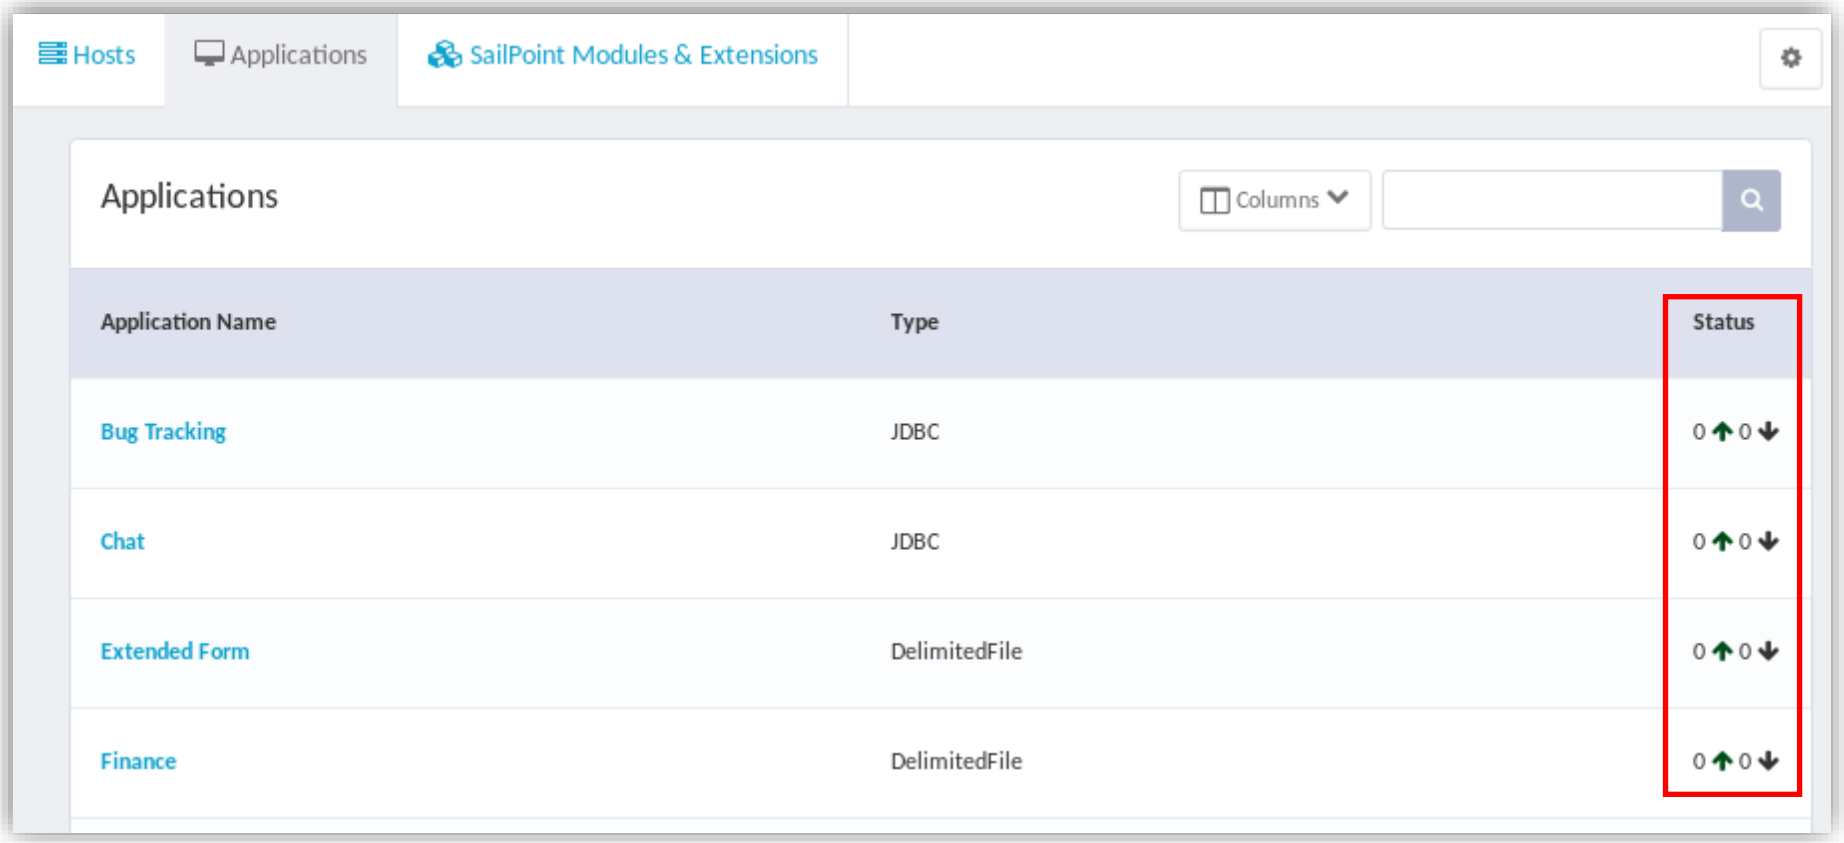

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 3, Exercise 1

- Explore Task Management Options
  - Delta Refresh
  - Run Rule task
  - Standard maintenance tasks
  - Aggregation and application maintenance windows
  - Monitor tasks with the Administrator Console

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint




Logging

IdentityIQ Essentials

Logging

Options

- Standard Out print statements
  (Not recommended for production)
- Java application logging (log4j)
- Email redirection
- Audit configuration
- Syslog logging configuration

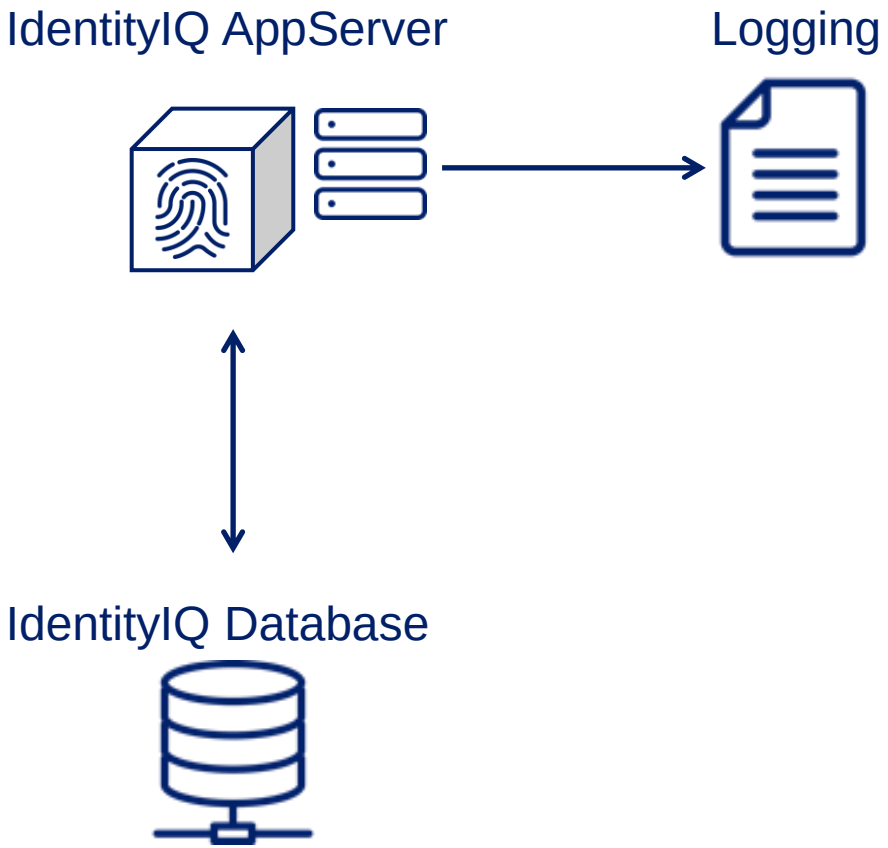

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Standard Out Logging

- Standard Out
  - Usage: System.out.println(“I’m logging this message.”);
- Configuration
  - App server configuration determines where to send this information
- Best practices
  - Only use for testing – useful for quick debugging
  - Do not use in production
  - Not as useful as log4J since these messages are always printed no matter what

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Logging

Print vs. Log4j

- System.out.println(“I’m logging this message all the time.”);
- log.debug(“I’m logging this message when debug logging is turned on.”);

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Java Application Logging

Log4j File Settings

Logging levels

RootLogger configuration

Class logging configurations

```
### set default log levels and appenderRef
### valid log levels in increasing order of severity are:
###     trace, debug, info, warn, error, fatal, off
### trace is required to get method entry and exit logging

rootLogger.level=warn
rootLogger.appenderRefs = rolling, stdout
rootLogger.appenderRef.rolling.ref = roll
rootLogger.appenderRef.stdout.ref = stdout

logger.aggregator.name=sailpoint.api.Aggregator
logger.aggregator.level=debug

#logger.cacheTracker.name=sailpoint.api.CacheTracker
#logger.cacheTracker.level=trace

#logger.certificationer.name=sailpoint.api.Certificationer
#logger.certificationer.level=info
```

<install dir>/WEB-INF/classes/log4j2.properties

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Java Application Logging

Log4j Log Levels

```
logger.aggregator.name=sailpoint.api.Aggregator
logger.aggregator.level=debug
```

log4j2.properties

Set log level

```
2019-06-14T11:33:21,562  INFO QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1665 - Creating: Grace.Stanley
2019-06-14T11:33:21,568 DEBUG QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1672 - Iterating over the next account.
2019-06-14T11:33:21,571 DEBUG QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1672 - Processing object Cori.Garrett
2019-06-14T11:33:21,587  INFO QuartzScheduler_Worker-4 sailpoint.api.Aggregator:4359 - Committing : Grace.Stanley
2019-06-14T11:33:21,594  INFO QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1665 - *** Aggregating: 1c2d
2019-06-14T11:33:21,600  INFO QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1665 - Creating: Cori.Garrett
2019-06-14T11:33:21,606 DEBUG QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1672 - Iterating over the next account.
2019-06-14T11:33:21,610 DEBUG QuartzScheduler_Worker-4 sailpoint.api.Aggregator:1672 - Processing object Tyler.Petrick
2019-06-14T11:33:21,624  INFO QuartzScheduler_Worker-4 sailpoint.api.Aggregator:4359 - Committing : Cori.Garrett
```

<custom dir>/iiq_training_rolling.log

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Java Application Logging

Log4j Example

- Inside of rule

```
log.error(“This is an error message”);
log.warn(“This is a warn message”);
log.info(“This is an info message”);
log.debug(“This is a debug message”);
log.trace(“This is a trace message”);
```

- What gets printed into log file if log level is set to “info”?

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Java Application Logging

Enabling Class Logging

Enabled class

Disabled classes

```
### set default log levels and appenderRef
### valid log levels in increasing order of severity are:
###     trace, debug, info, warn, error, fatal, off
### trace is required to get method entry and exit logging

logger.aggregator.name=sailpoint.api.Aggregator
logger.aggregator.level=debug

#logger.cacheTracker.name=sailpoint.api.CacheTracker
#logger.cacheTracker.level=trace

#logger.certificationer.name=sailpoint.api.Certificationer
#logger.certificationer.level=info
```

<install dir>/WEB-INF/classes/log4j2.properties

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Java Application Logging


Activating New Settings

```
########################################
## Global log4j2 properties
########################################
name=identityiq_default
status=warn
monitorInterval=20
packages=sailpoint.api.logging
```

log4j2.properties

Reload changes every 20 seconds

Force reload

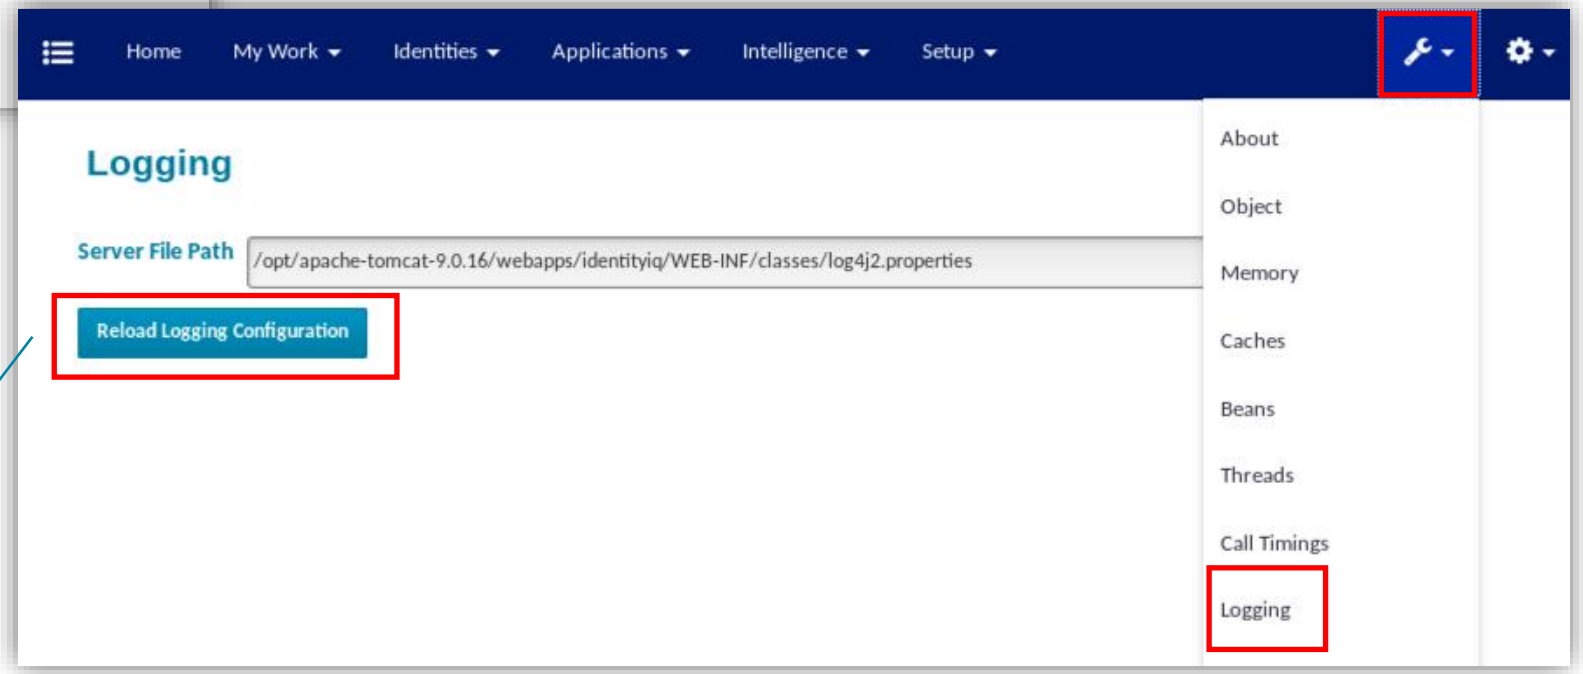


Debug Pages → Logging

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Email Logging


- Can redirect emails to file for testing, debugging, and troubleshooting
  - Send to log file
  - Send to single email recipient

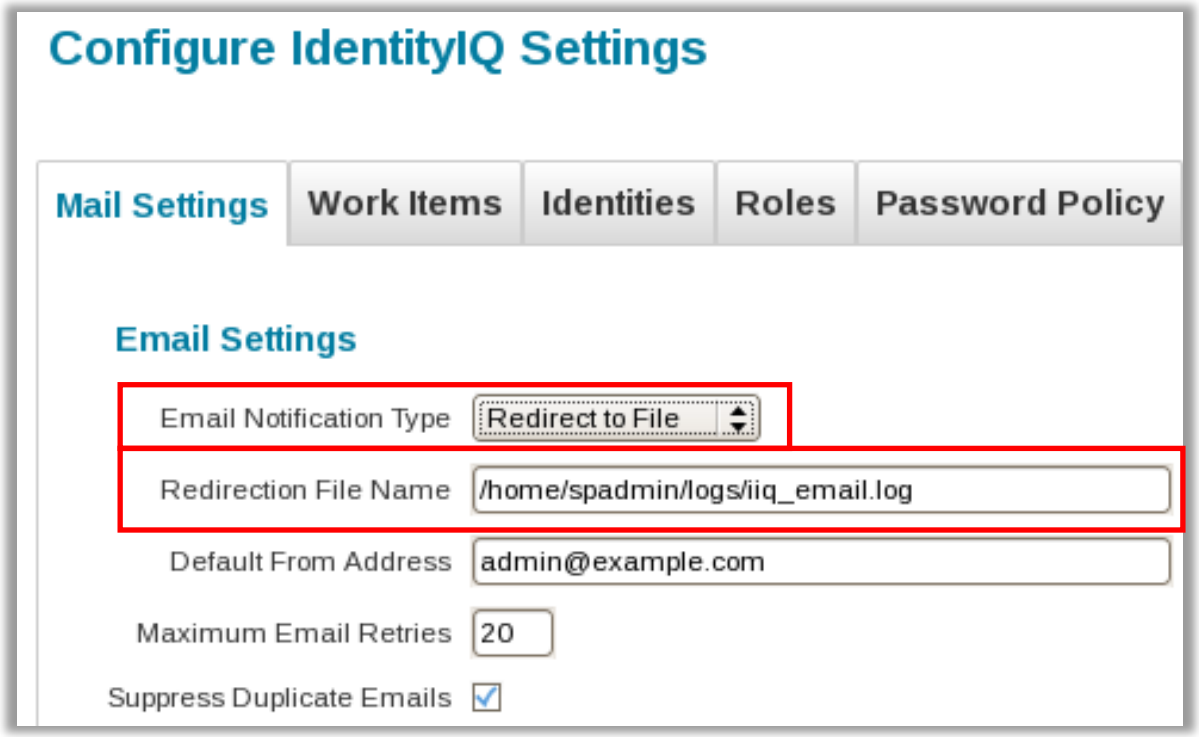

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Auditing

Configure

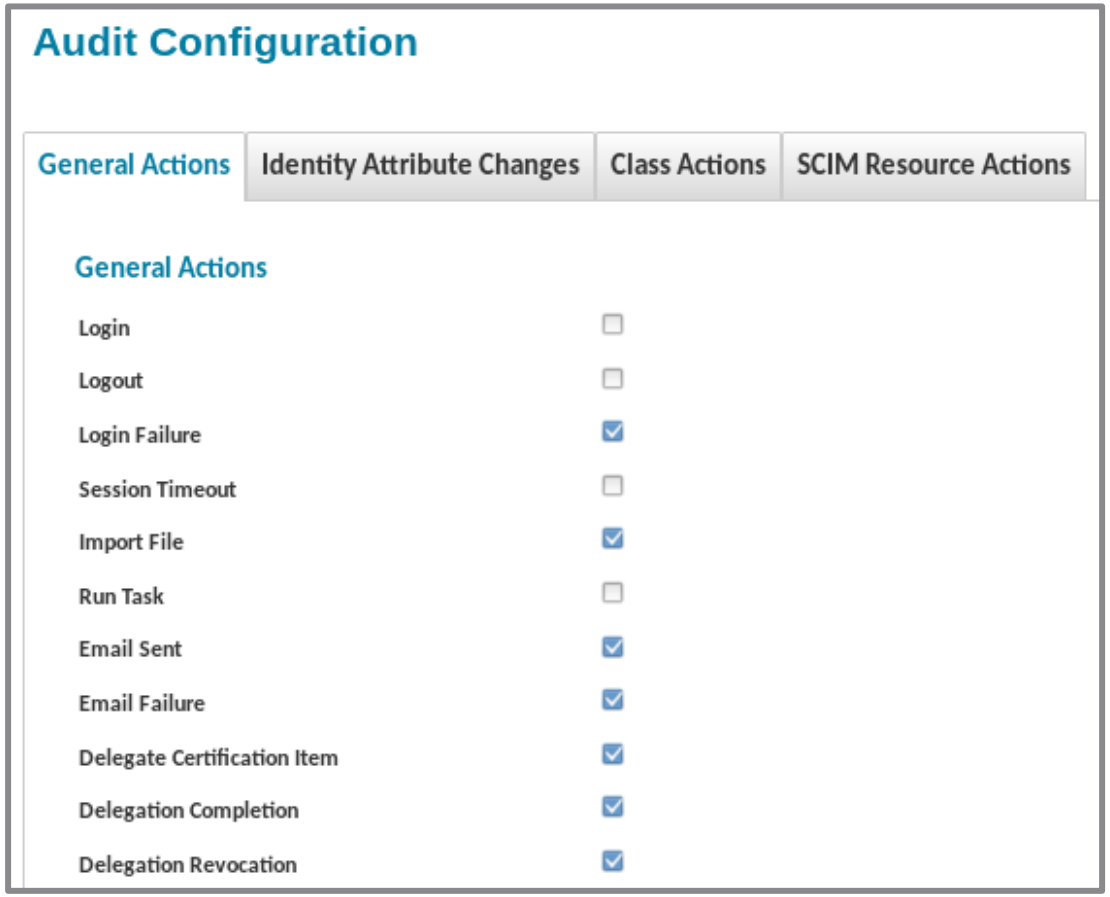

Gear → Global Settings → Audit Configuration

View

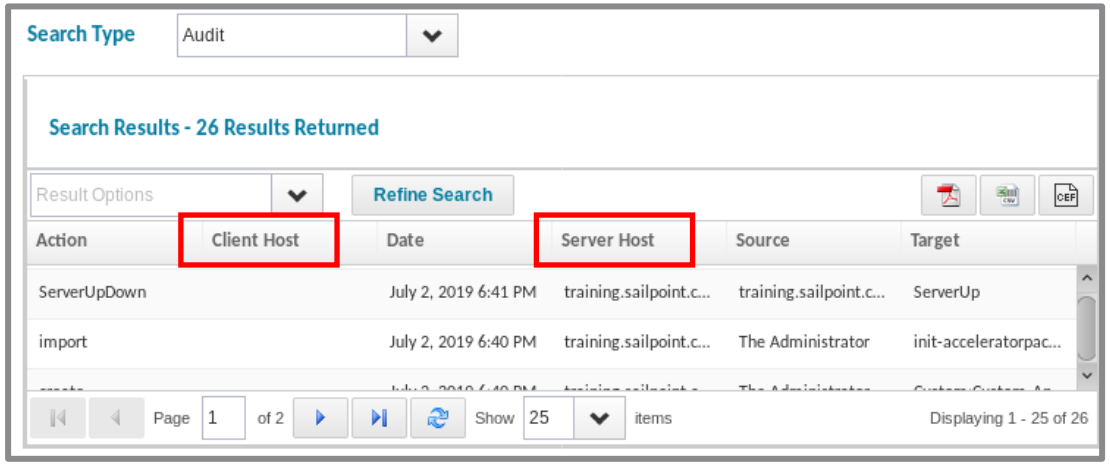


Intelligence → Advanced Analytics → Audit Search


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Syslog – Incident Codes

- When errors occur, an incident code may display in the UI

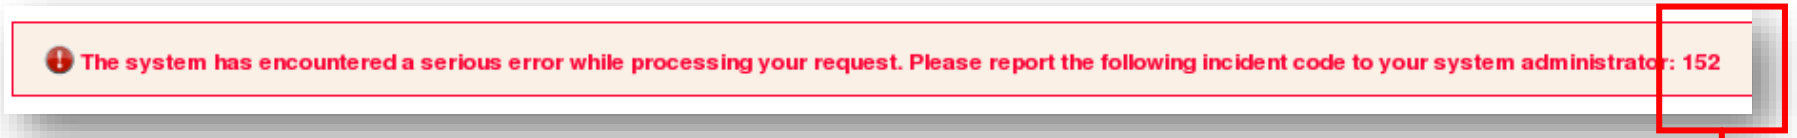

- Enter incident code to retrieve details
  - Intelligence → Advanced Analytics → Syslog Search

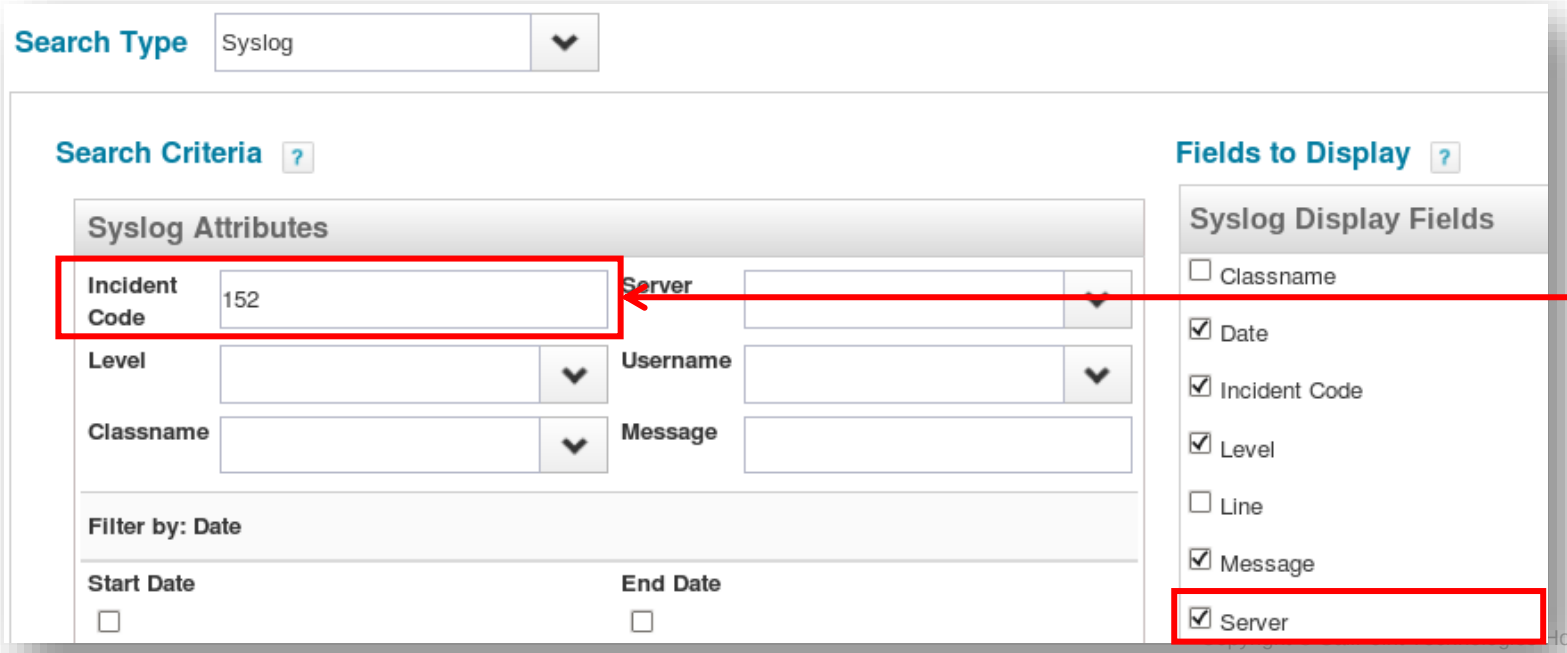


Holdings, Inc. 2020. All rights reserved.

Syslog Log

Configuration

- Default = enabled, with no event deletion
- Set “Days before syslog event deletion” (best practice)
  - Typically set to 30 days
- Gear → Global Settings → IdentityIQ Configuration → Miscellaneous

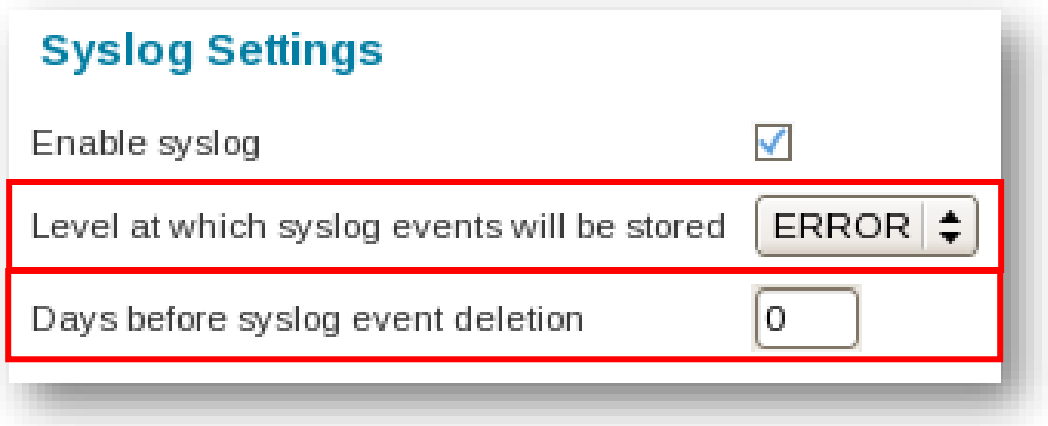

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Next Step?

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 3, Exercise 2

- Explore Logging Options
  - Enable/disable logging
  - View results

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Troubleshooting Tools and Resources

IdentityIQ Implementation and Administration: Essentials

Overview

Troubleshooting Tools and Resources

- Factors in successful troubleshooting
- IdentityIQ Console
- IdentityIQ Debug Pages

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Factors in Successful Troubleshooting

- Detail-Oriented
  - Small inconsistencies can cause large headaches
  - Take detailed notes, follow documentation steps carefully
- System Familiarity
  - Build your IdentityIQ knowledge
  - Training and time spent with the product
- Methodical Testing
  - Repeatable testing leads to success
  - Change one variable at a time
- Environmental Awareness
  - Components in play: database, application server, JVM, network, other systems
  - It might not be related to IdentityIQ

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Console and Debug Pages

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Console

- Command-line interface
- Authentication required
  - Exception: **spadmin** with the **admin** password
- Connects directly to database
  - Can be used to troubleshoot connectivity problems
- Many commands available through both browser interface and console
  - Test connections
  - Import objects
- Some commands are only available via console
  - SQL query interface
  - Export


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Console

Managing Objects

- Act upon sets of objects
  - List
  - Count
  - Delete

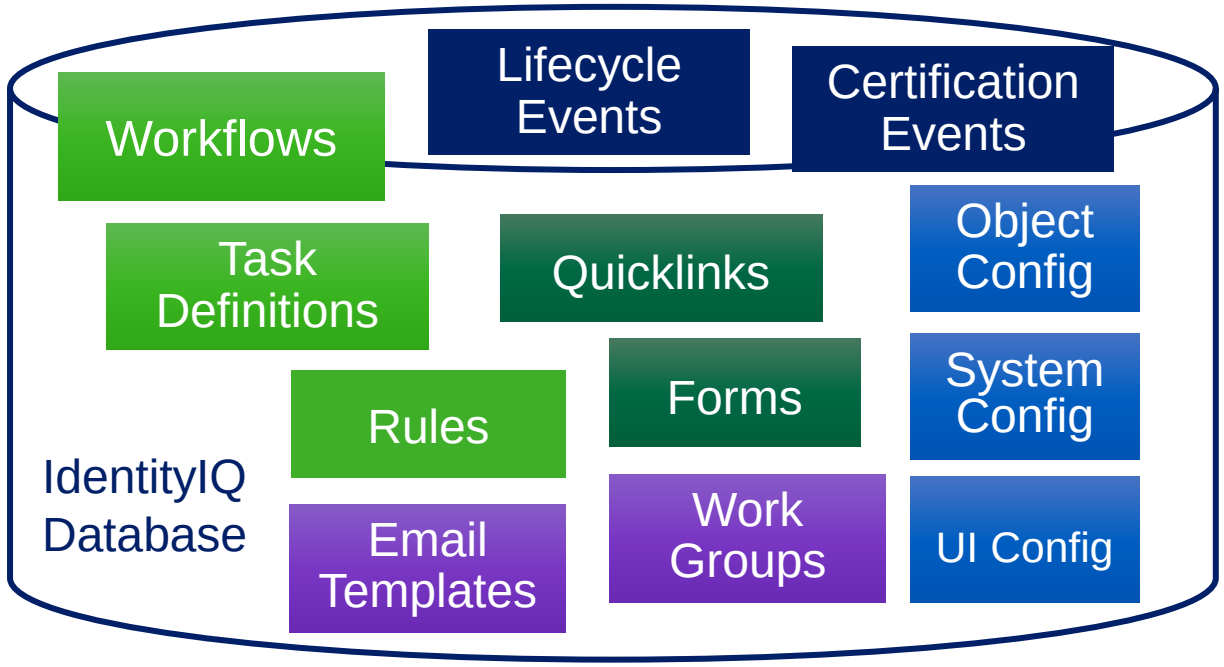

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Console

Retrieving Objects

- View XML representation
  - Get


```
<?xml version='1.0' encoding='UTF-8'?>
<!DOCTYPE TaskDefinition PUBLIC "sailpoint.dtd" "sailpoint.dtd">
<TaskDefinition created="1581899628883" formPath="/monitor/tasks/accountAggregationTask.xhtml"
id="7f0000017050l8c081705090c1530533" modified="1582019248229" name="Aggregate Chat"
resultAction="Delete" subType="task_item_type_acct_aggregation" type="AccountAggregation">
  <Attributes>
    <Map>
      <entry key="TaskDefinition.runLengthAverage" value="20"/>
      <entry key="TaskDefinition.runLengthTotal" value="62"/>
      <entry key="TaskDefinition.runs" value="3"/>
      <entry key="TaskSchedule.host"/>
      <entry key="applications" value="Chat"/>
      <entry key="checkDeleted" value="true"/>
      <entry key="checkHistory" value="false"/>
      <entry key="checkPolicies" value="false"/>
      <entry key="correlateEntitlements" value="false"/>
      <entry key="correlateOnly" value="false"/>
      <entry key="correlateScope" value="false"/>
      <entry key="deltaAggregation" value="false"/>
      <entry key="enablePartitioning" value="false"/>
      <entry key="haltOnMaxError" value="false"/>
      <entry key="noAutoCreateApplications" value="false"/>
      <entry key="noAutoCreateScopes" value="false"/>
      <entry key="noNeedsRefresh" value="false"/>
      <entry key="noOptimizeReaggregation" value="true"/>
      <entry key="promoteManagedAttributes" value="true"/>
      <entry key="refreshScorecard" value="false"/>
      <entry key="sequential" value="false"/>
      <entry key="taskCompletionEmailNotify" value="Disabled"/>
      <entry key="taskCompletionEmailRecipients"/>
      <entry key="taskCompletionEmailTemplate"/>
    </Map>
  </Attributes>
  <Description>Task template for application account scanning.</Description>
  <Owner>
    <Reference class="sailpoint.object.Identity" id="7f000001704511648170l45e1c6de0109" name="sp
  </Owner>
  <Parent>
    <Reference class="sailpoint.object.TaskDefinition" id="7f000001704511648170l45e1dd3501bf" na
  </Parent>
</TaskDefinition>
```

SailPoint

Console

Importing/Exporting Objects

- Checkout
- Export
- Import

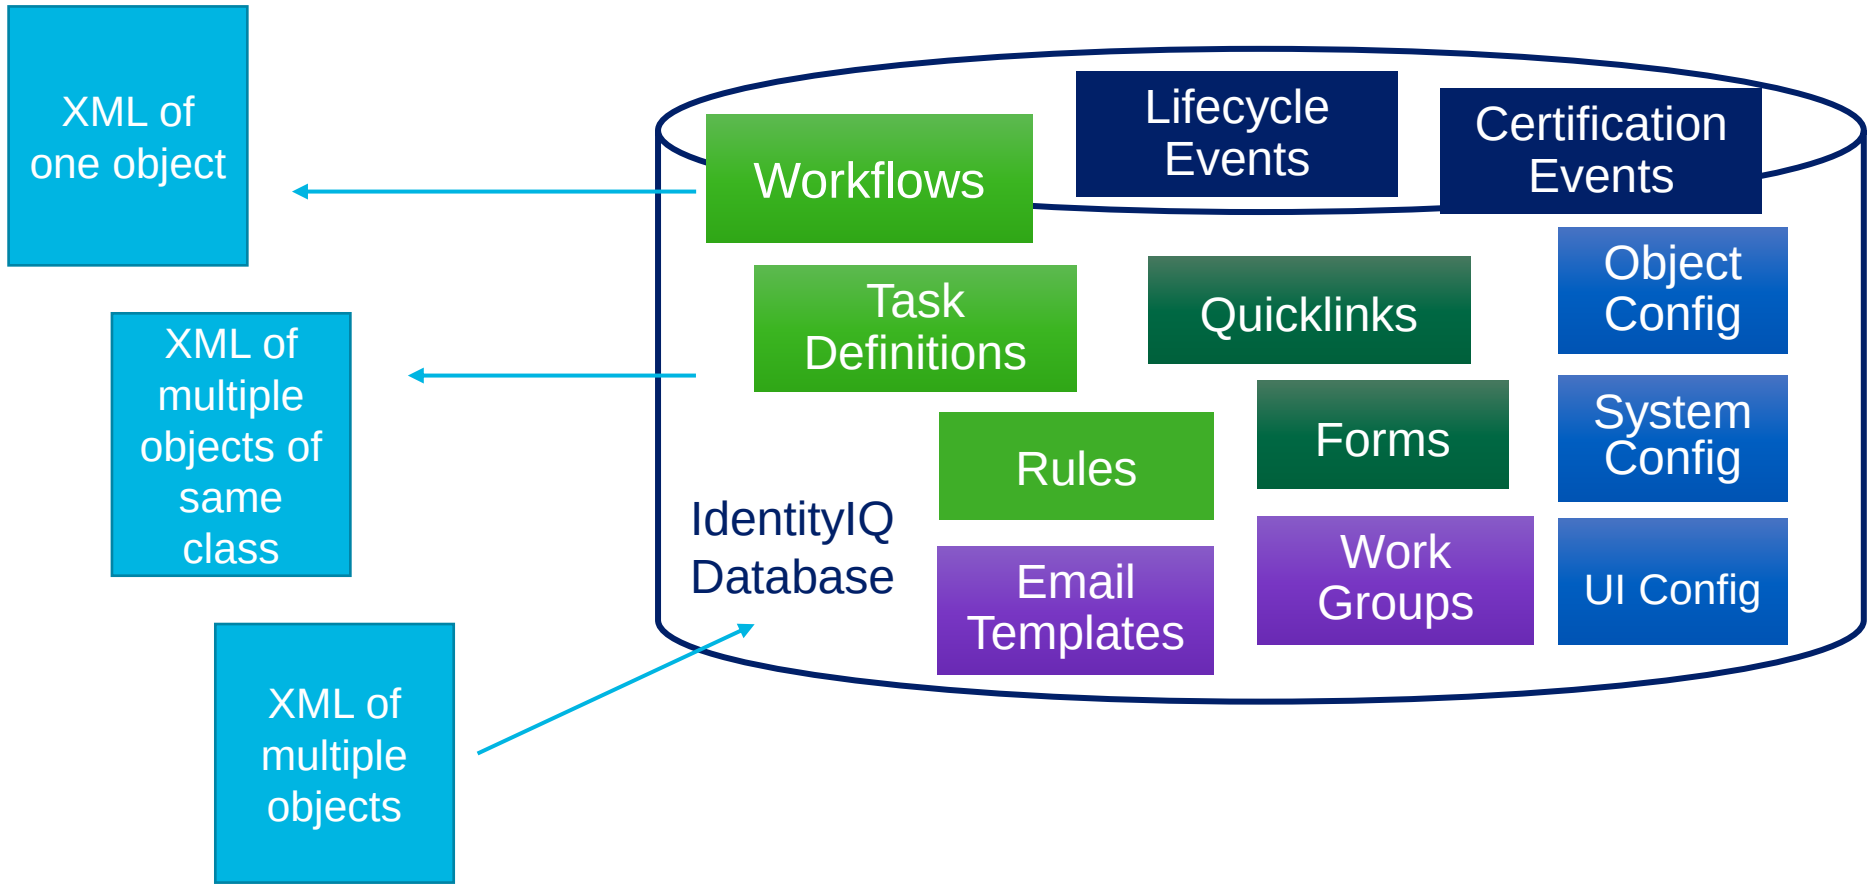

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Console

Data Export Best Practice

Unique to Instance
- Id
- Created Date
- Modified Date

```
<?xml version='1.0' encoding='UTF-8'?>
<!DOCTYPE AuditEvent PUBLIC "sailpoint.dtd" "sailpoint.dtd">
<AuditEvent action="loginFailure" clientHost="0:0:0:0:0:0:0:1" created="1581722848004"
id="7f000001704514b9817046074aff004f" modified="1582025795342"
serverHost="training.sailpoint.com" source="foo"/>
```

- Remove information unique to IdentityIQ instance
  - Export and checkout “clean” option
  - Import “noid” option

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Console

Other Useful Commands

Category	Command	Purpose
Aggregation	connectorDebug	Iterate over application accounts or groups without loading them
Rules	rule <rulename>	Runs a rule
Tasks	list taskdefinition	Lists all tasks ***and reports*** in the system
	tasks	Lists all scheduled tasks
	run <taskname>	Runs a task
General	about	Lists info about system
	source	Load and execute command file into console

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Debug Pages

Advanced Configuration and Debugging

- Only available to users with System Administrator capability
- Hidden context root for debugging options


  Example: http://localhost:8080/identityiq/**debug/**
- Provides Many Features
  - Viewing and editing of XML objects
  - Creating and deleting objects
  - Access to Configuration
    - System Configuration
    - UI Configuration
  - Memory Usage
  - Garbage Collection Methods

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Debug Pages

System Information

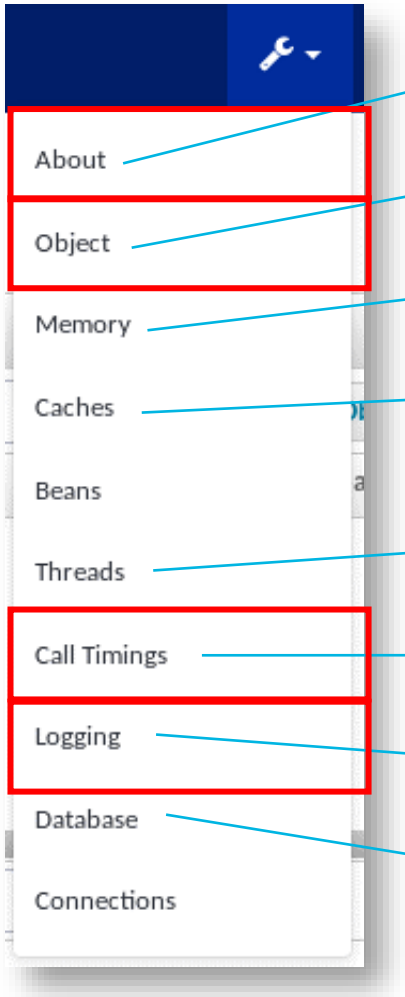

- About IIQ Environment
- Object Viewer (Default Page)
- Display Current Memory Usage
- Reset Cache
- Troubleshoot Threads
- Call Timings
- Reload Log4J Configuration
- DB Settings/# of Connections Used

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Debug Page – Default View

Object Viewer


Object Type to Search for

Object to Search for

Manipulate Configuration Objects UIConfig System Config Identity / Mapping

Run Rules

Create and Delete Objects

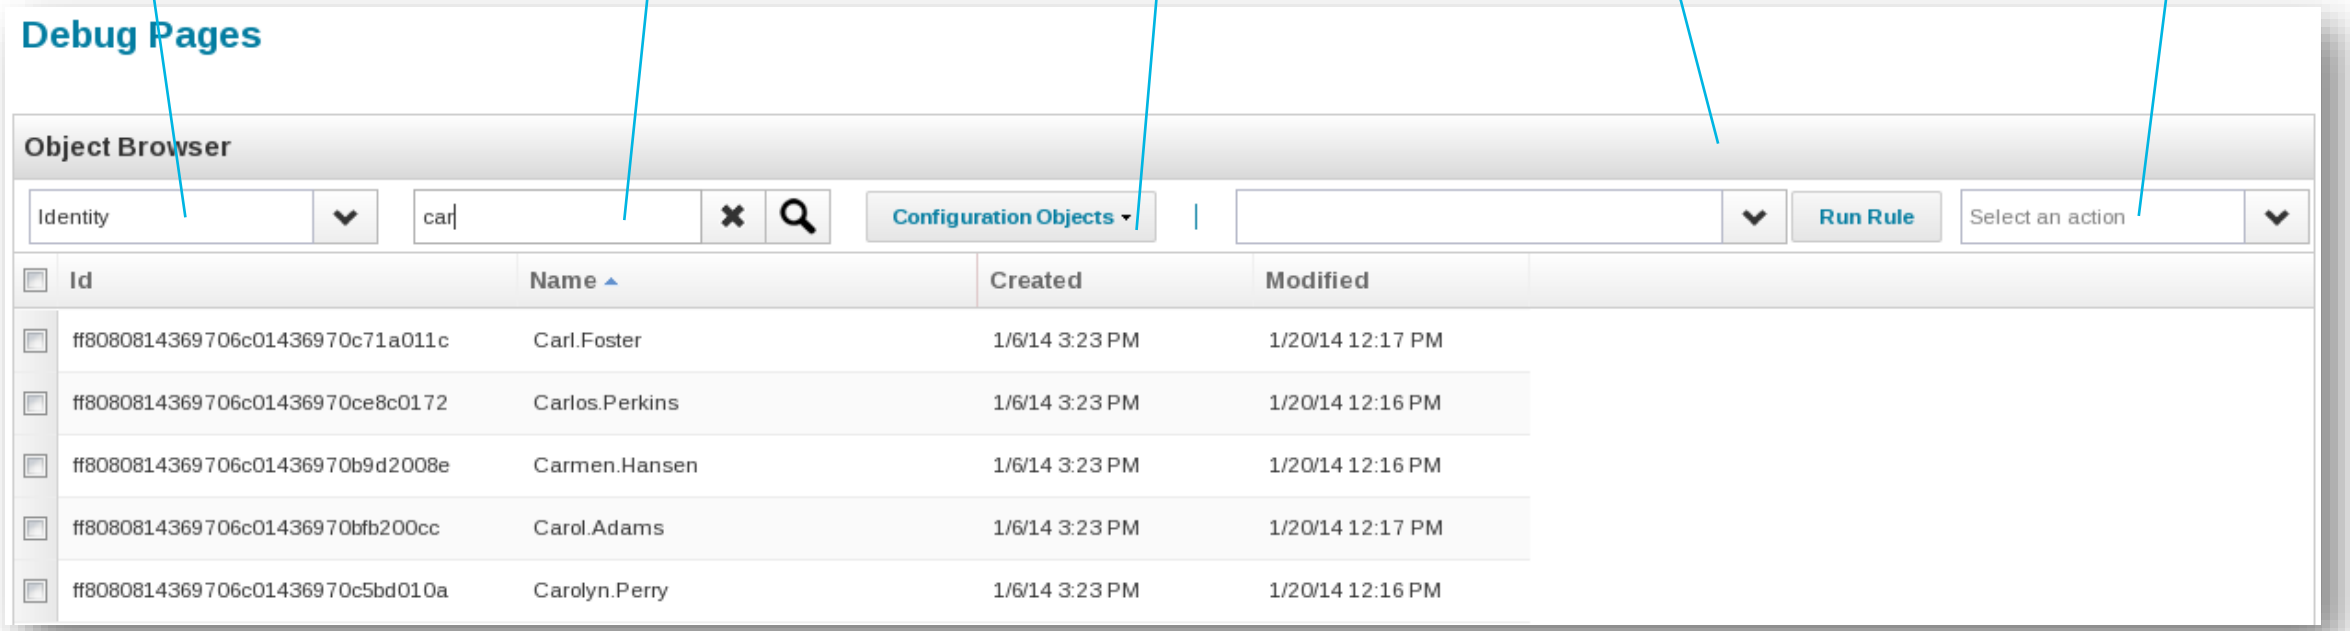

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Next Step?

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 3, Exercise 3

- Explore IdentityIQ Debug, Console, and Logging
  - Explore Debug Pages
    - About, Logging, and Call Timings
    - Object Browser
    - Create a copy of an object
    - Run a rule
  - Explore IdentityIQ Console
    - Explore help
    - Explore commands
    - Run a rule
    - Import/export objects

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Introduction to Policies

IdentityIQ Essentials

Policy Definition

- IdentityIQ policies define the access-related business policies of your enterprise

  Example: Can't have access to both approve vendor and pay vendor

- Detect users who are currently in violation of policies
- Prevent users from violating policies

- Defined using data from business environment
  - Identity attributes
  - Application attributes
  - Risk scores
  - Roles
  - Entitlements

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Policy Examples

- Mutually exclusive access



- Incorrect responsibilities




- More than one account



Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Policy Usage

Compliance – Detective

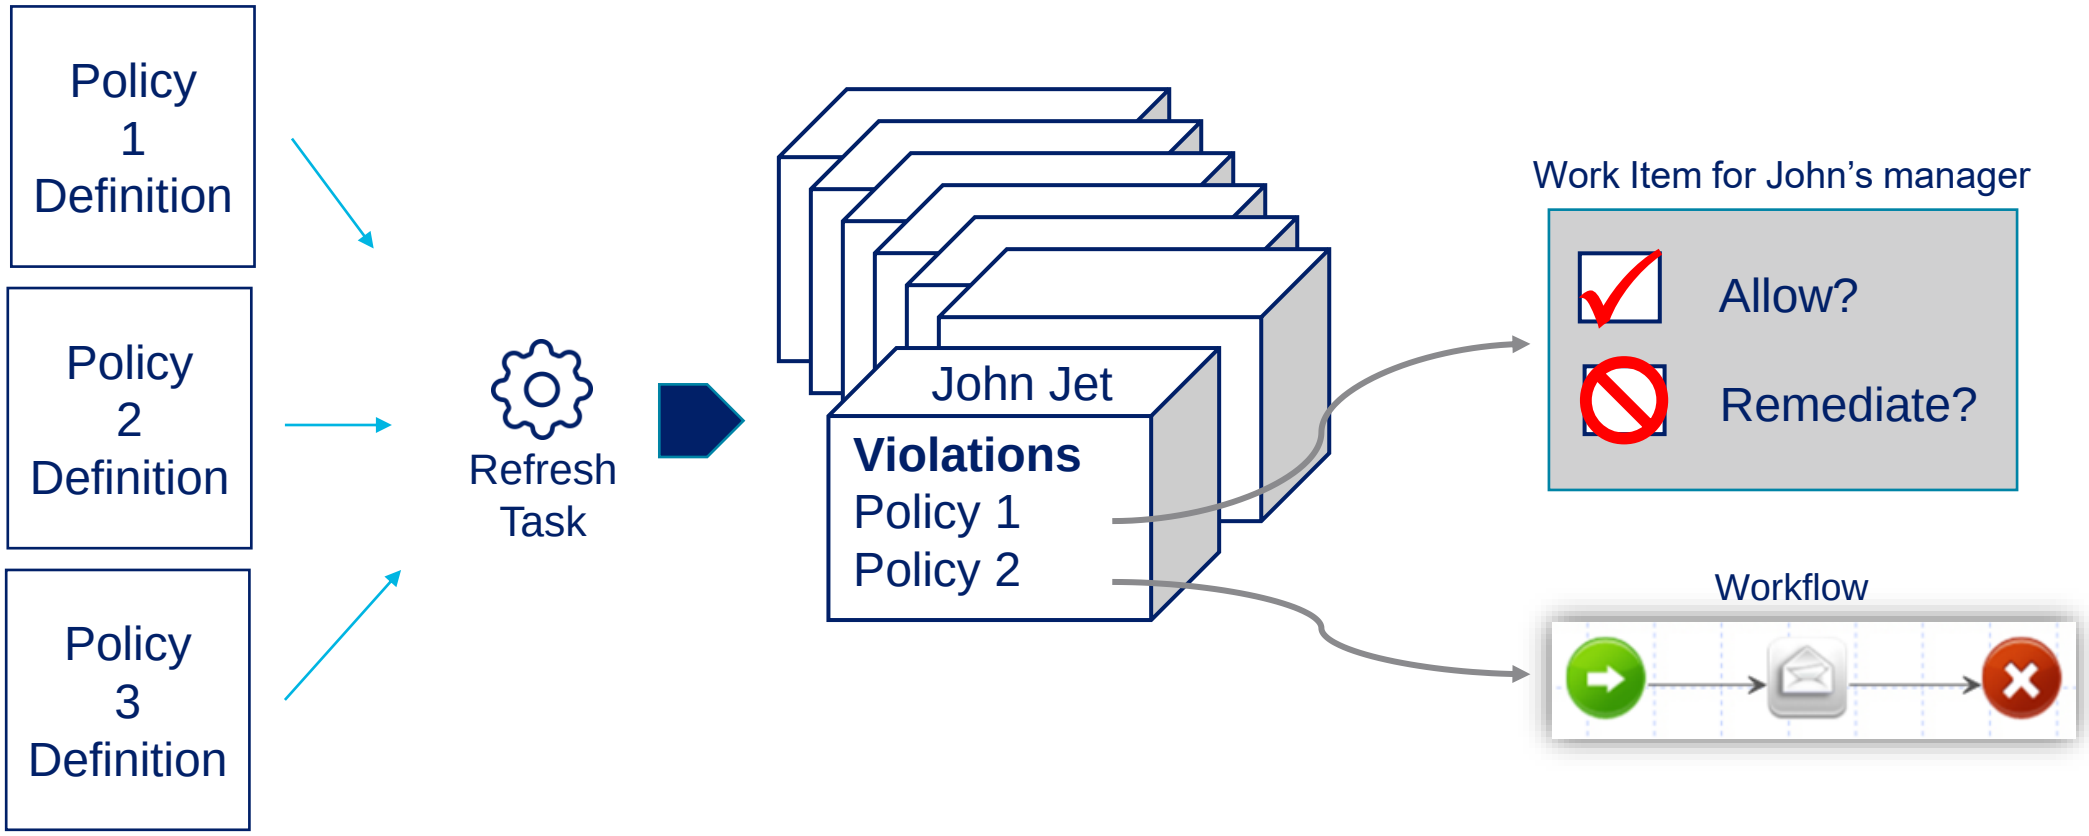

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Policy Usage


Provisioning – Preventive



Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Detection

Identity Refresh Task

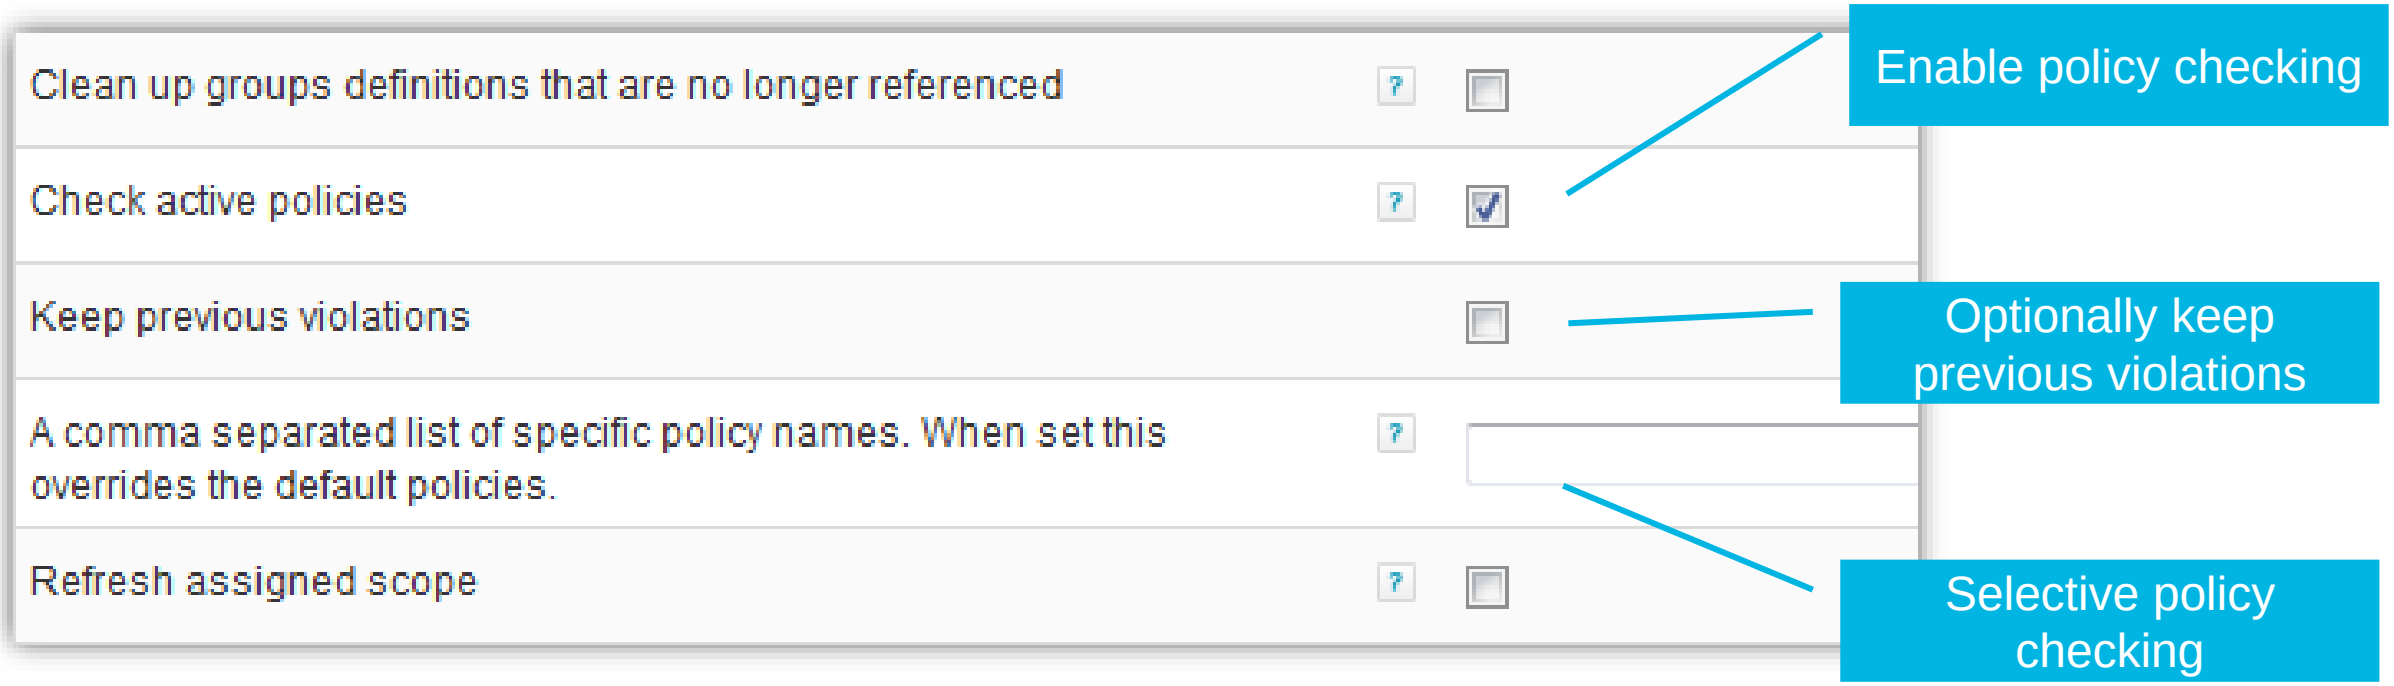

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 3, Exercise 4

- Define Policies
  - Define entitlement separation of duties (SoD) policy
  - Detect users in violation of policy

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Introduction to Certifications

IdentityIQ Essentials

Certifications

Purpose and Responsibilities

- Purpose
  - Keep user access compliant
    - Legal requirements
    - Industry standards or regulations
    - Business rules
  - Provide oversight and visibility
- Responsibilities
  - Implementers and system administrators
    - Responsible for knowing how these features work
    - Possibly responsible for providing rules
    - Unlikely to be responsible for ongoing configuration and monitoring
  - Often companies have dedicated compliance teams/business administrators

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Access Certification

- The process of automating the periodic review and approval of:
  - Identity Access
  - Role Membership
  - Account Group Membership
  - Role Composition
  - Account Group Permissions

Targeted
Manager
Application Owner
Entitlement Owner
Advanced

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Certifications/Access Reviews

Definitions

- Certifications
  - Define the certification campaign
    - What is reviewed
    - When
    - By whom
  - Comprised of one or more access reviews that share the same parameters

- Access Reviews
  - Gather users' access data at time of generation
  - Provide that collection of data to be certified
  - Routed to the reviewer to take action


- Access Review Details
  - Present the entities to be certified

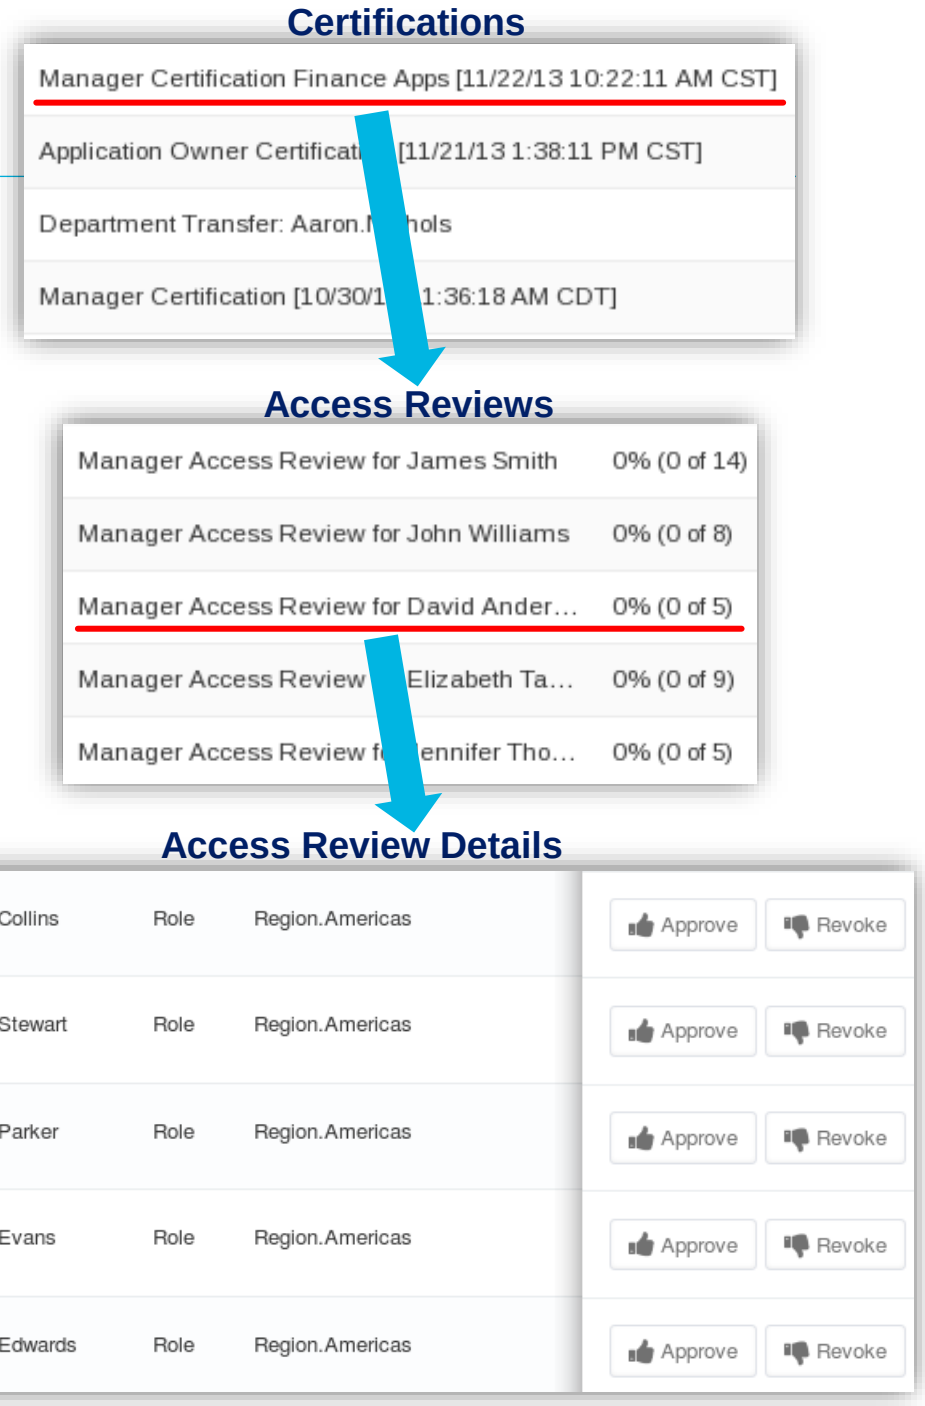

SailPoint

Certification Lifecycle

Process and Time Periods

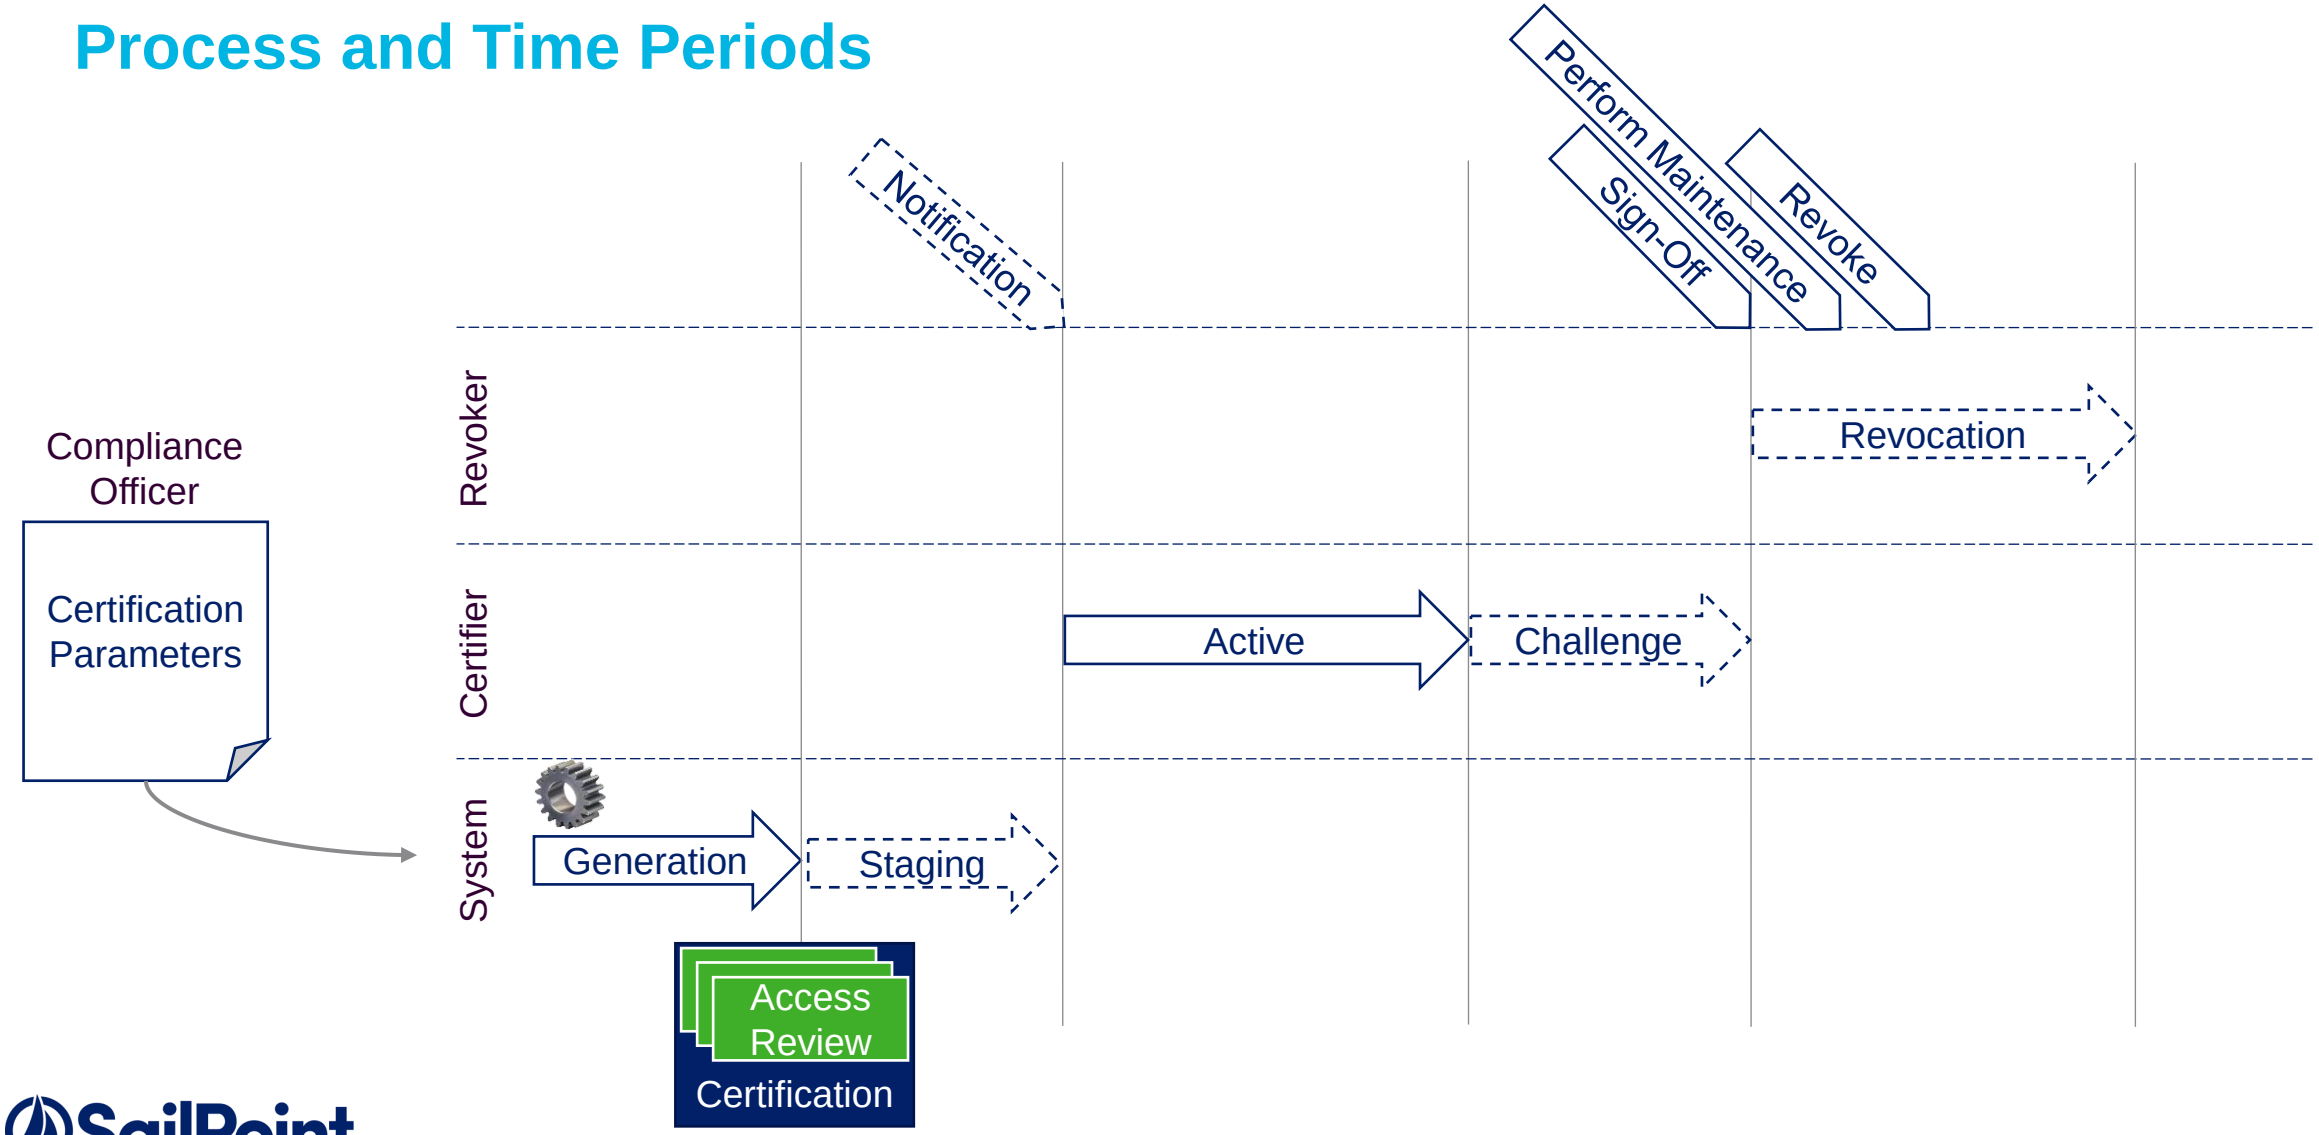

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Certification Configuration


Rules (Supplied by Implementation Team)

- Certification Control
  - Exclusion Rule
  - Pre-Delegation Rule
  - Sign Off Approver Rule
- Time Period Rules
  - Active Period Enter Rule
  - Challenge Period Enter Rule
  - Revocation Period Enter Rule
  - End Period Rule
  - Closing Rule
- Escalation
  - Escalation Rule for Expirations and Revocations

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Trigger Certifications


- Multiple options for triggering certifications
  - Manual creation
  - Scheduled, recurring
  - Data changed, triggering Certification Event

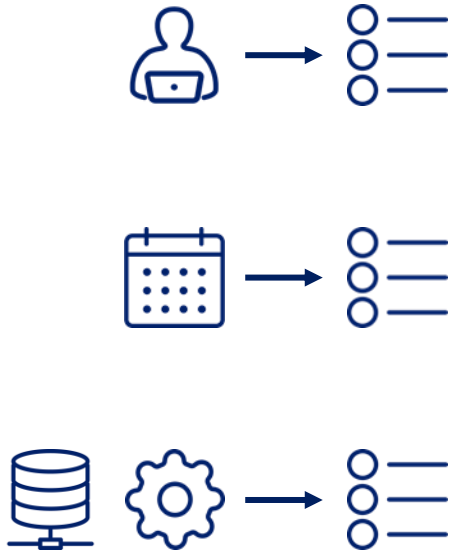

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

AI Recommendations in Certifications

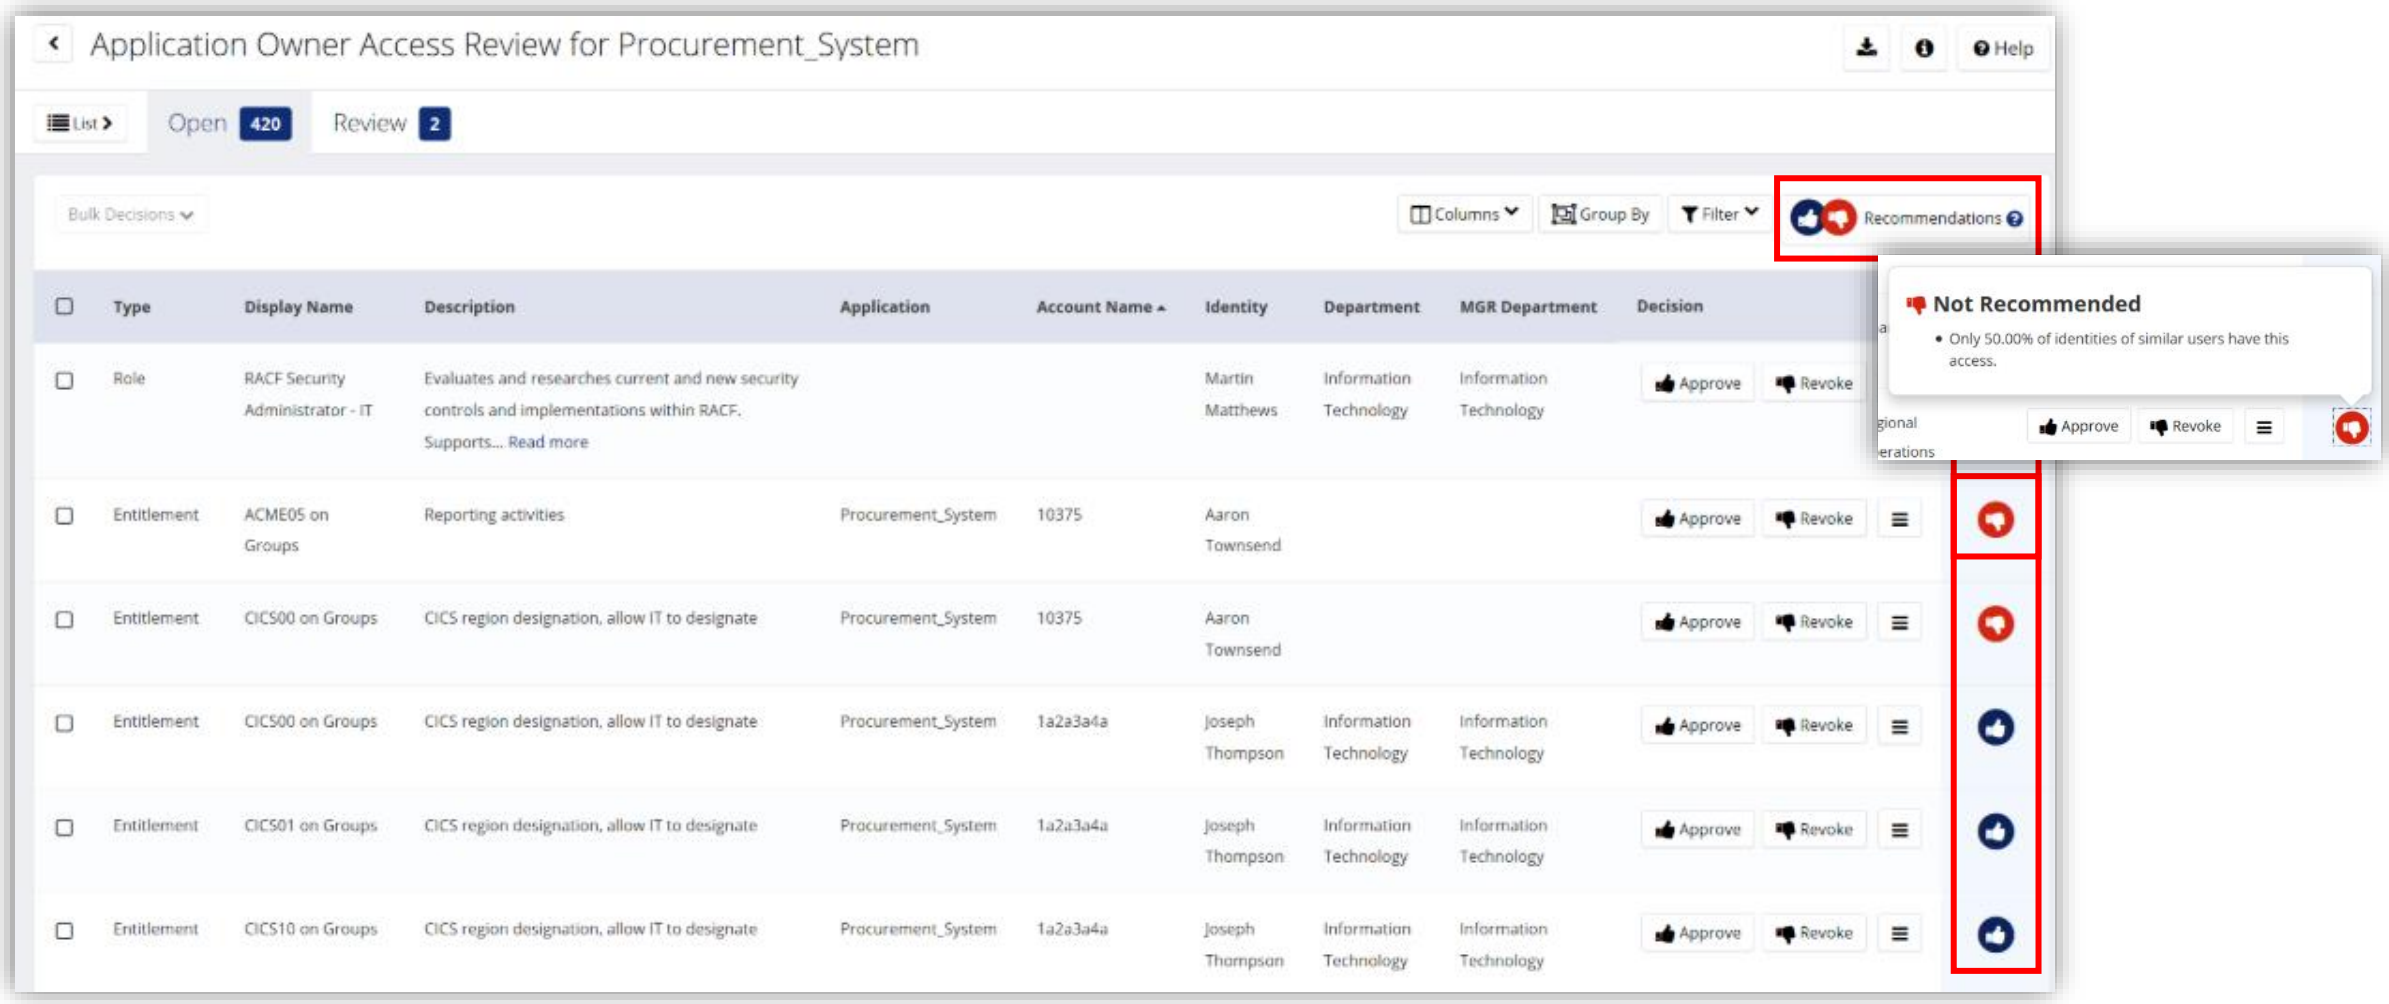

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Certification Demonstration

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 3, Exercise 5

- Certify Access
  - Generate targeted certification
  - Perform access review

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint




Introduction to Roles


IdentityIQ Essentials

Role

Definition (Review)

- An object that encapsulates sets of access
  - Regulate and provision access to resources based on roles of each user

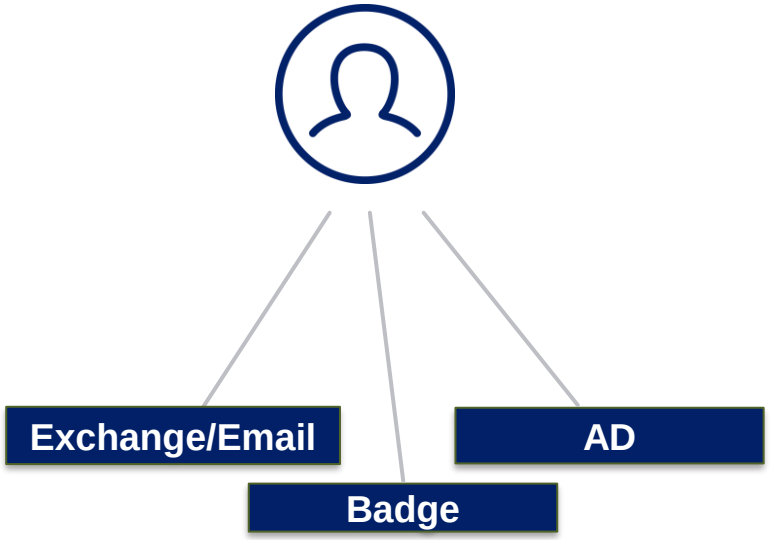

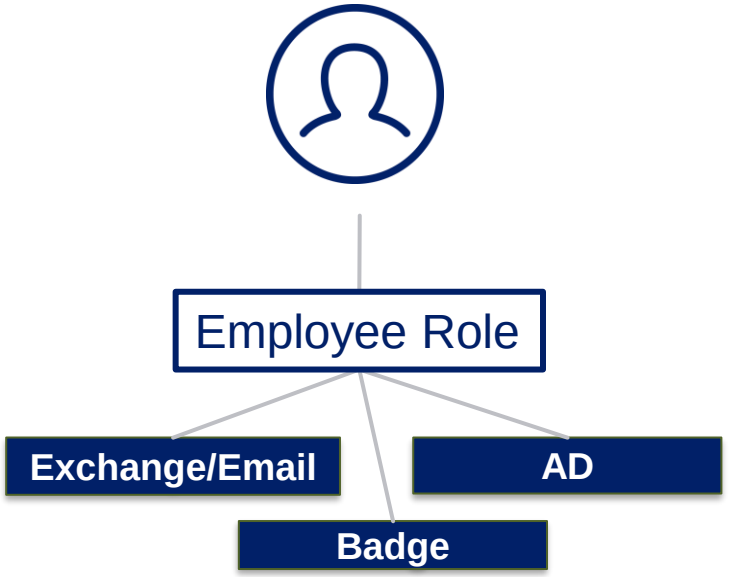


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Two Tier Role Model


IdentityIQ Default

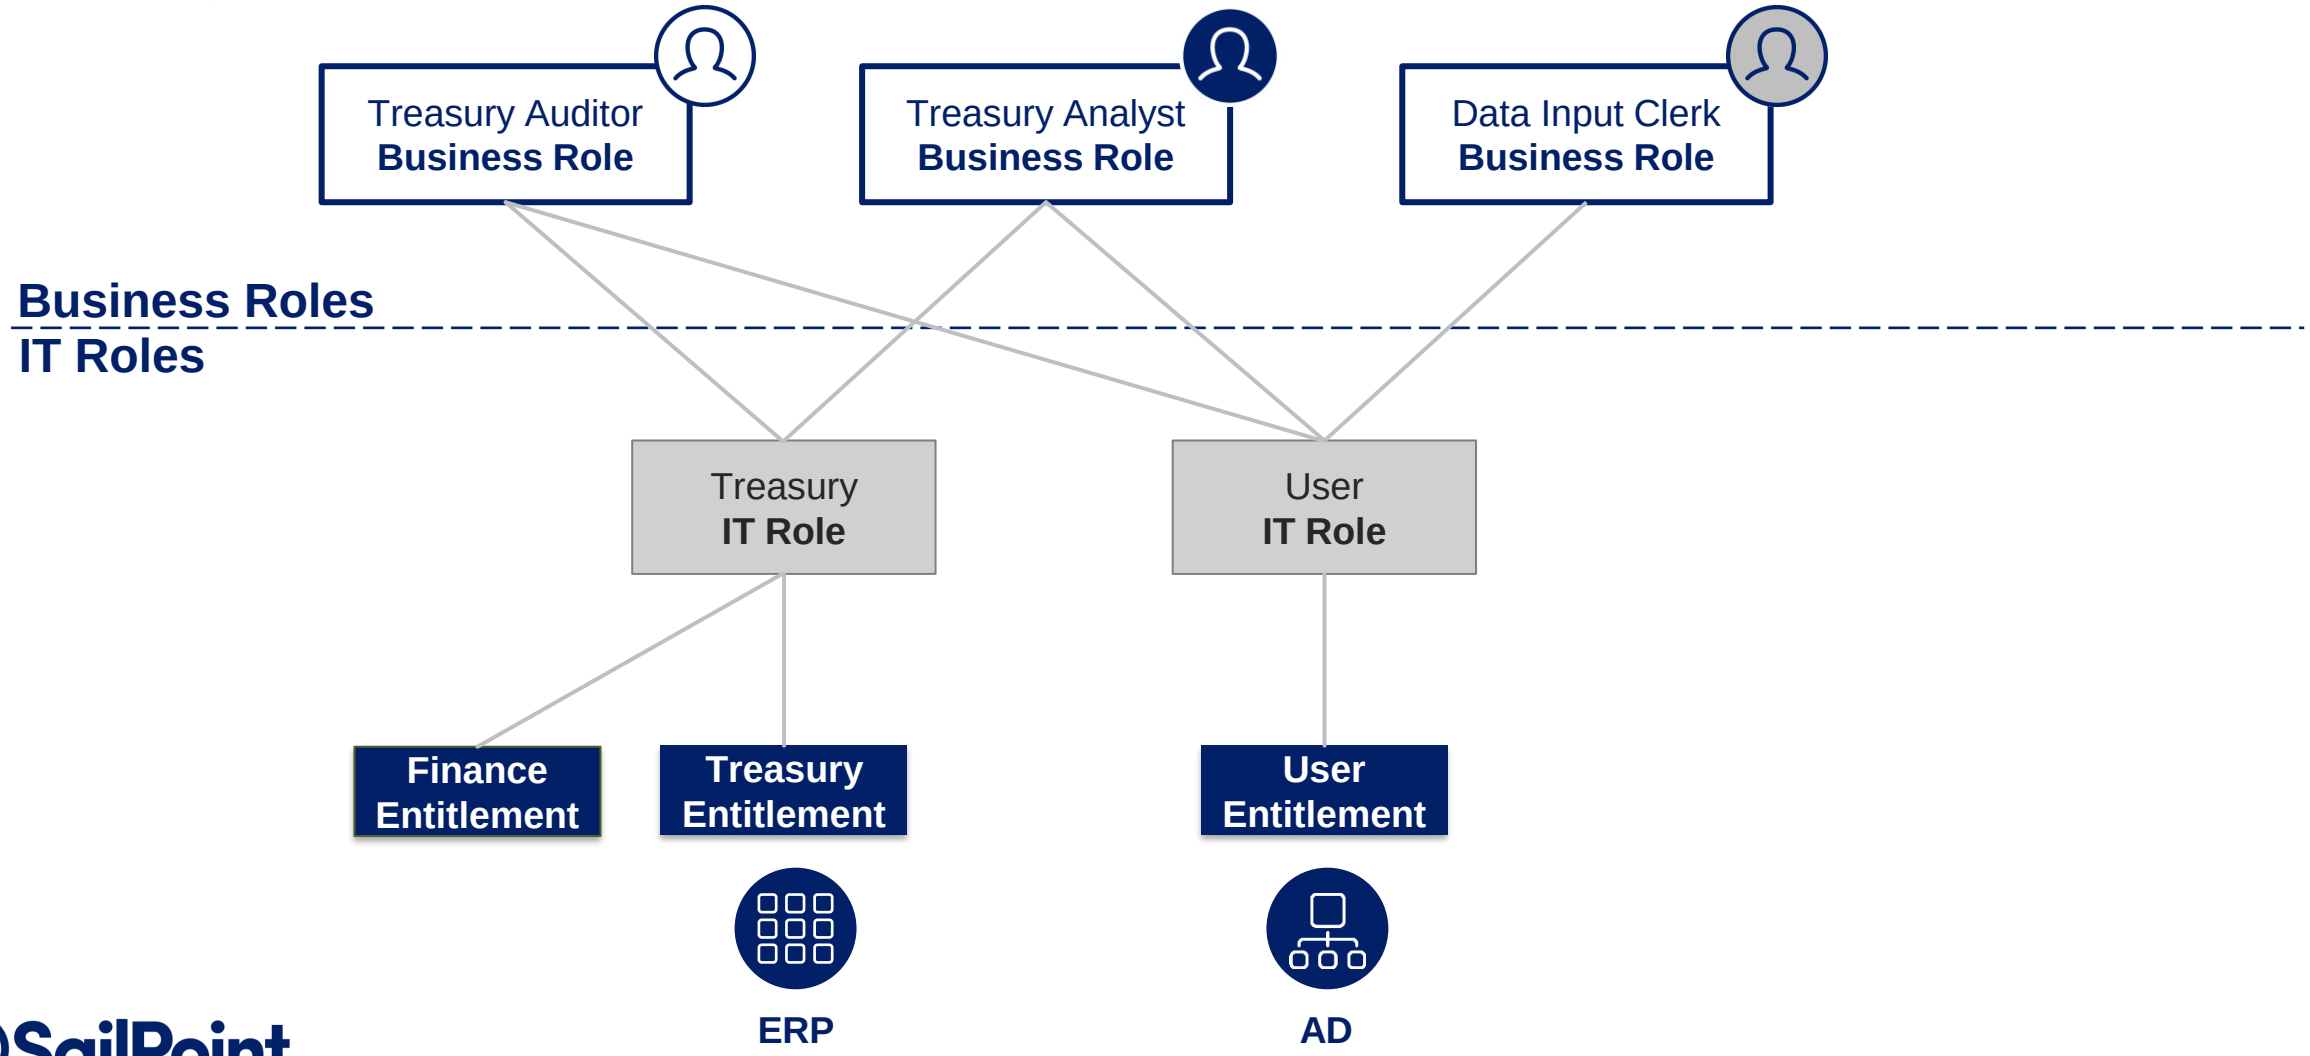

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

IdentityIQ Two Tier Role Model

Usage

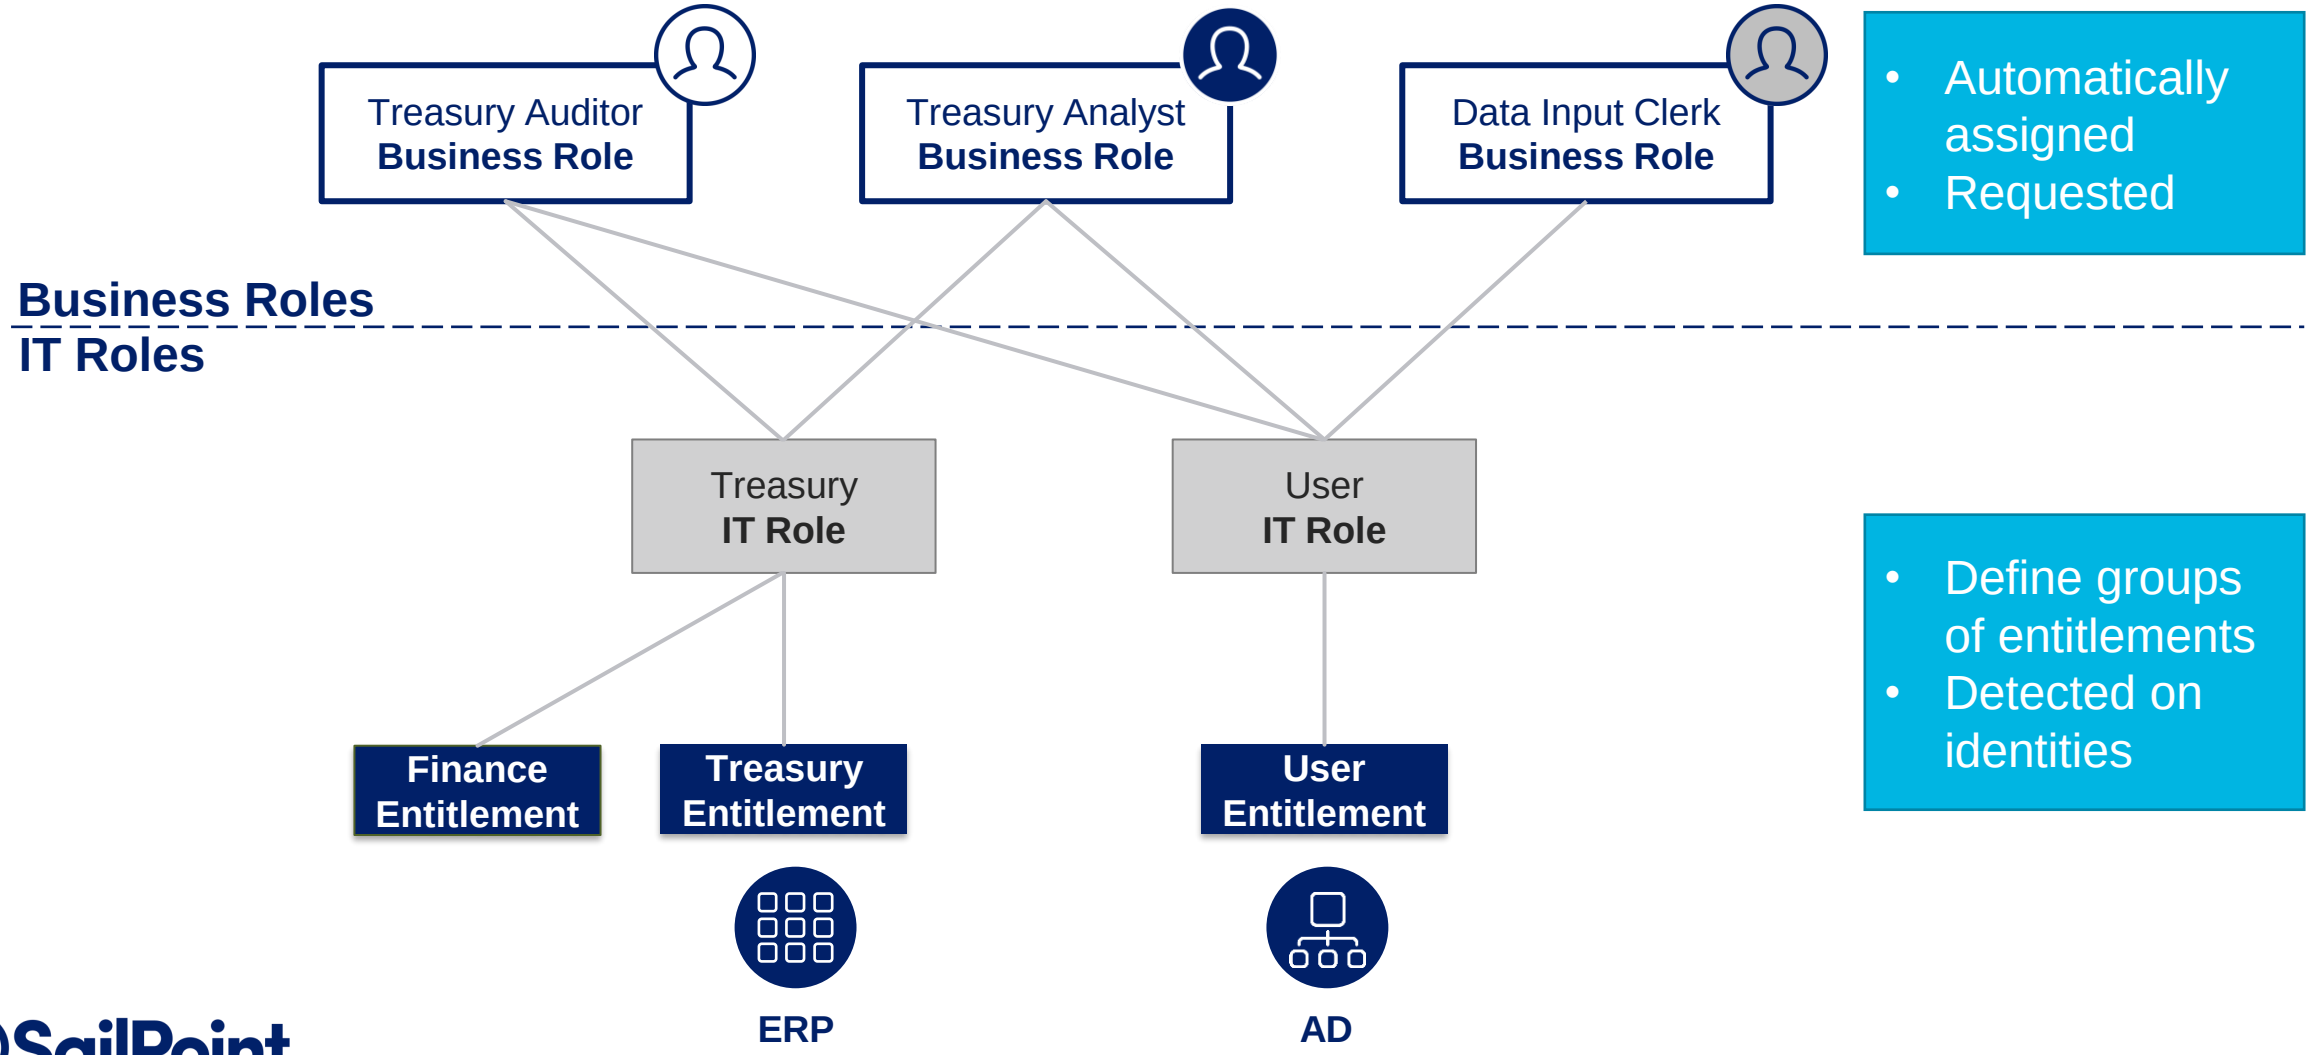


- Automatically assigned
- Requested

- Define groups of entitlements
- Detected on identities

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Required and Permitted Relationships

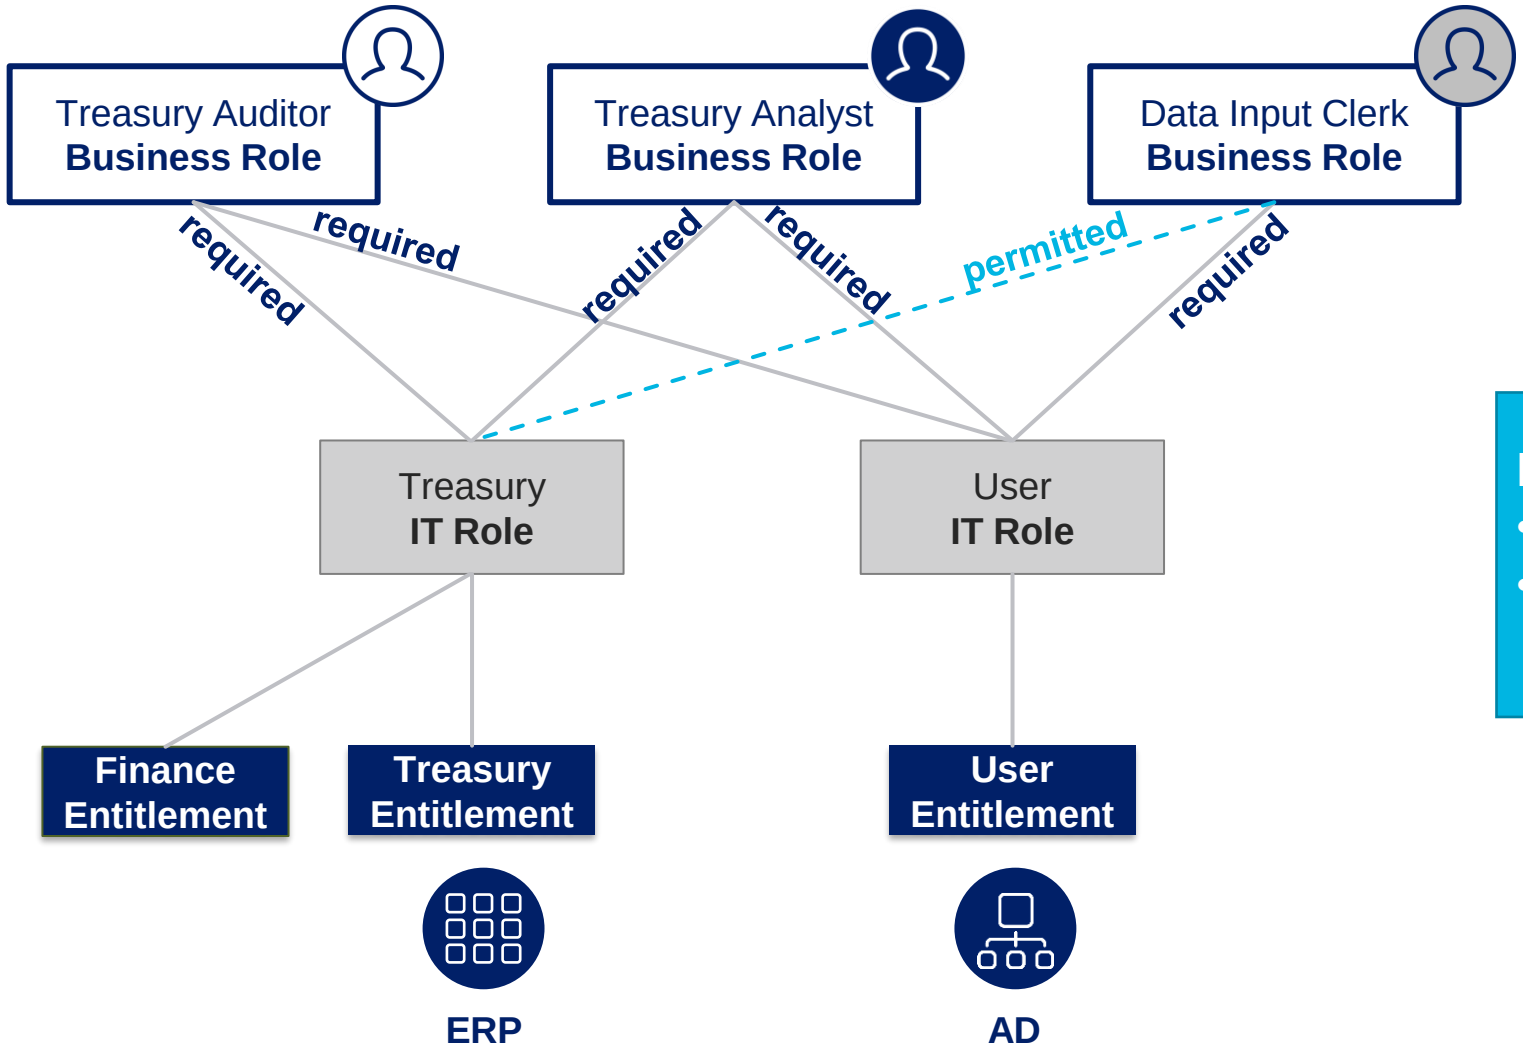


Permitted roles
- Must be requested
- Not automatically provisioned

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Assigning and Detecting Roles

Identity Refresh Task


- “Refresh assigned, detected roles…”
  - Processes assignment rule defined in business role
  - Detection defined through an IT Role Profile
- Optionally choose
  - “Provision assignments”
  - “Disable deprovisioning…”

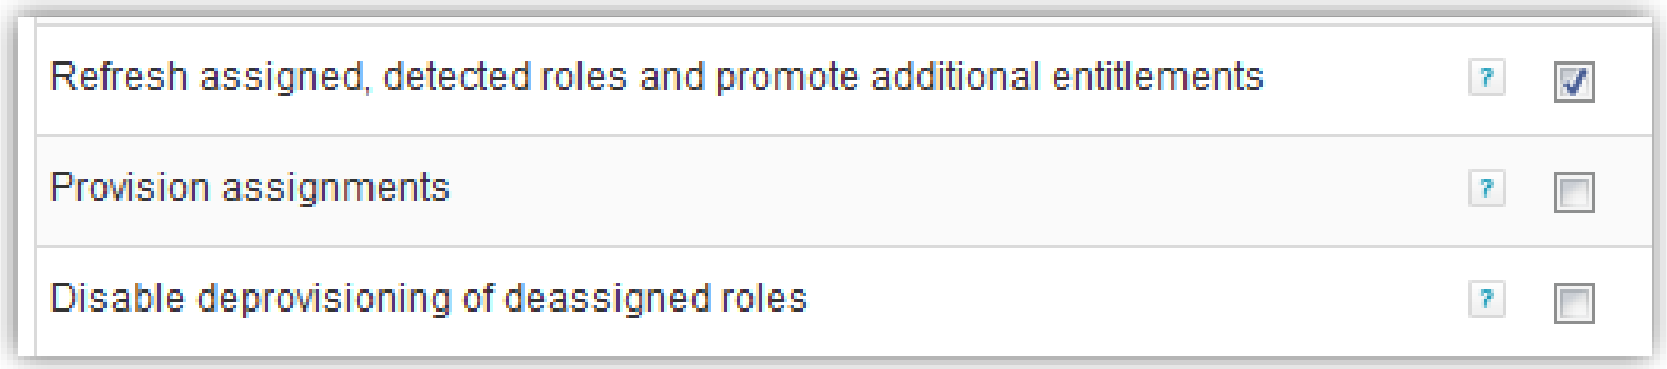

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Automated Role Provisioning


Illustration

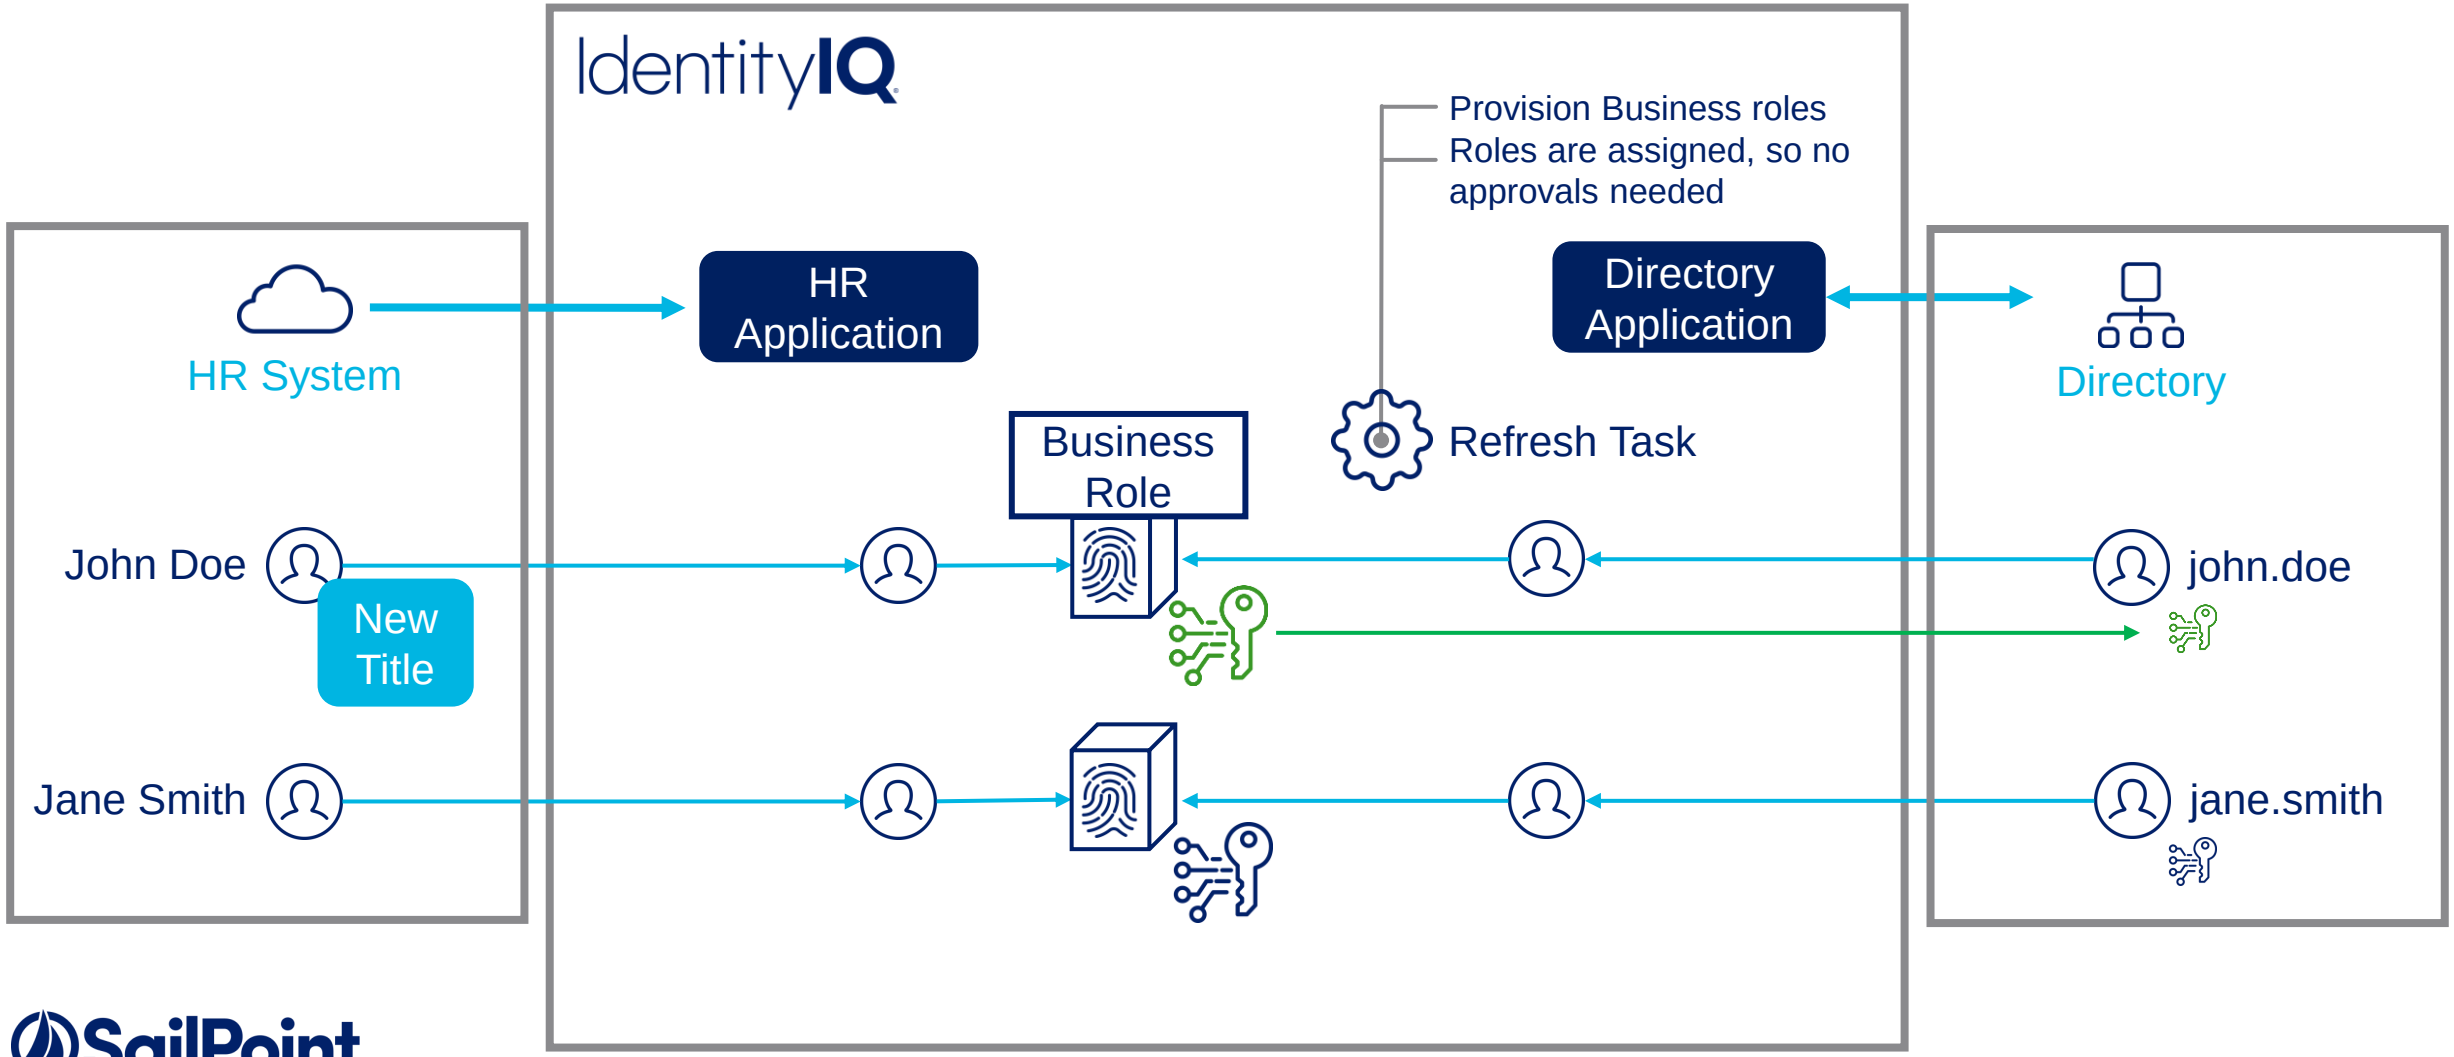

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Automated Role Provisioning

Account Provisioning

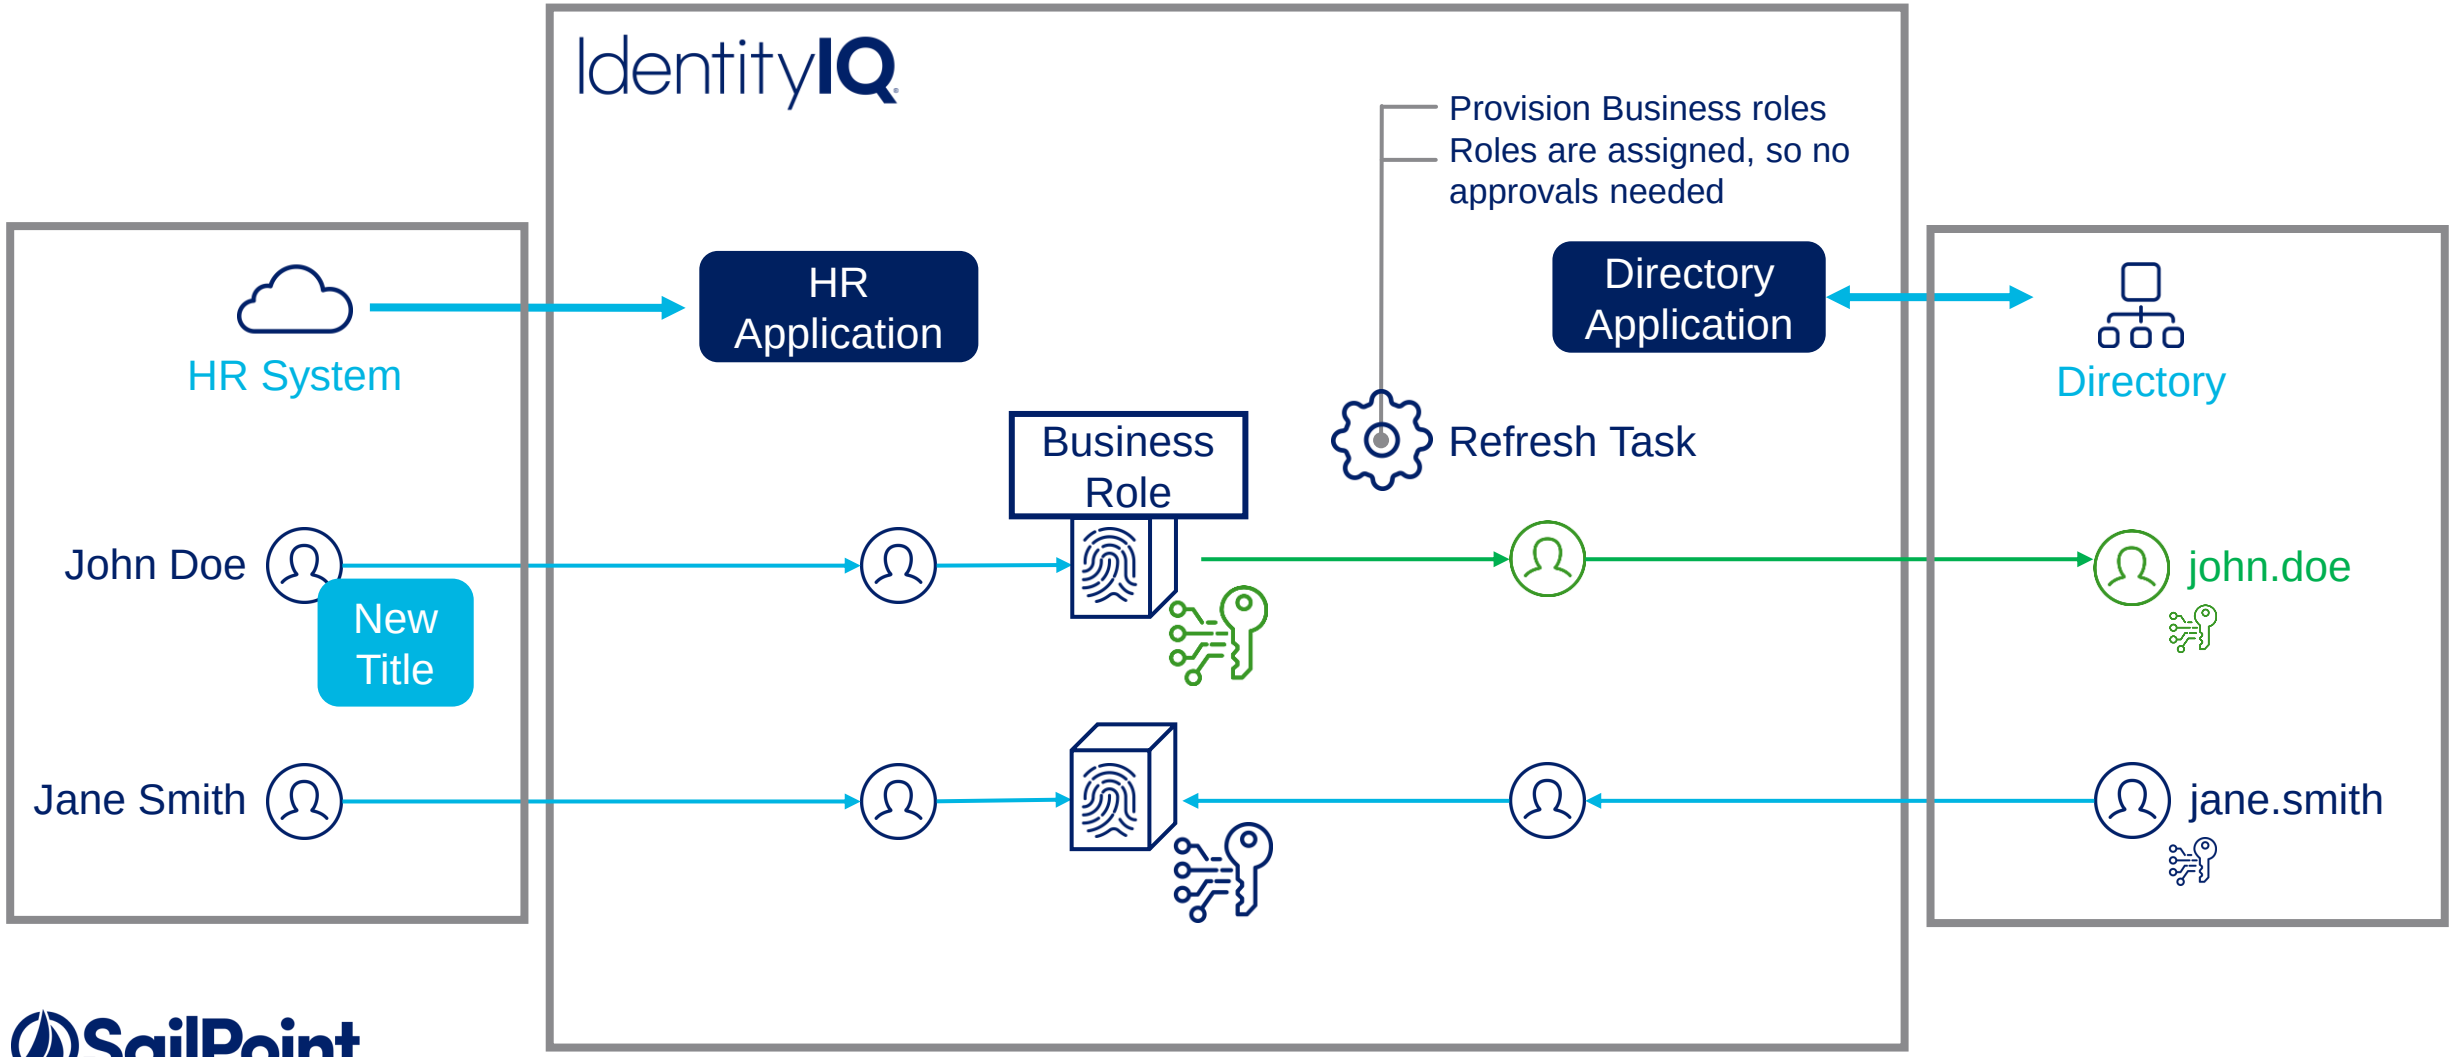


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Birthright Roles

Rapid Setup

- Only assigned during joiner lifecycle events
- Not requestable
- Single tier role model

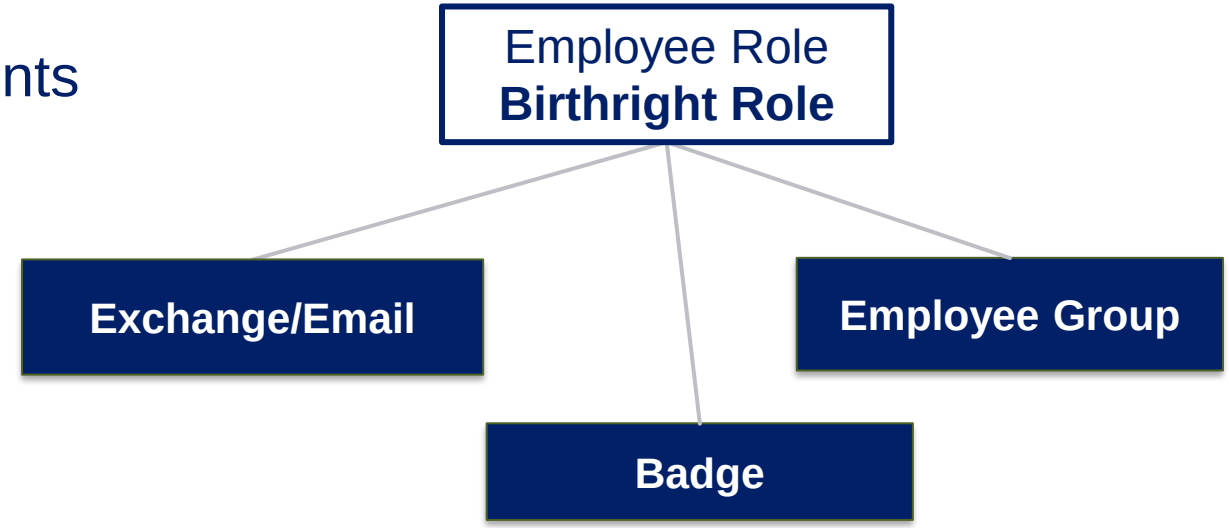

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Birthright versus Business Roles

Birthright Roles

- Baseline access, assigned to new personnel
- Only assigned during joiner lifecycle events
- Not requestable
- Single tier

Business Roles

- Access for teams, departments, projects, etc.
- Assigned by Identity Refresh task, “Refresh assigned, detected roles…”
- Requestable
- Two-tier: required and permitted relationship with IT roles

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Role Extension Options

Beyond the Default Role Model

- Extended attributes
  - Support business-specific governance or provisioning requirements
- Different role types
  - Address business-specific requirements
  - Manage IdentityIQ capabilities

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 3, Exercise 6

- Explore Business, IT, and Birthright Roles
  - Import Business and IT Roles
  - Assign and Detect Roles
  - Review Provisioning Activity
  - Create Birthright roles

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Provisioning Overview

IdentityIQ Essentials

Overview

Provisioning Overview

- Provisioning overview
  - What causes provisioning to occur?
  - How does IdentityIQ process provisioning requests?
  - What are the available provisioning channels?
- Provisioning configuration
  - Provisioning policies
  - Provisioning dependencies on accounts or entitlements

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Overview


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning:
Adding, modifying, or deleting user or access data

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Change Lifecycle

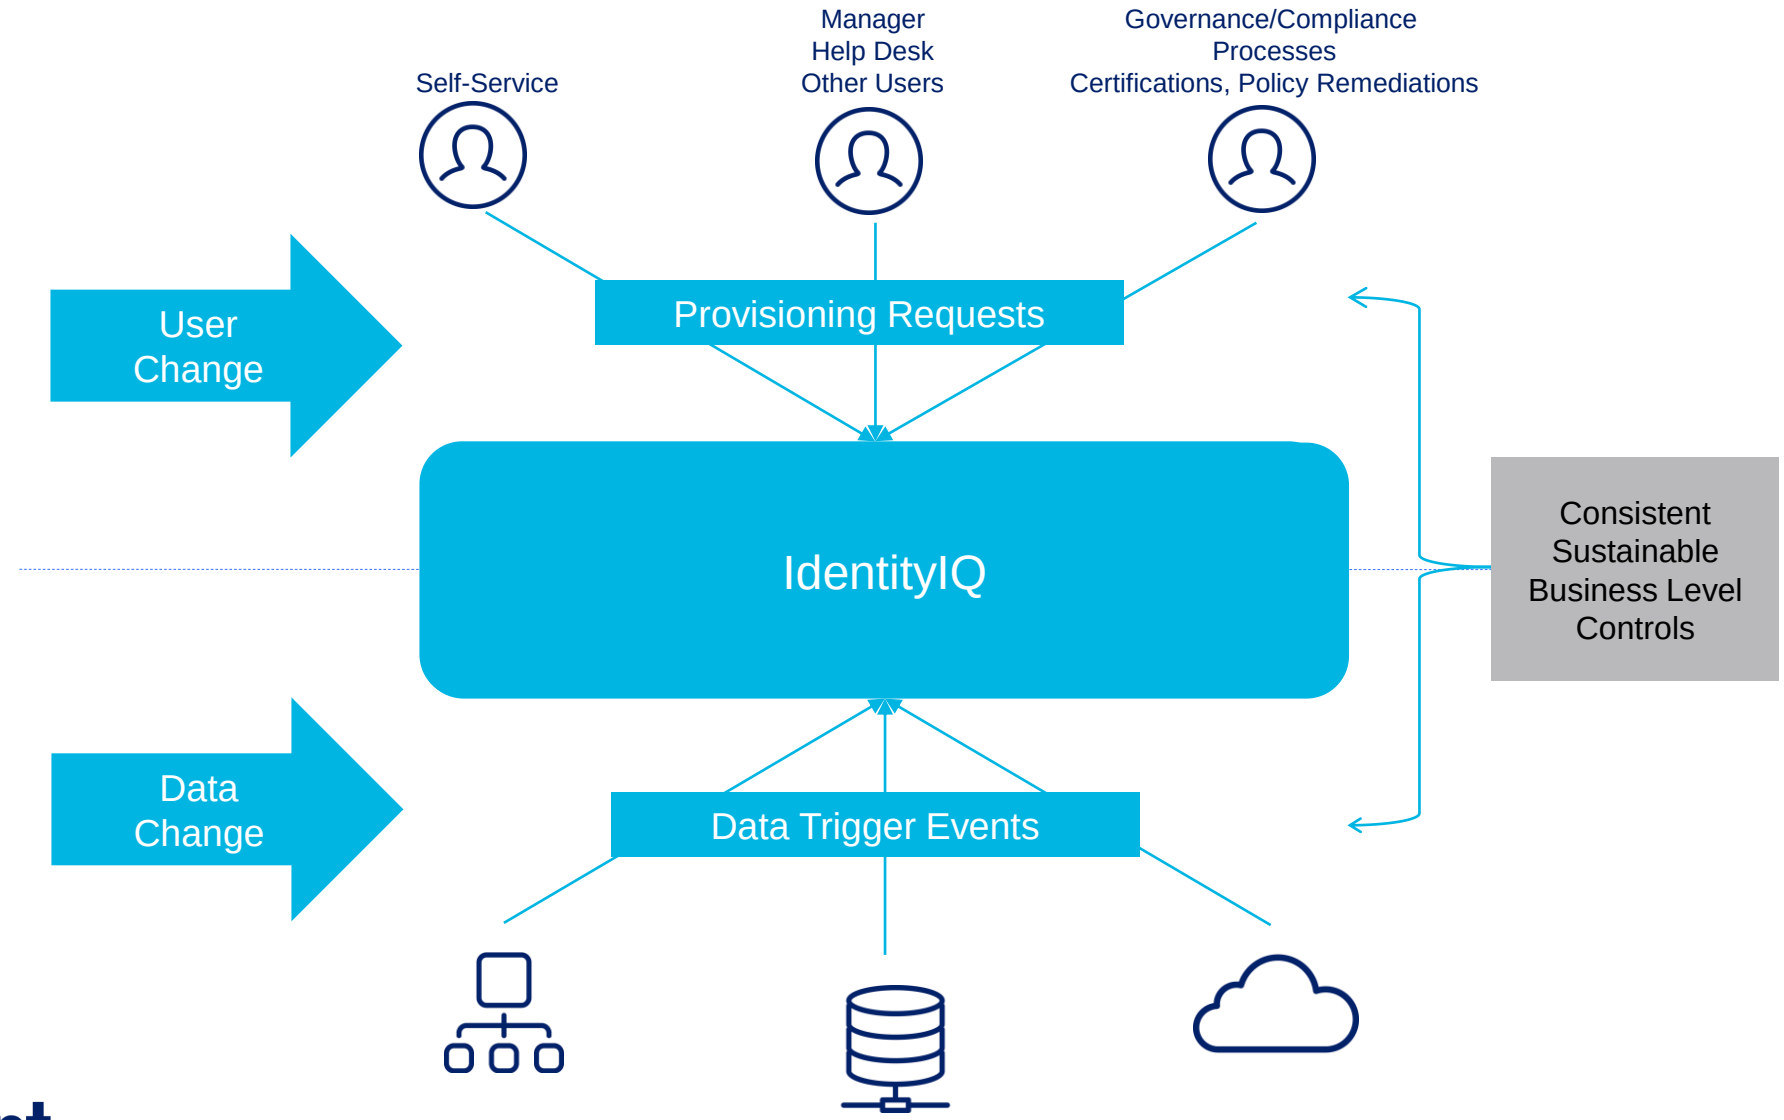


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage the Fulfillment

Supported Write Channels

- Multiple channels available
  - Automated with direct connectors
  - Semi-automated with 3rd party integration
  - Manual with user-assigned work items

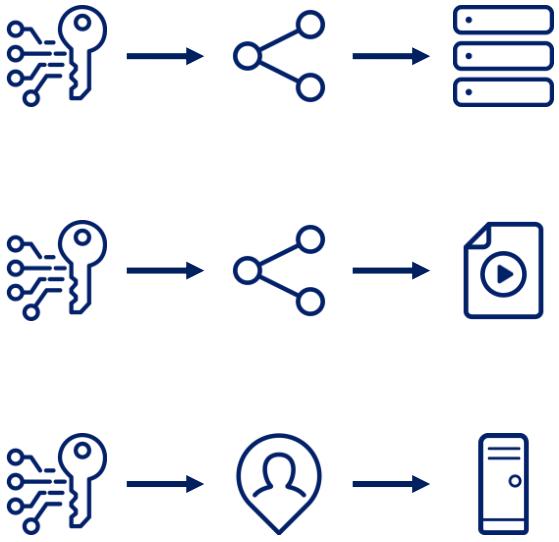


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Channel

Controlling Provisioning

- Most connectors can read and write

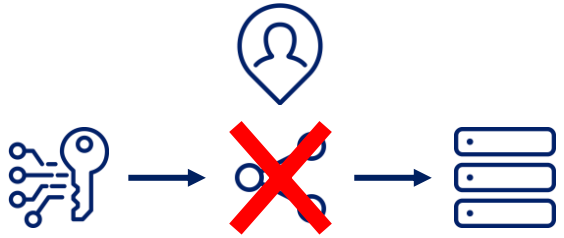

- Force provisioning via manual work item
  - Ex: JDBC connectivity not fully implemented (missing JDBC Provisioning Rule)

Object Editor - Application : Chat

```
1  <?xml version='1.0' encoding='UTF-8'?>
2  <!DOCTYPE Application PUBLIC "sailpoint.dtd" "sailpoint.dtd">
3  <Application connector="sailpoint.connector.JDBCConnector" created="1559341038837" featuresString="DISCOVER_SCHEMA, PROVISIONING, SYNC_PROVISIONI
4    <Attributes>
5      <Map>
6        <entry key="SQL" value="select * from users;"/>
7        <entry key="acceleratorPackEnabled" value="TRUE"/>
8        <entry key="accountCorrelationAttrExpression" value="displayName#IIQCorrelated#login#IIQCorrelated#EQUALS"/>
9        <entry key="accountCreateConditionalRule"/>
10       <entry key="accountCreateEntitlements"/>
11       <entry key="accountDisableAttrExpression" value="status#IIQDisabled#I#IIQDisabled#EQUALS"/>
```

Debug Pages → Application


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Process

Provisioning Engine Features

- Expansion
  - Understanding plan requirements
    - Roles → entitlements
    - Account creation
- Filtering
  - Understanding existing identity access
- Channel Selection
  - Determining provisioning pathway

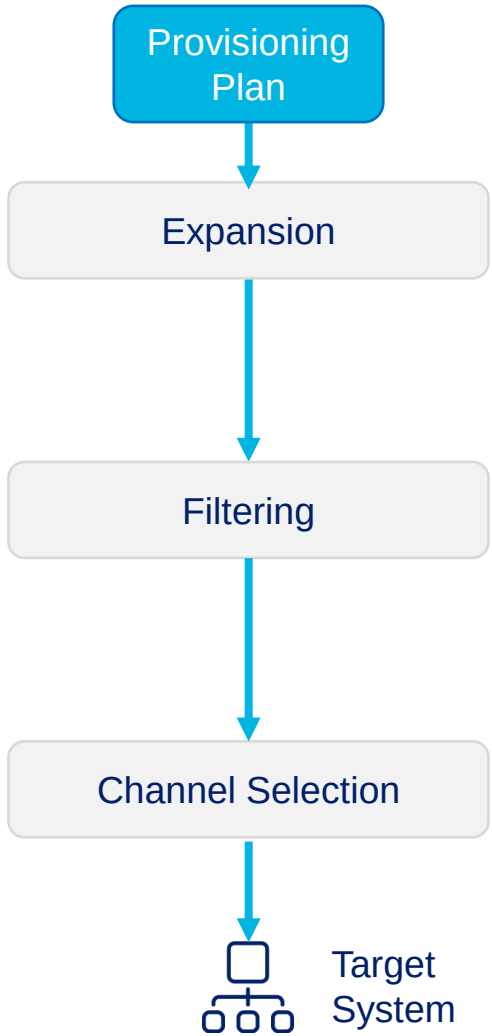

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Prepping for Provisioning

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Policies


Overview

- Provide values to **create**, **update**, and **delete** accounts on connected applications
  - Values can be provided manually by user
  - Values can be provided by IdentityIQ (auto-calculated or static)

Example: Create an account on “Bug Tracking” application

Bug Tracking application – Create Provisioning Policy

Attribute	Value
First	return identity.firstname;
Last	return identity.lastname;
Login	return identity.name;
Status	A
Locked	N

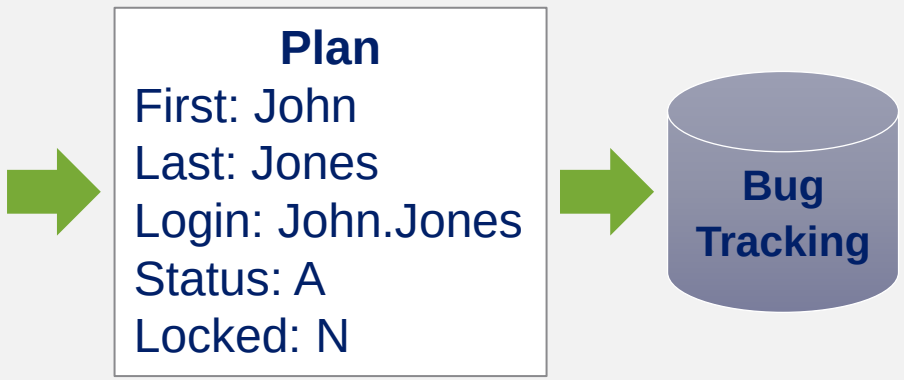


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Policies

Configuration: Application Policies


- Support
  - Account *create*
    - Most important policy
    - Often predefined with connector
  - Account *update*, *delete, enable, disable, unlock,* and *password change*
  - Group *create* and *update*
    (if groups are supported by connector)
- *Create* often predefined

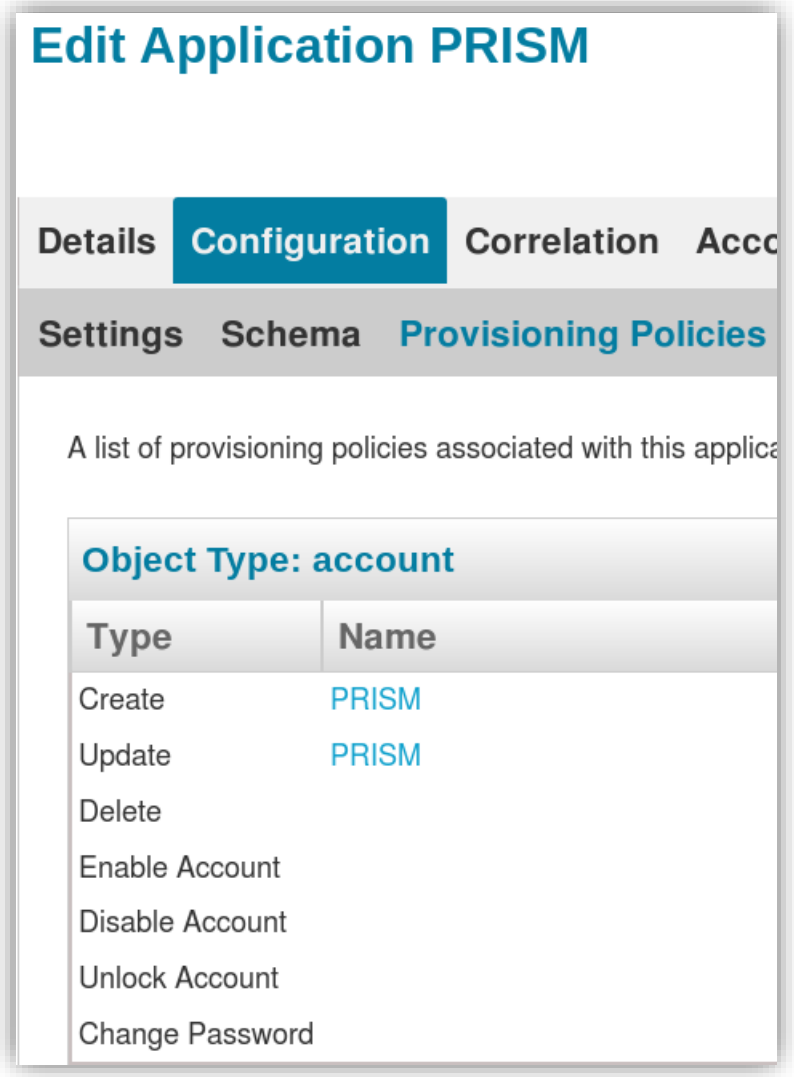

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Policies


Form Editor

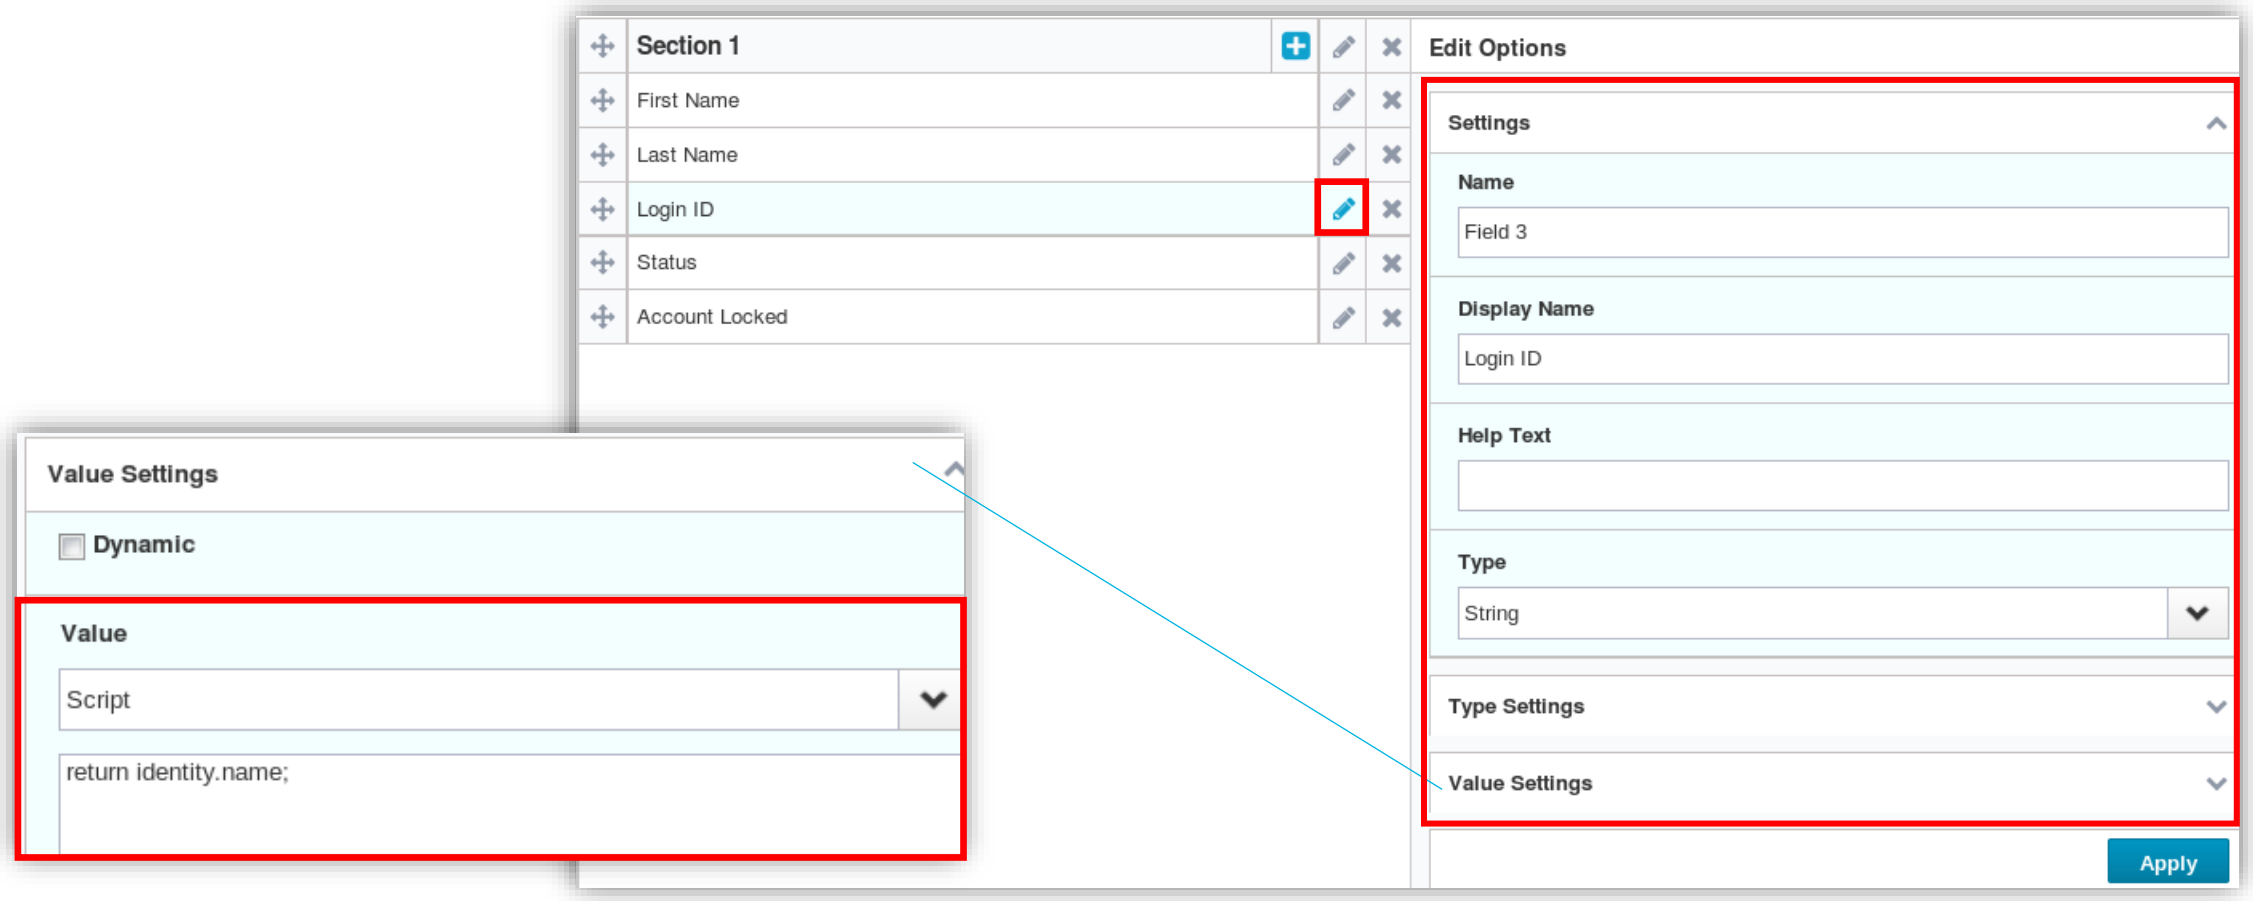


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

JDBC Provisioning

Provisioning Policy

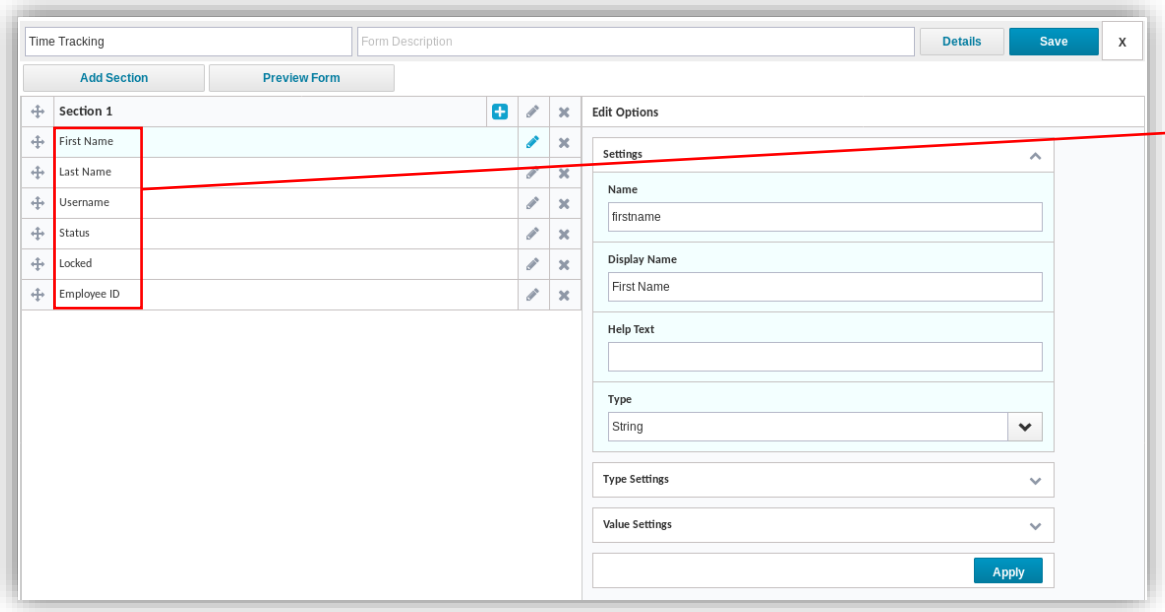

Provisioning Rule

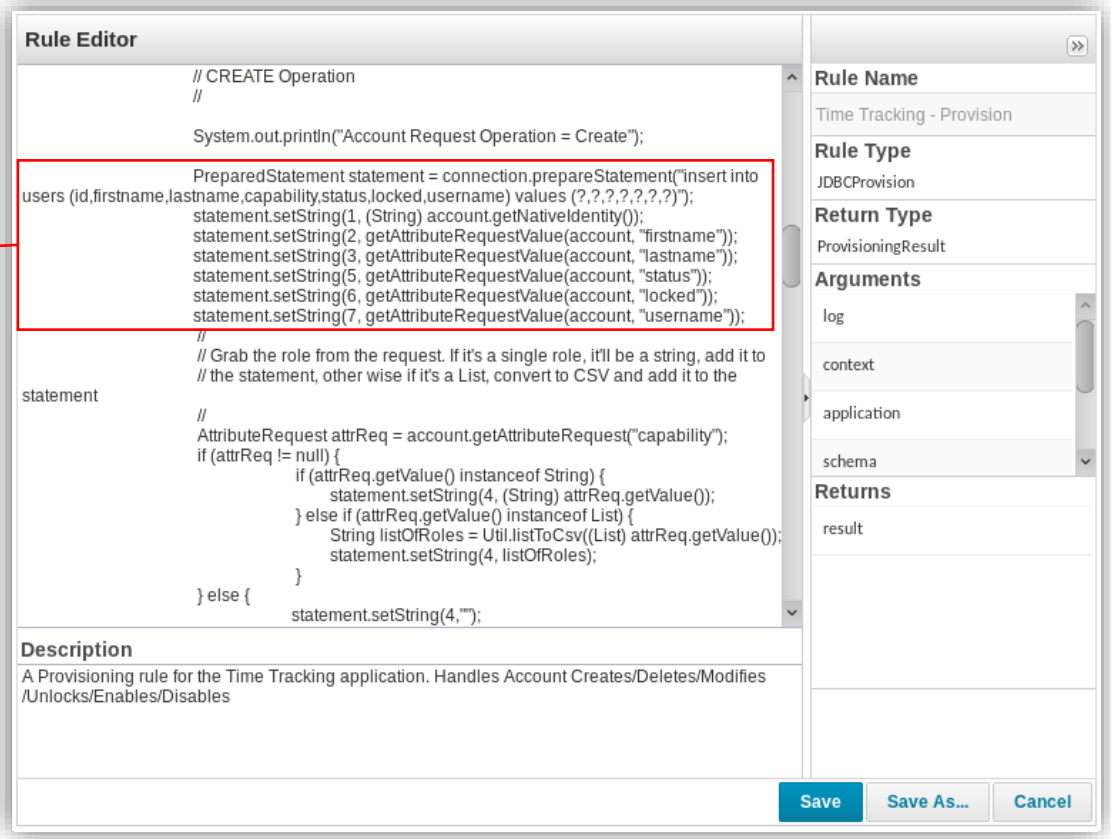


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Provisioning Dependencies

Dependency on Account

- Dependencies on direct-connected applications only
- Pull account attribute values from master application attributes

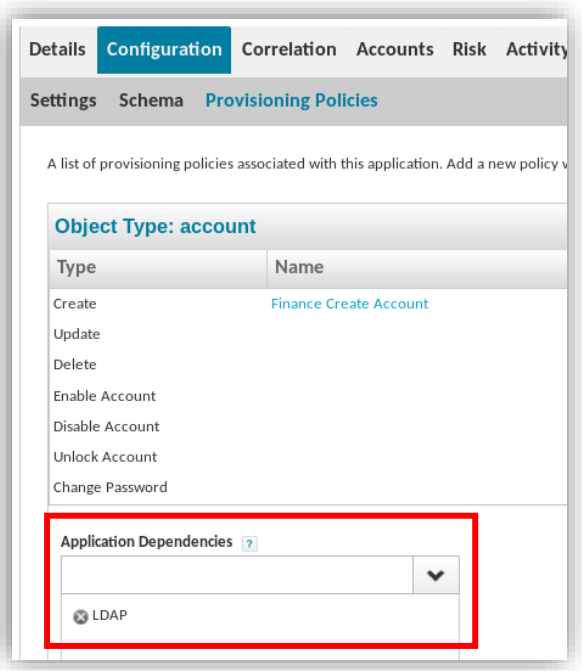

Application → Configuration → Provisioning Policies

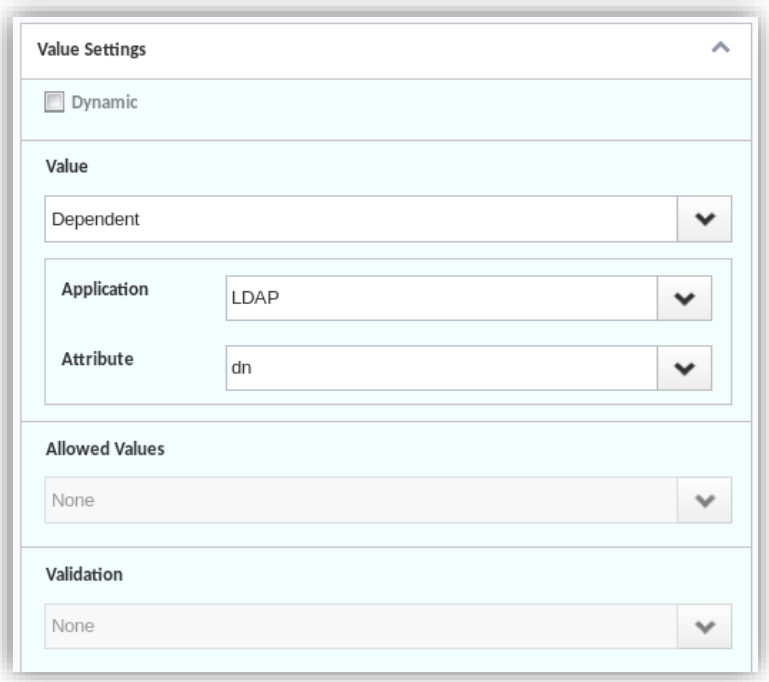

Finance Account Create Policy → Field → Value Settings

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 4, Exercise 1

- Exercise 1: Configure applications to support provisioning actions
  - Define provisioning policies
  - Set provisioning rules for JDBC applications
  - Configure Account Dependency

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Monitoring Provisioning

IdentityIQ Essentials

Overview

Monitoring Provisioning

- Administrator Console, Provisioning
- Workflows
  - WorkflowCase
  - WorkItem


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Administrator Console Provisioning

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Transactions Page

- Override to convert automated transaction to manual workitem
- Retry to force next attempt for retry-enabled applications

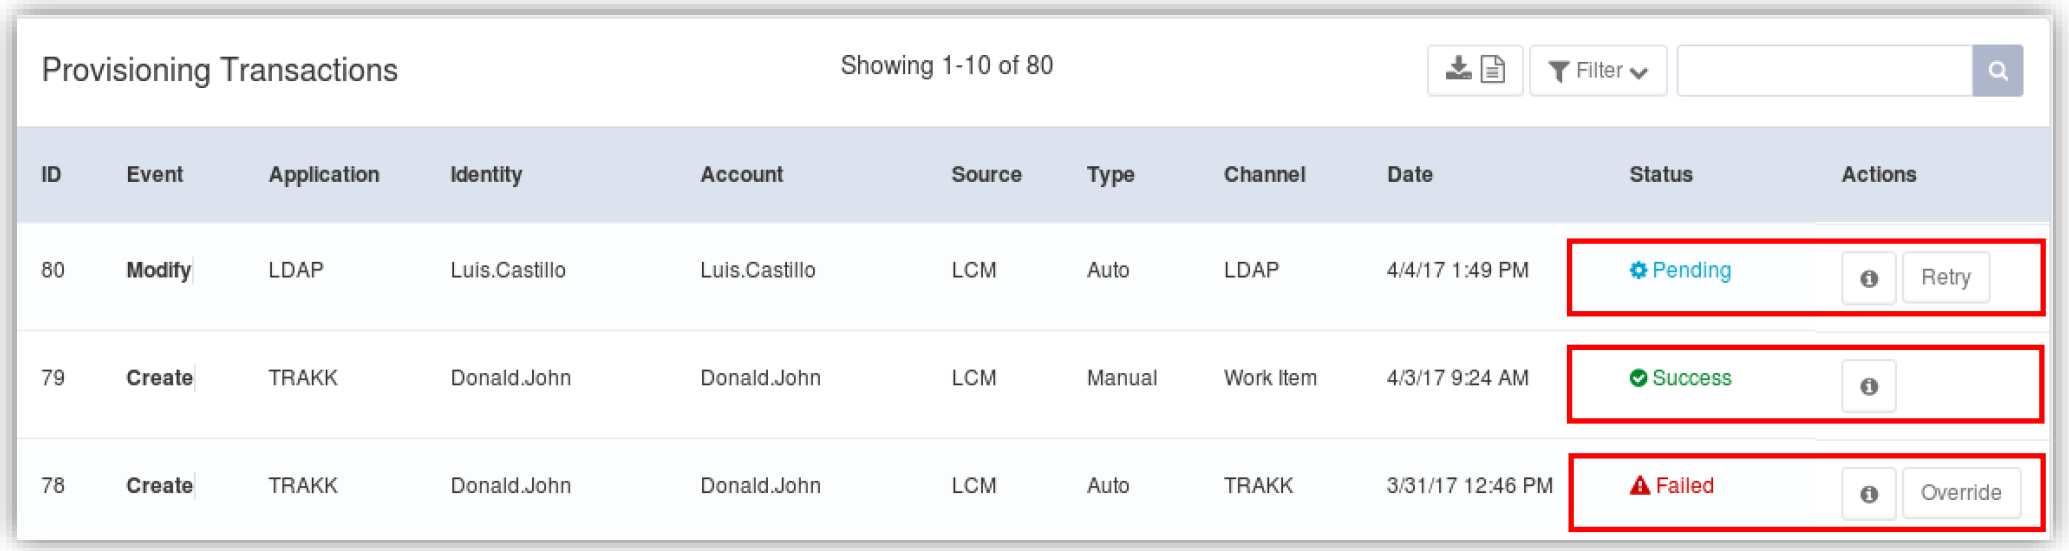


Gear → Administrator Console → Provisioning

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Provisioning Transactions Page

Configuration

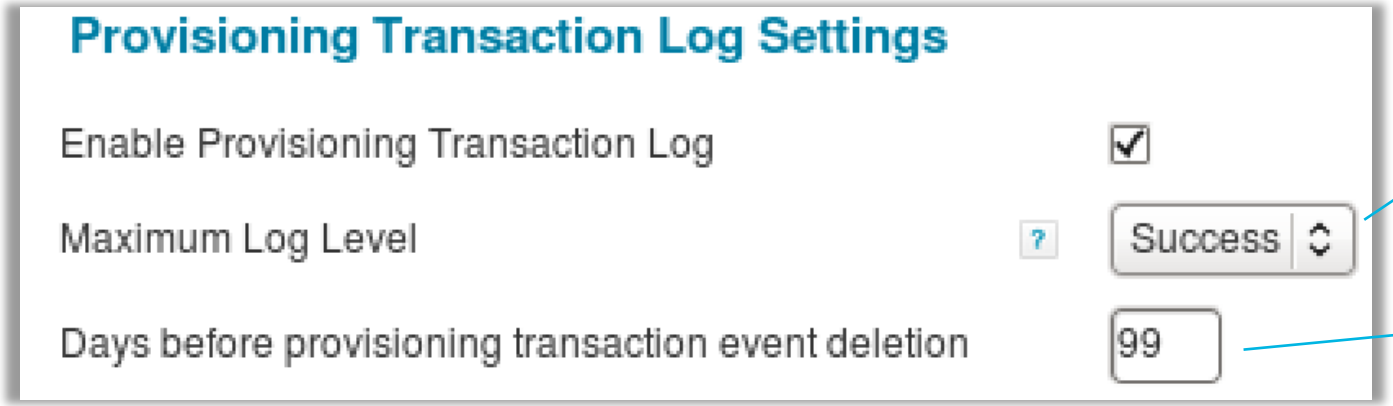

Global Settings → IdentityIQ Configuration → Miscellaneous

- Set log level (Success, Retry, or Failure)
- Default setting = Failure

- Set to non-zero
- Default is no purge

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Workflow Monitoring

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Workflow Execution

WorkflowCase Object


- Created when action in IdentityIQ triggers a workflow
- Contains details for a running workflow process
  - Launcher, type of workflow, copy of the workflow, current step being processed, info about target objective, etc.
- Exists only until workflow completes

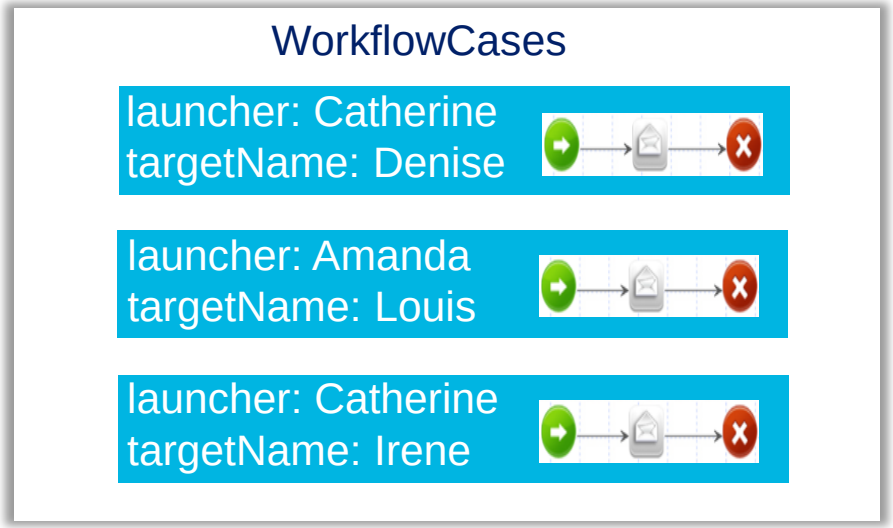

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Workflow Status

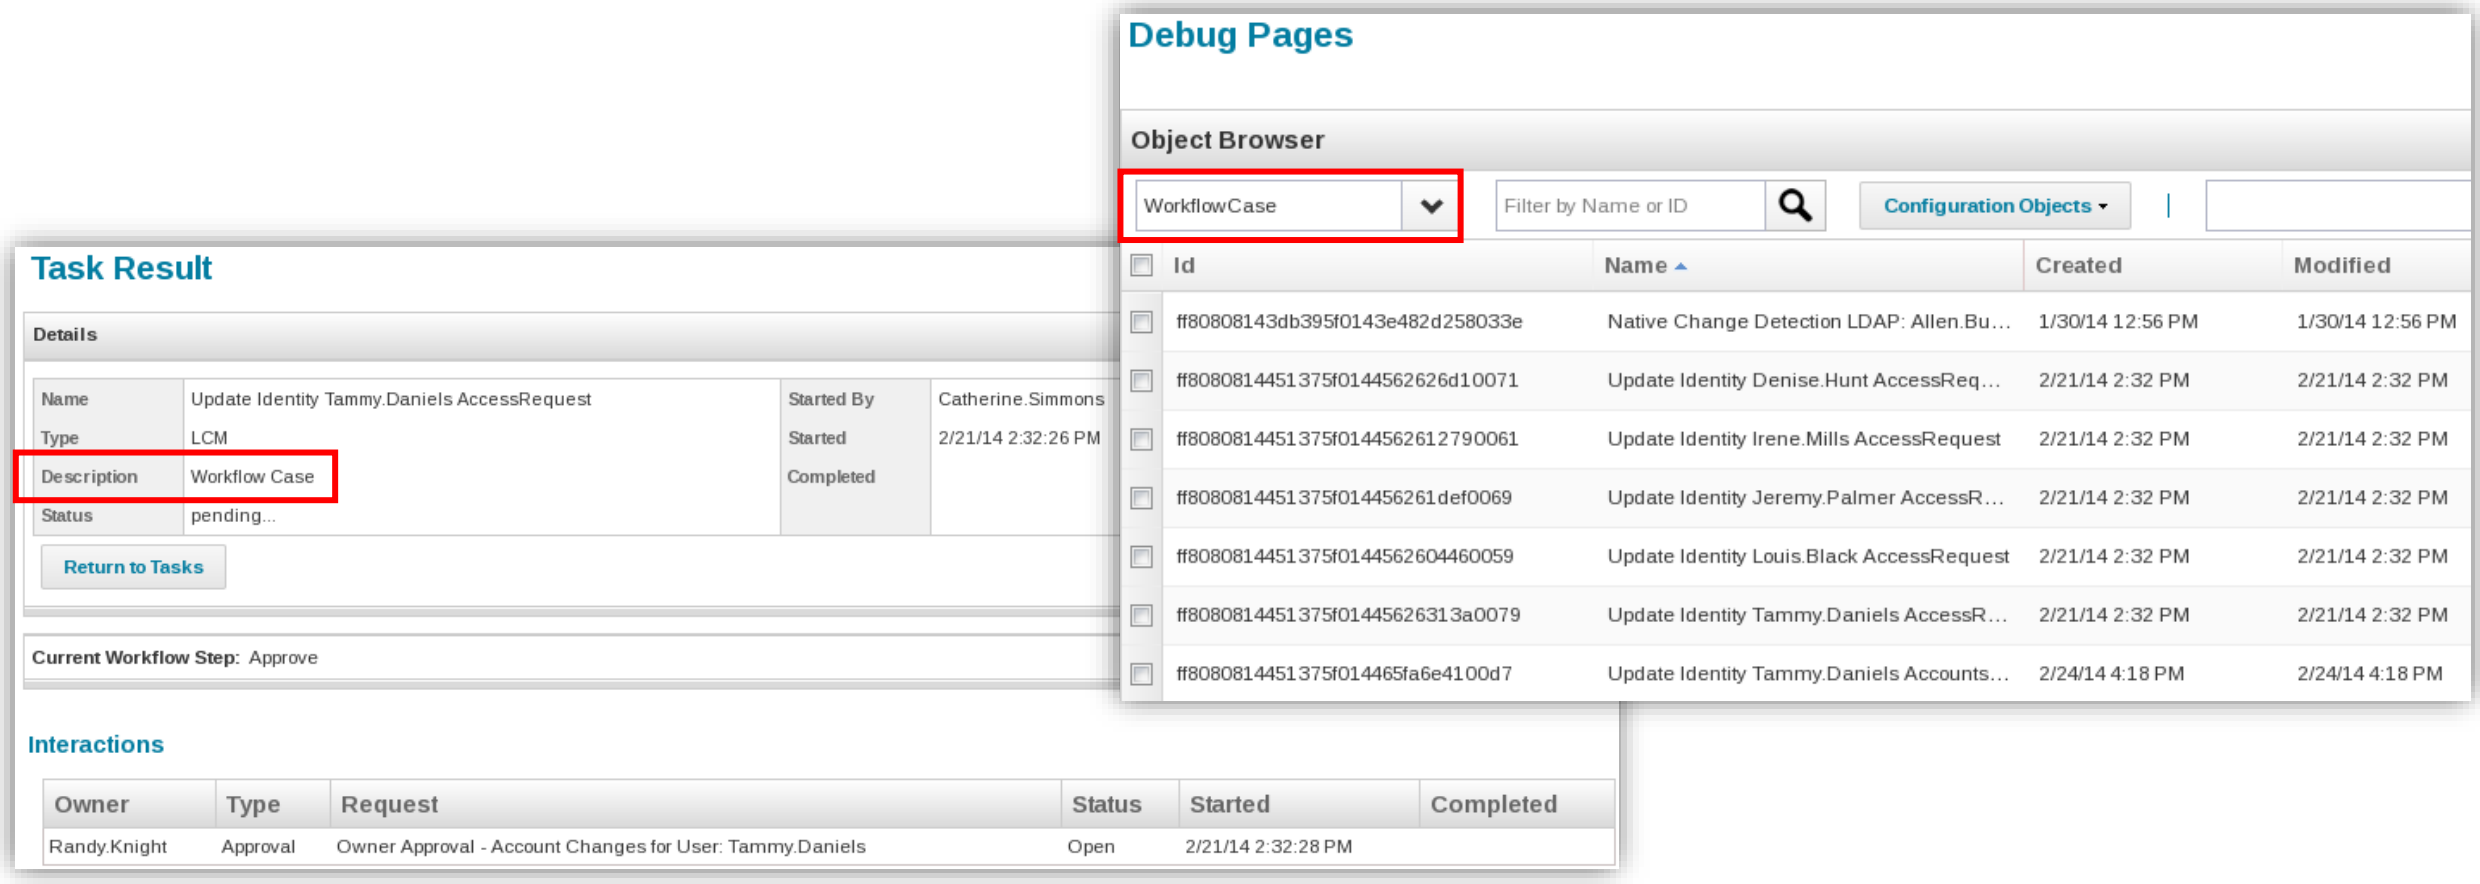

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Workflow Execution

WorkItem

- Created by a workflow (or IdentityIQ) to obtain input from a person
- Exists until the input is acquired
- Examples
  - Approvals
  - Policy violations
  - Request for manual provisioning
  - Access review delegations
  - Request for data

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Rapid Setup Lifecycle Events

IdentityIQ Essentials

Overview

Lifecycle Events

- Lifecycle Event overview
- Rapid Setup Lifecycle Events
  - Joiner, Mover, Leaver

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Event Overview


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Events Overview

- What are Lifecycle Events?
  - Activities that happen in the normal course of a person's employment
    - Joining the company (joiners)
    - Changing departments/managers (movers)
    - Leaving the company (leavers)

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Event Process

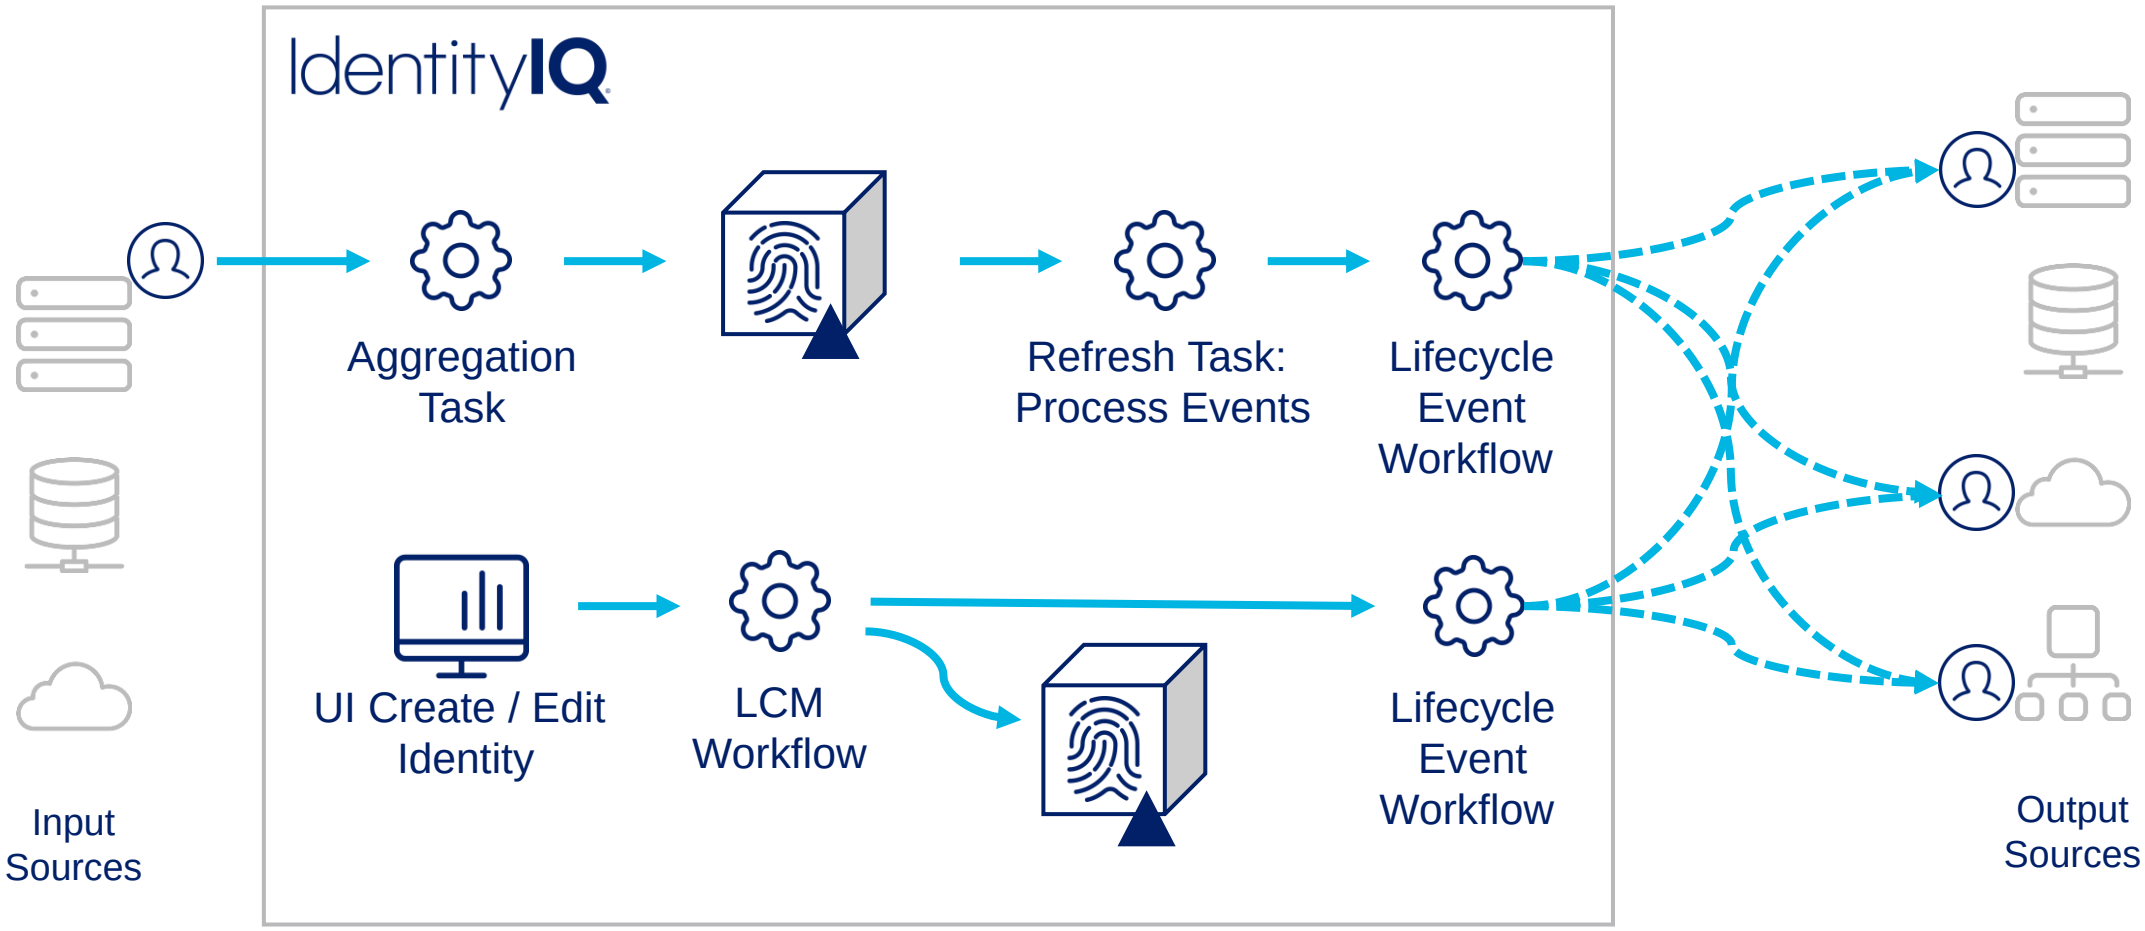

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Lifecycle Events

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Lifecycle Events

Supported Options

- Joiner
  - Birthright role assignment
  - Application-specific account-creation
- Mover
  - Certification
  - Reprocess joiner
- Leaver
  - Disable, delete, move account
  - Remove entitlements
  - Scramble password
  - Immediate or time-delayed

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Lifecycle Events

Configuration Actions

- Define supporting objects
  - Birthright roles
  - Others: populations, workgroups, email templates, etc.
- Set up per-application actions
- Configure global settings
  - Event criteria
  - Global event actions


SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Joiner Event

Rapid Setup Birthright Roles

- Assigned during joiner lifecycle events

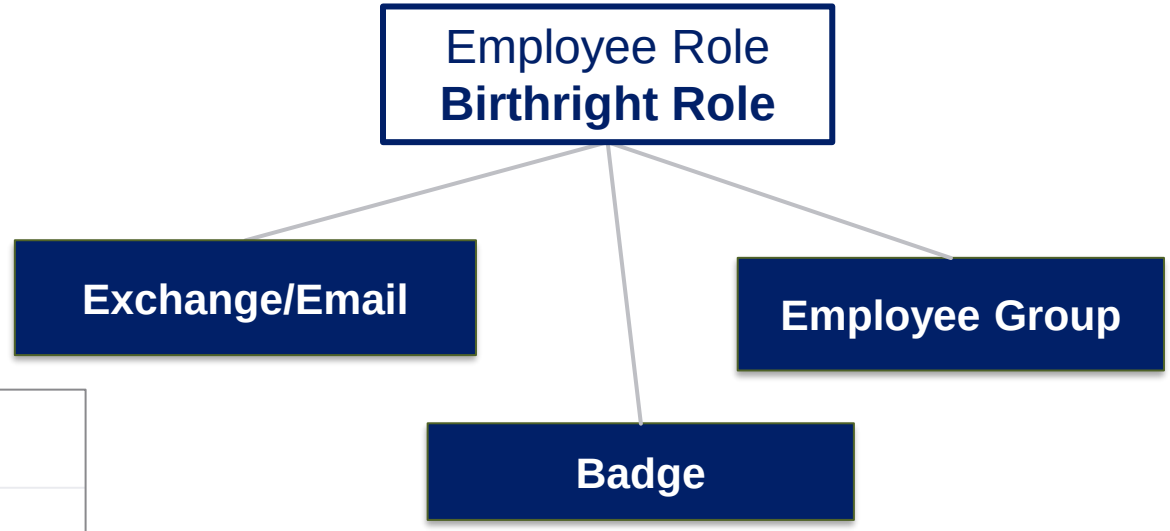

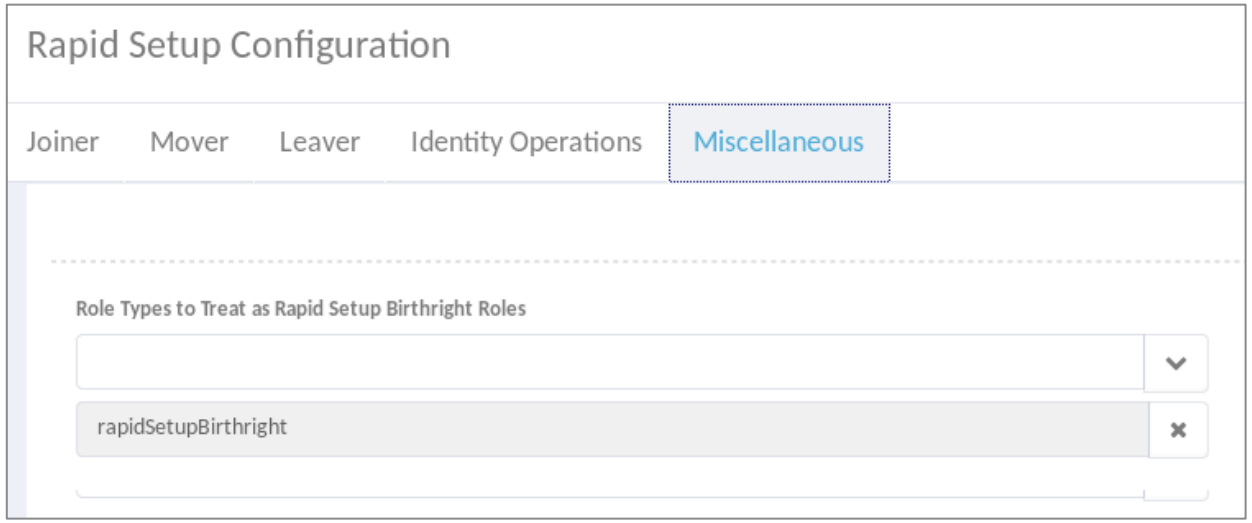

Global Settings → Rapid Setup Configuration → Miscellaneous

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Joiner Event

Other Supporting Objects


- Populations – filtering option
- Workgroups
  - Granting access
  - Assigning responsibility
  - Sending notifications
- Email templates

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Joiner Event

Define Joiner Eligibility

- Specify which applications are sources for Joiner identities
- Usually authoritative applications

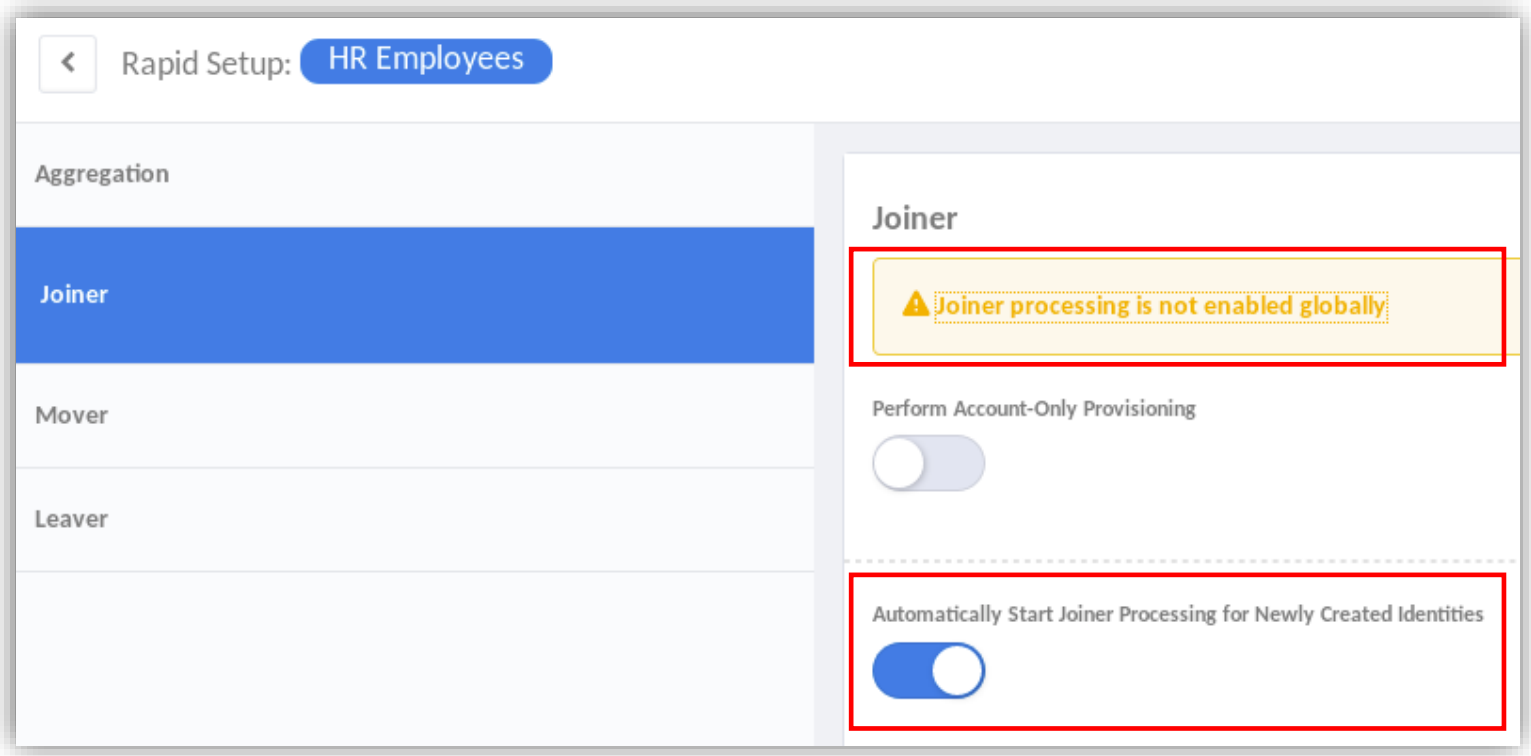


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Joiner Event

Application-specific Logic

- Account-only provisioning
  - Identity Selection
    - Everyone
    - Selected Users
- App-specific instructions and password instructions in joiner emails

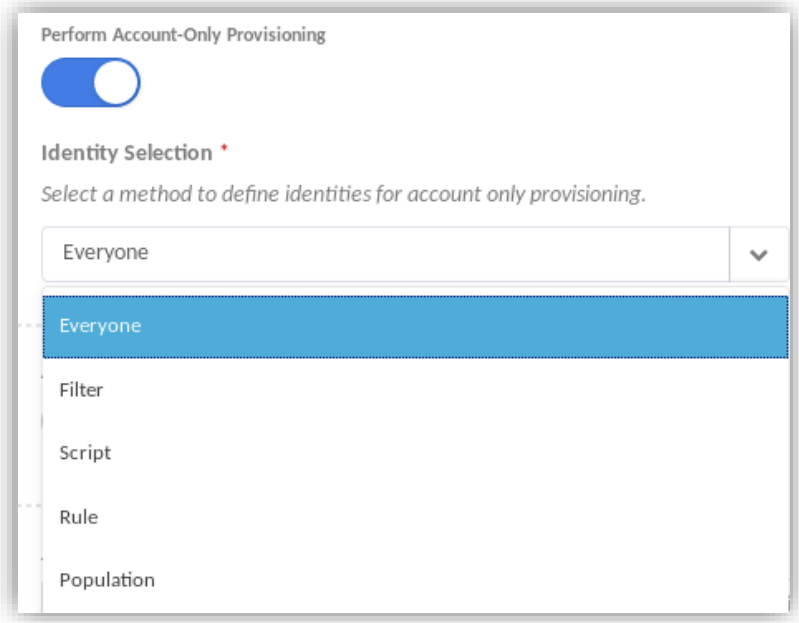




SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Joiner Event

Global Joiner Configurations

- Enable Joiner feature
- Approval requirements
- Business process
- Email notification
  - Workgroup vs. manager
  - Email templates
  - Password email
- Post Joiner Rule

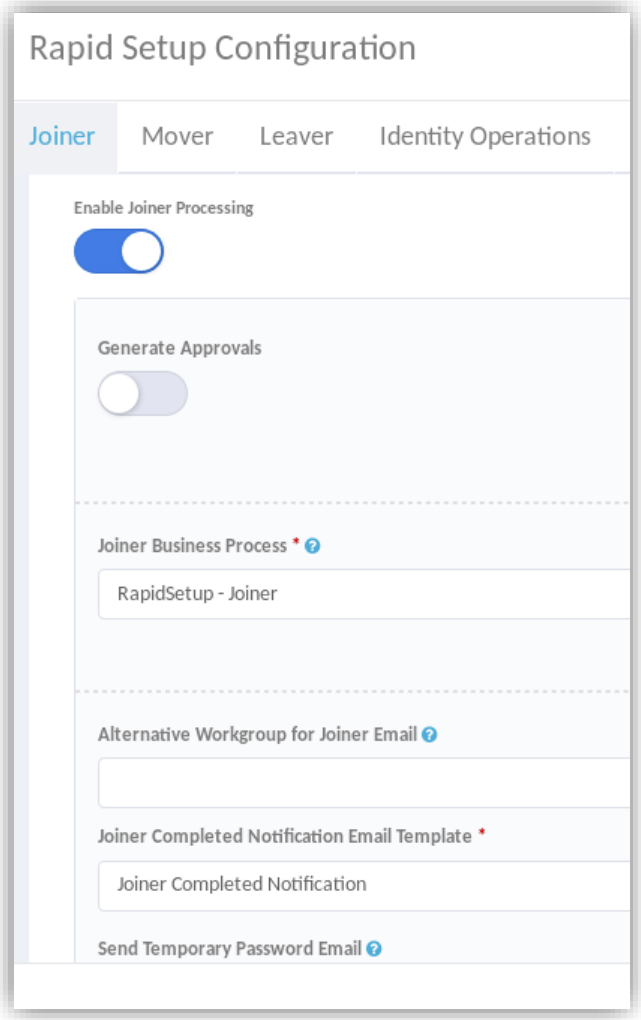


Global Settings → Rapid Setup Configuration

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Rapid Setup Joiner Event

Global Trigger Controls

- Identity-source configurations
  - Trigger for IdentityIQ-created identities
  - Exclude uncorrelated identities (override)

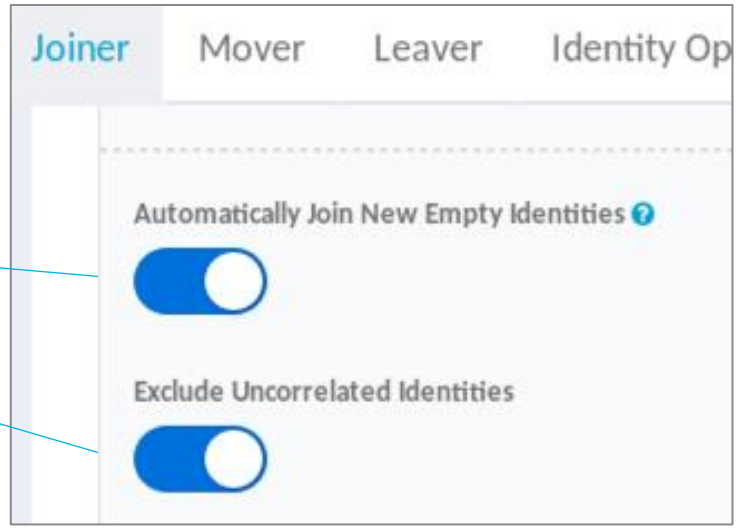

- Trigger Filter
  - Limit joiners within aggregated identities

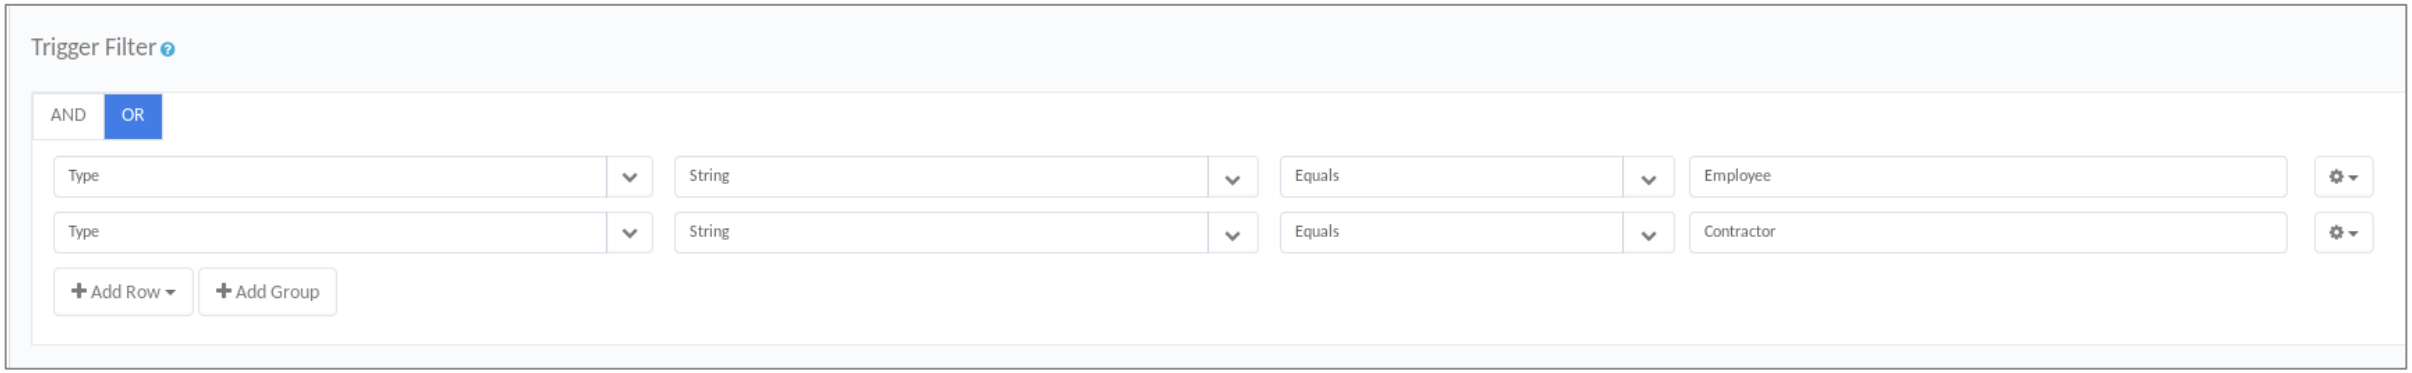


Global Settings → Rapid Setup Configuration → Joiner

Rapid Setup Mover Event

Define Mover Criteria

- Trigger Filter define criteria
  - Manager, department, job title changed (any or all)
  - Flag attribute set
  - Targeted: Region = Americas + job title change

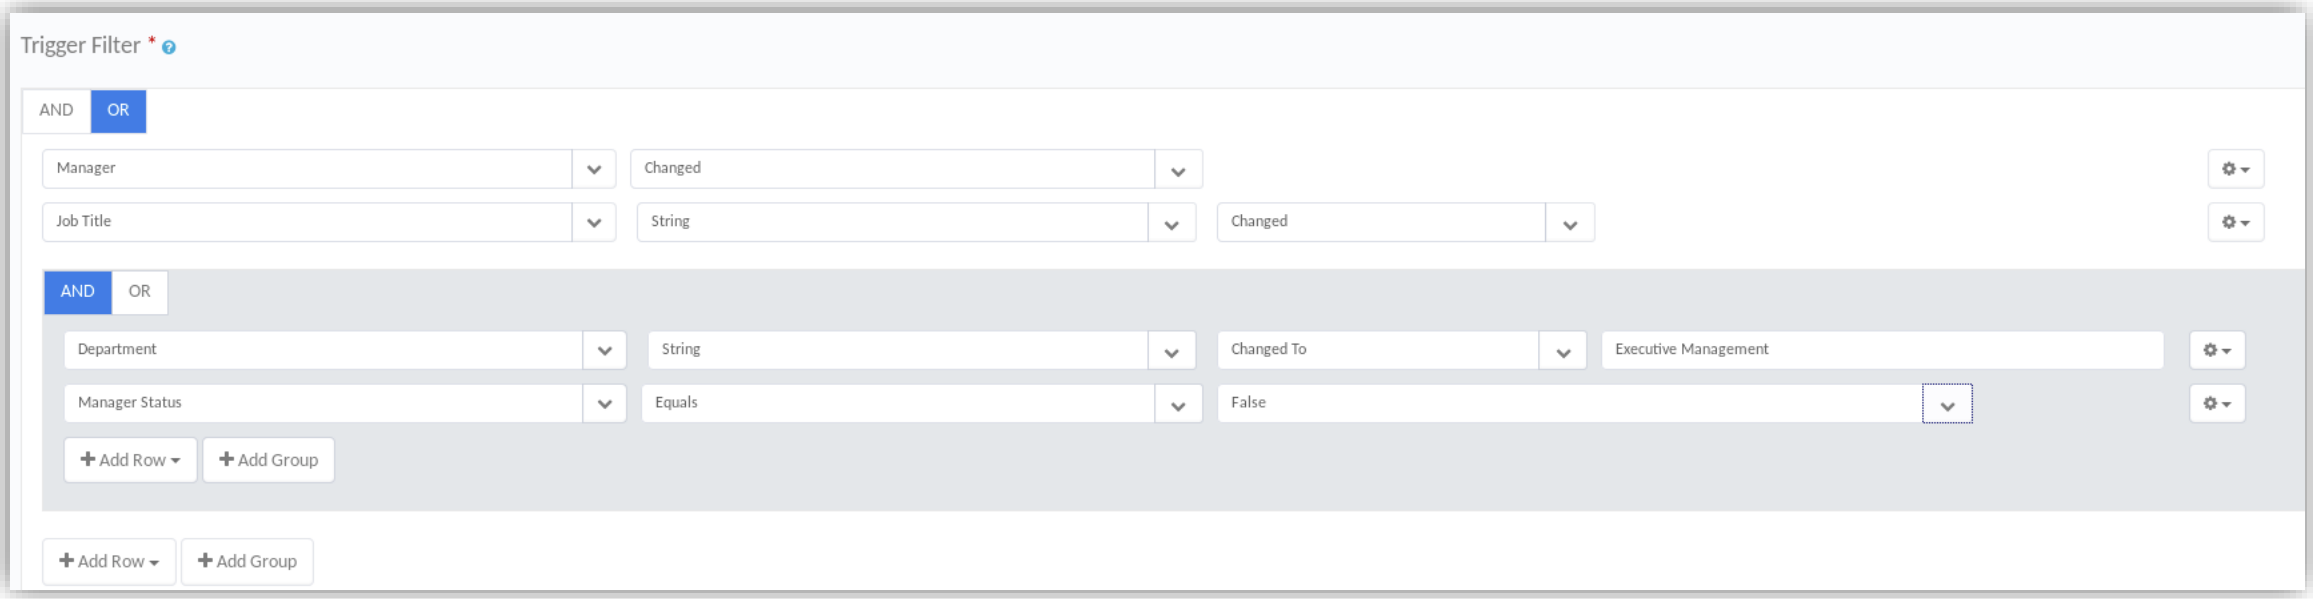

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Mover Event

Triggered Actions

- Generate access review for identity's manager
- Re-process joiner logic
- Other controls
  - Business process
  - Post mover rule

Global
- Birthright roles
- Approvals

Per Application
- Account-only provisioning

Global Options
- Enable
- Staged certification
- Include birthright roles
- Certification owner
- Backup certifier
- Previous manager as additional certifier

Per Application Options
- Include entitlements in access review
- Include target permissions in access review


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Leaver Event

Define Leaver Criteria

- Trigger Filters define criteria
  - Inactive attribute changes from False to True
  - Flag attribute set

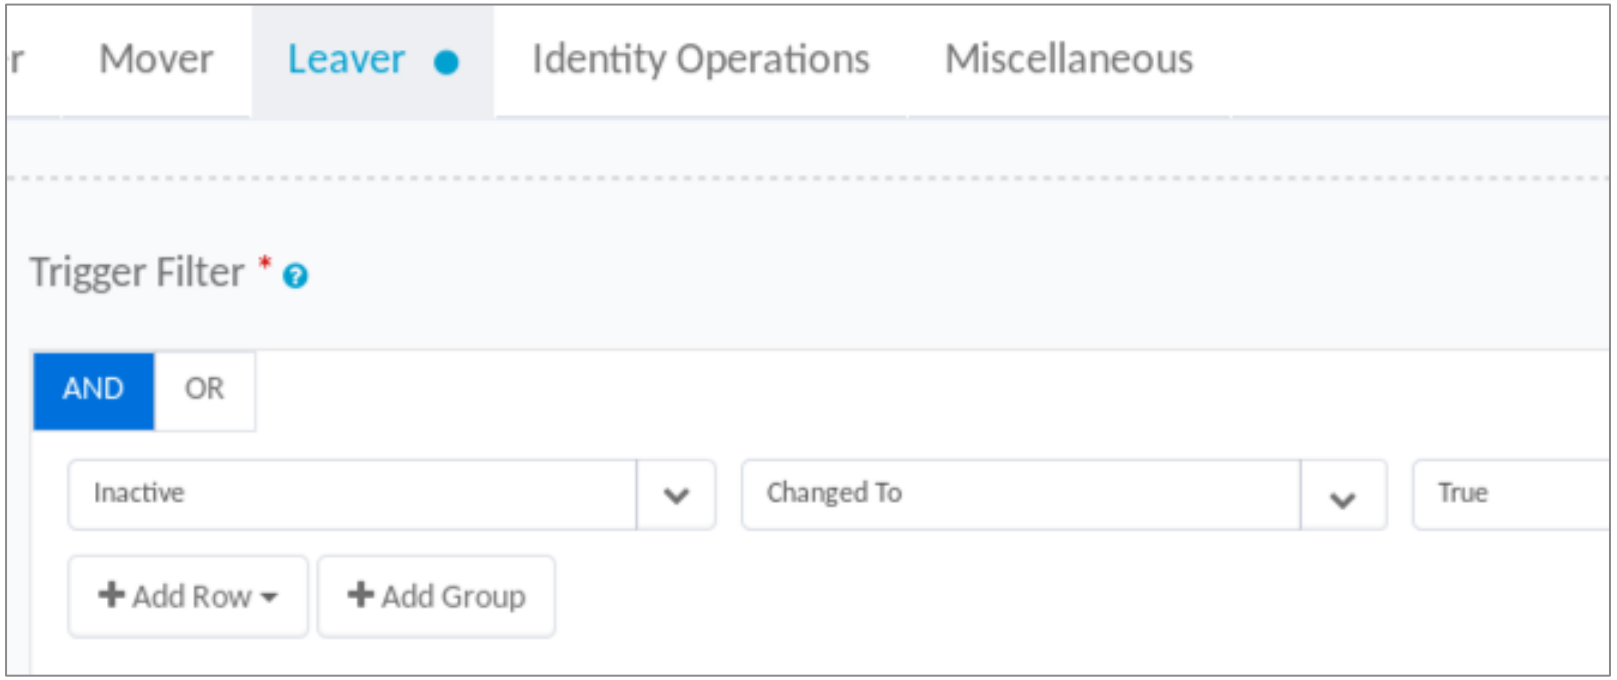


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Leaver Event

Global Configuration

- IdentityIQ-internal actions
  - Remove assigned roles
  - Reassign owned artifacts
    - Which ones, to whom
  - Reassign RPA/Service Identities
- Approvals
- Notification
  - Manager or workgroup
  - Email templates
- Logic Controls
  - Business process
  - Post leaver rule

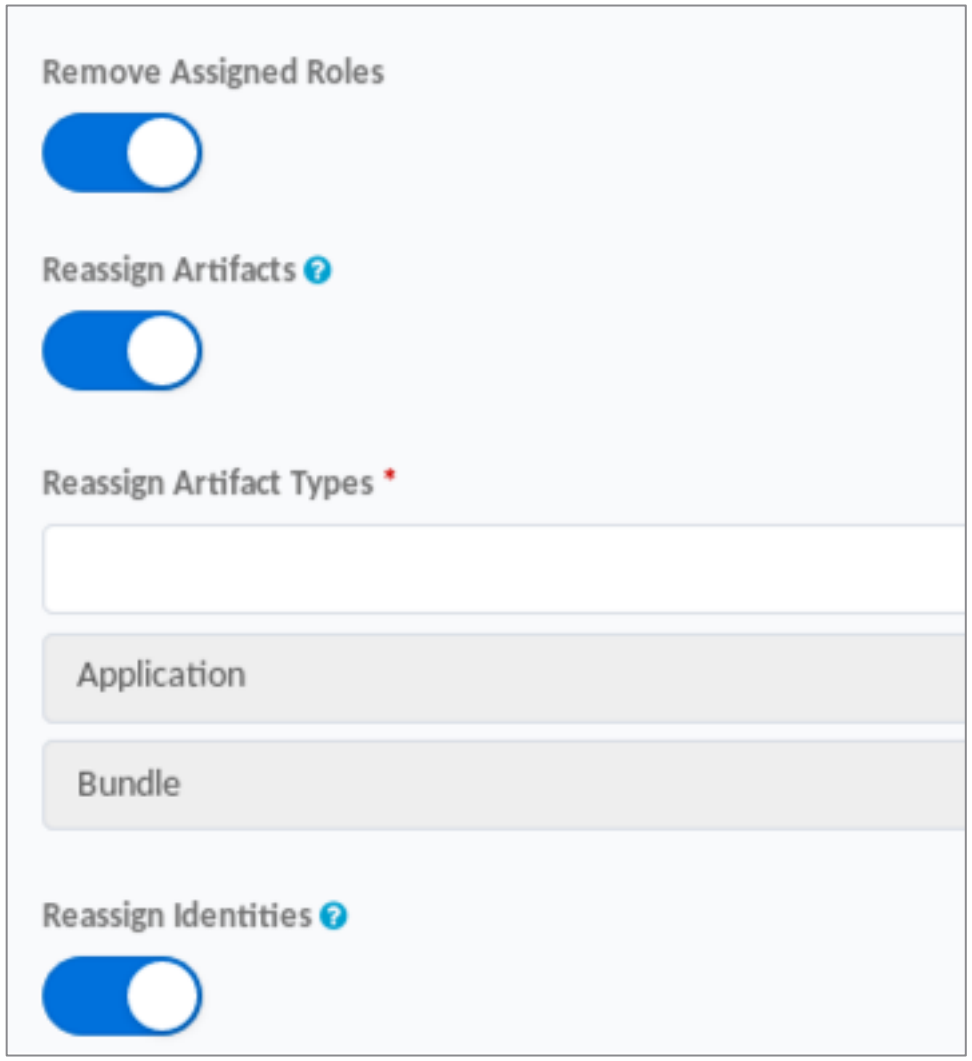

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Leaver Event

Per Application Configuration

- Delete account
- Disable account
- Scramble password
- Remove entitlements
  - Keep certain entitlements
- Add comments
- Active Directory only: Move OU

- Immediate or delayed (# of days)

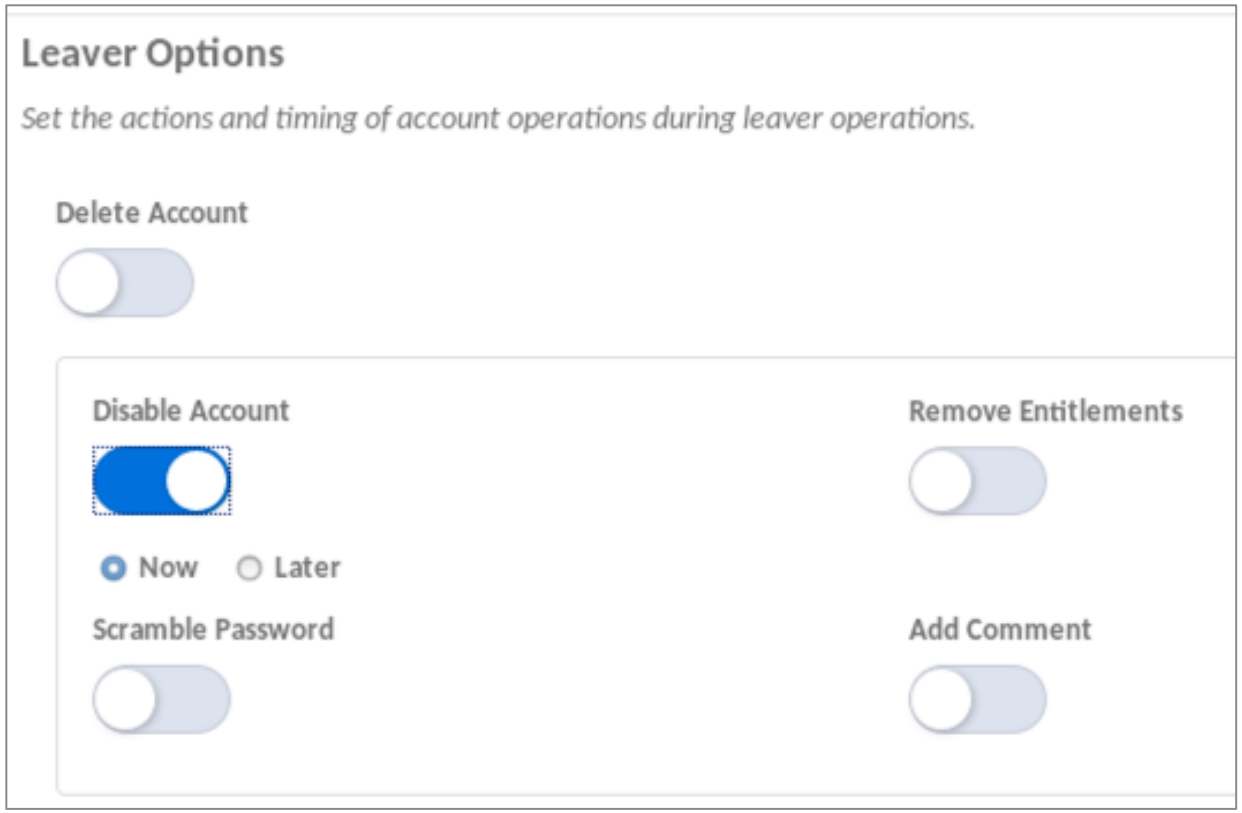


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Leaver: Scramble Password

Password Policies (Best Practice)

- Enforce application's password policy
  - Set constraints to match application password constraints
- Zero to multiple policies per application
- Apply to specific users or all

- More information
  - Product Documentation***:*** ***IdentityIQ Administration Guide***

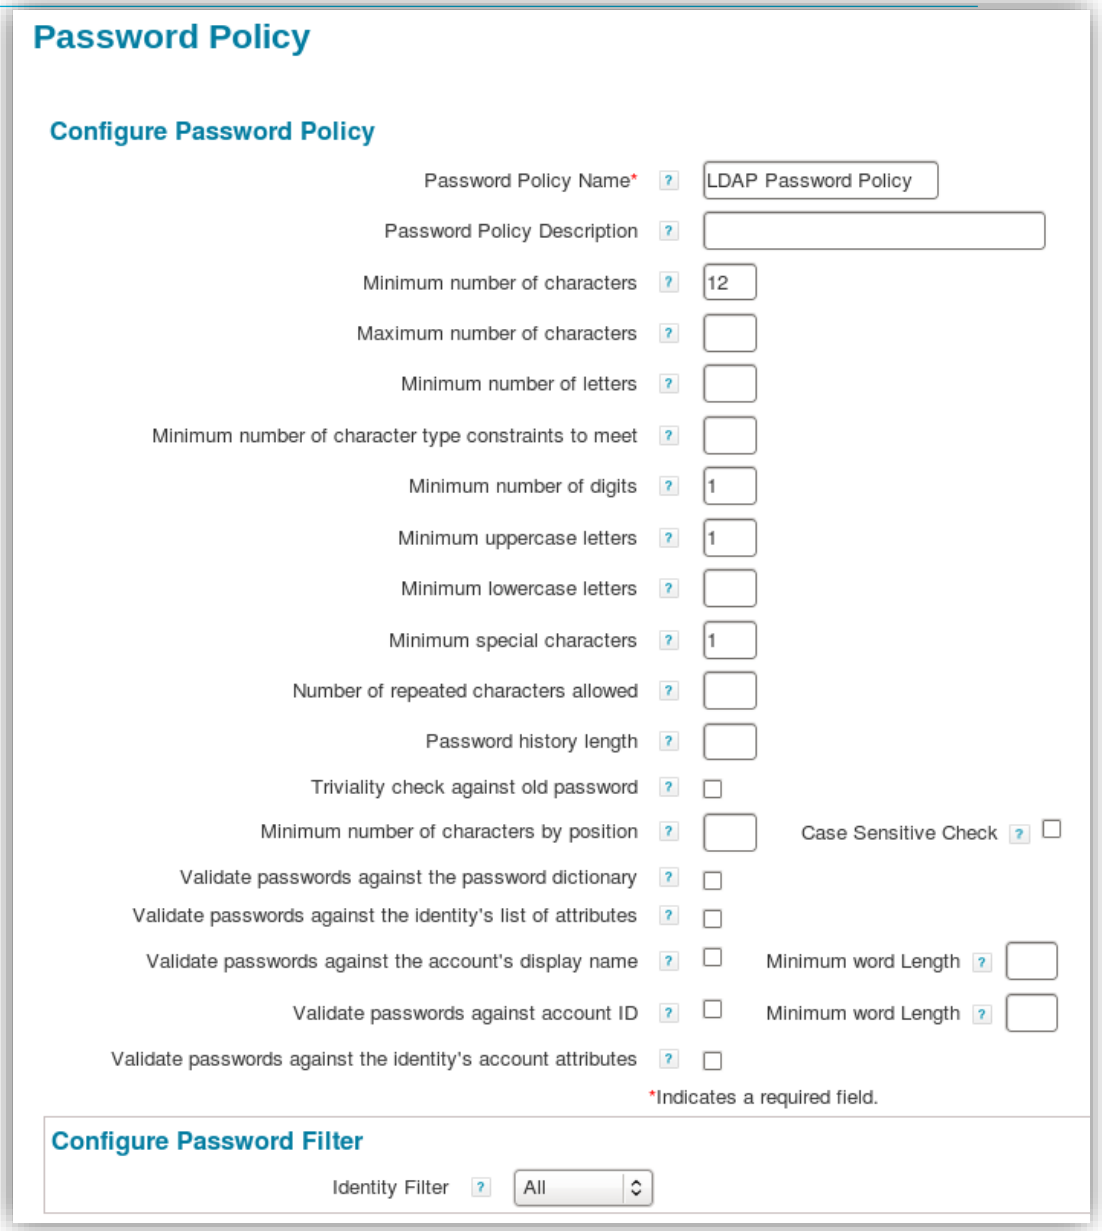

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 4, Exercises 2, 3

- Exercise 2: Define and Test Joiner Lifecycle Event
  - Configure Joiner event
  - Test Joiner event
- Exercise 3: Define and Test Mover Lifecycle Event
  - Configure Mover event
  - Test Mover event

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Lifecycle Event Configurations

IdentityIQ Essentials

Overview


Lifecycle Events

- Other Lifecycle Event configurations
- Viewing Lifecycle Events

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Events

Standard IdentityIQ Feature

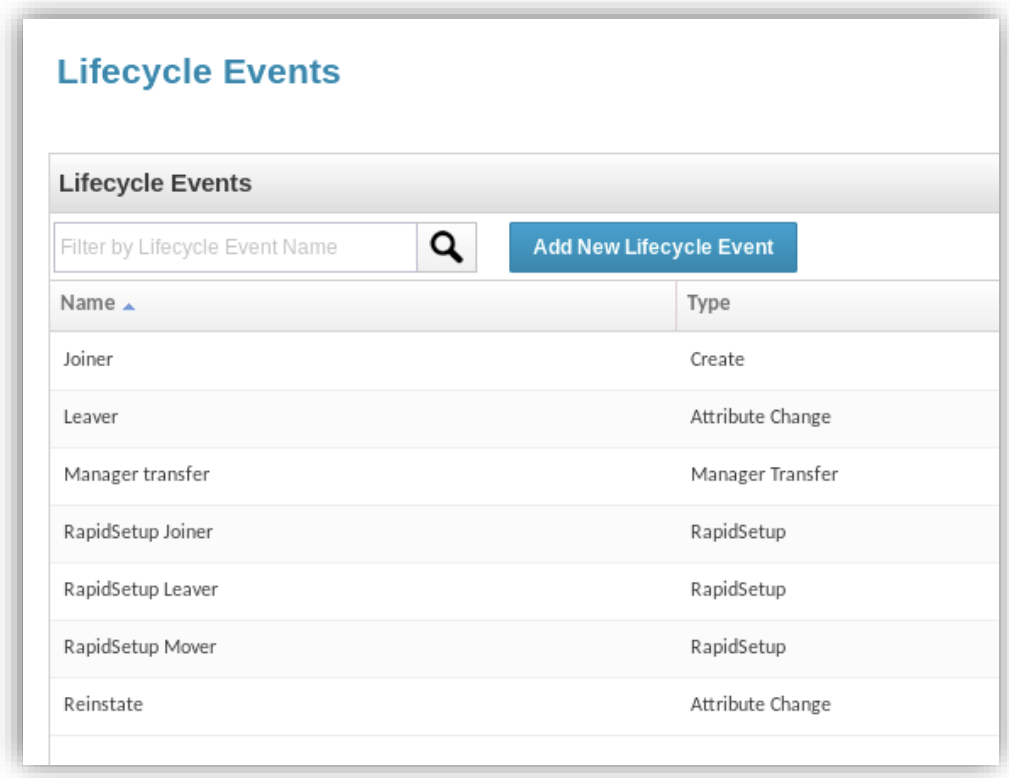


Setup → Lifecycle Events

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Events

Custom

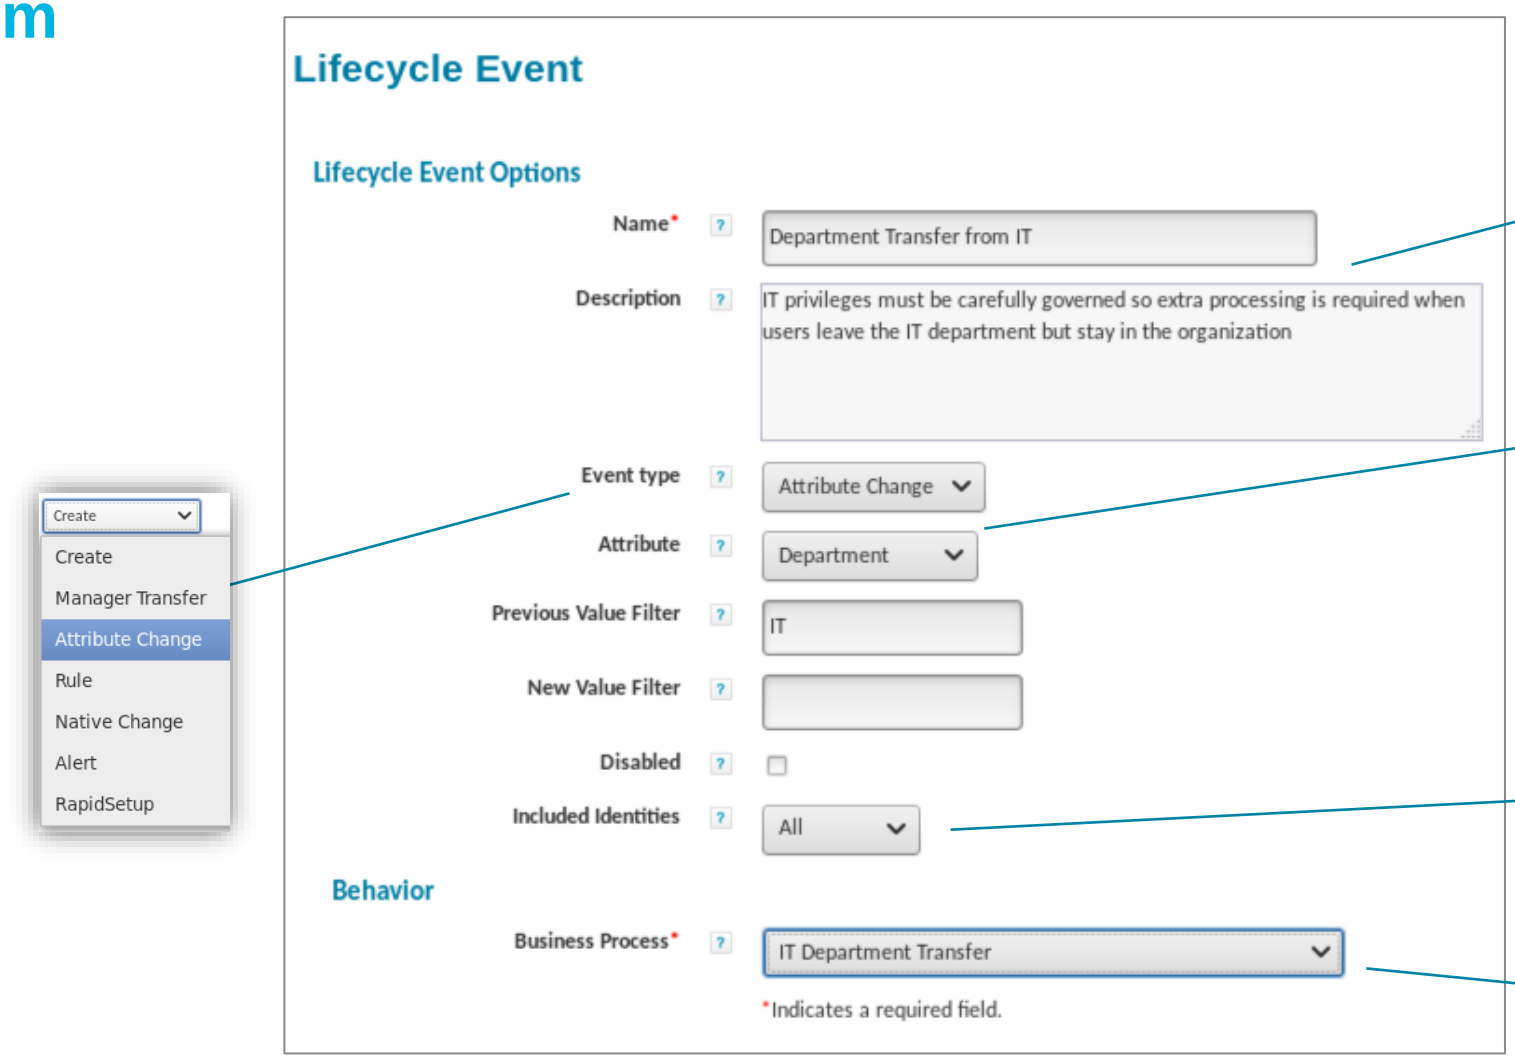

Name and description

What is being monitored

Targeted Identities


Workflow to process event

Setup → Lifecycle Events → Add New Lifecycle Event

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Implementation Steps

Included Identities Filter

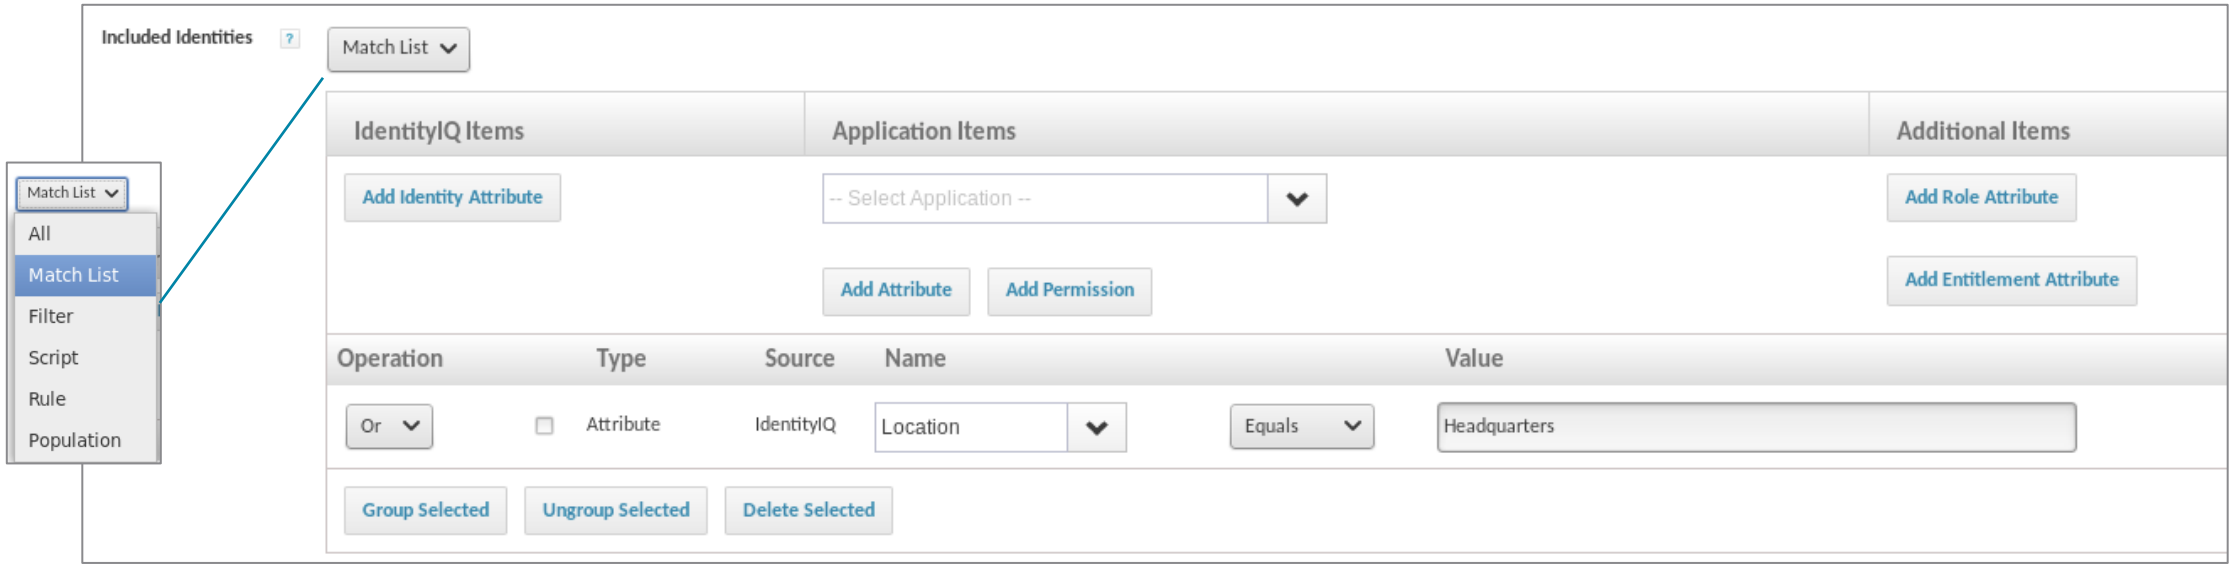


Setup → Lifecycle Events → Add New Lifecycle Event


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Events

Rapid Setup

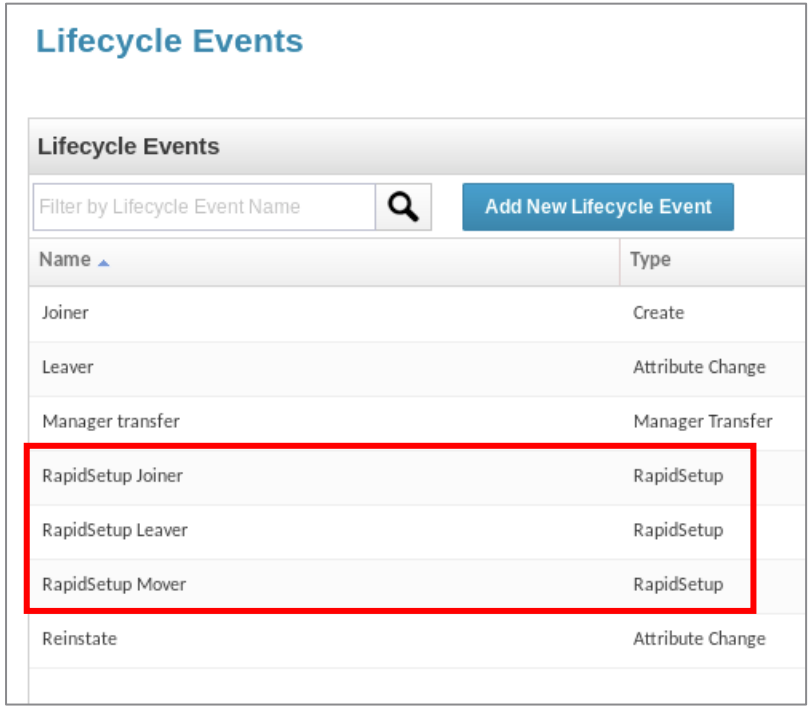

Setup → Lifecycle Events

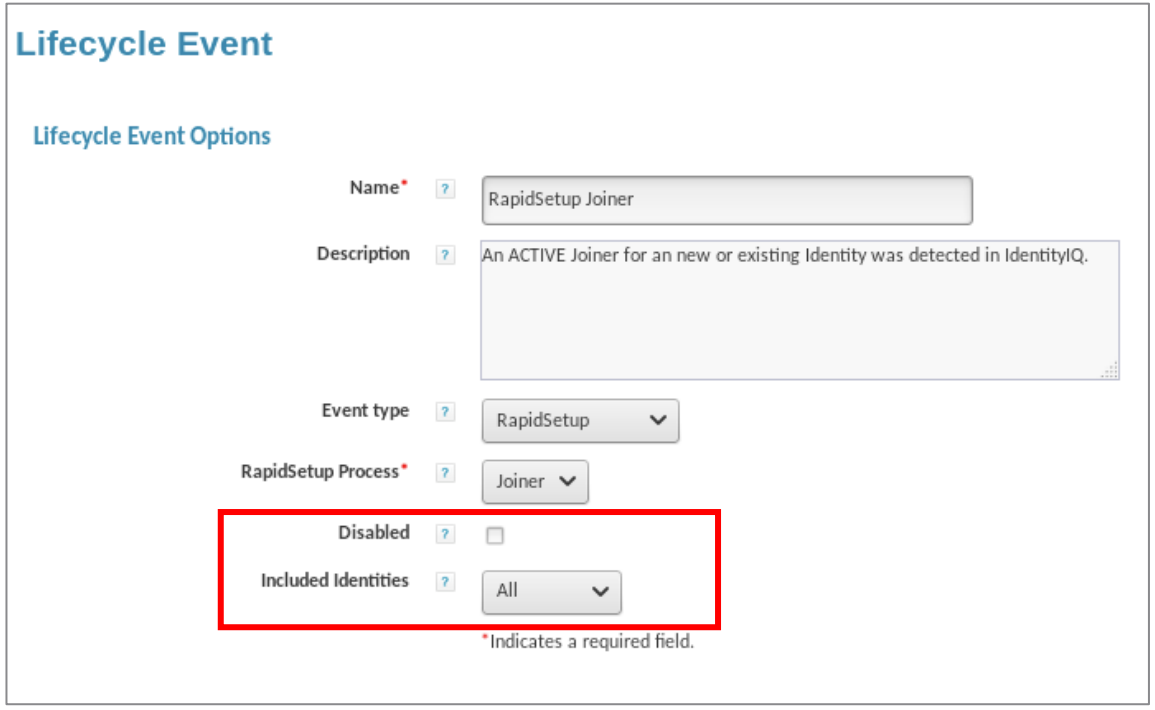

Rapid Setup Lifecycle Events


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Monitoring Lifecycle Events

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Monitoring Lifecycle Events

Track My Requests

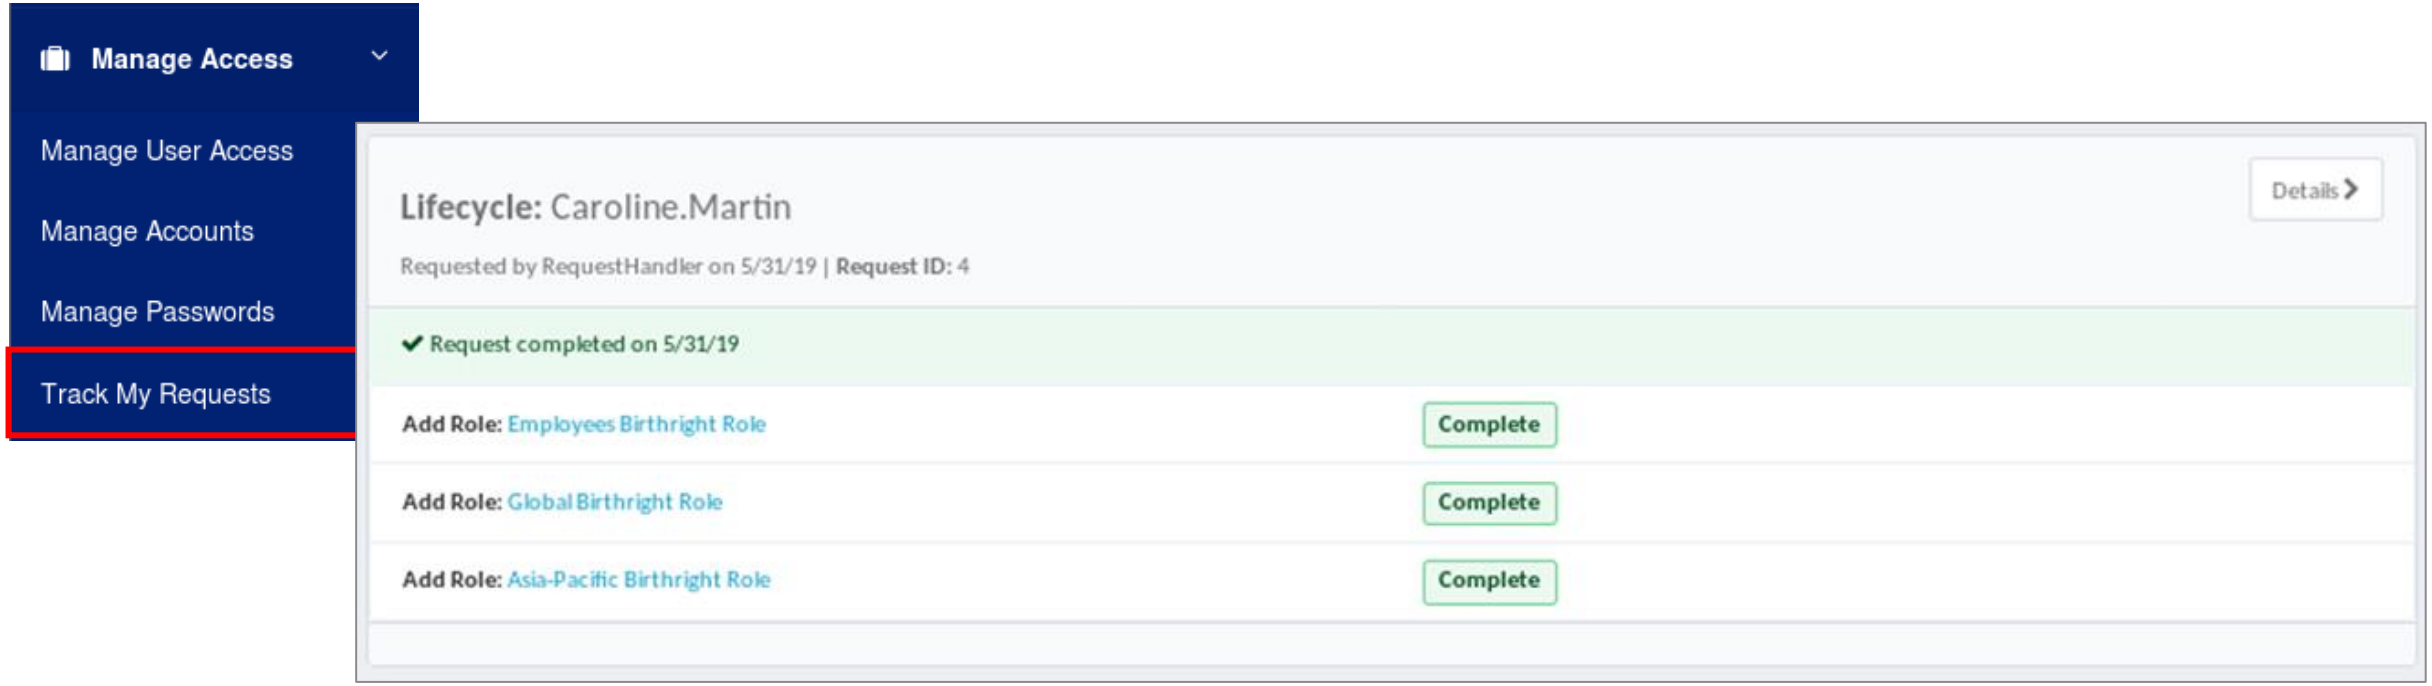


- Dependent upon workflow
- Rapid Setup workflows provide tracking

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Monitoring Lifecycle Events


Advanced Analytics - Audit

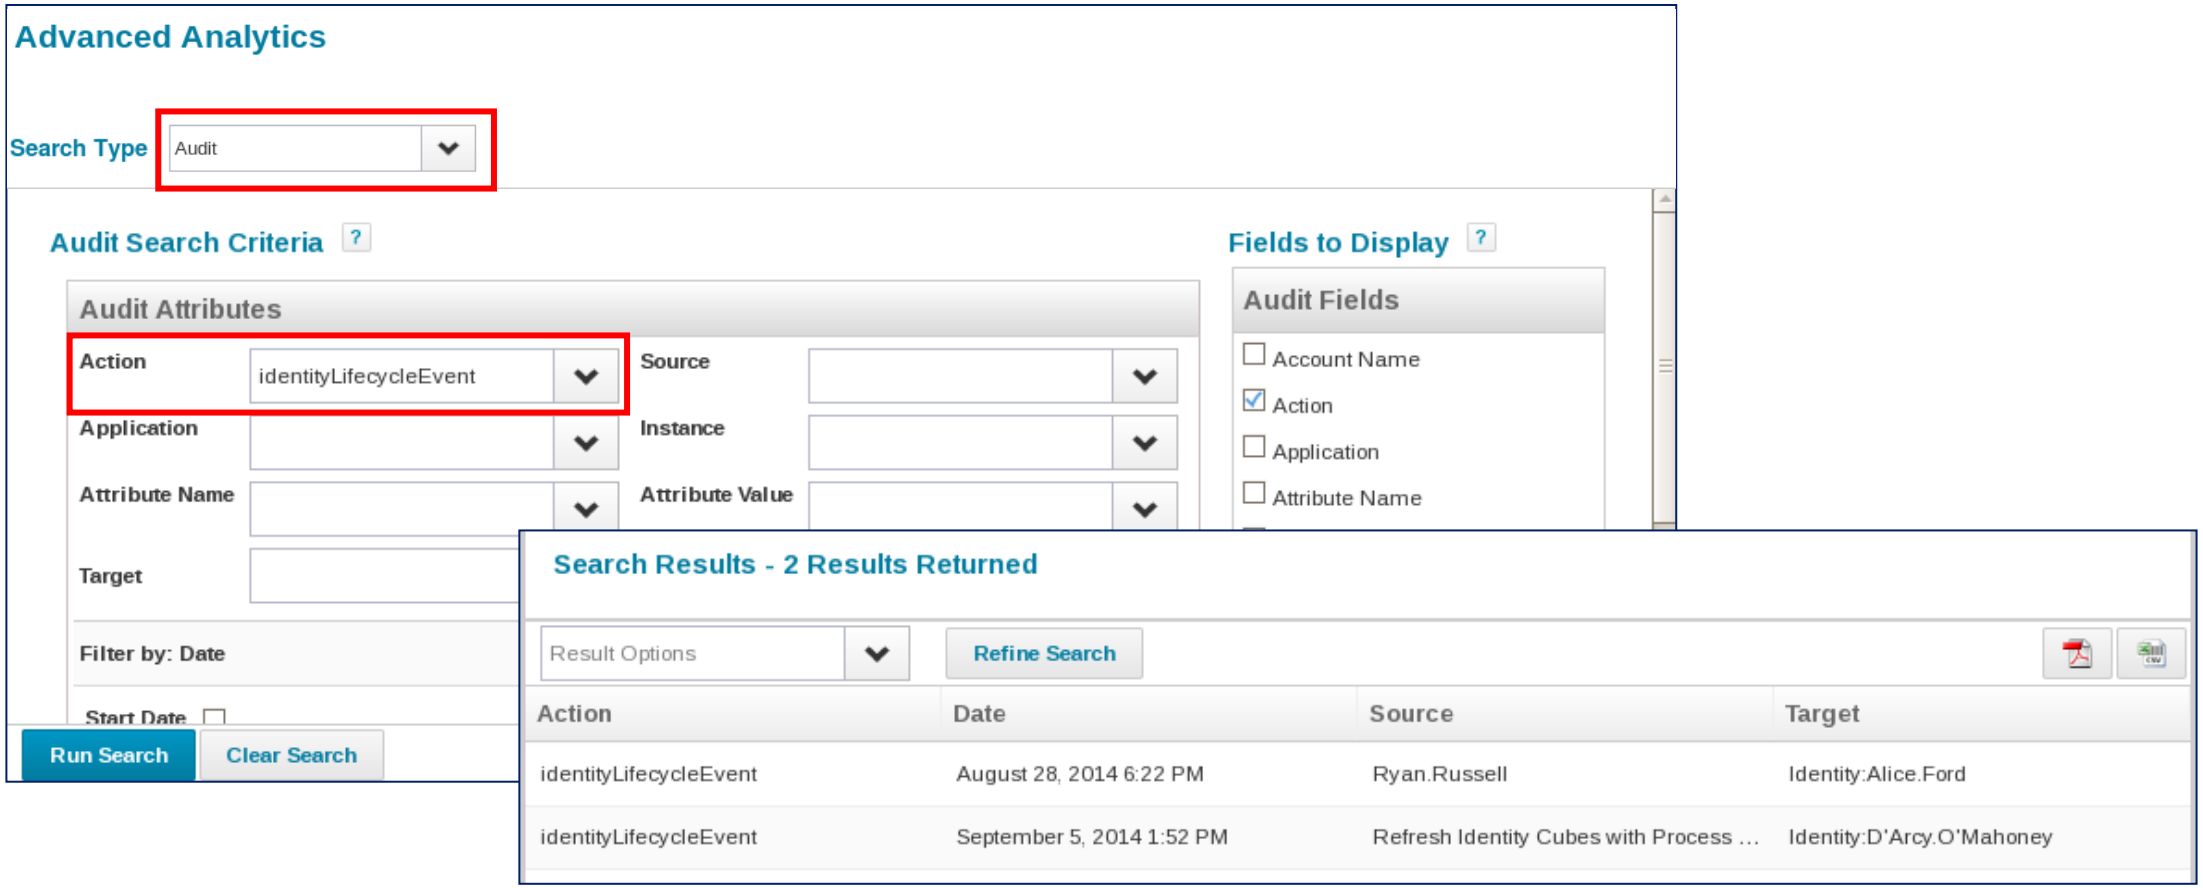

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Monitoring Lifecycle Events

Identity Events

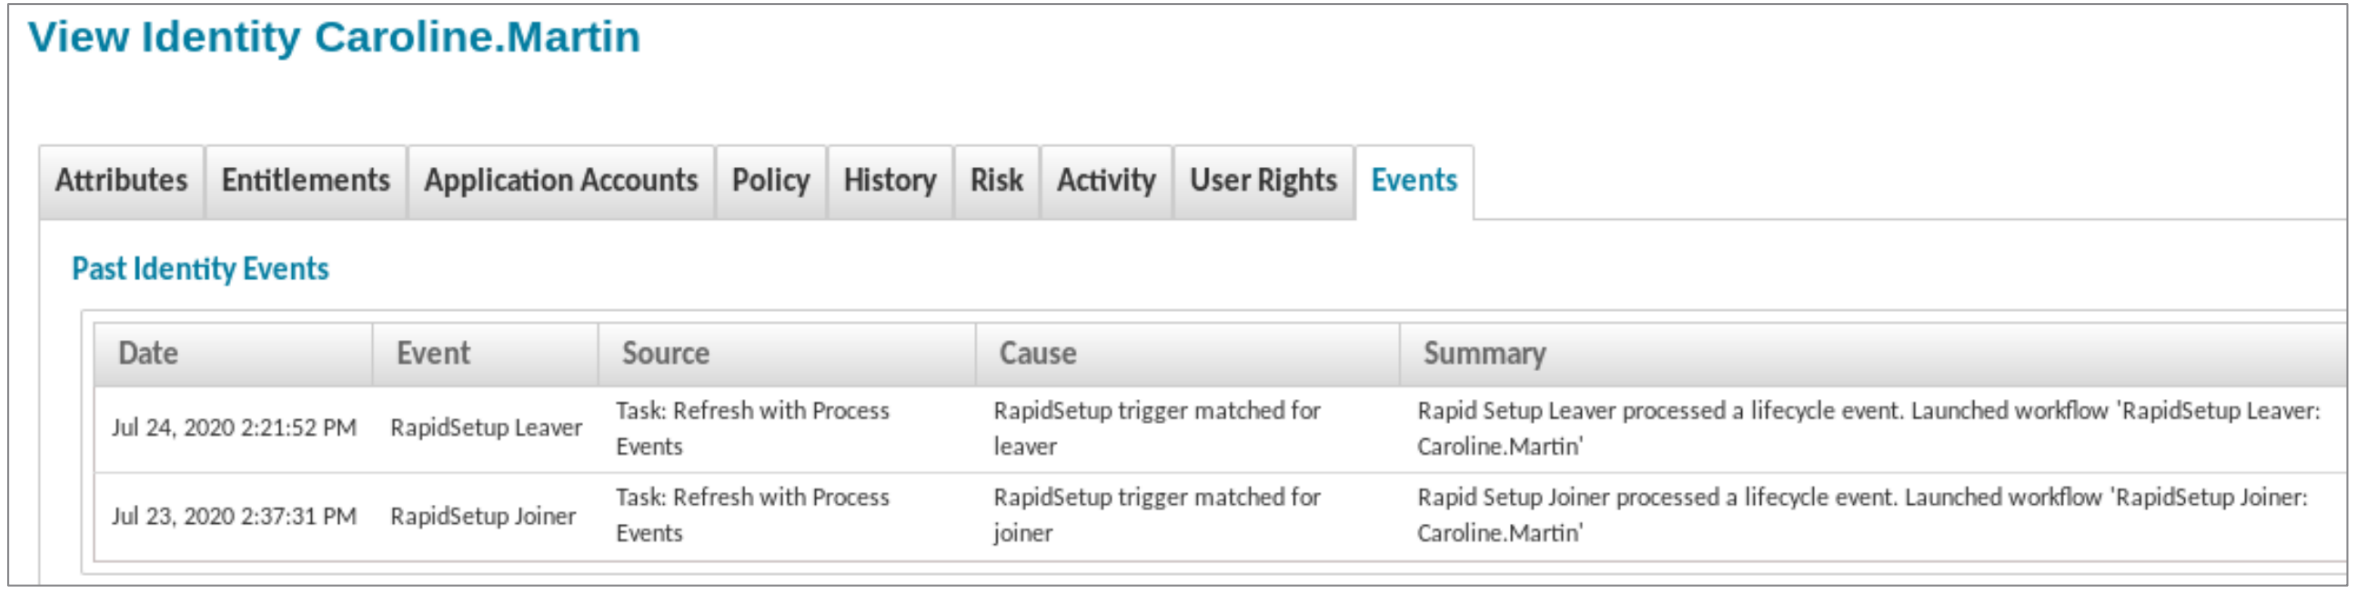

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Lifecycle Manager Requests

IdentityIQ Implementation and Administration: Essentials

Overview


Lifecycle Manager Requests

- Request Process Overview
- Supported Request Types
- Quicklink Populations

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Process Overview

Access Request

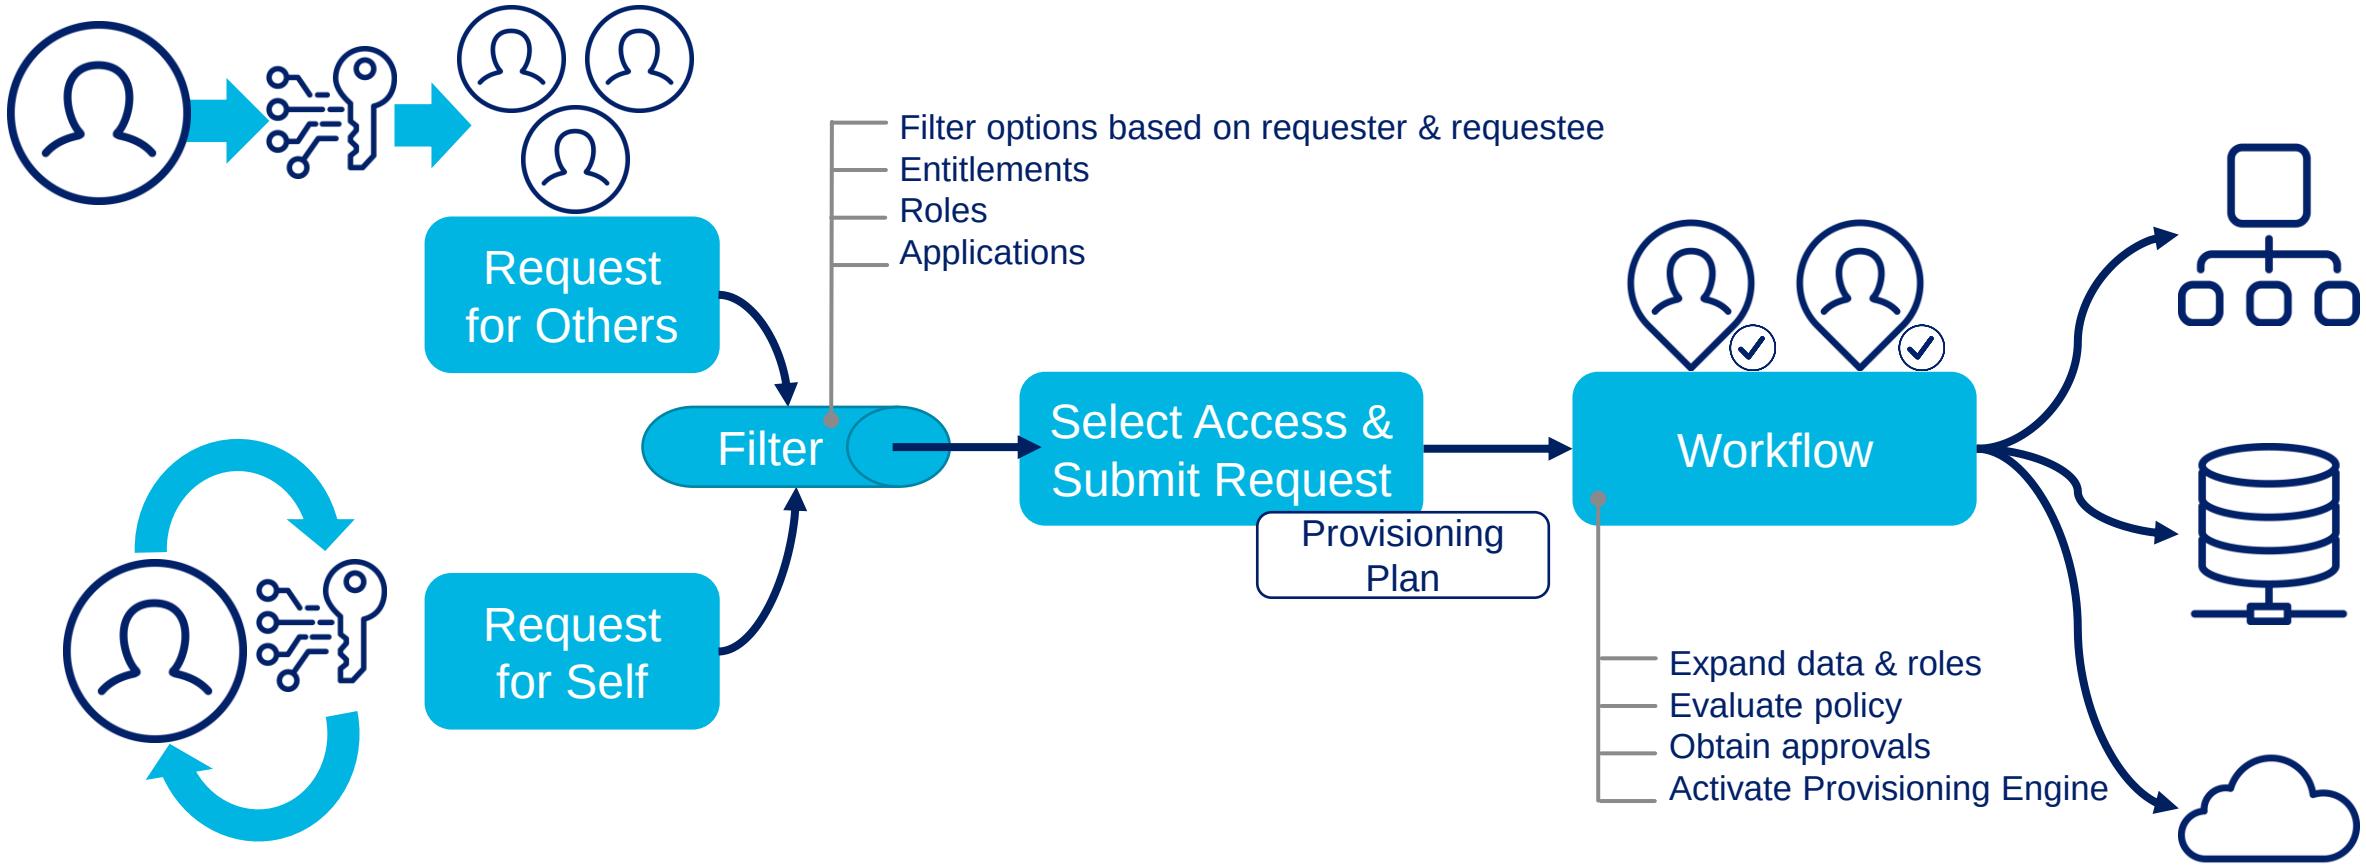

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Manager

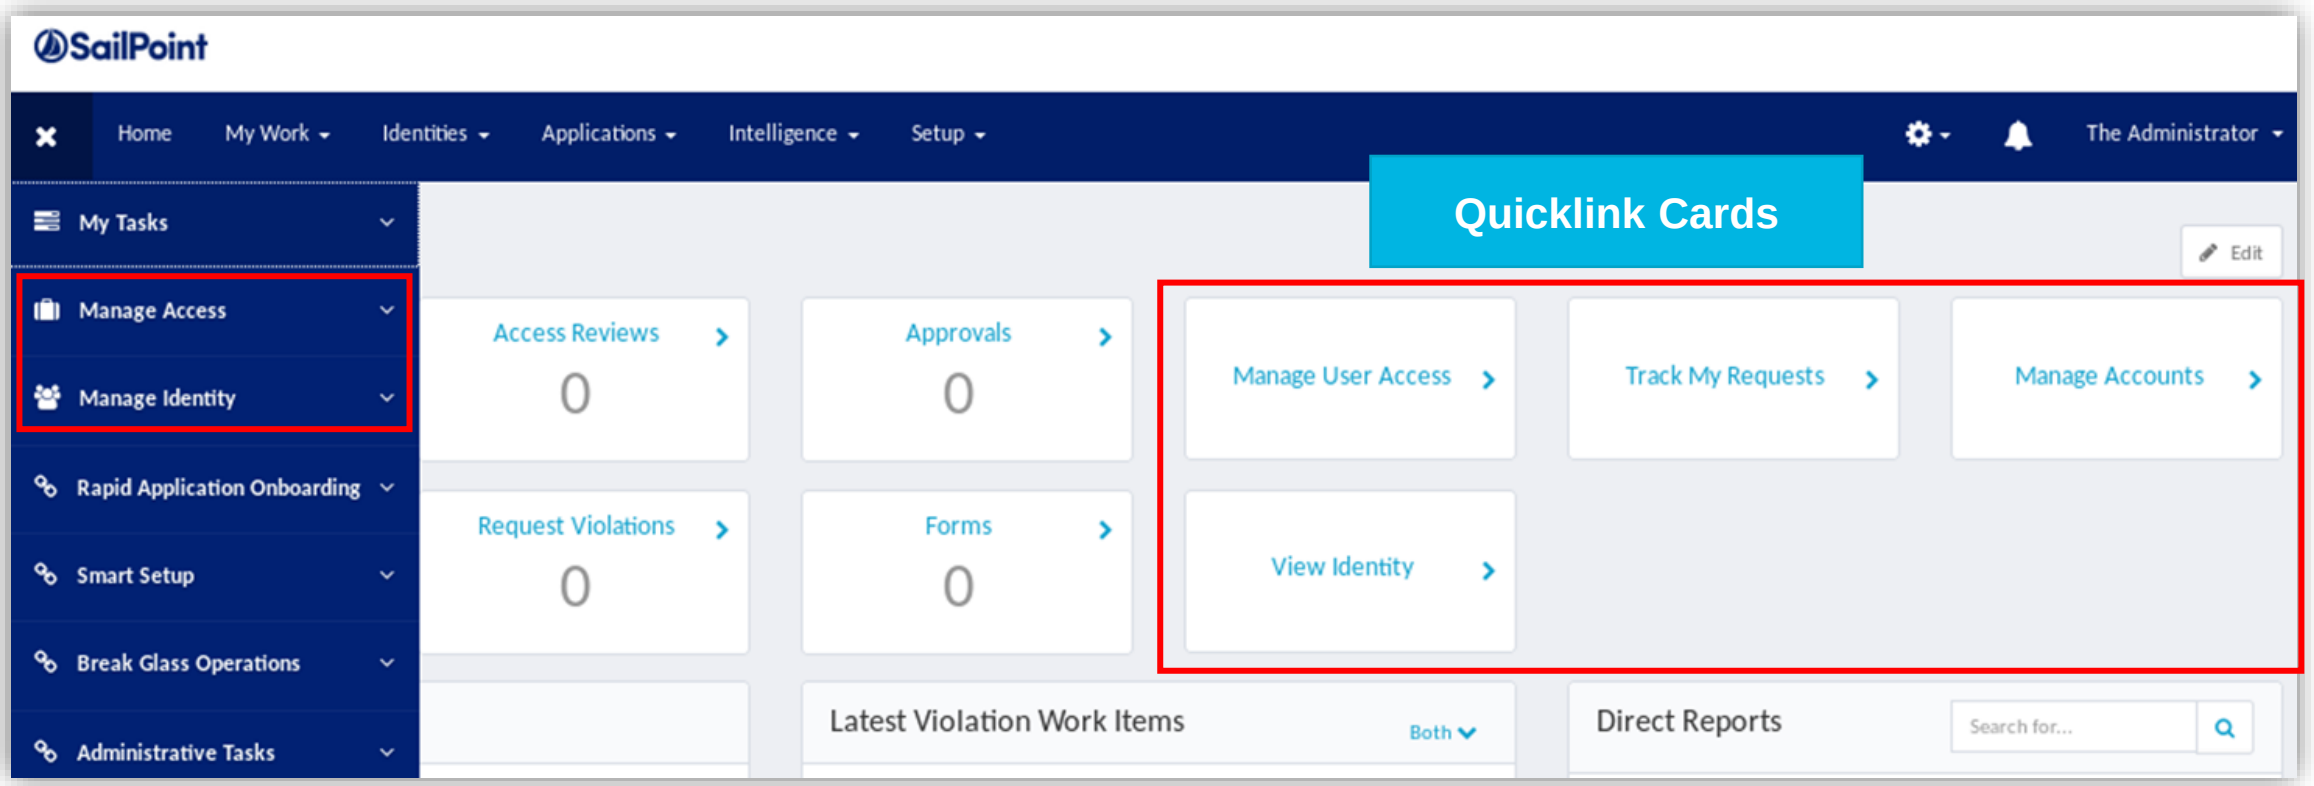



Quicklink Menu

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Access Request Types

Quicklinks

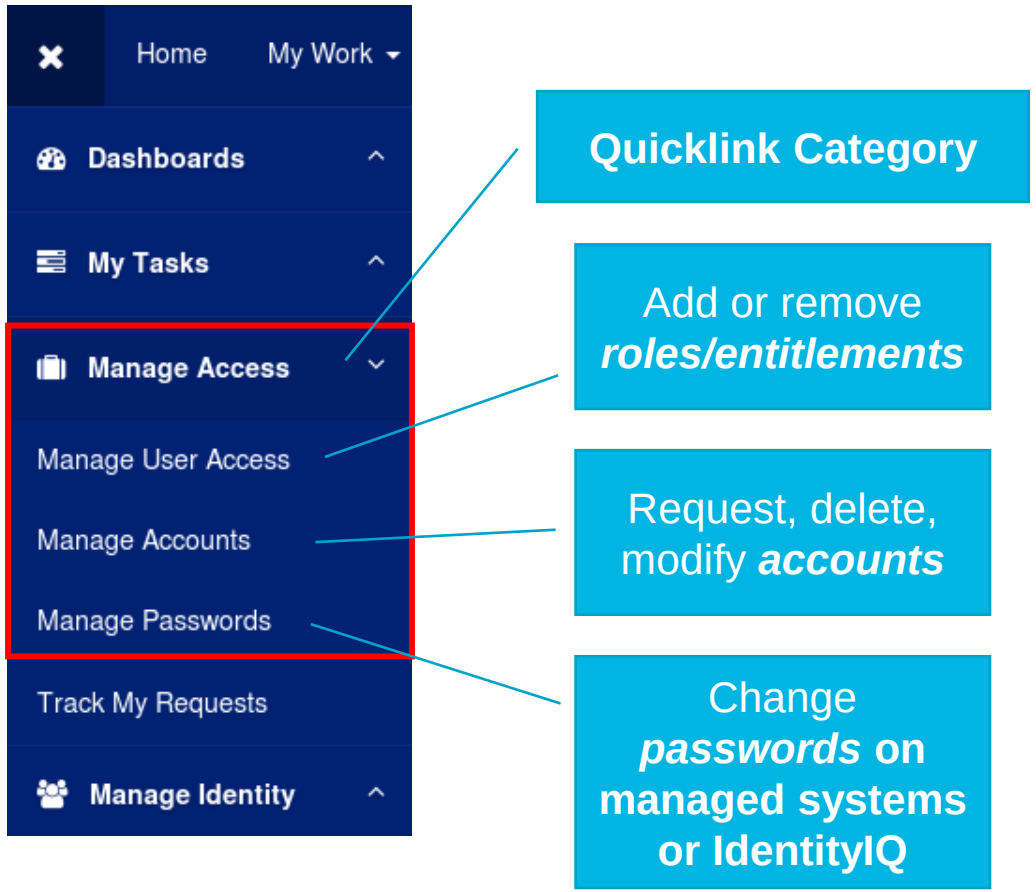

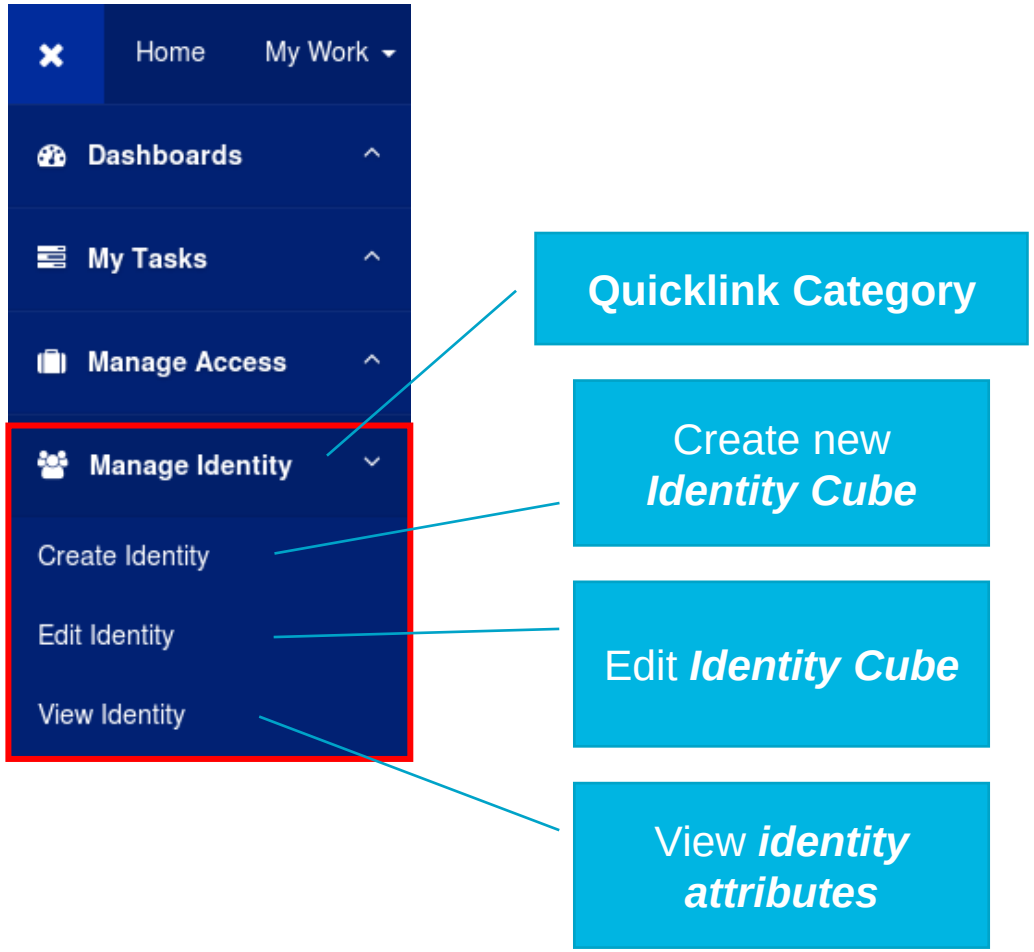

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Key Considerations

User-driven Changes: Lifecycle Requests

- Lifecycle Requests
  - **Who** submits the request? (requester)
  - **What** is the request? (requested)
  - **Which** identity is the target of the access change? (requestee)
- Responses
  - **How** is the request fulfilled? (business process)

Who can request **what** for **whom**?


What **workflow** should run to fulfill the request?

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Manager Workflows

Default Workflows

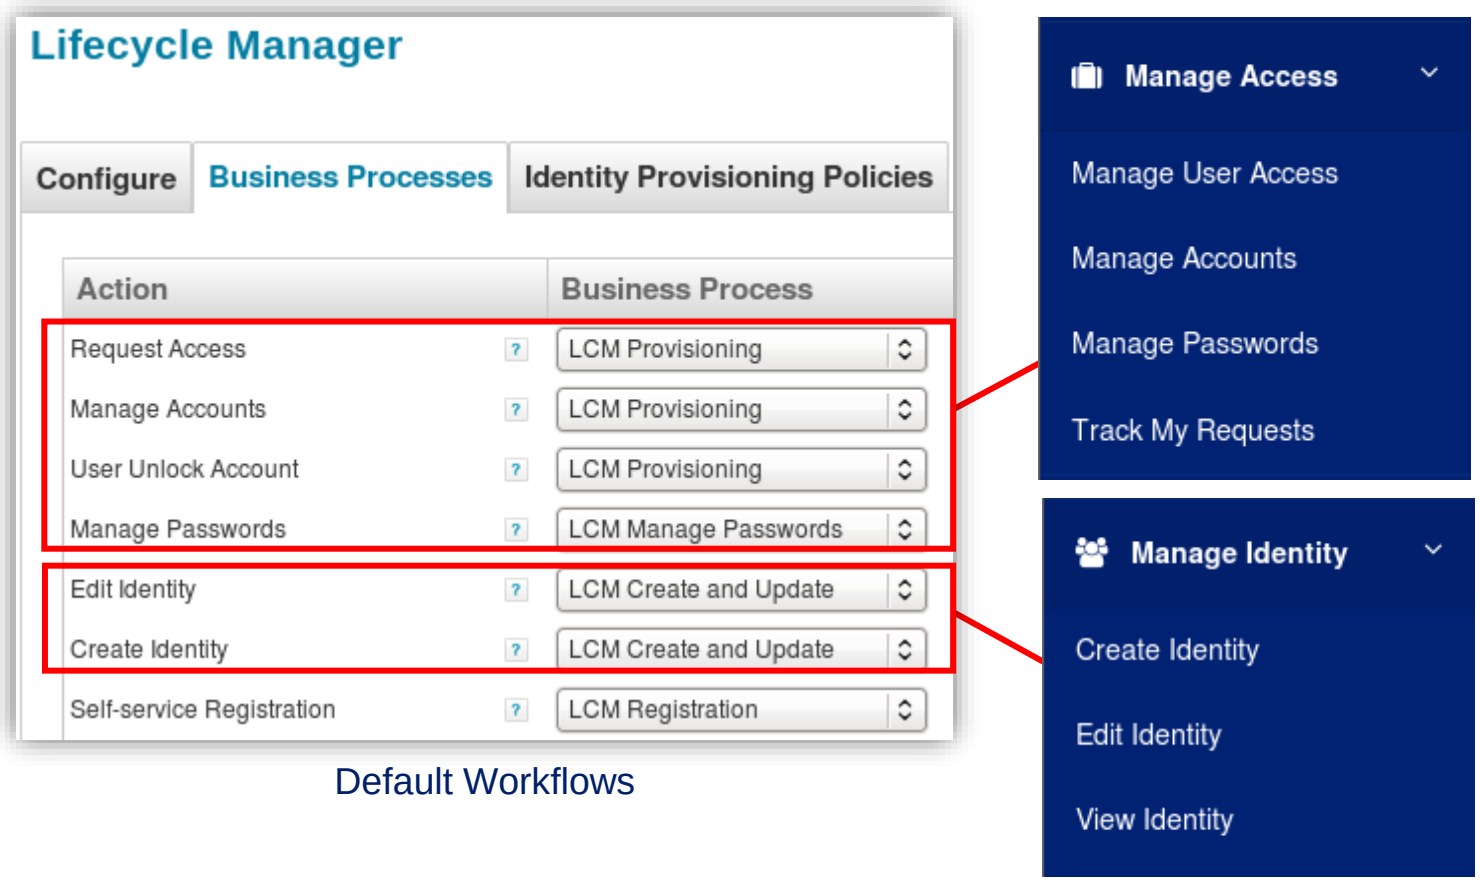

Default Workflows

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Quicklink Populations


Definition

- Flexible method to control who has access to a Quicklink
- Provide for answering the three questions:

Who can request?

Which identities can be targeted?

What can be requested?

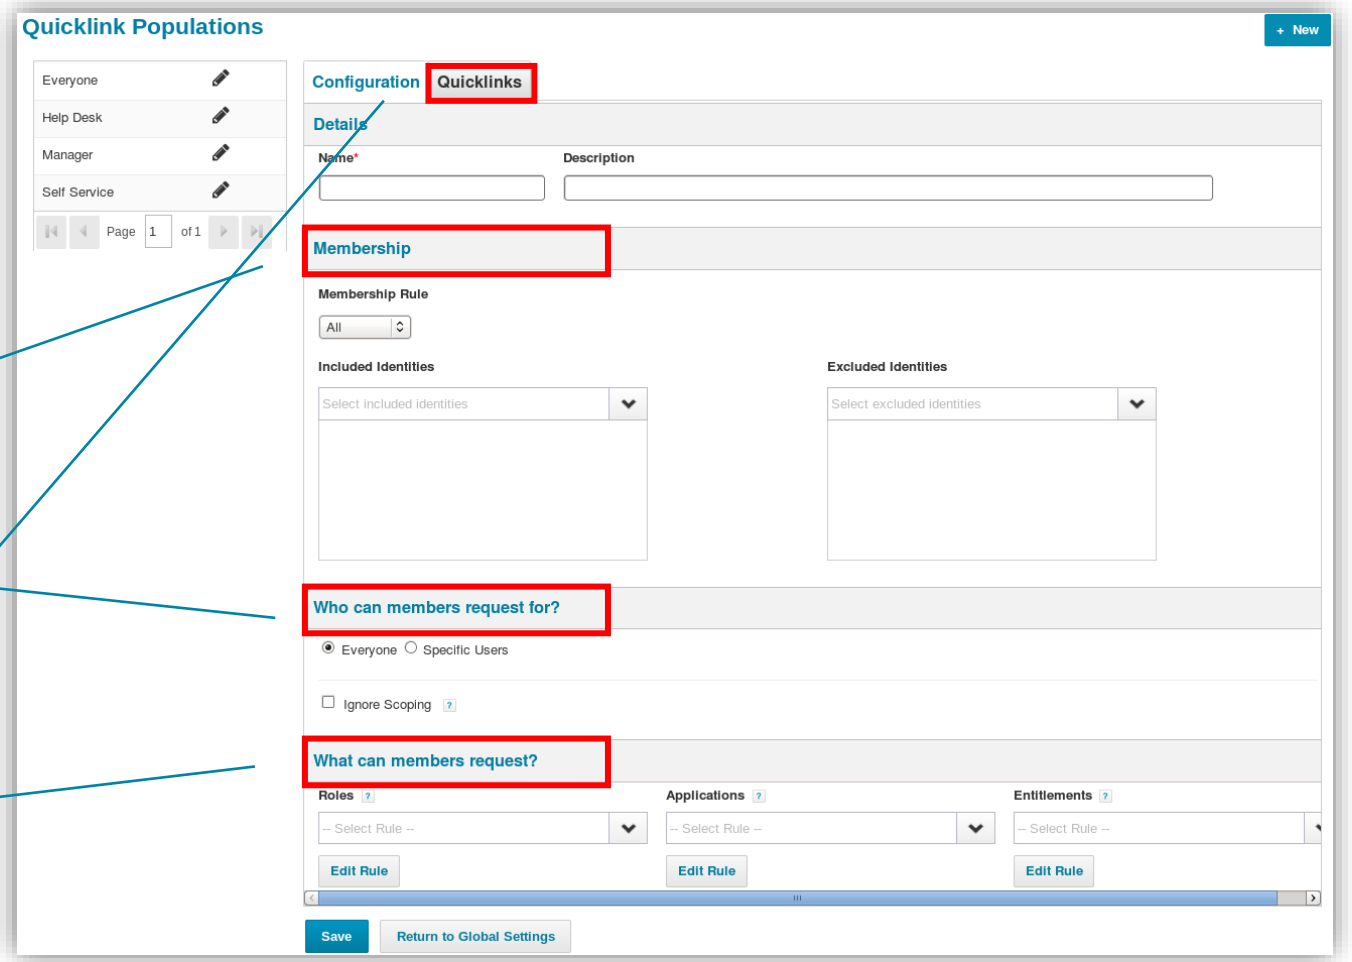

Global Settings → Quicklink Populations

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Manager Quicklink Populations

Members and Requestees

- Default LCM Quicklink Populations


	Help Desk	Manager	Self-Service
Who can request?	Users with *Help Desk Personnel* capability	Users with *Manager Status* = true	All identities
Which identities can be targeted?	All identities	Direct and indirect reports	Themselves

- Custom Quicklink Populations
  - Members based on attribute match, filter, script, rule, or population
  - Requestees are either everyone or specific users
- Access is cumulative

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Who Can Request?

Quicklink Population Members

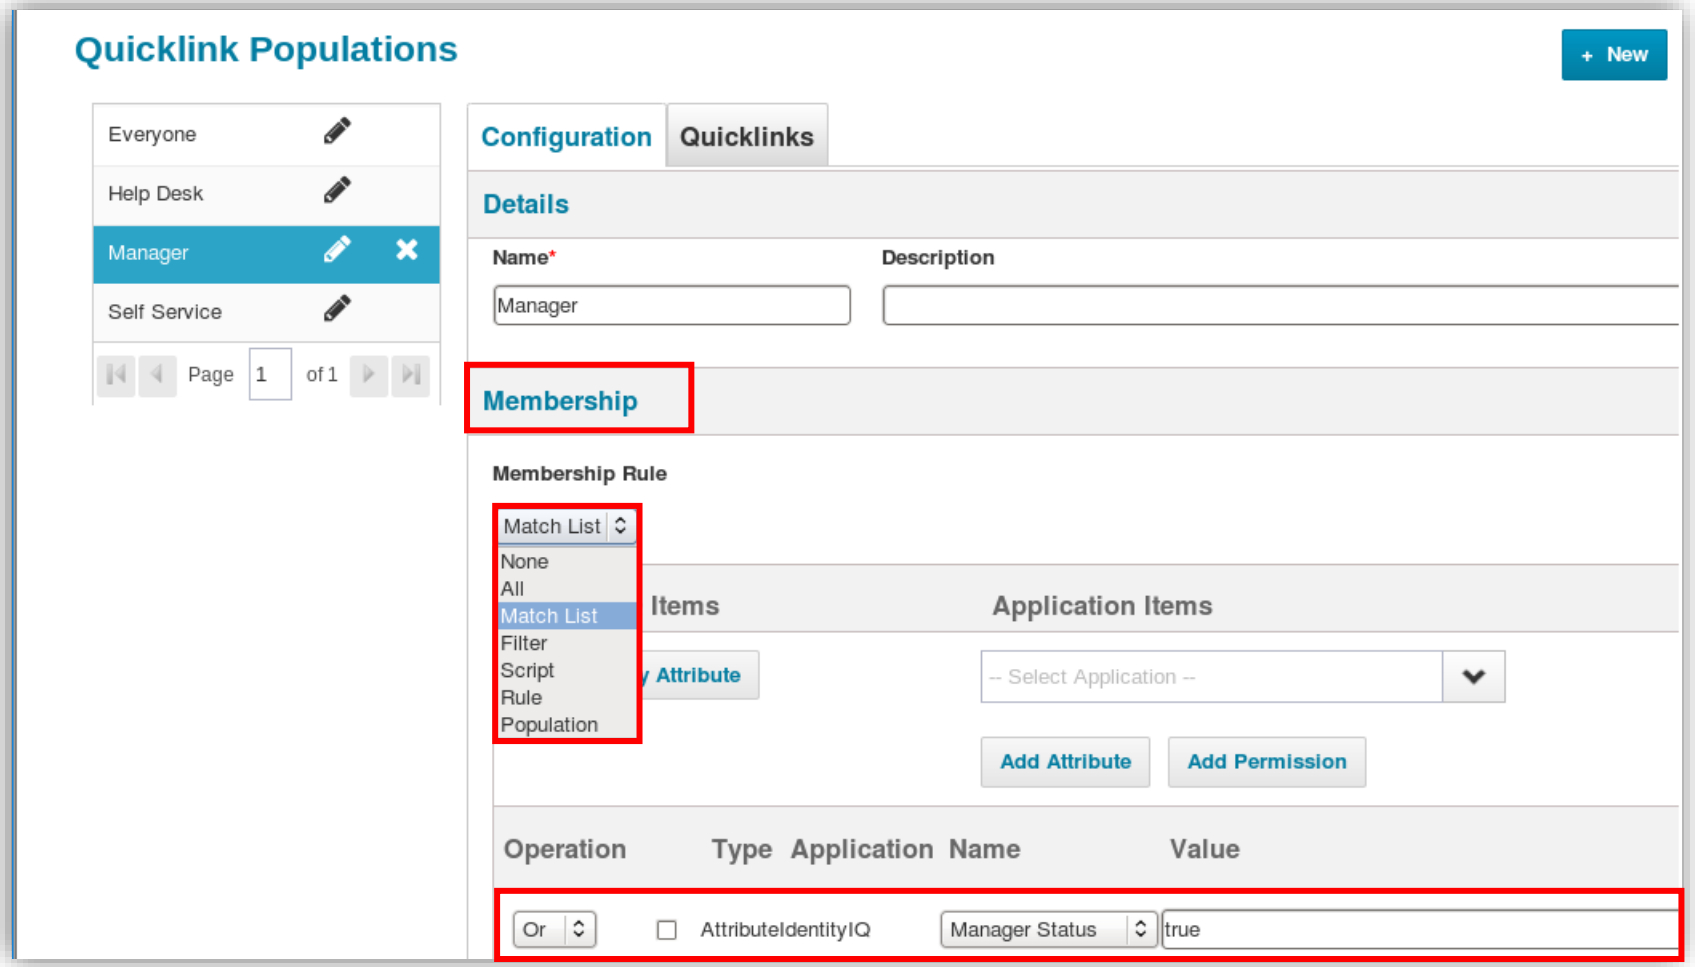


Criteria Options

- Identity attribute values
- IdentityIQ controls: workgroups, capabilities
- Account-level data
- Populations
- Rules, Scripts
- Inclusion, Exclusion lists

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

For Which Users?

Target Identities / Requestees

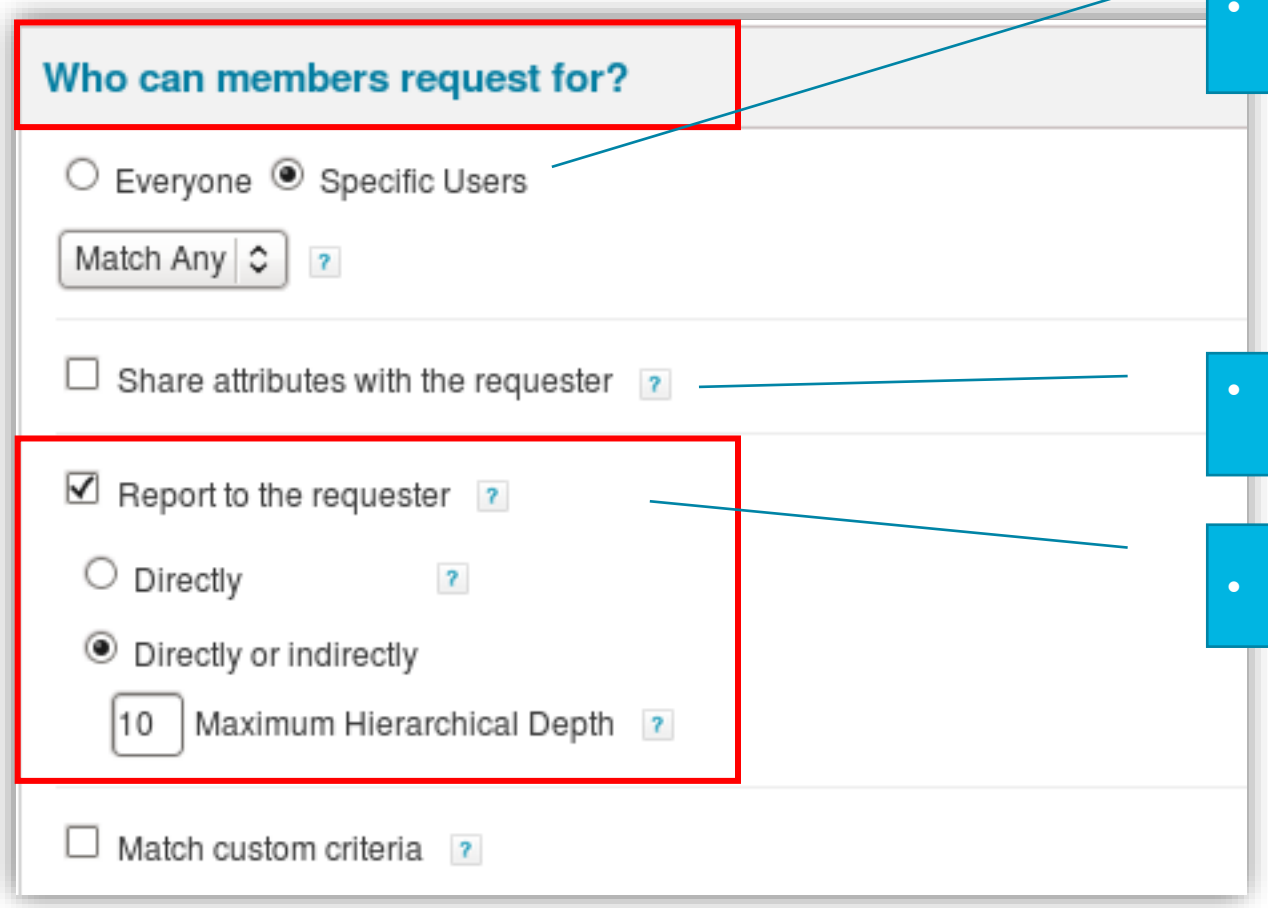


- Allow population to request for all or as filtered
- Allow population to request for others where they share specified attributes
- Allow managers to request for subordinates

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

What can they request?

Quicklink Access

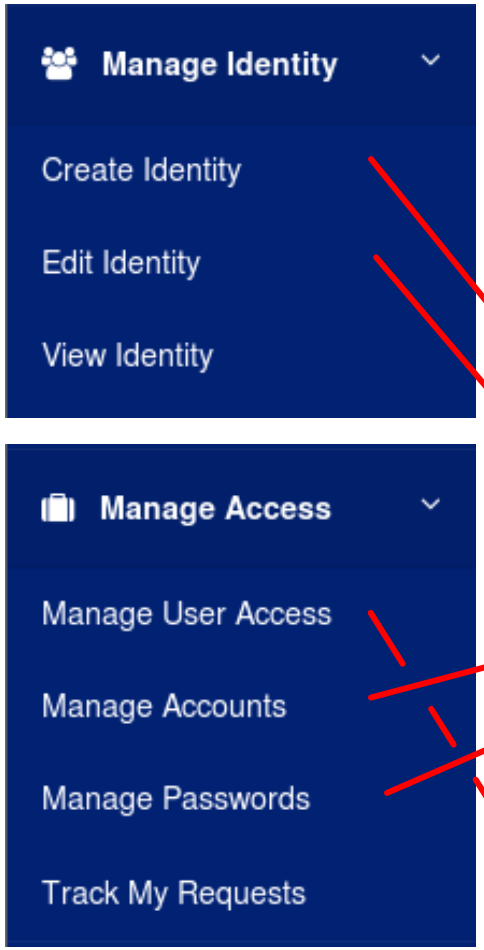

Configuration | Quicklinks

Click the checkbox to enable a Quicklink. Use Configure to control specific Quicklink settings.


Enabled	Name	Description	Category	Options
☐	Access Reviews	The number of access reviews that require attention.	Tasks	Configure
☐	Approvals	Opens the Manage Work Items page displaying approvals that require attention.	Tasks	Configure
☑	Create Identity	Create a new identity.	Manage	Configure
☑	Edit Identity	Edit identity attributes.	Manage	Configure
☐	Forms		Tasks	Configure
☑	Manage Accounts	Take action on any assigned accounts.	Access	Configure
☑	Manage Passwords	Issue requests to auto-generate or manually set account passwords.	Access	Configure
☐	Mobile Violation Reviews	The number of policy violation activities that require attention.	Tasks	Configure
☐	Policy Violations	The number of policy violation activities that require attention.	Tasks	Configure
☑	Request Access	Requests the addition or removal of roles or entitlements.	Access	Configure

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Specifically, what can they request?

Object Filtering Rules

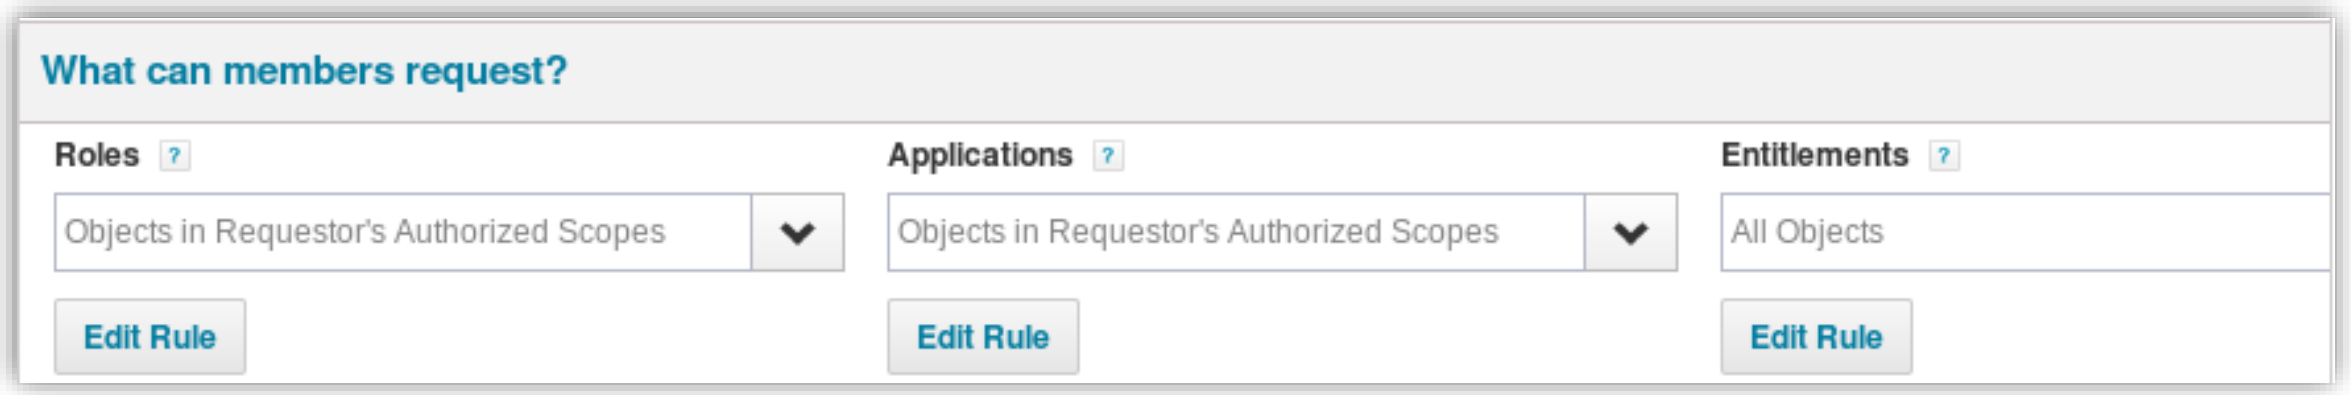

- Availability based on requester and/or requestee
- Configured through rules
  - Multiple rule options provided
  - Can create own rules
- Separate rule set for revocation filters

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

What can members request?

Example: Controlling Access with Rules and Extended Attributes

CONFIGURATION

Access	Identity Cubes
Spy Super User Rec_Sec_Level: 10	**John** Security Level: 7
Spy Data Entry Rec_Sec_Level: 5	**Susan** Security Level: 12
Spy Audit Rec_Sec_Level: 10	**Ian** Security Level: 2

ACCESS REQUESTS

	Access Options
	Spy Data Entry
	Spy Super User Spy Data Entry Spy Audit
	<No Spy Options>

Rule

```
import sailpoint.object.Filter;
return Filter.le(”rec_sec_lev”,requestee.getAttribute(“security_lev”));
```

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Manage User Access


IdentityIQ Essentials

Access Request Overview


Manage User Access Quicklink

- **Role** requests
- **Entitlement** requests

Request for self and others

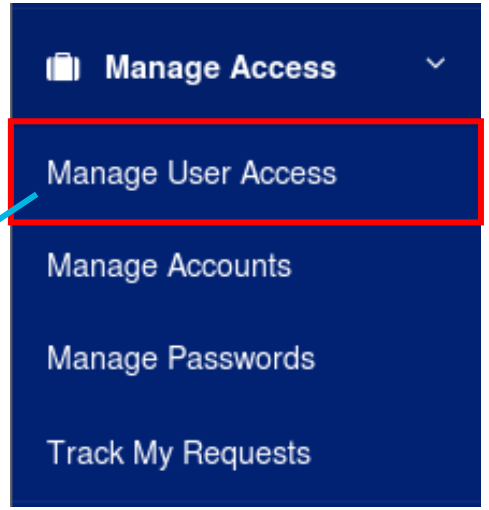


Request only for self

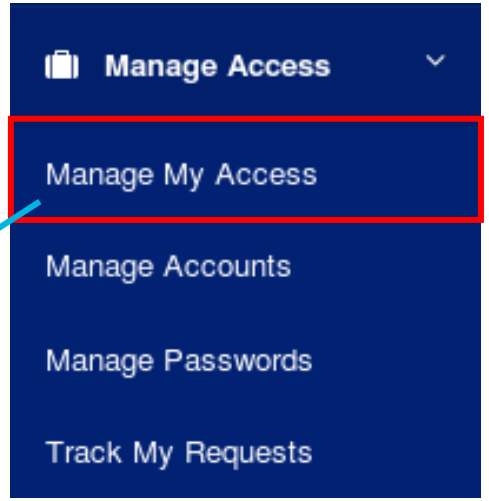

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage User Access Quicklink Configuration

Quicklink Population Example

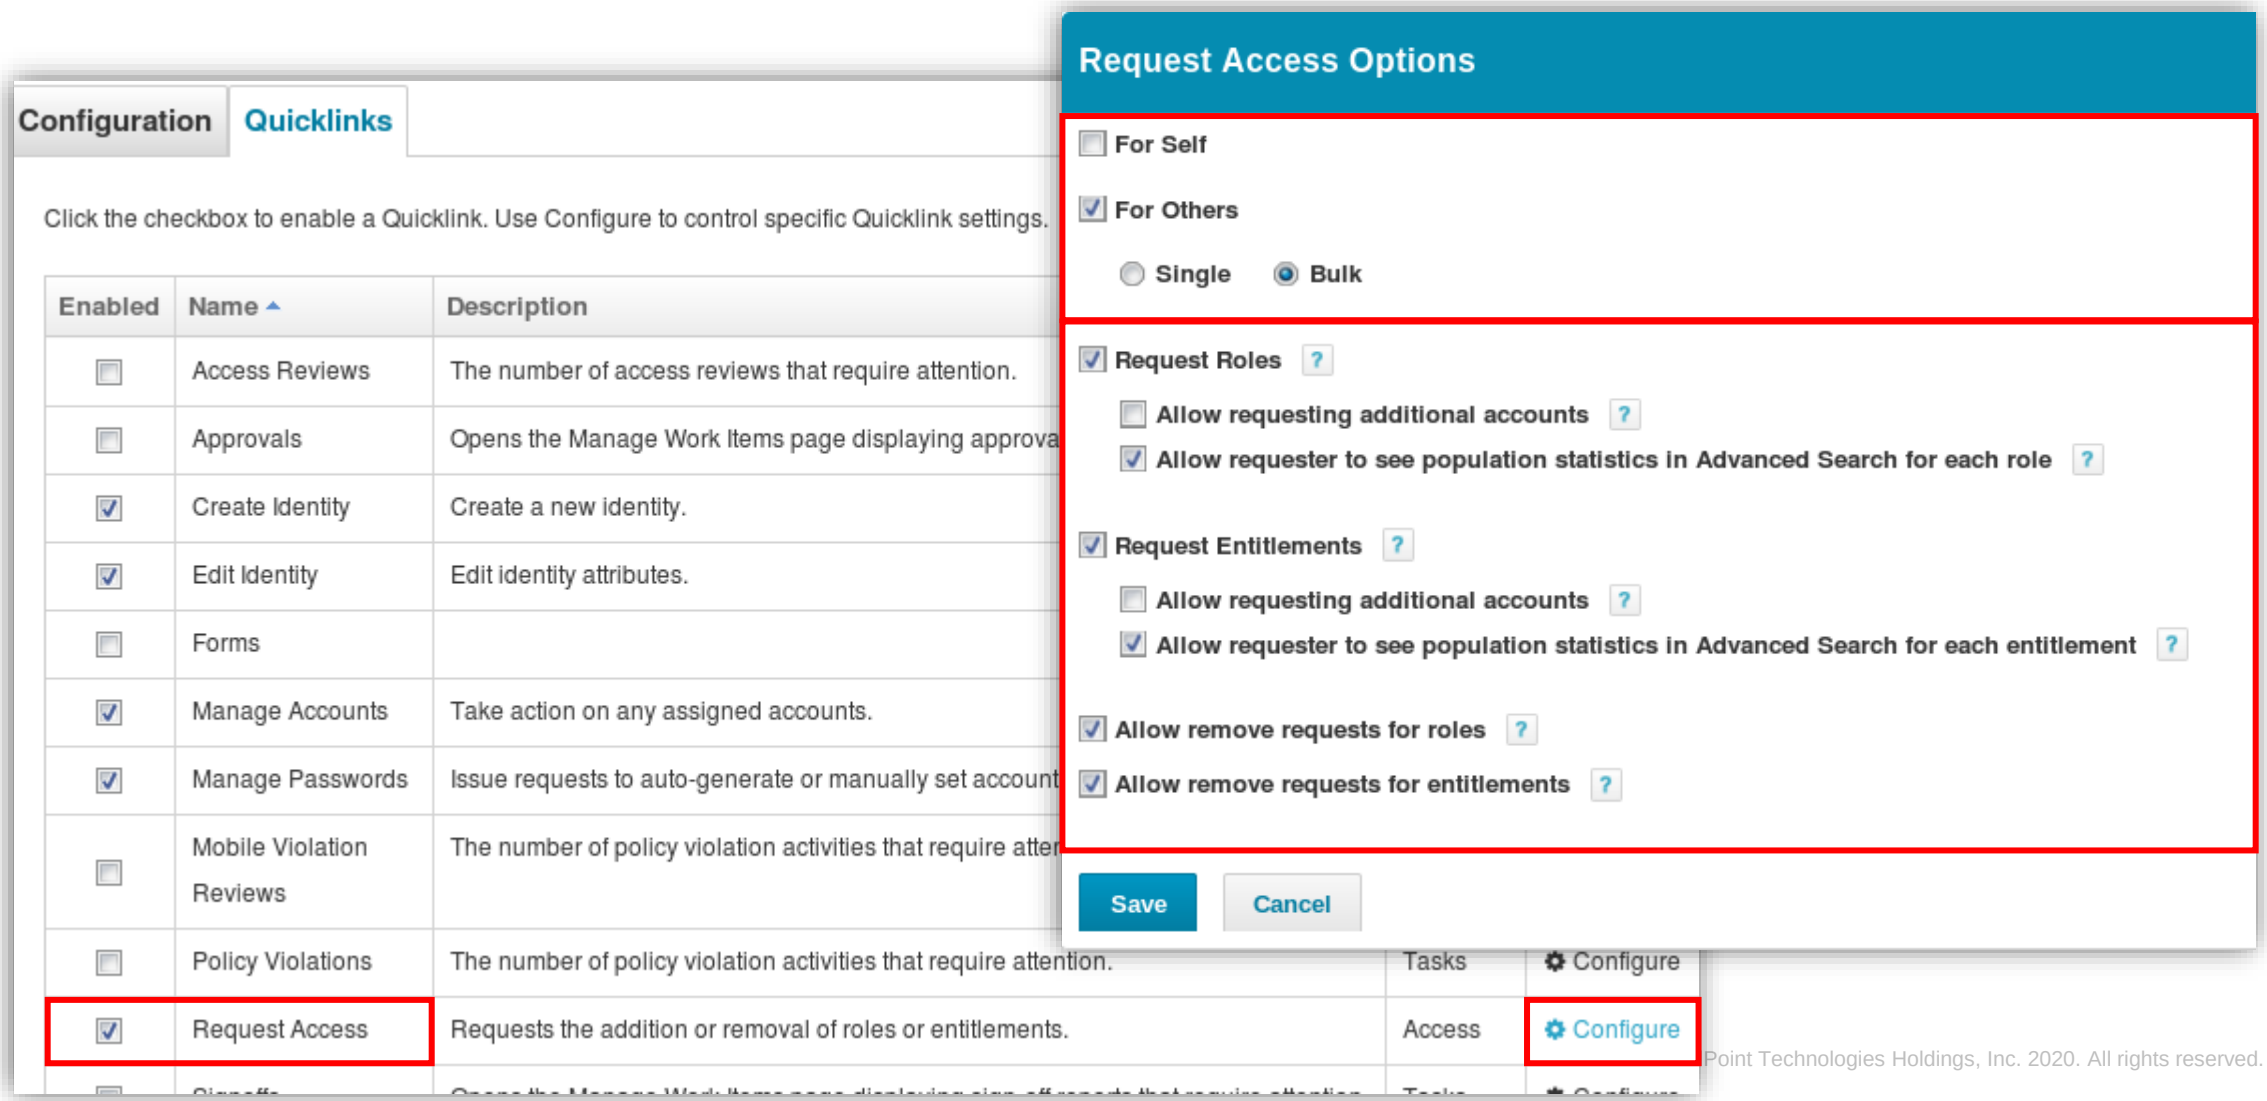


Point Technologies Holdings, Inc. 2020. All rights reserved.

Entitlement Catalog

Which entitlements can be requested?

- Requestability indicator
- Standard default: all requestable
- Alternatives
  - Rapid Setup configurable
  - Rules to auto set
    - ManagedAttributePromotion
    - GroupAggregationRefresh


- Visible in LCM

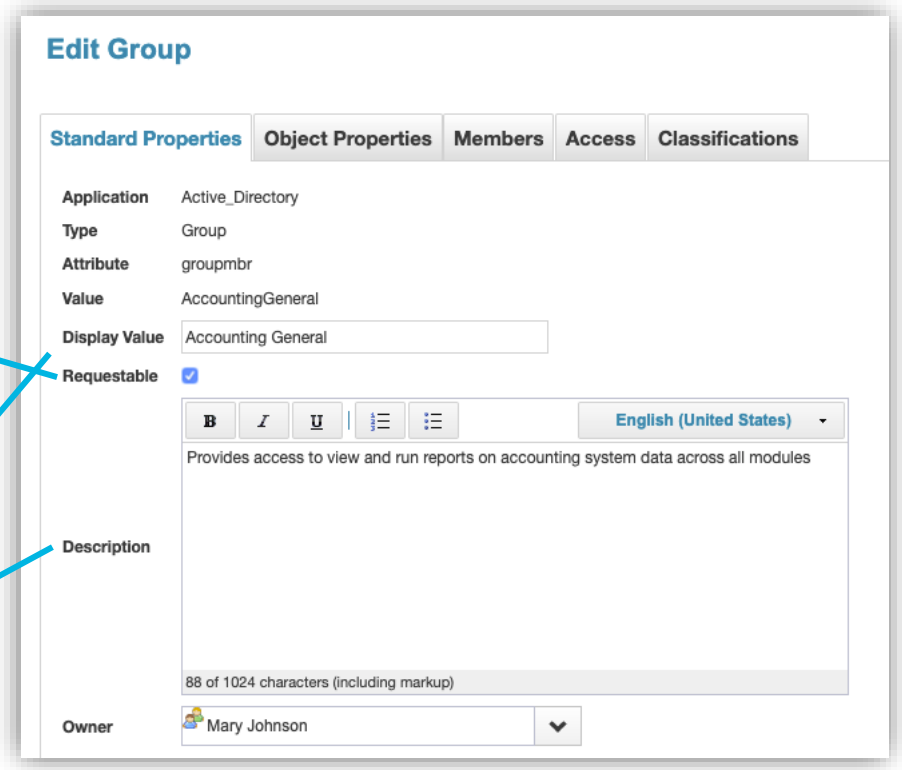

Applications → Entitlement Catalog

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Role Type Filtering

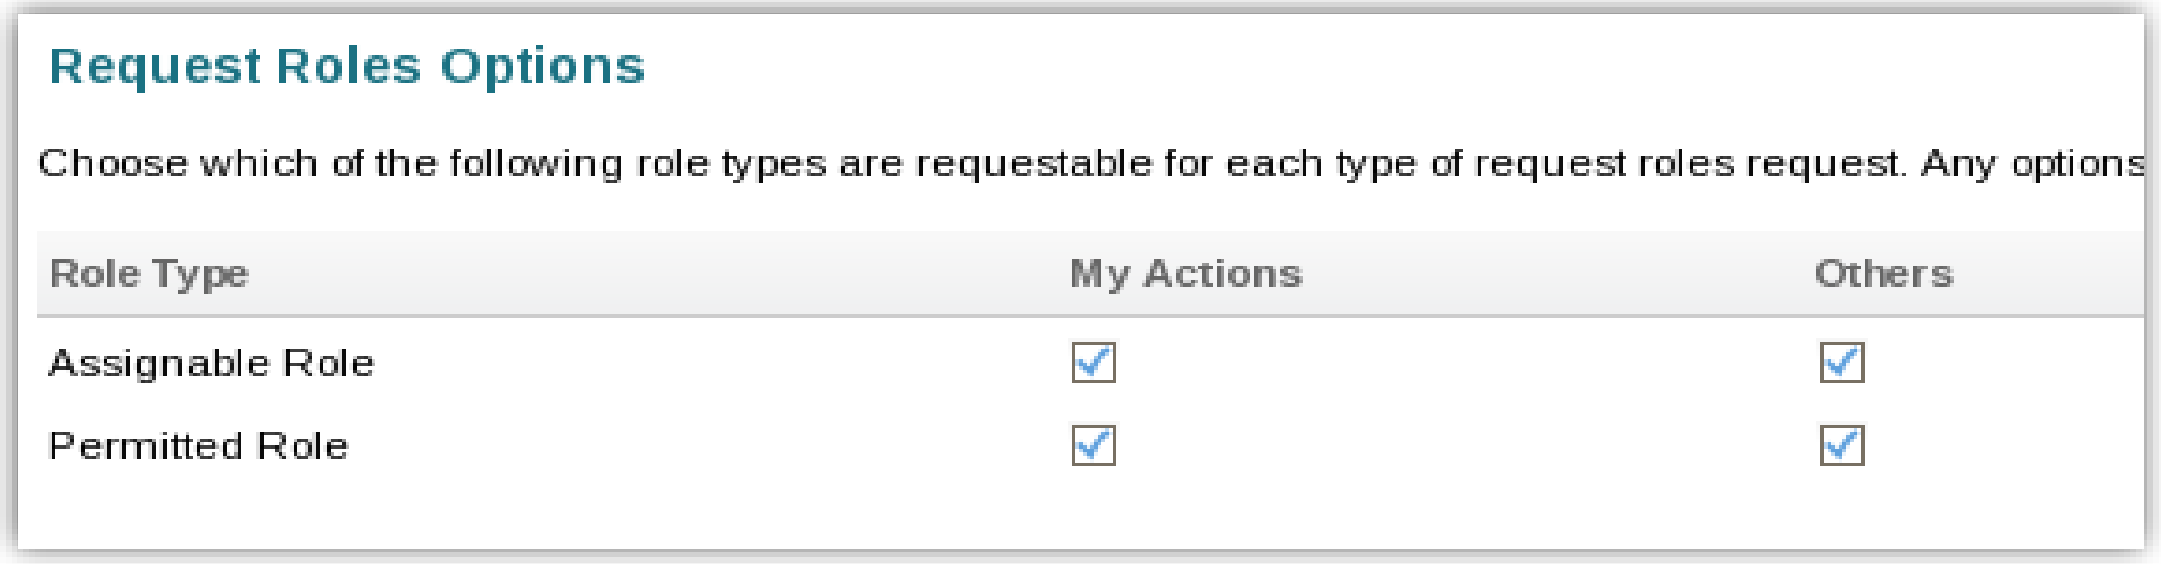

Gear → Lifecycle Manager

Example:

- My Actions: Only Permitted Roles allowed for self-service
- For Others: Assignable Roles are allowed


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

LCM Quicklinks Demonstration

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Manage User Access

Requesting for Others

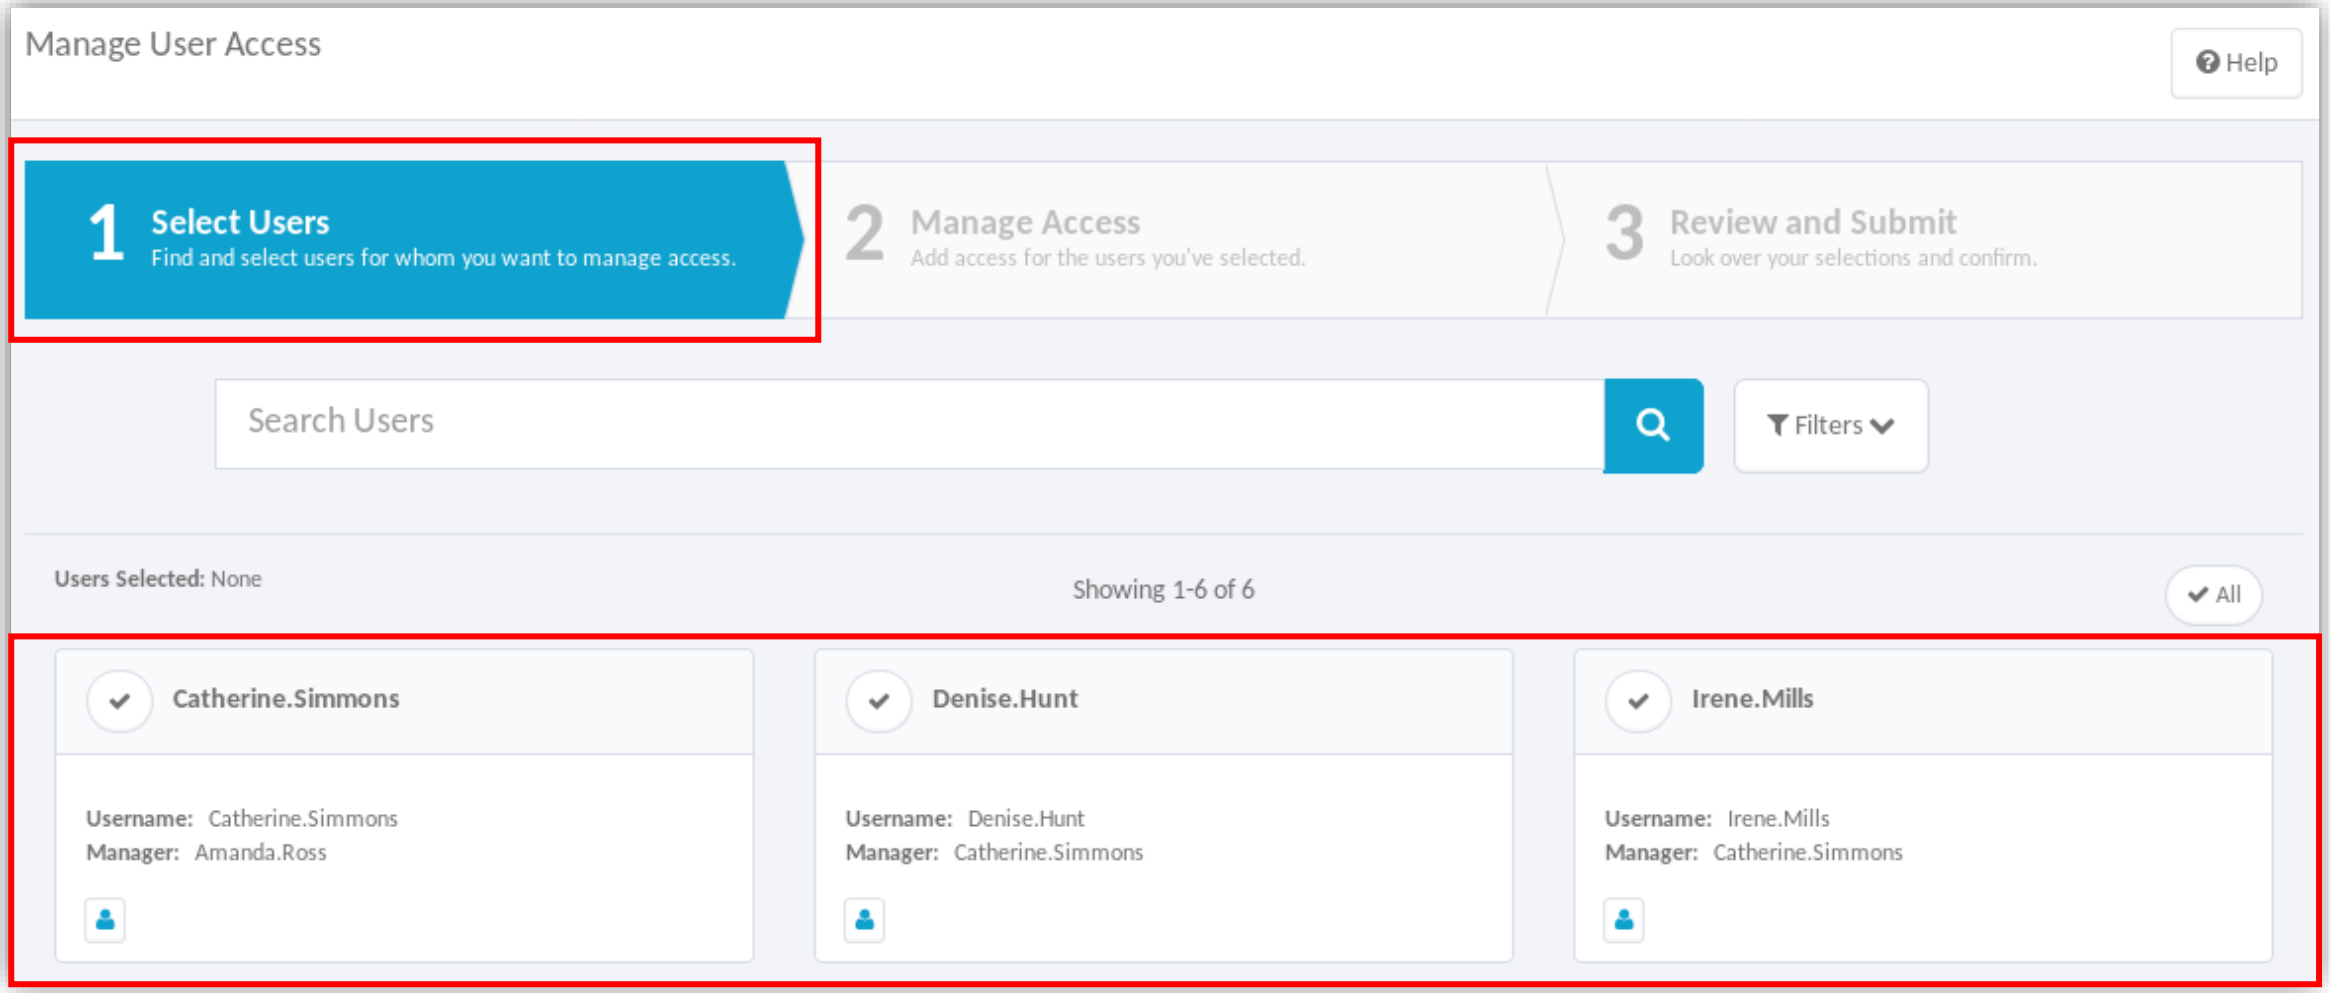

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Access Request Configuration Options

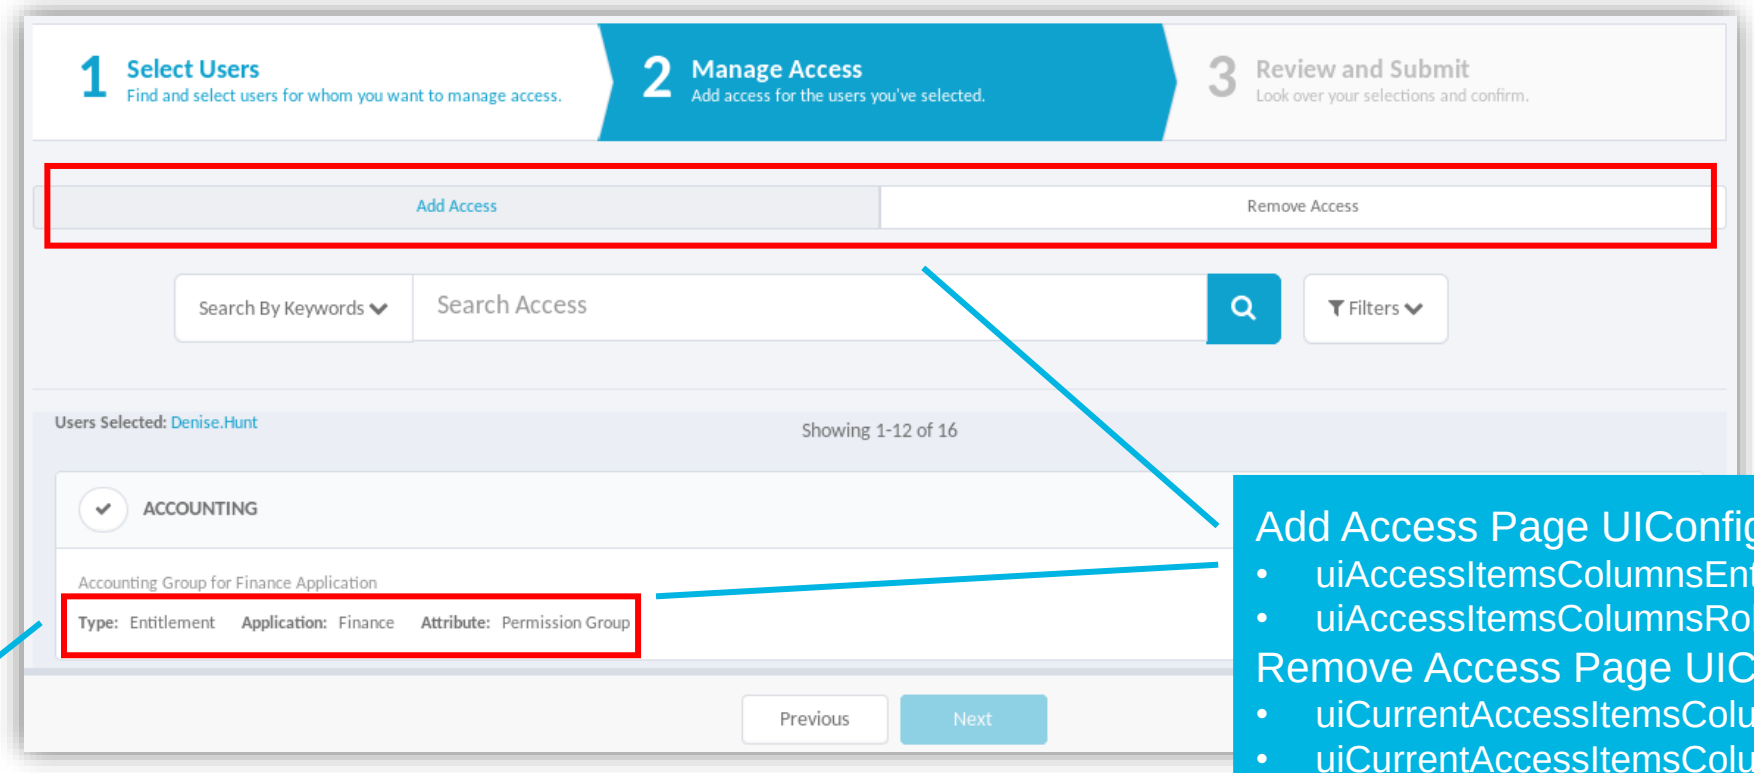

Add Access Page UIConfig Entry Keys:

- uiAccessItemsColumnsEntitlement
- uiAccessItemsColumnsRole

Remove Access Page UIConfig Entry Keys:

- uiCurrentAccessItemsColumnsEntitlement
- uiCurrentAccessItemsColumnsRole


Listed roles and entitlements controlled by Quicklink configuration

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Search Configuration

Searching by Keyword

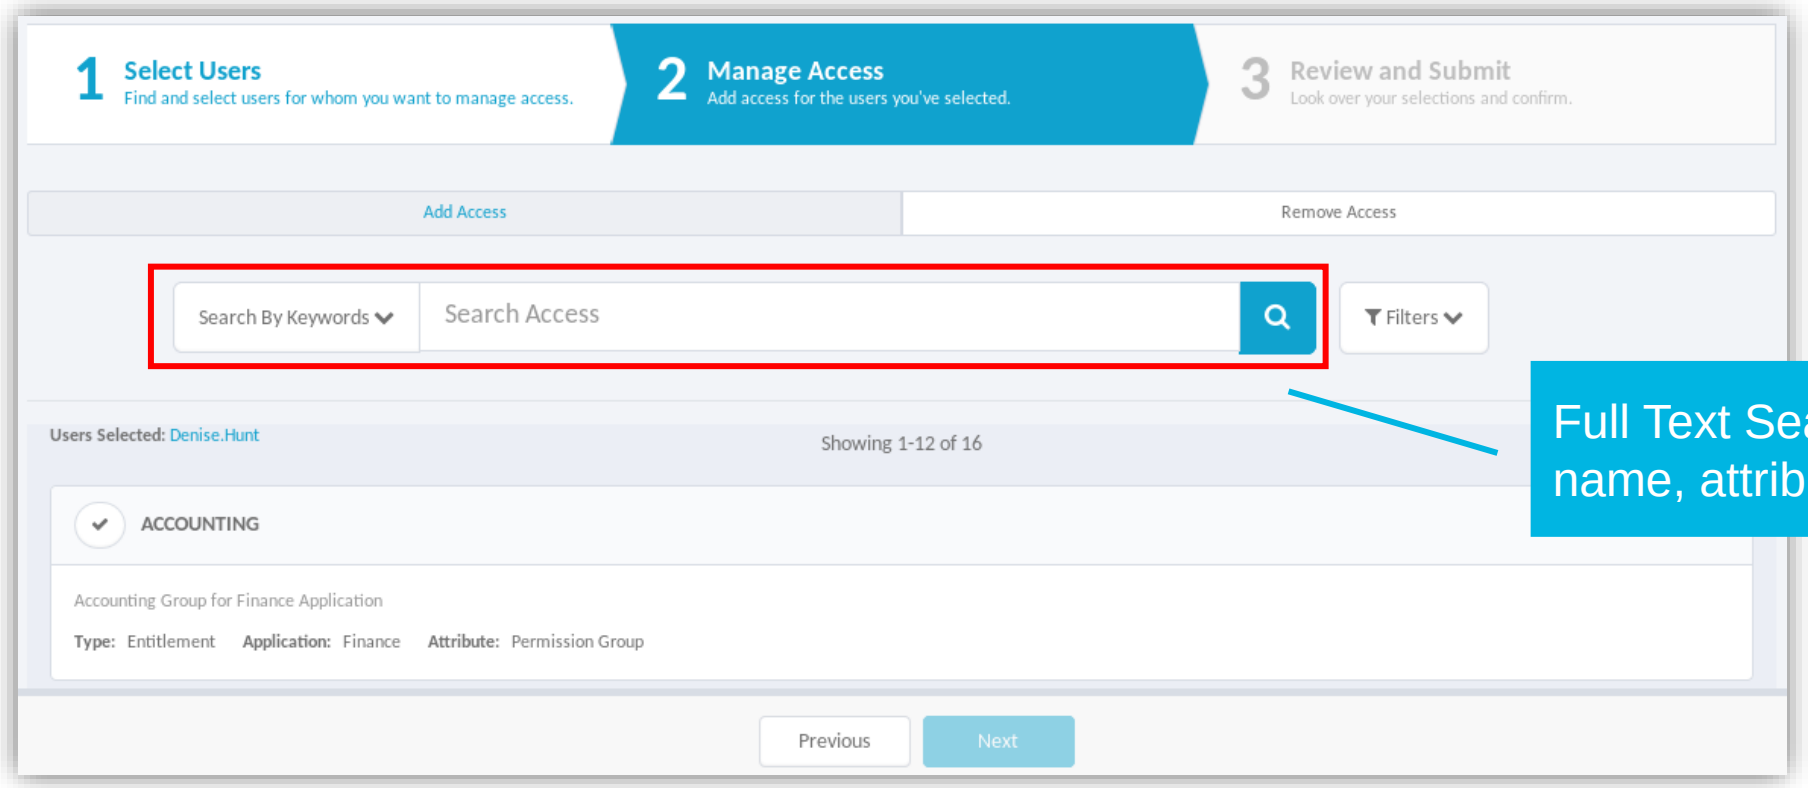


Full Text Search (default) includes name, attributes, and description

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Searching Configuration

Searching by Affinity

- Search by *identity match* or by *population attribute matching*
- Request access from search results
- Available only to those who can request access for others
- Quicklink configuration

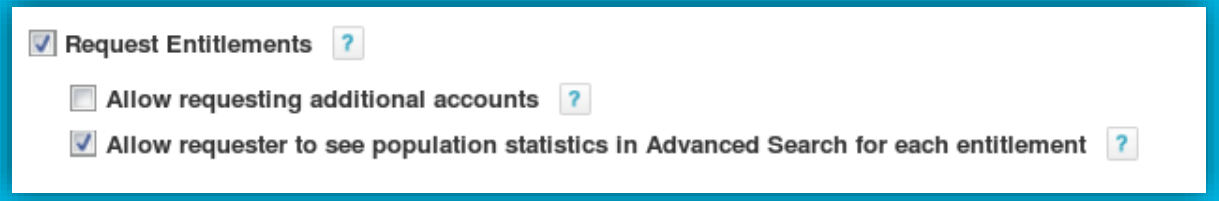


- UIConfig controls available search options
  - Entry Key: “IcmSearchIdentityAttributes”

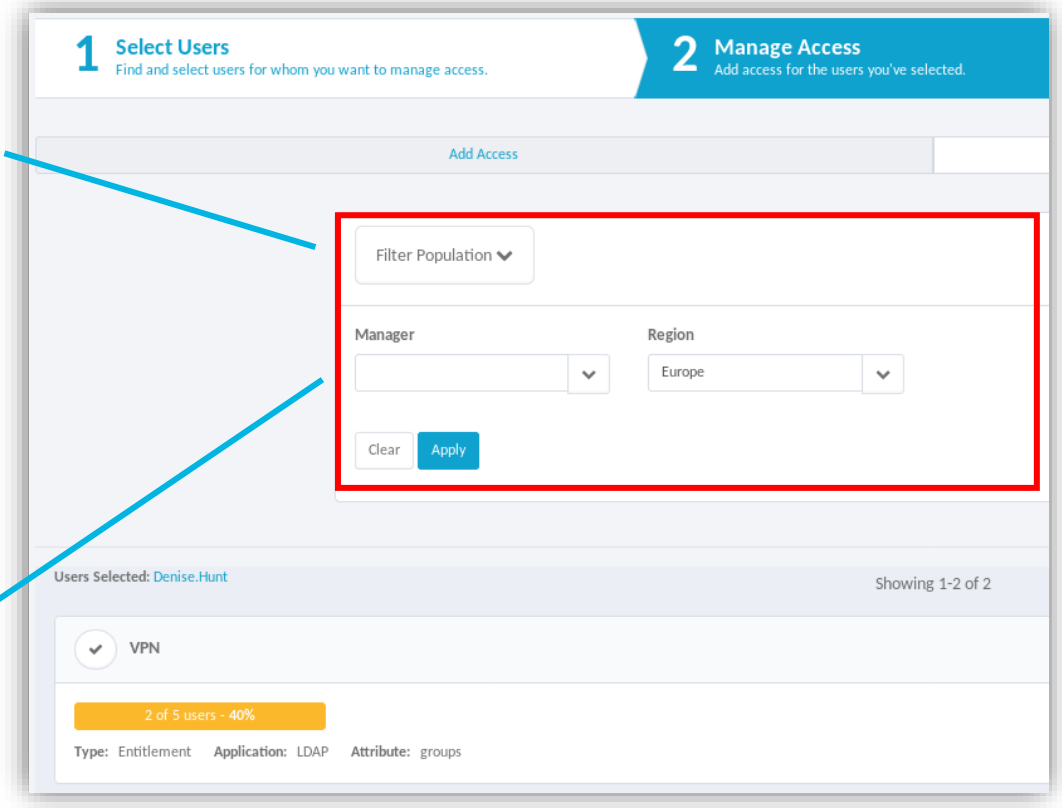

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Searching Configuration


Filtering Search Results

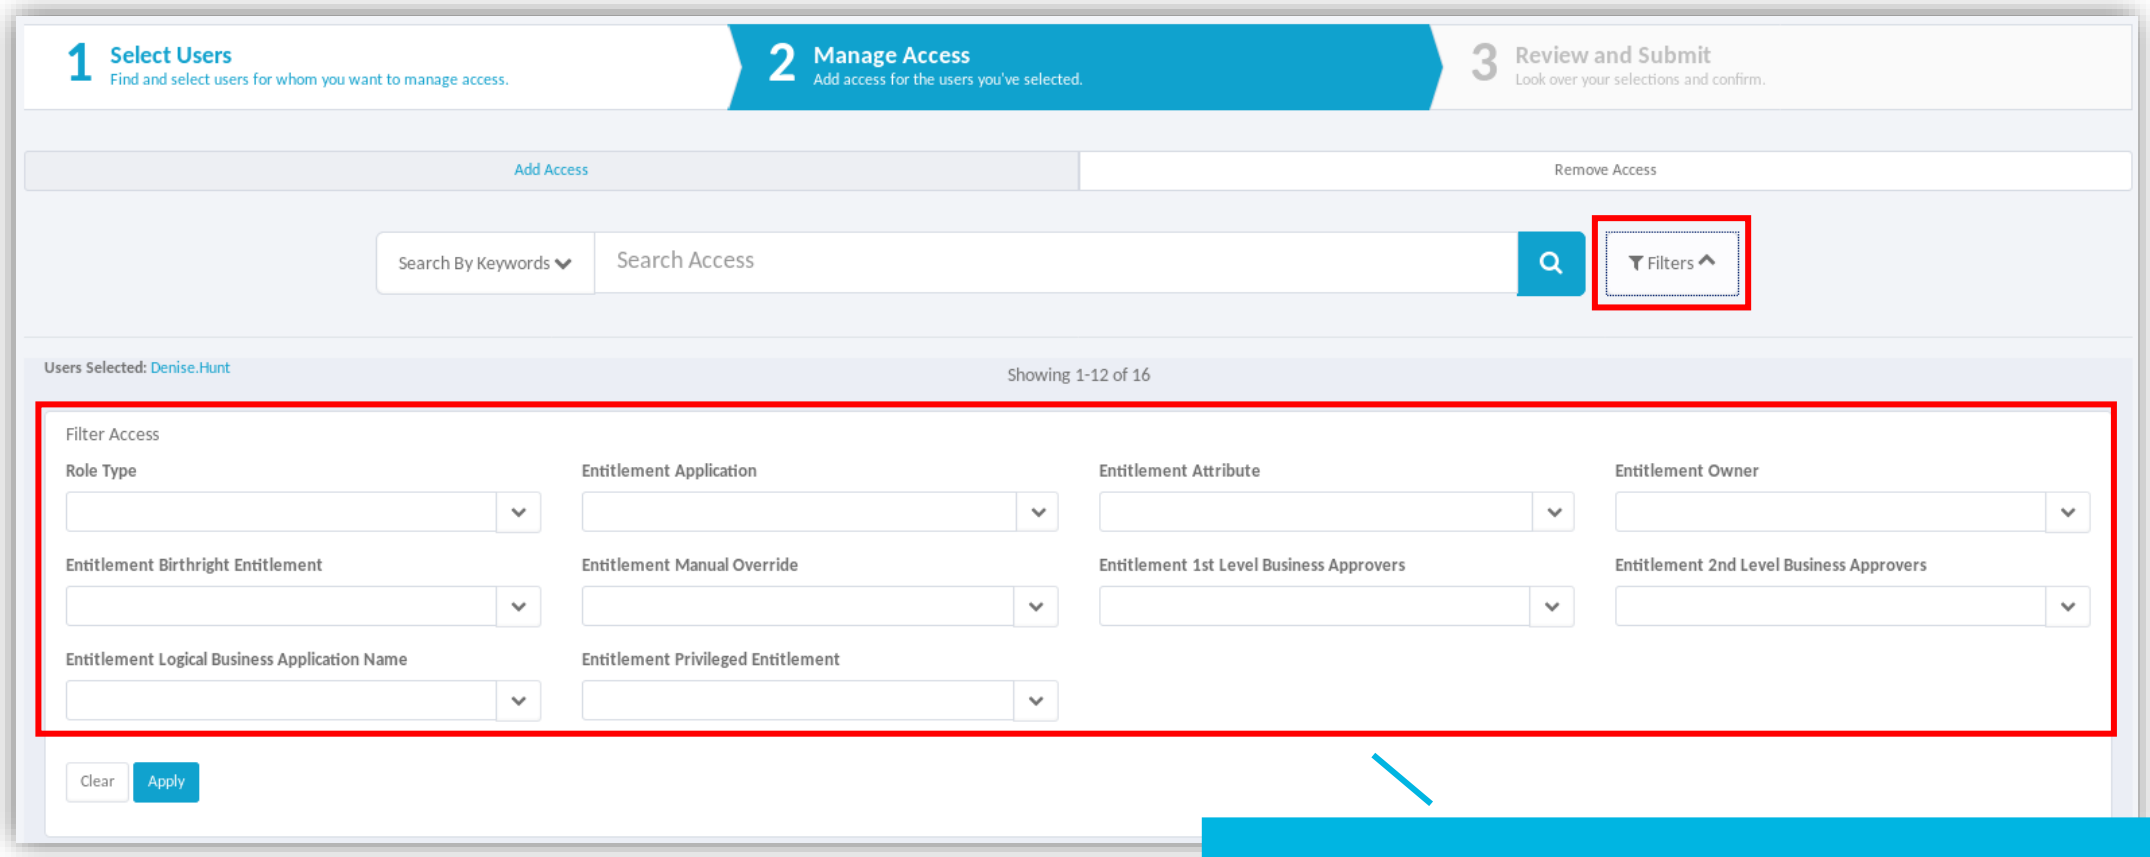

- *Searchable* entitlement/role extended attributes automatically added to search parameters

Submitting the Request

Review and Submit

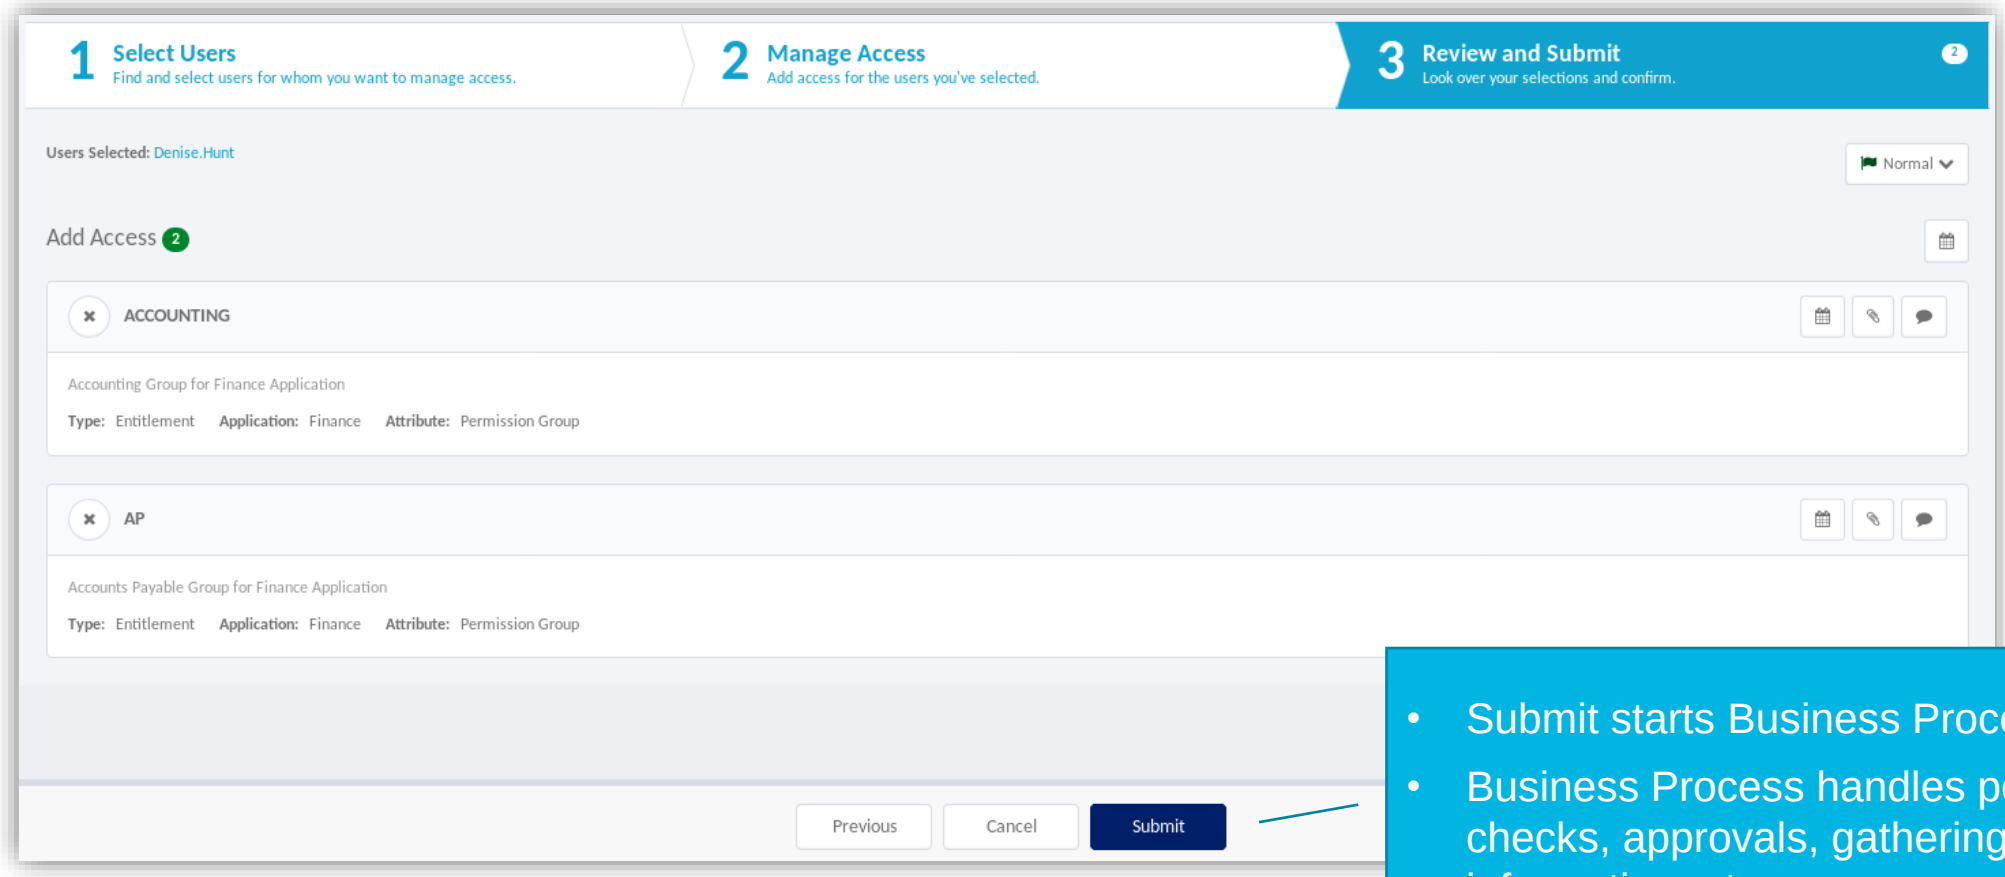


- Submit starts Business Process
- Business Process handles policy checks, approvals, gathering needed information, etc.

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Workflow Execution

WorkflowCase Per Target User

Example: Catherine Simmons submits request for 3 employees

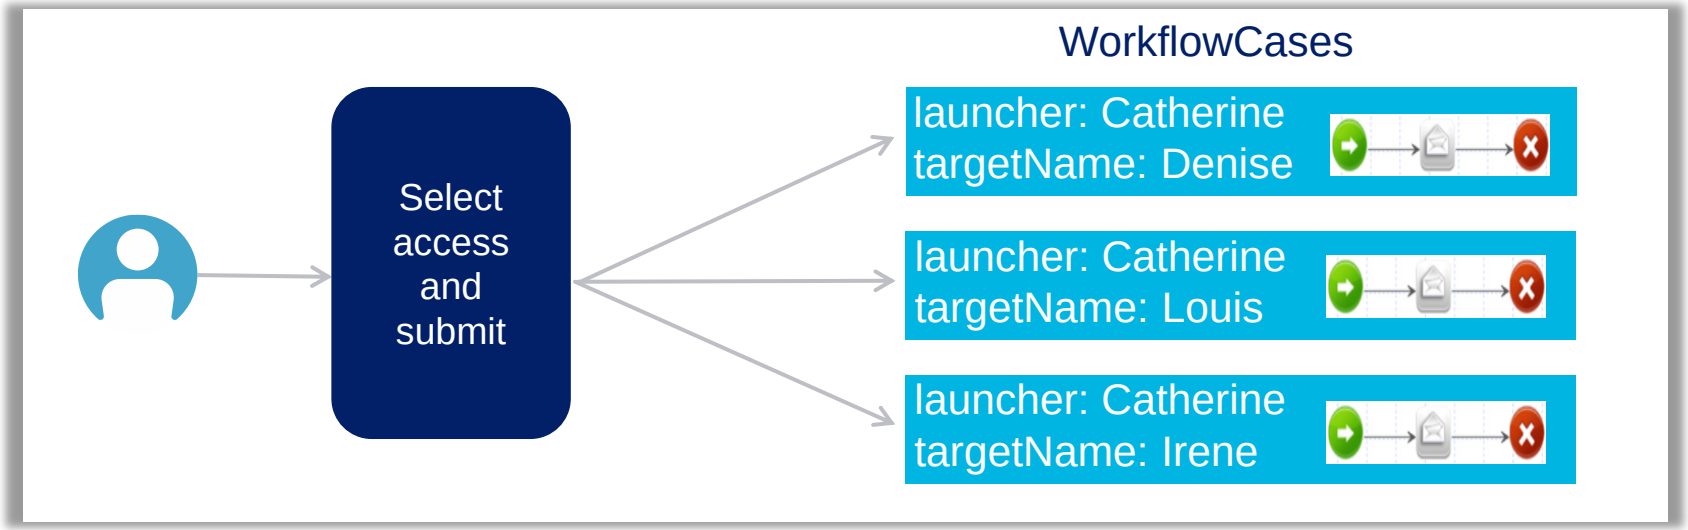

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Approval Process


Default and Configuration


Method	Default Approver	Configuration
Standard IdentityIQ workflow (LCM Provisioning)	Object owner	• Set variables on the provisioning workflows • Set rules (if necessary) on the provisioning workflows
Custom Workflow	Dependent upon design	Dependent upon design

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Track My Requests

Review Request

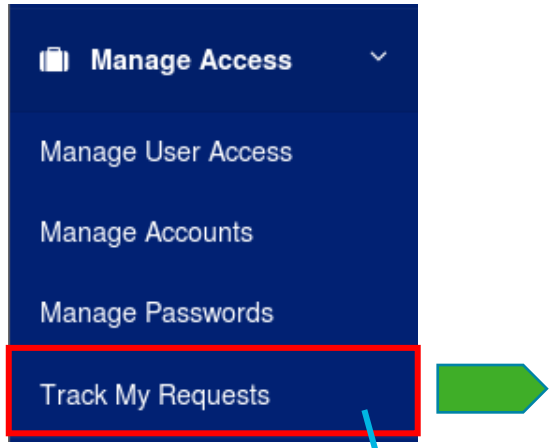

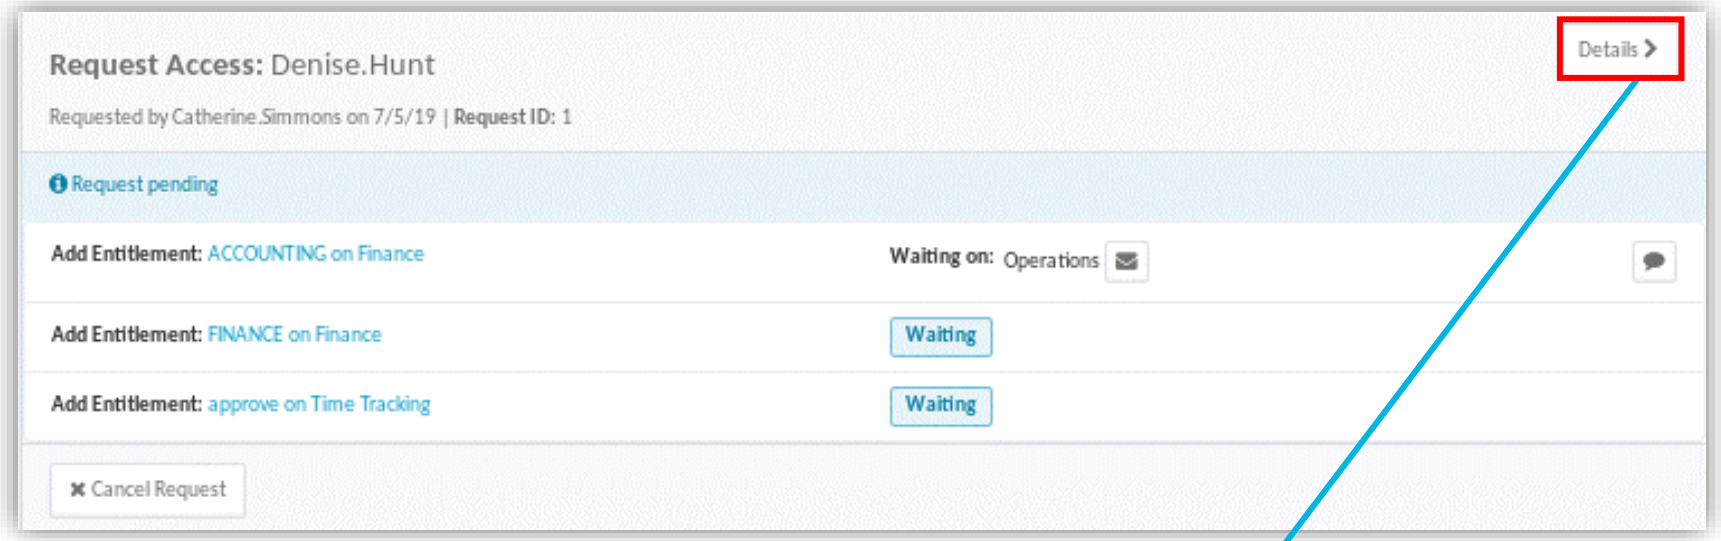

- View access requested ***by*** you or ***for*** you
- Administrators view all requests

- Approval status
- Provisioning status
- Error messages
- …and more

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Additional Access Request Options

Overview

Additional Access Request Options

- Attachments on access requests
- Future-dated provisioning actions
- Recommendation Engine advice

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Attachments on Access Requests

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Attachments on Access Requests

- Who can access attachments?
  - Requester
  - Requestee
  - Approver
  - System administrator
- Configuration options
  - Constrain file types
  - Require attachment with rule
- Limits
  - Maximum size: 20 MB
  - Single user request
  - 10 attachments per request

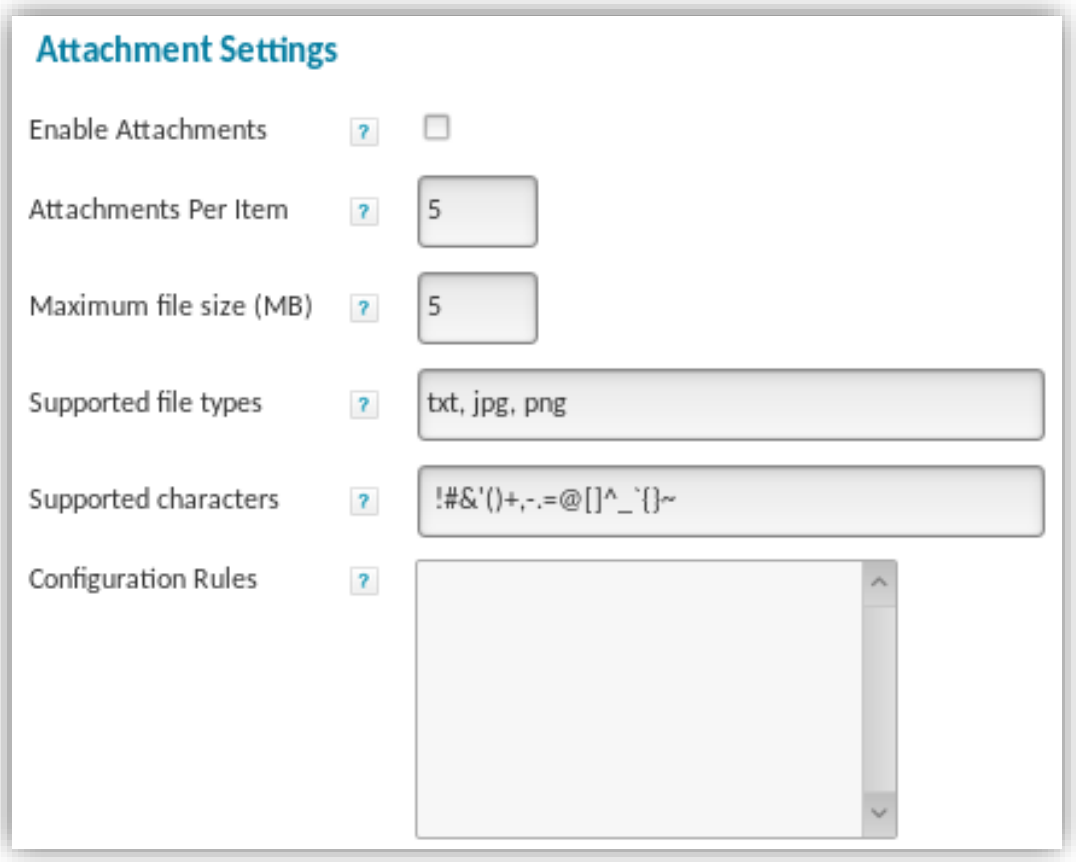


Global Settings → IdentityIQ Configuration → Miscellaneous


SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Attachments on Access Requests

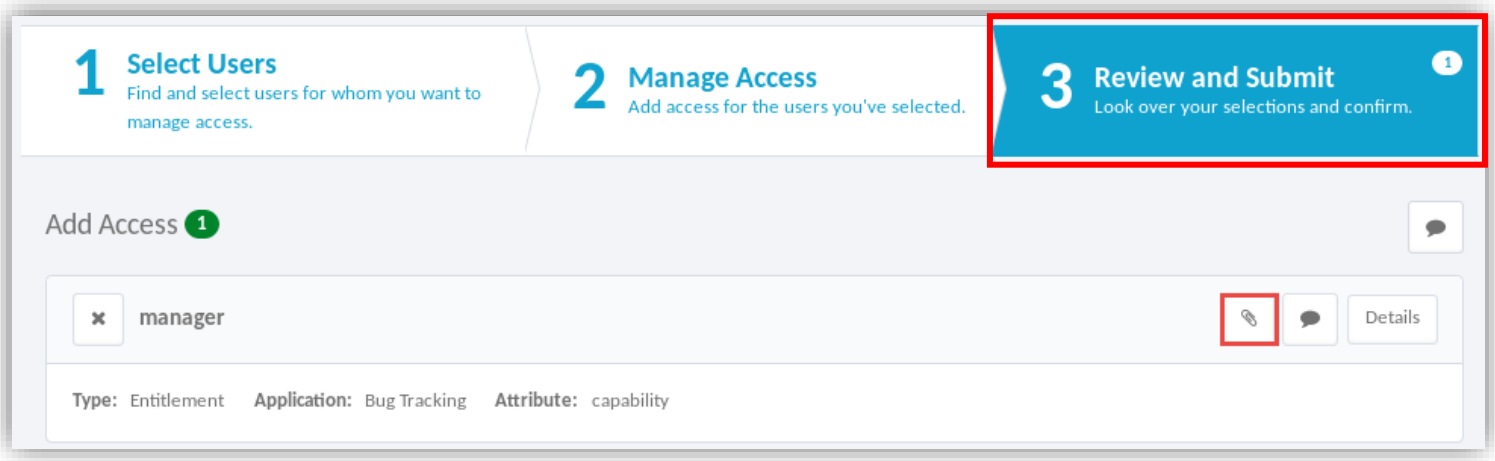

Access Request

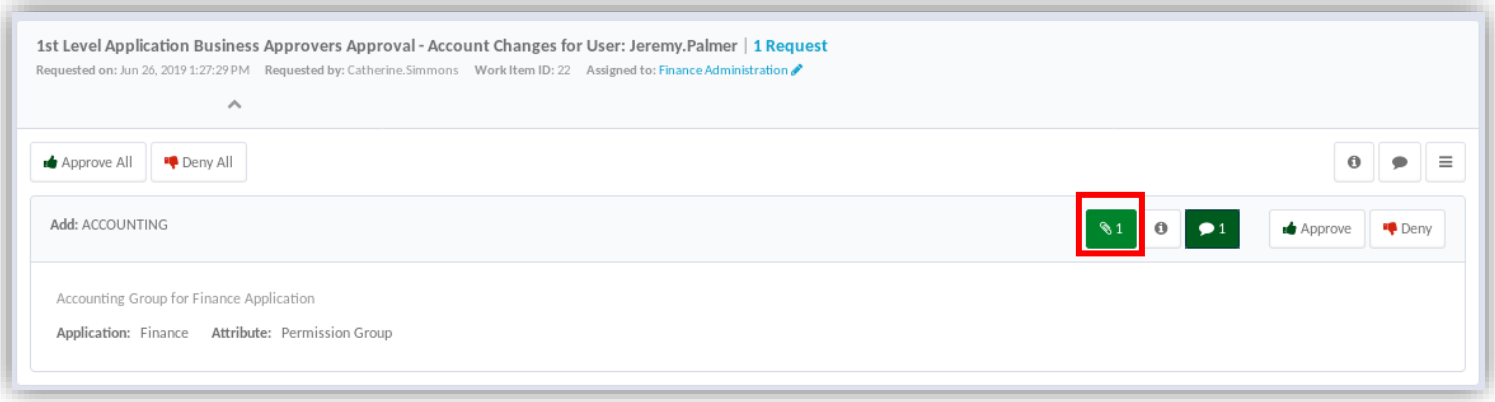

Approval

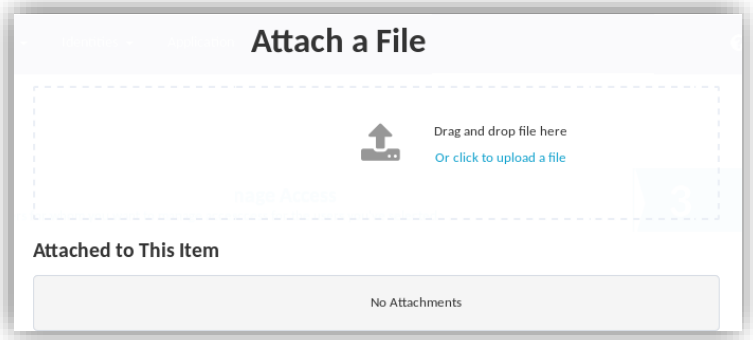

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Future-dated Provisioning Actions

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Role and Entitlement Assignment

Sunrise and Sunset Dates




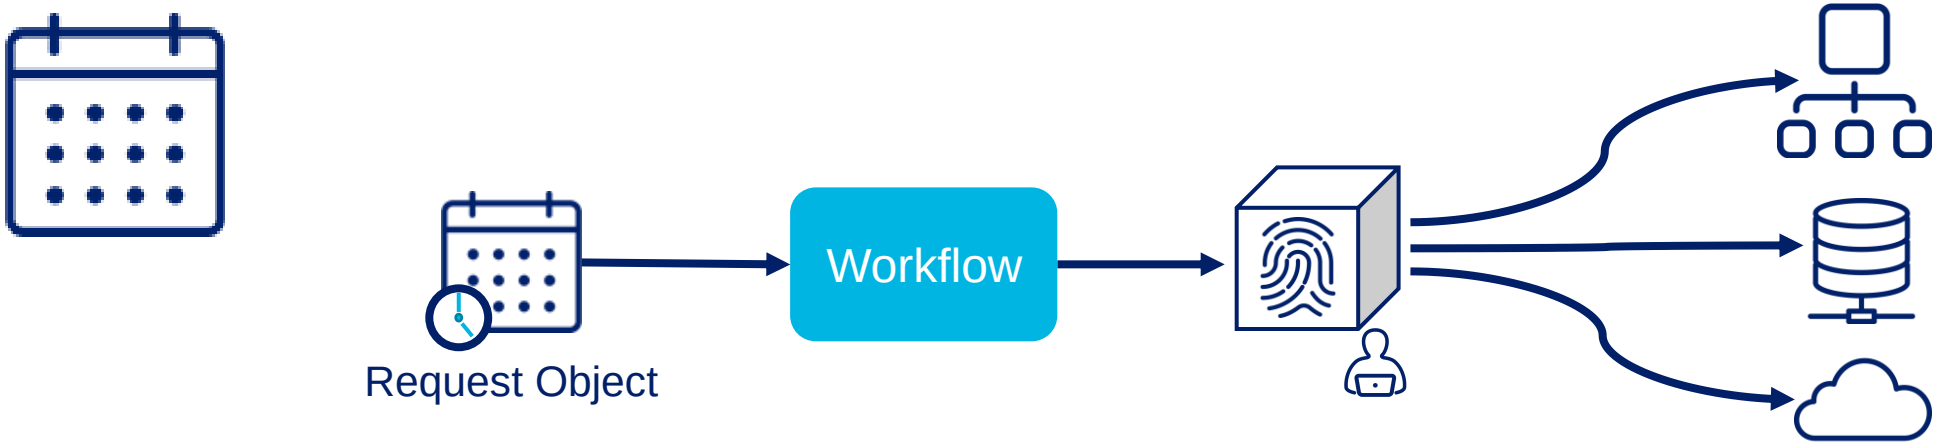


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Role and Entitlement Assignment

Sunrise/Sunset Configuration

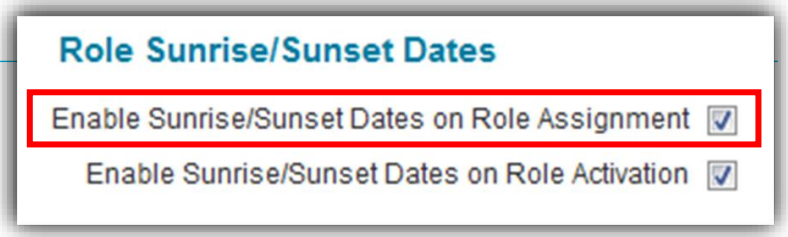


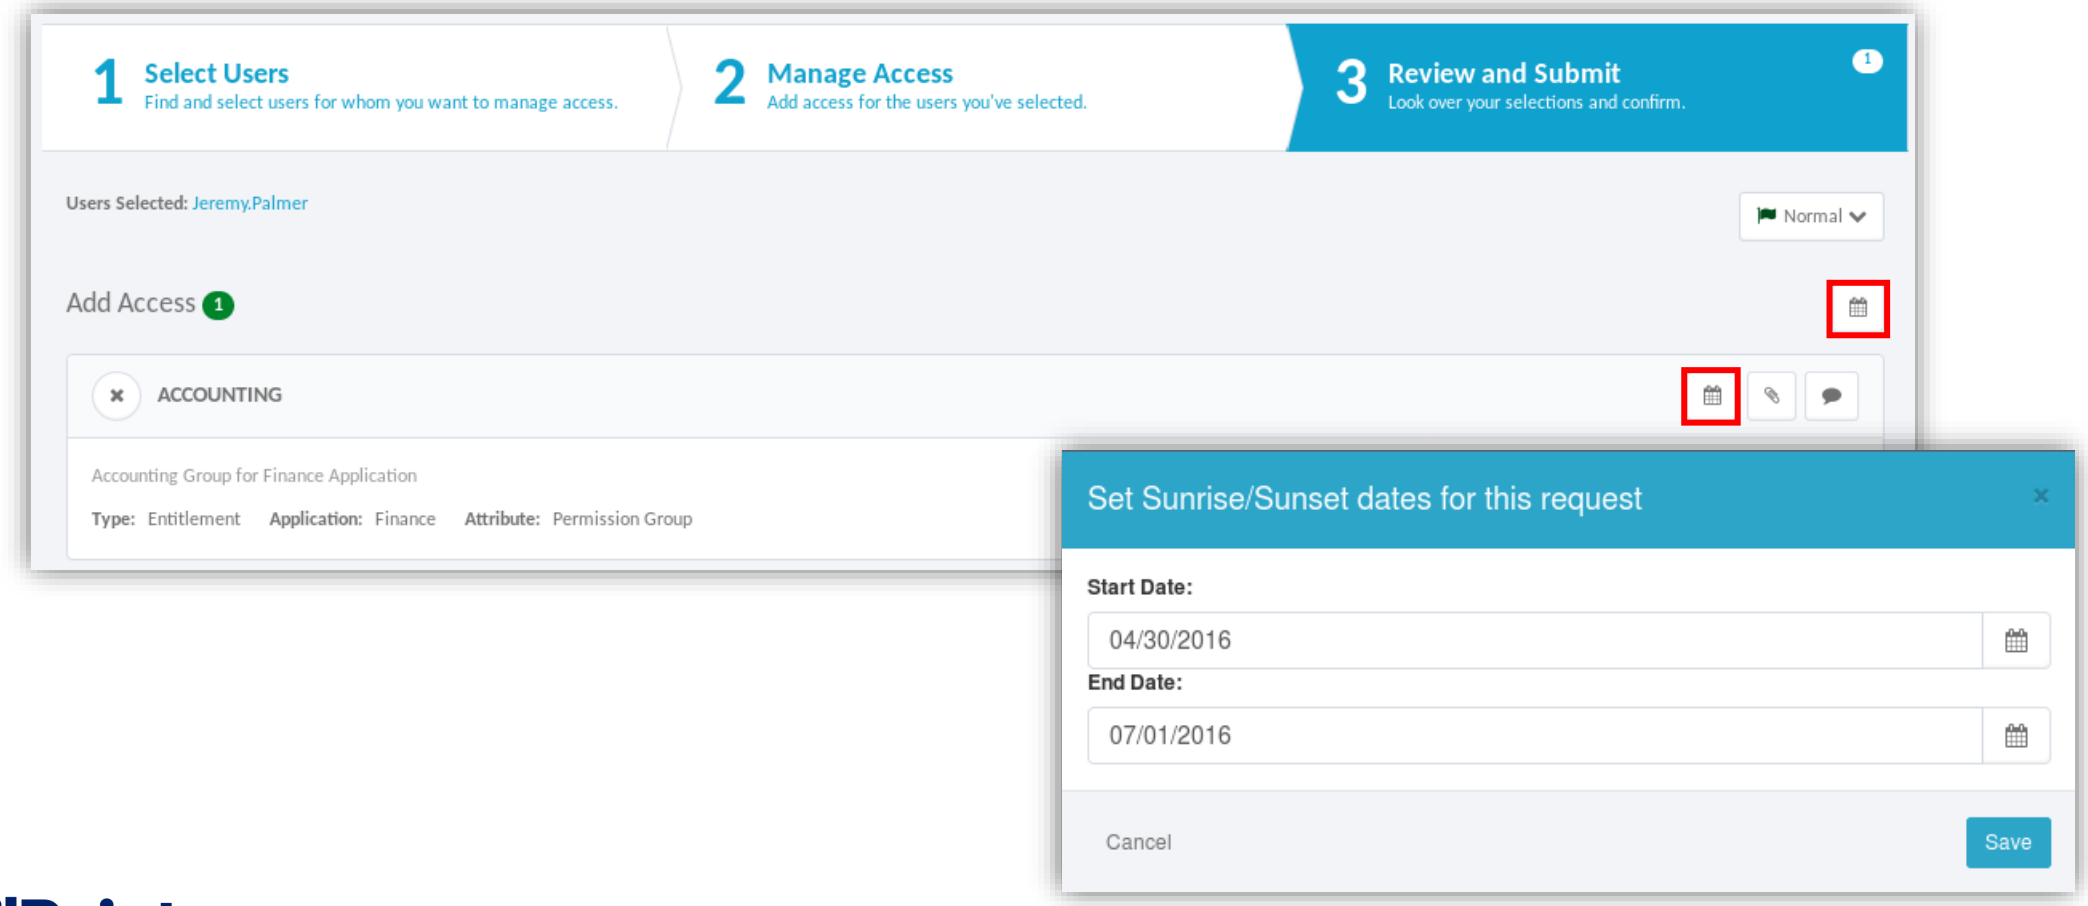

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Role Activation

Sunrise and Sunset Dates

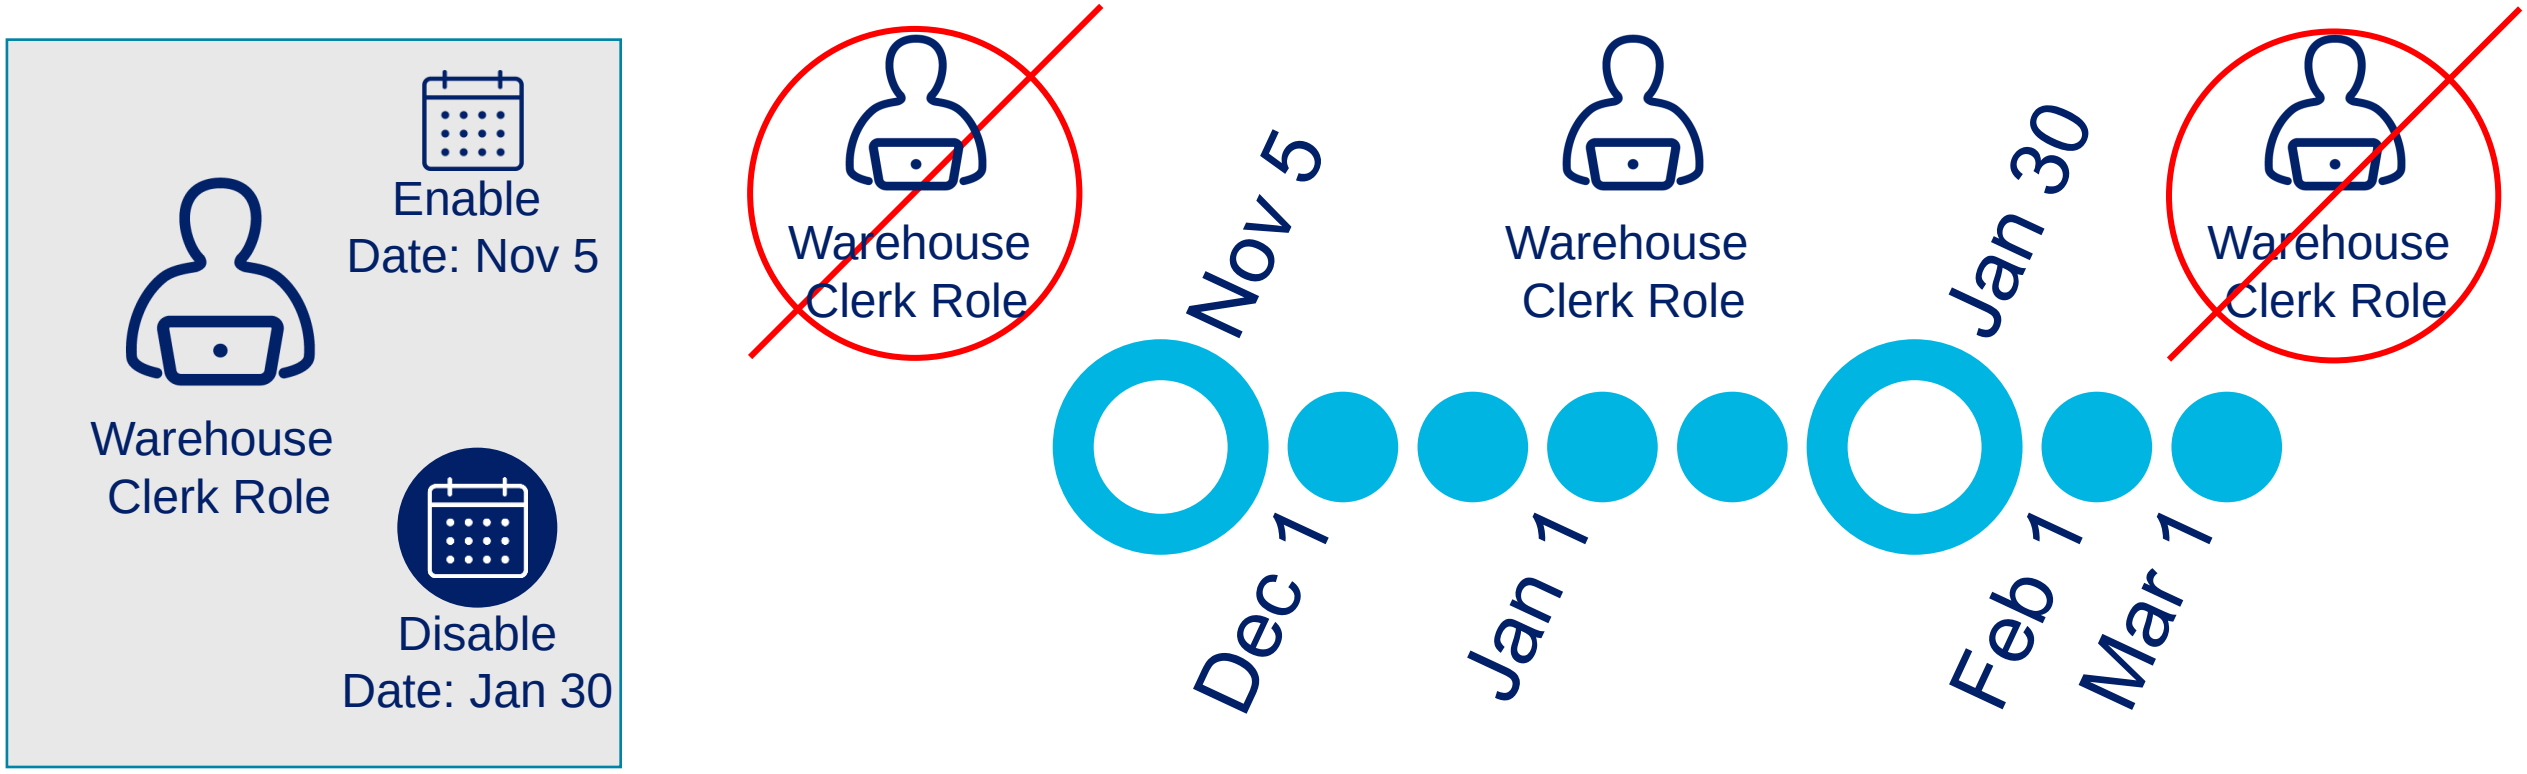


SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Role Activation

Sunrise/Sunset Configuration

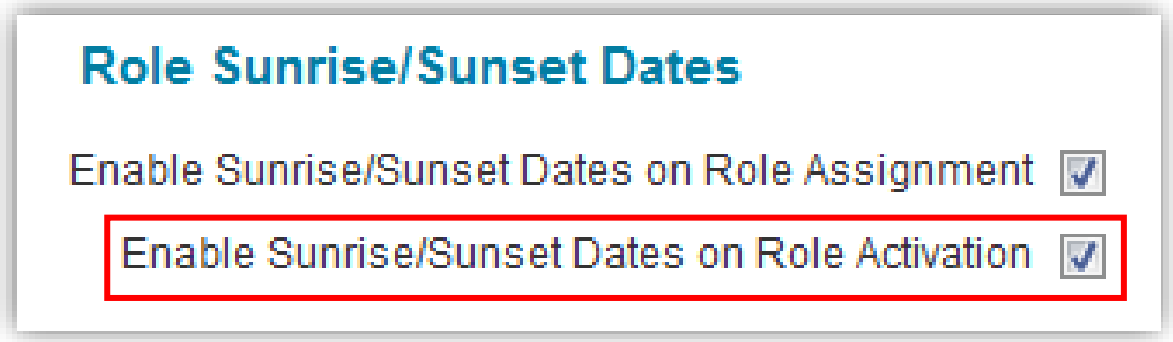

Global Settings → IdentityIQ Configuration → Roles

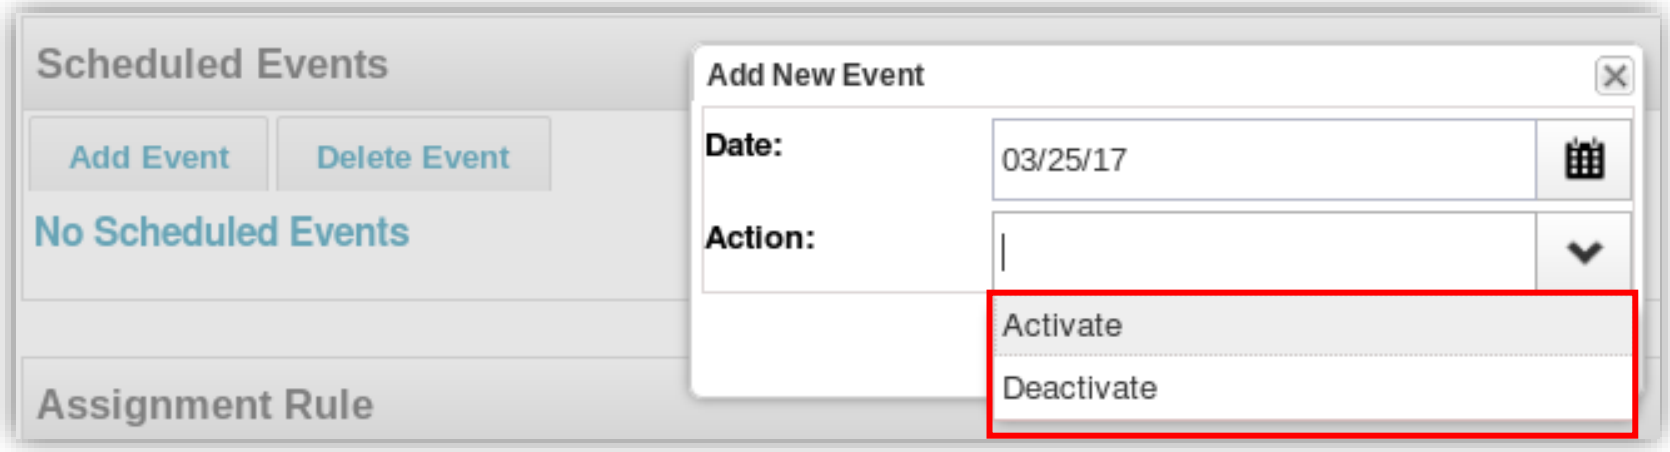

Setup → Roles → Edit Role → Scheduled Events → Add Event


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Recommendation Engine Advice

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Approving a Request

IdentityAI Guidance for Approvers

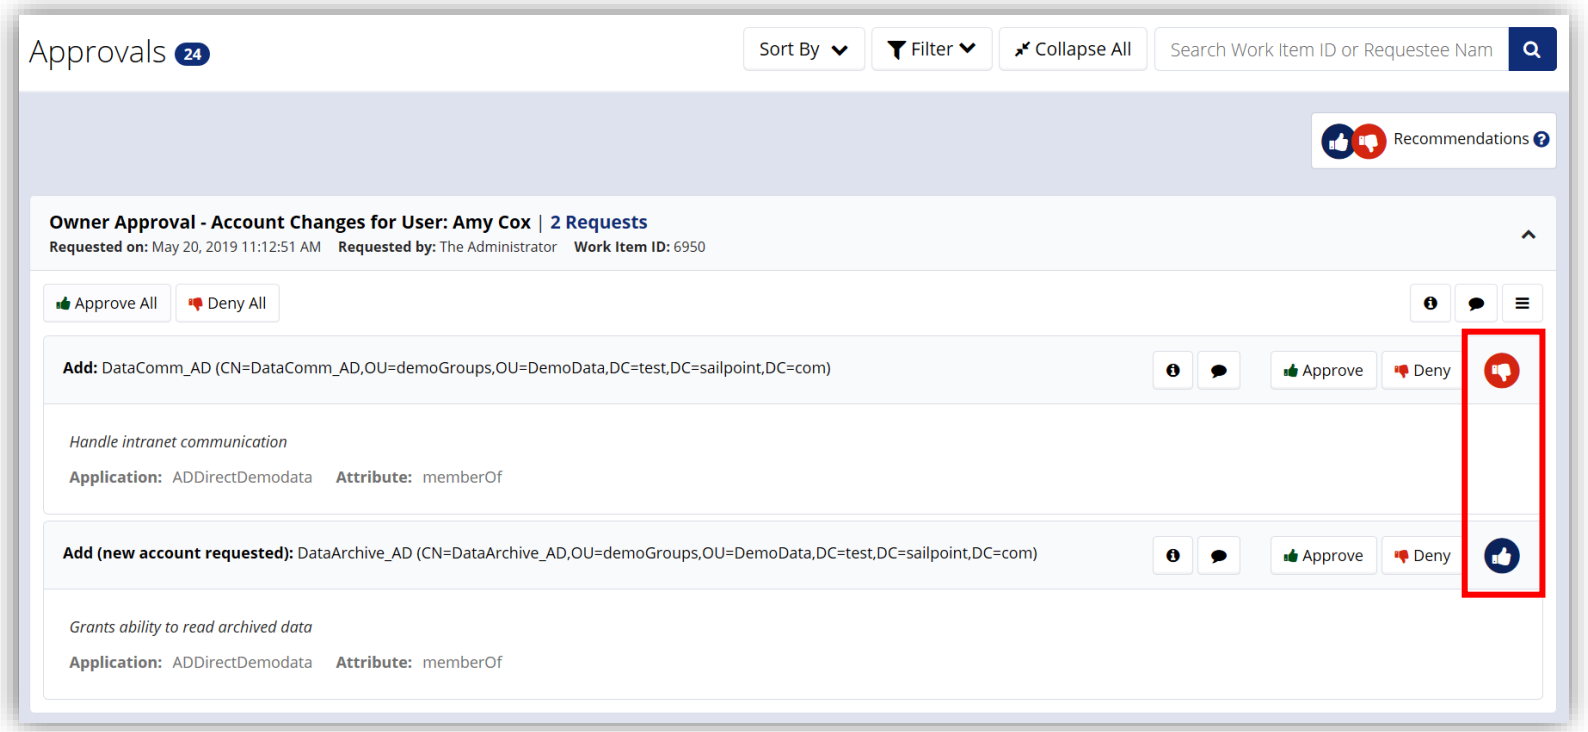

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 4, Exercise 4, 5 and Extension Exercise 7

- Exercise 4: Configure access requests
  - Update entitlements: description, requestable
  - Allow attachments on access requests
  - Configure Request Access options
- Exercise 5: Test access requests
  - Retry Provisioning
  - Access Request with Attachments
  - Preventive Policy and Multi-Step Approvals
  - Request Permitted IT Roles

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint




Other Lifecycle Manager Requests

IdentityIQ Implementation and Administration: Essentials

Remaining LCM Quicklinks

- Act on connected applications
  - Manage Accounts
  - Manage Passwords
- Act on IdentityIQ
  - Create Identity
  - Edit Identity
  - View Identity
- All can act on only one requestee at a time

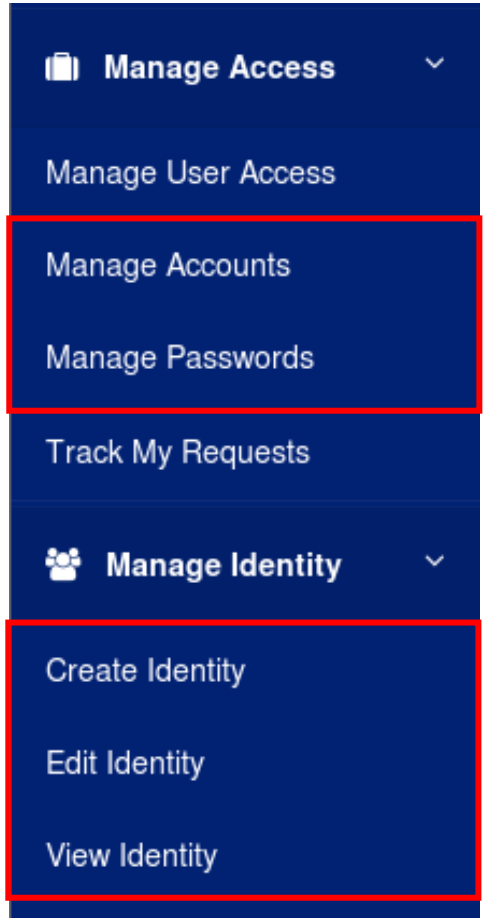


SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Submitting Single User Requests

Request for Others

- Card for each identity for which requester can perform action

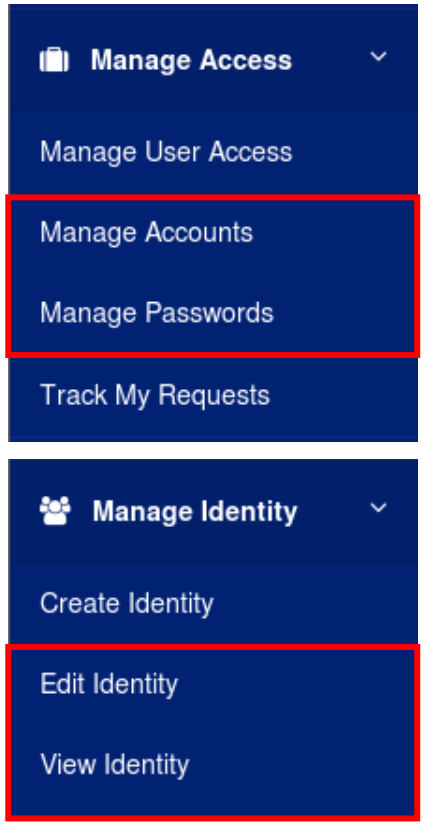


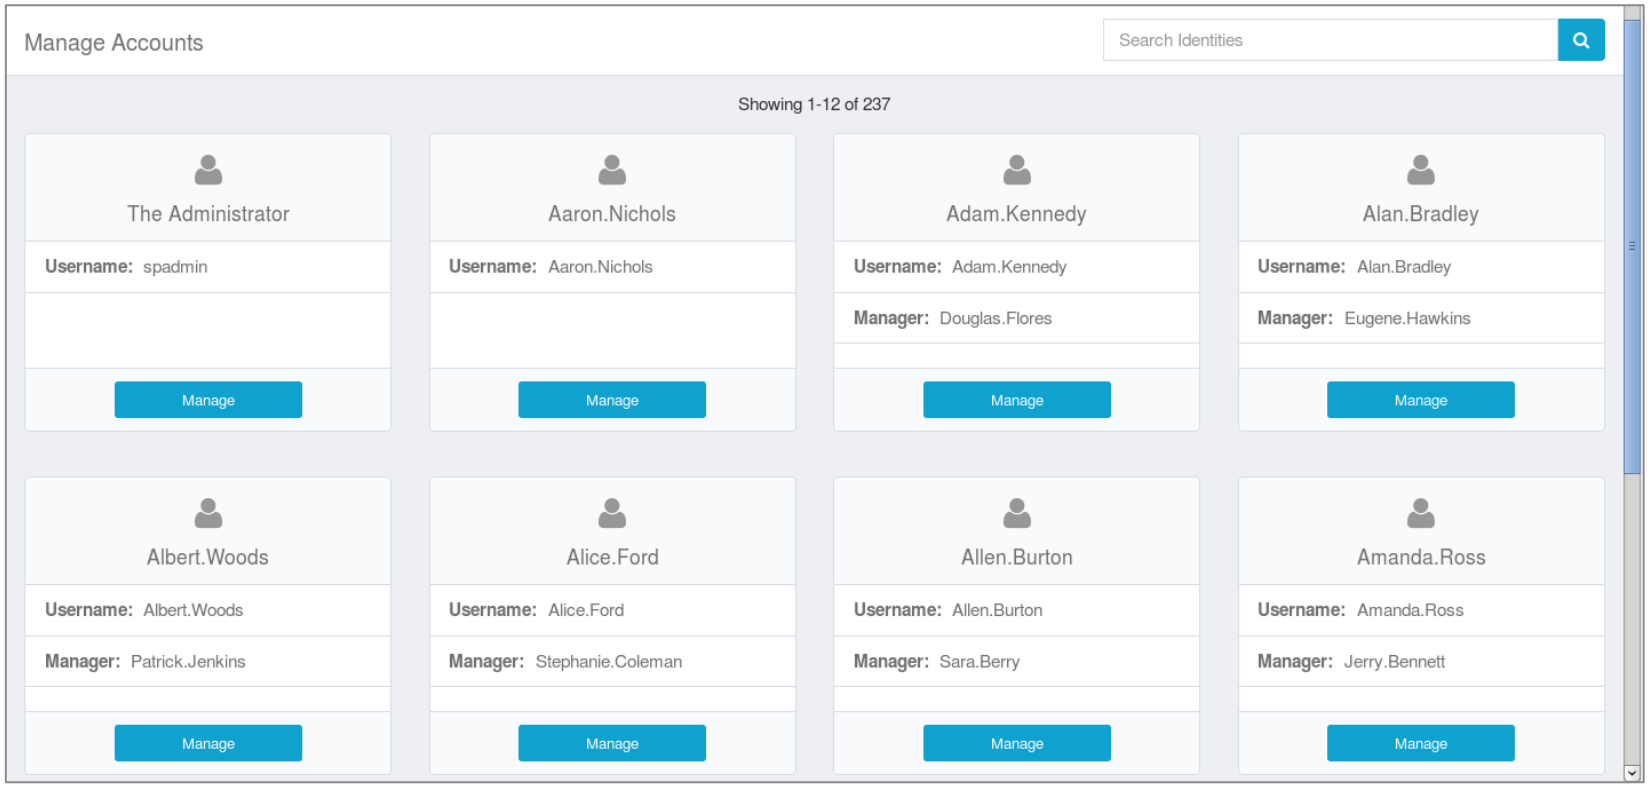

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Details Menu


Quicklinks with Secondary Menu

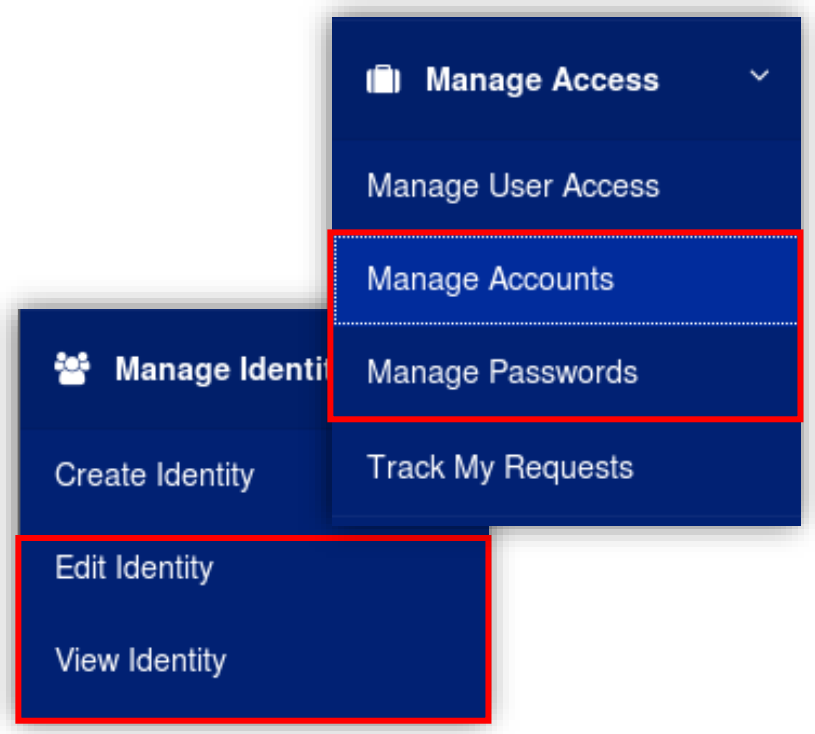

Select Quicklink



Select single user

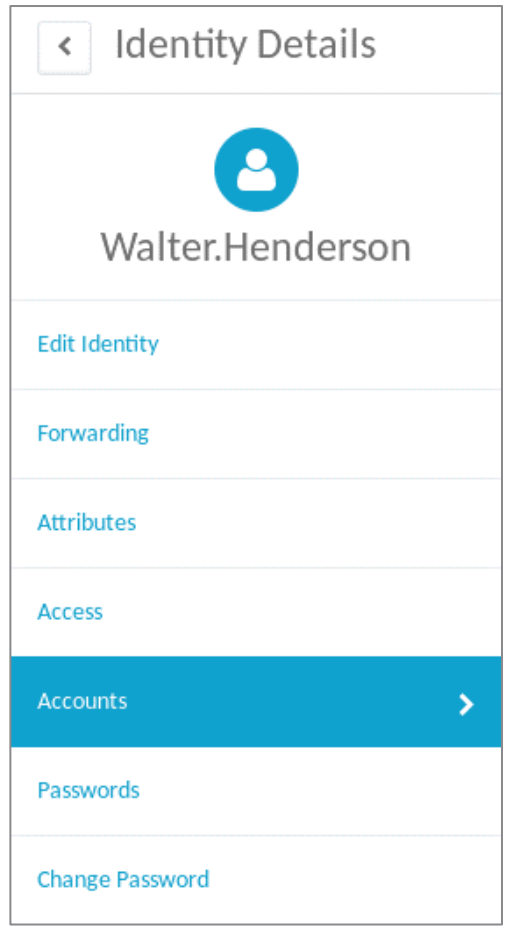

Perform selected or alternative action

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configuring Identity Details Menu


Controlled by Corresponding Quicklink Population

Edit Identity

View Identity

Manage Accounts

Manage Passwords

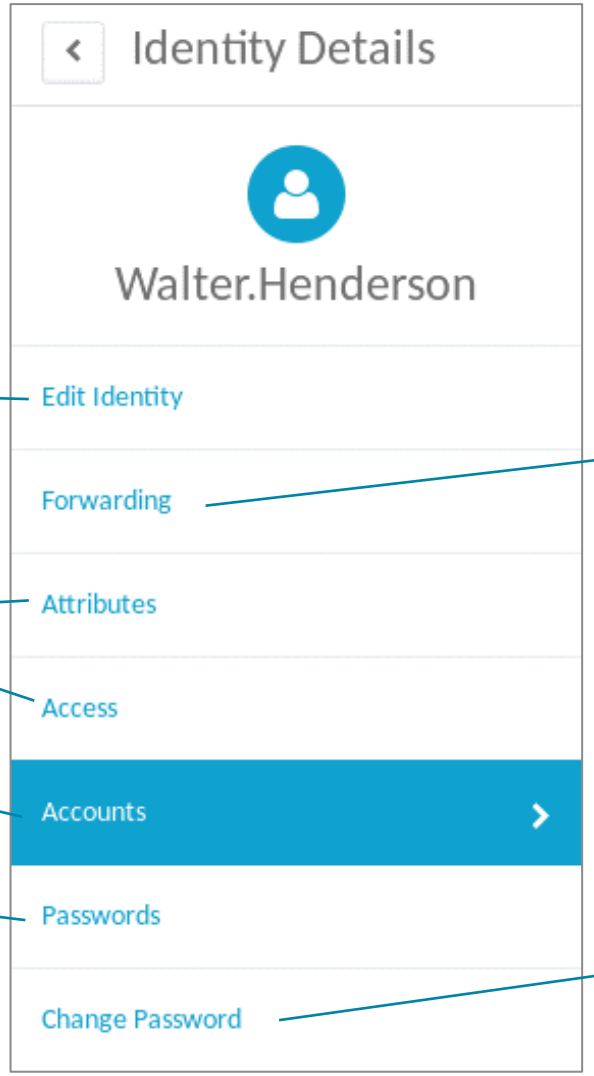

Add SP Right *SetIdentityForwarding* to capability and assign capability to user


Assign *Password Administrator* capability to user

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Configuring Manage Accounts Quicklink

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage Accounts Quicklink

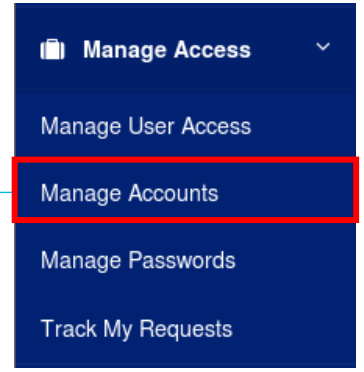


- Manage existing application accounts
  - Enable, Disable, Unlock, Delete
- Request a new account
  - One account or additional account
    - Configurable per application

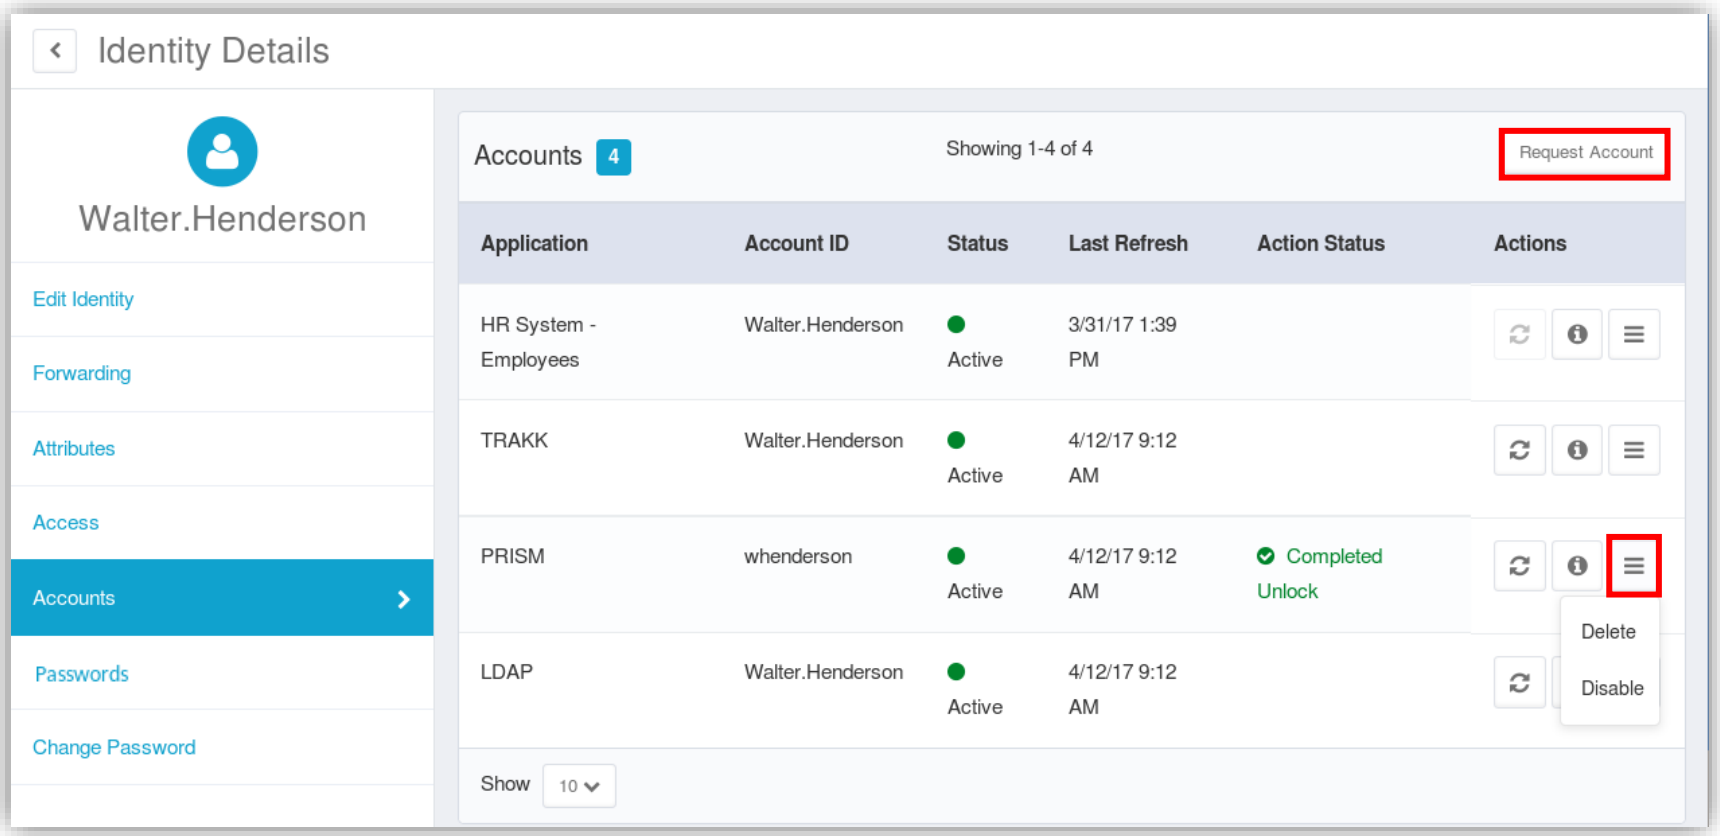

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Manage Accounts Quicklink


Configuration Options

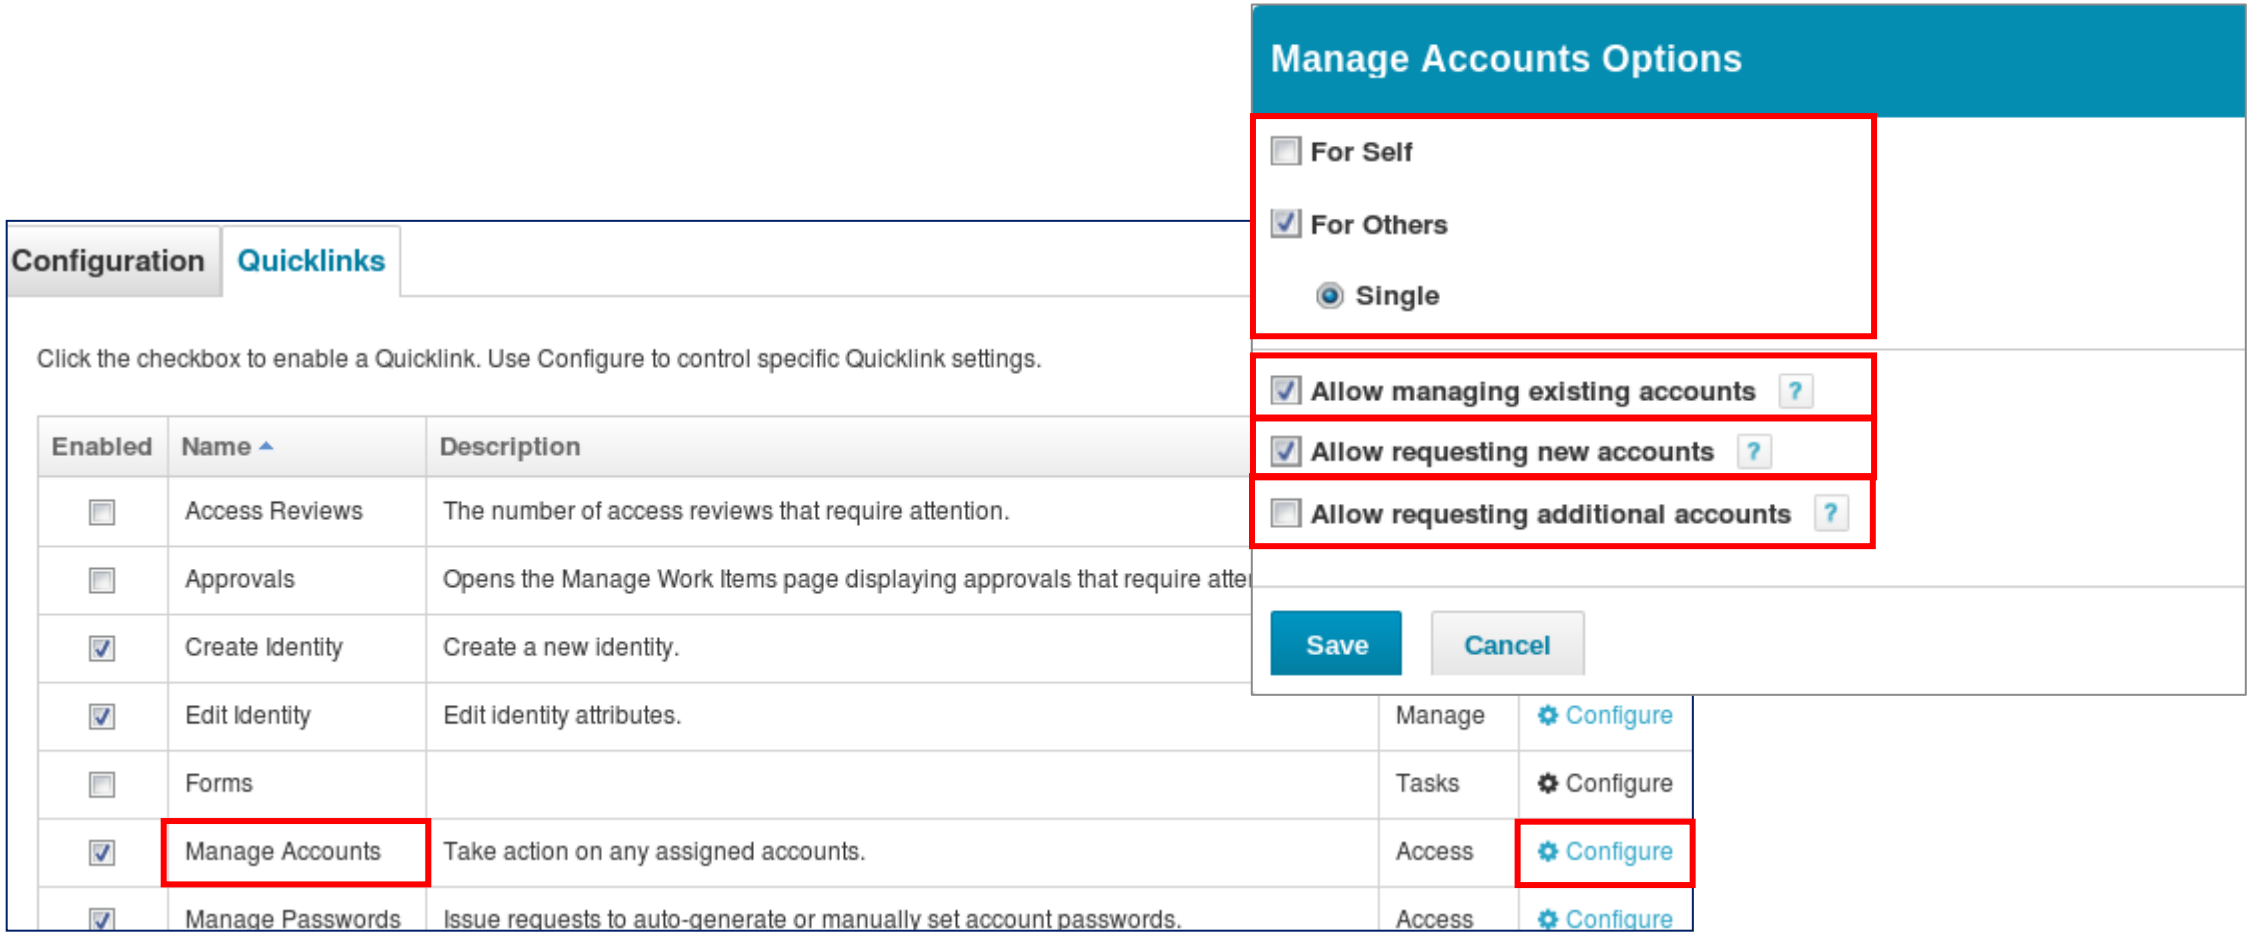


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

LCM Configuration

Supporting Account Only Requests

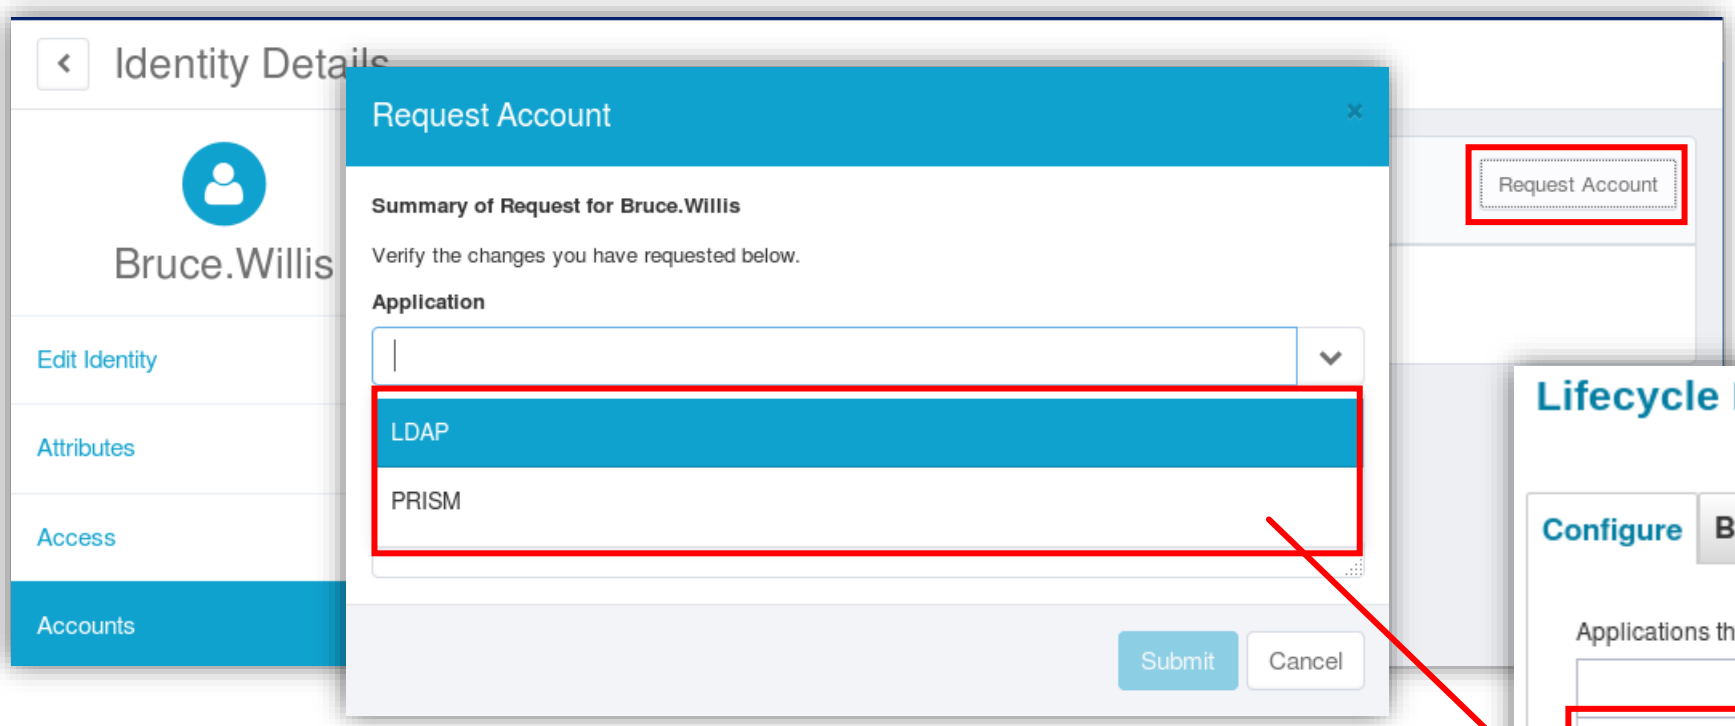

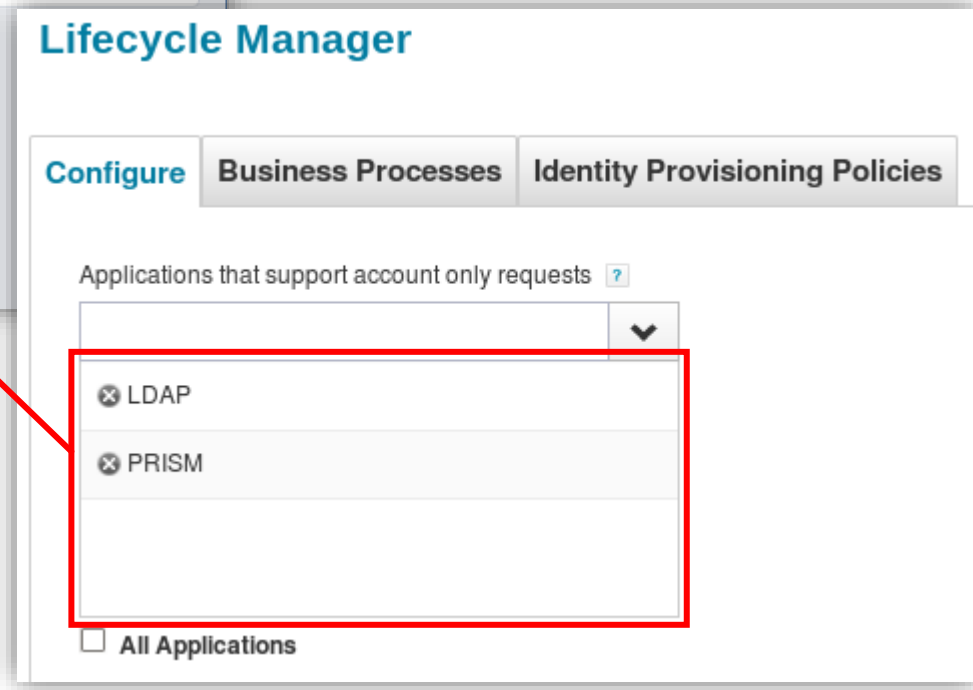



- Quicklink option
  - Allow requesting new accounts

SailPoint

LCM Configuration

Supporting Requests for Additional Account

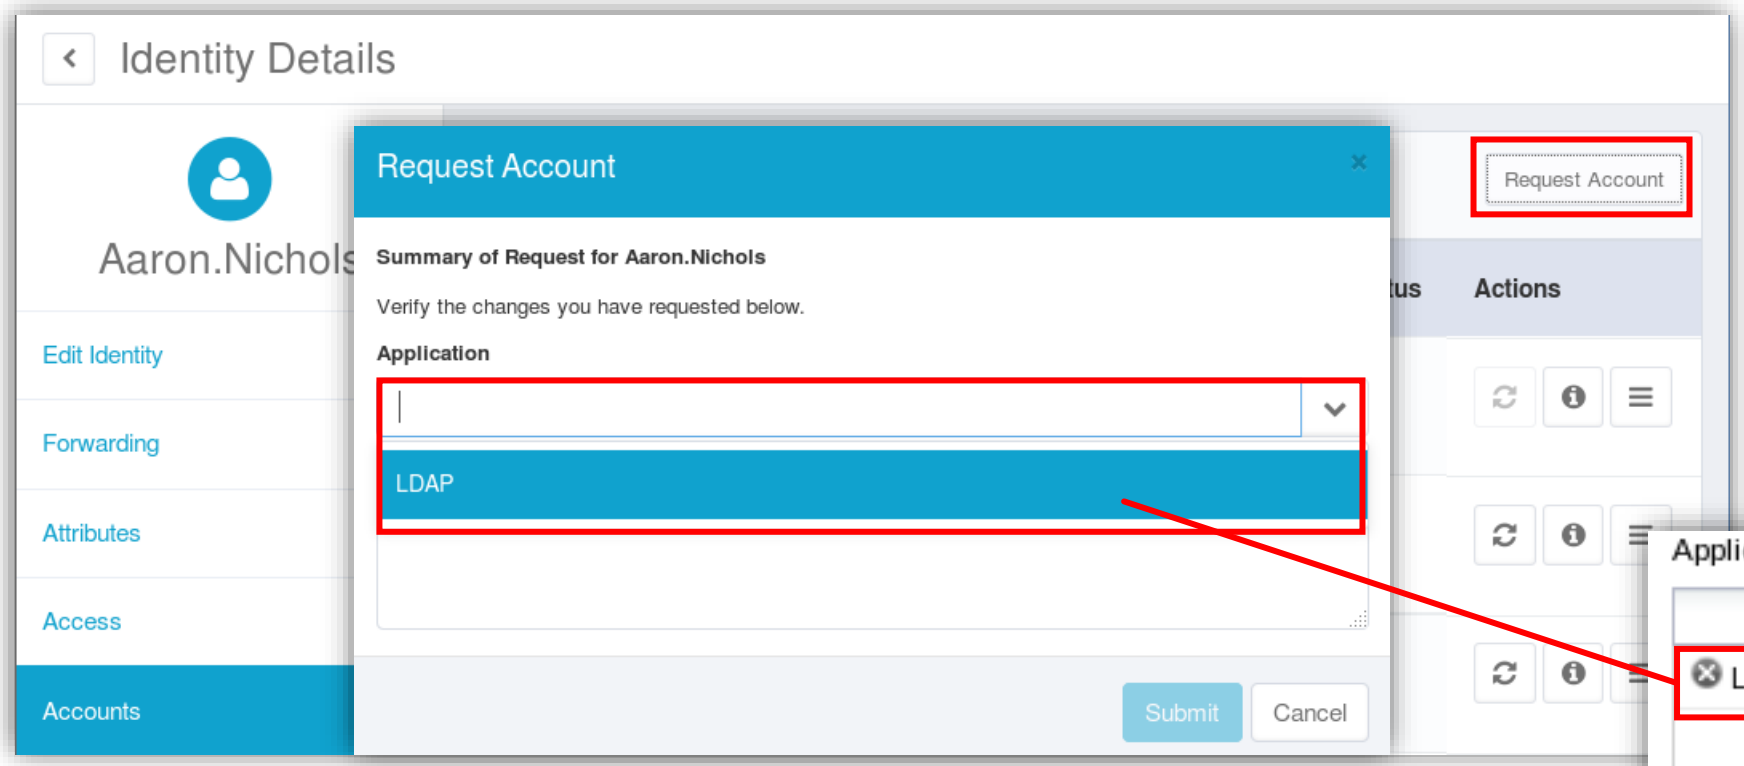

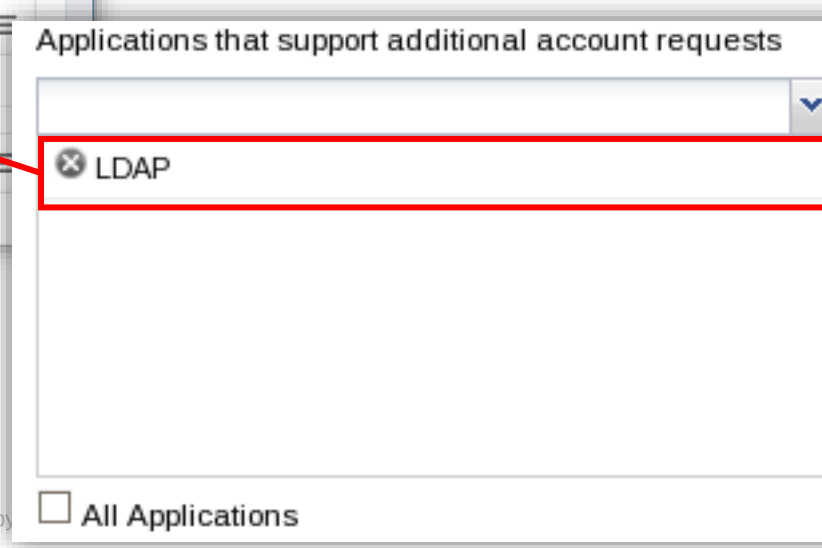


- Quicklink option
  - Allow requesting additional accounts


Copy

LCM Configuration

Supporting Account Operations

- Quicklink option
  - Allow managing existing accounts

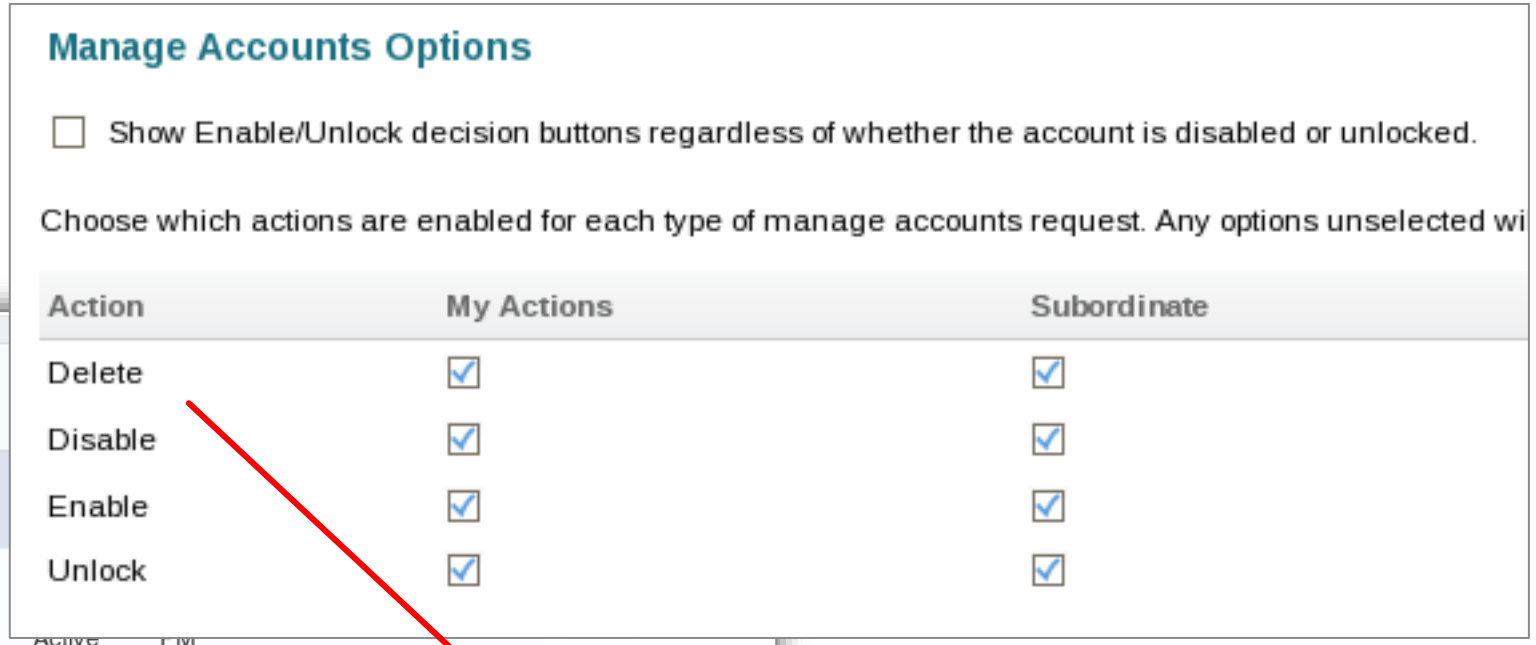

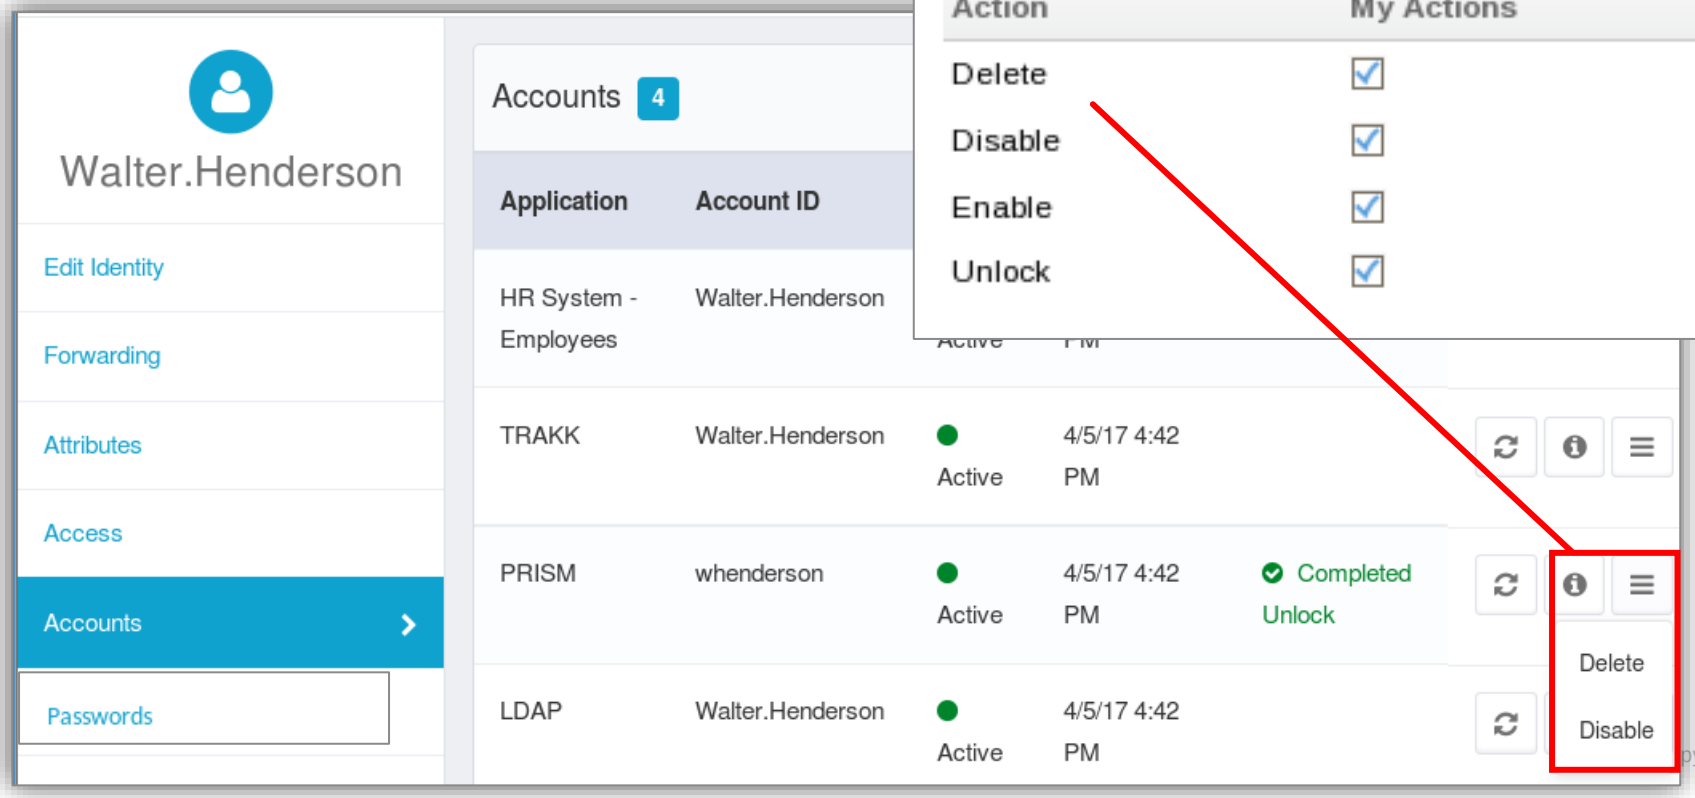

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Configuring Manage Identity Quicklinks


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Create Identity Options

Two Manual Methods


- *Create Identity* Quicklink
  - Requester has IdentityIQ identity
  - Default or custom form presented to requester


- *New User Registration* link
  - Requester has no IdentityIQ identity
  - Lifecycle Manager Create Identity option
    - Enable self-service registration
    - Default = disabled
  - Default or custom form presented to requester

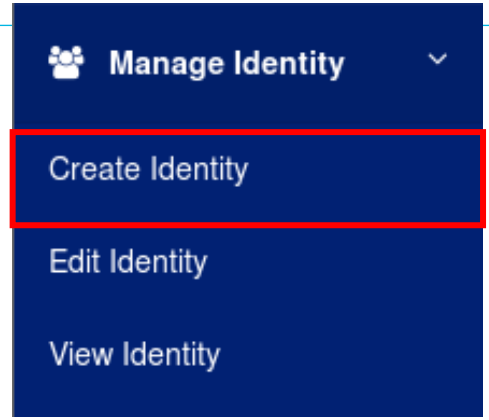


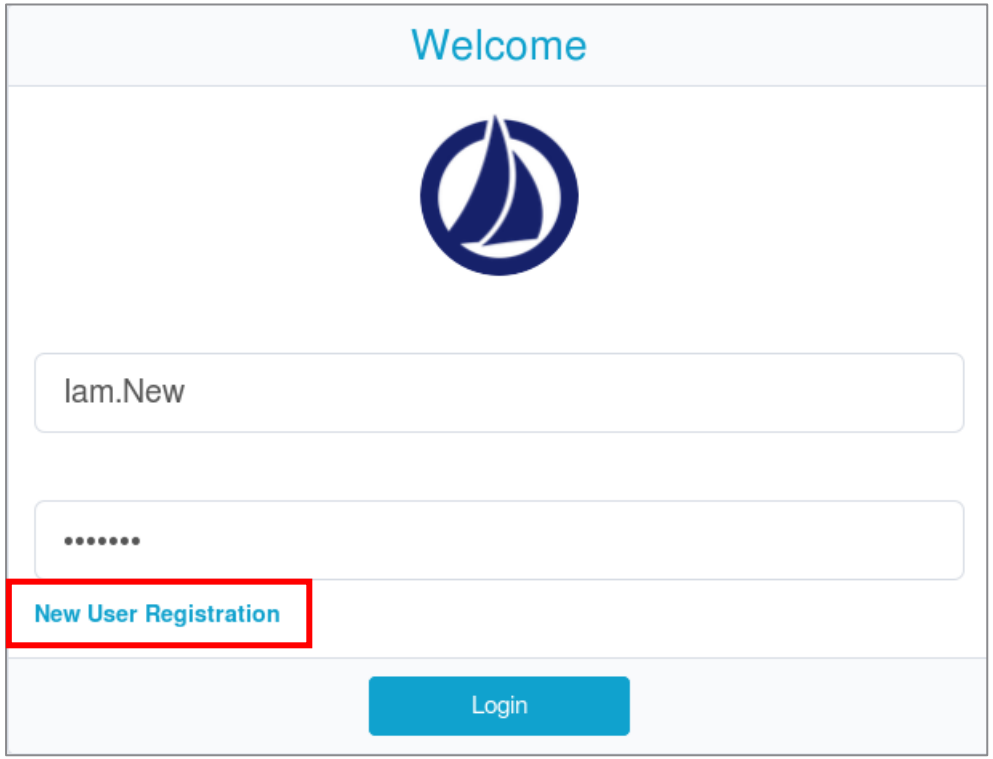

Edit Identity

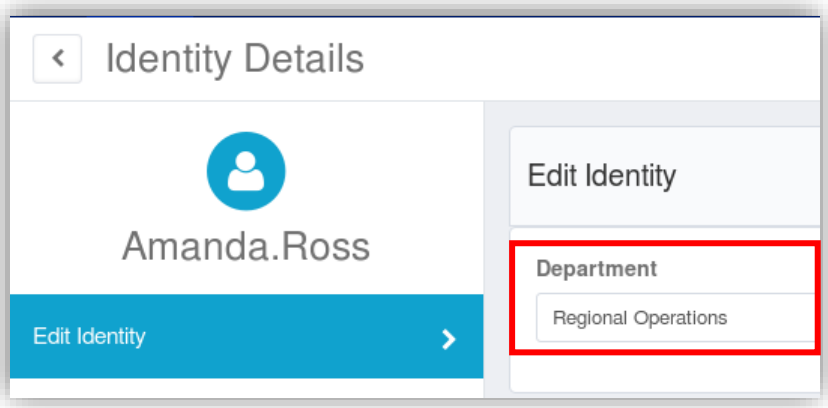

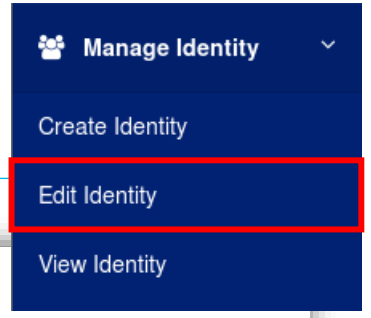


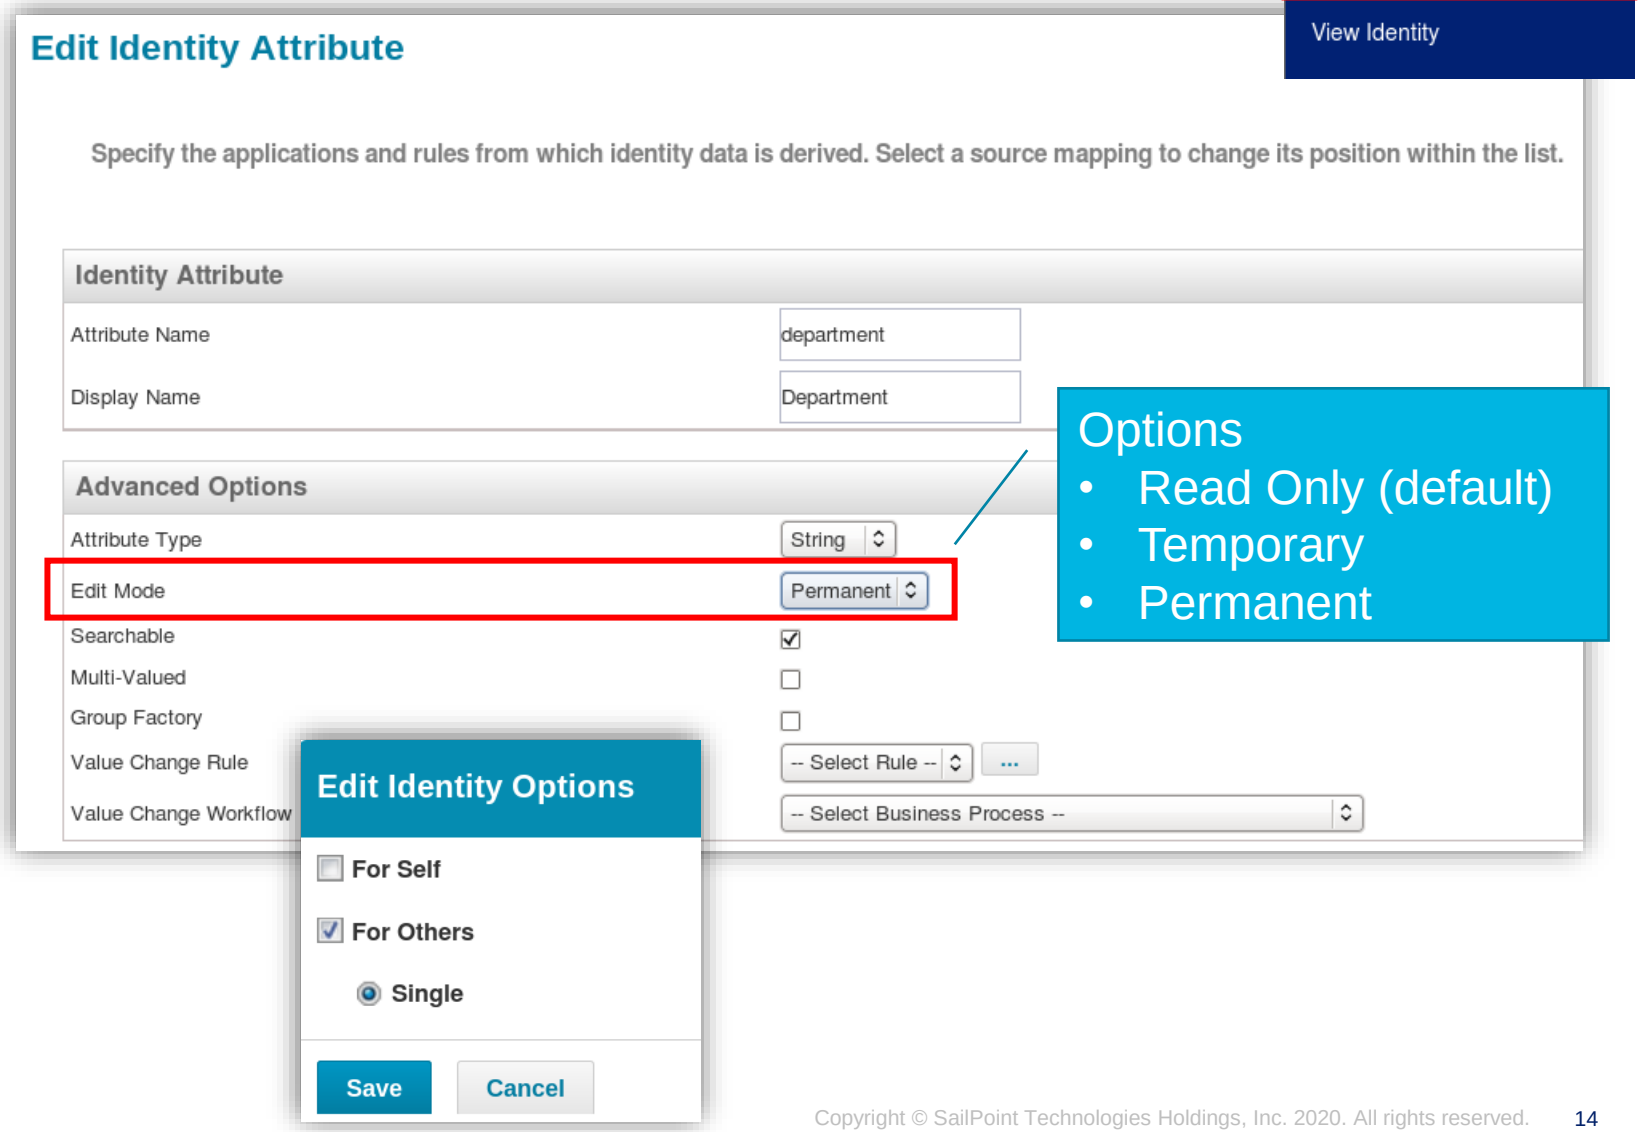


SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

View Identity

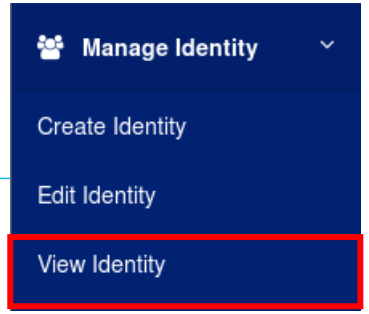

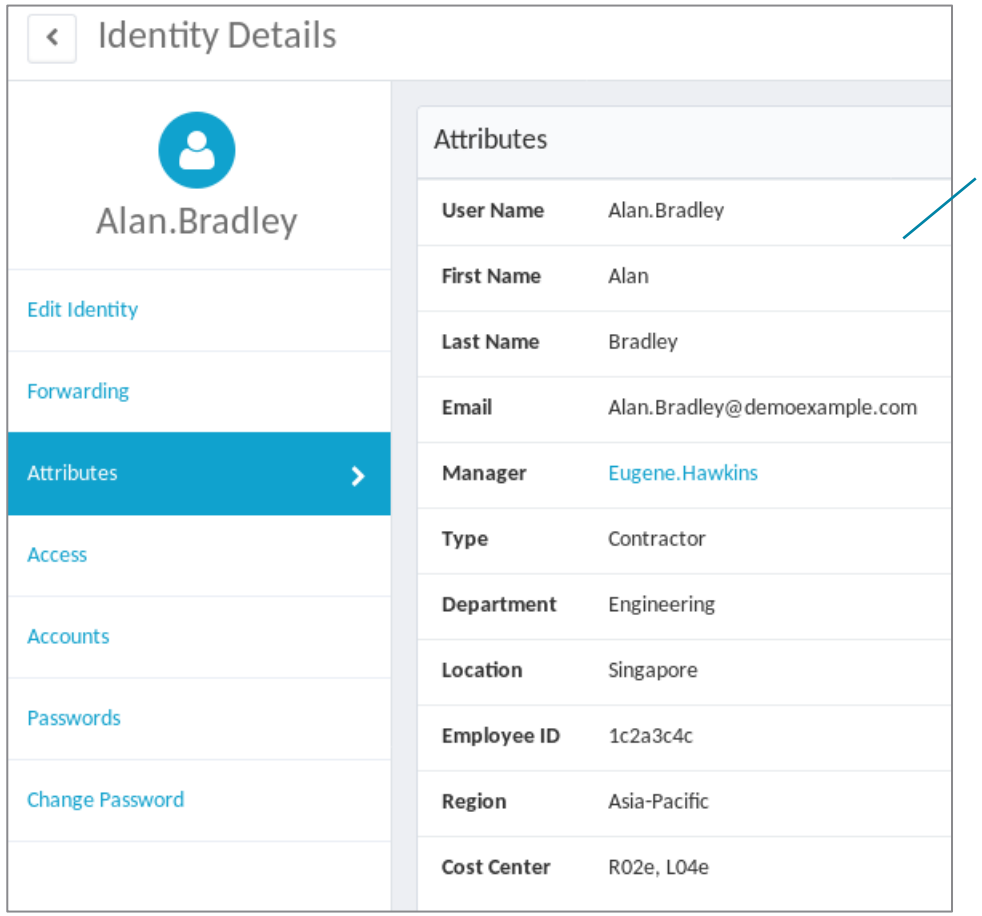


UIConfig entry:
identityViewAttributes

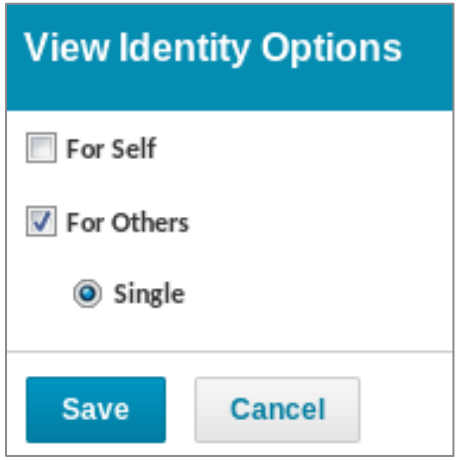

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Provisioning Policies

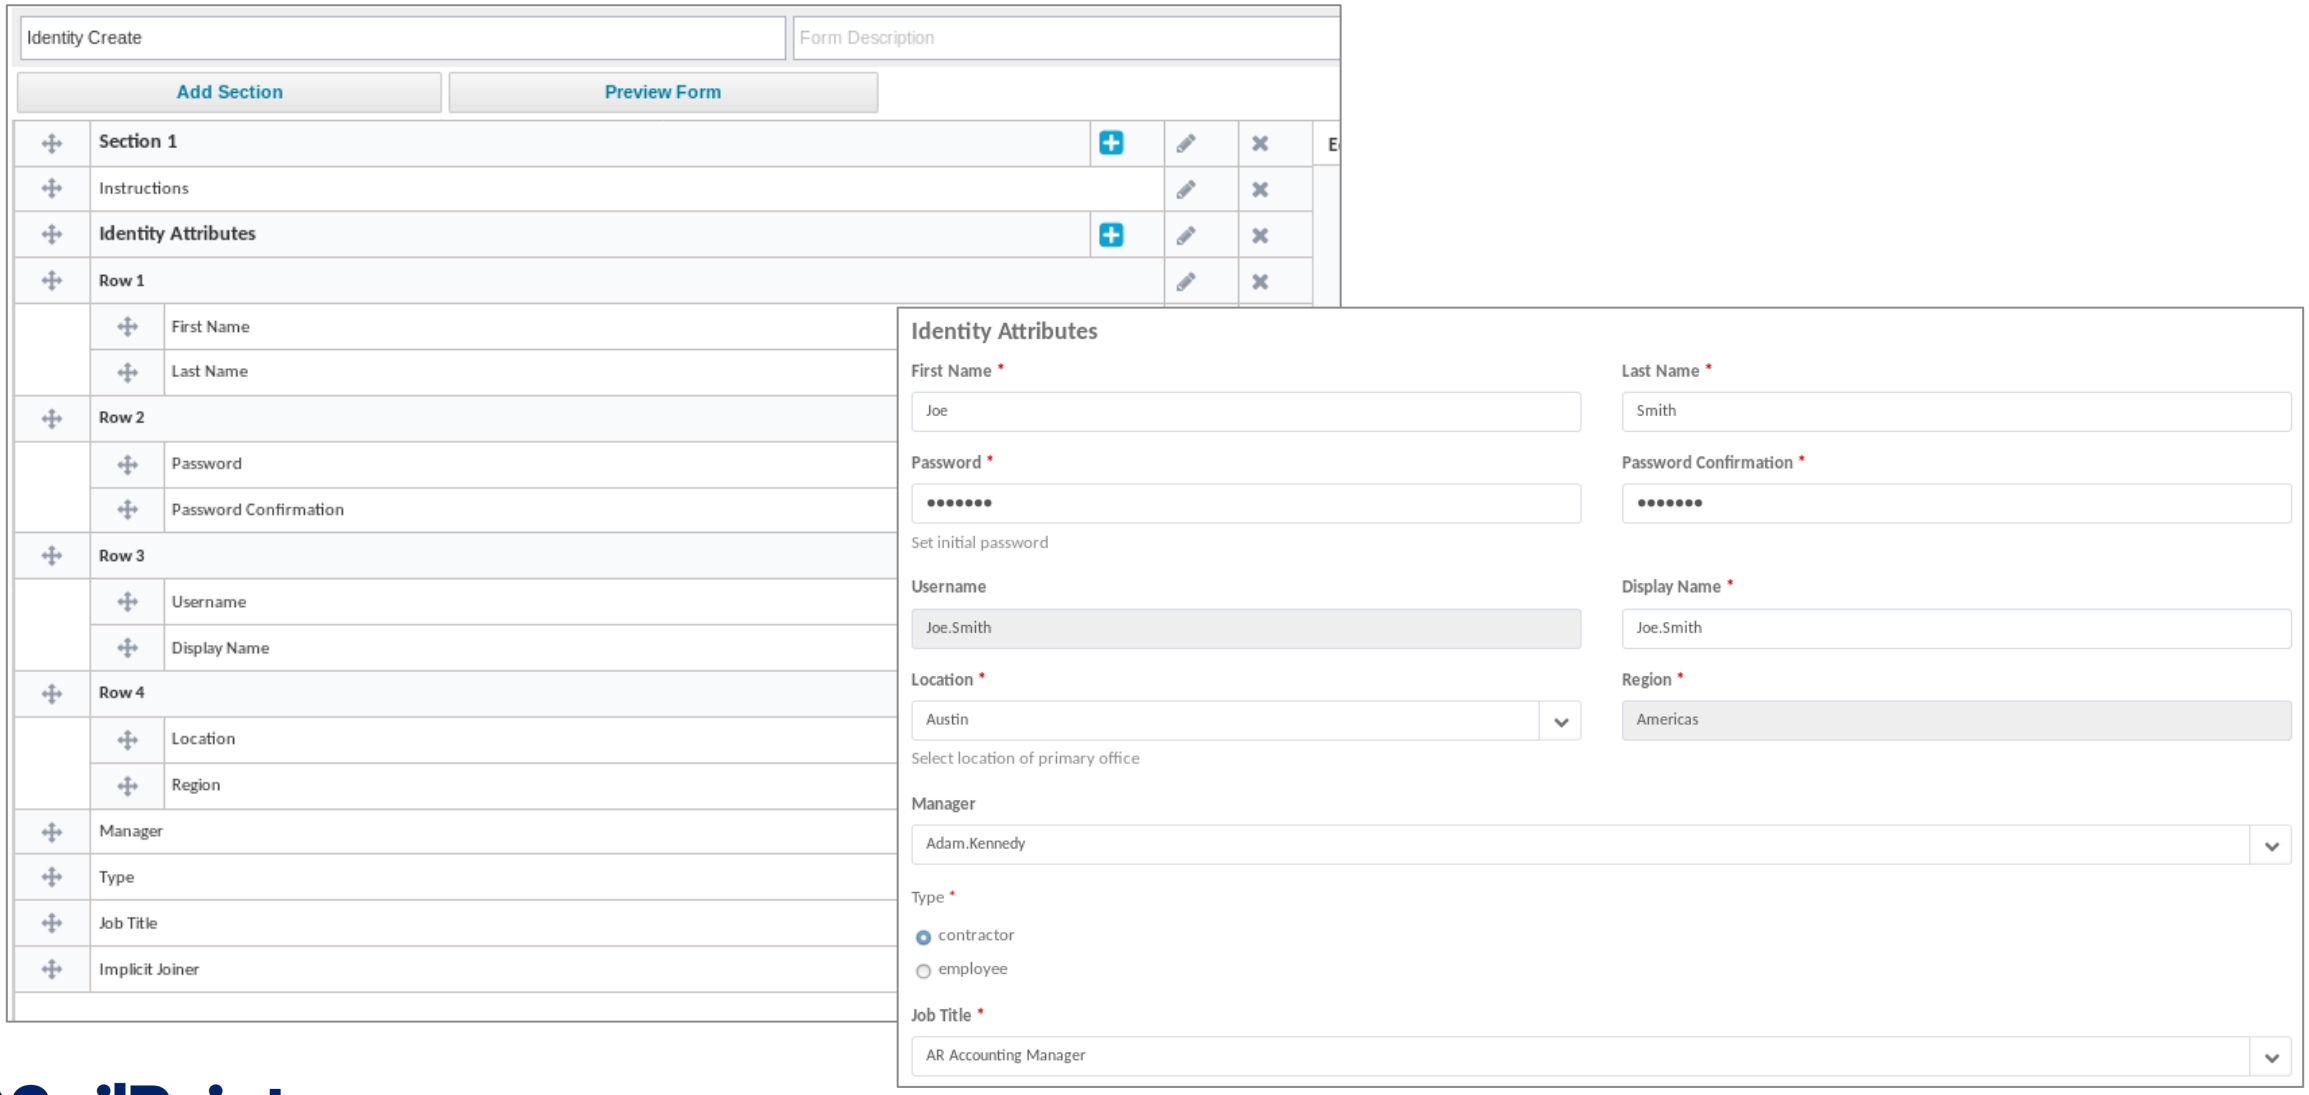

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Next Step?

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 4, Exercise 6

- Explore Provisioning Policy for Creating Identities
  - Import Provisioning Policy
  - Create Identity
  - Investigate Policy Form

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Automated Provisioning

IdentityIQ Essentials

Overview

Automated Provisioning

- Attribute Synchronization
- Password Interception
- Native Changes

SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Attribute Synchronization

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Attribute Synchronization

Process Overview

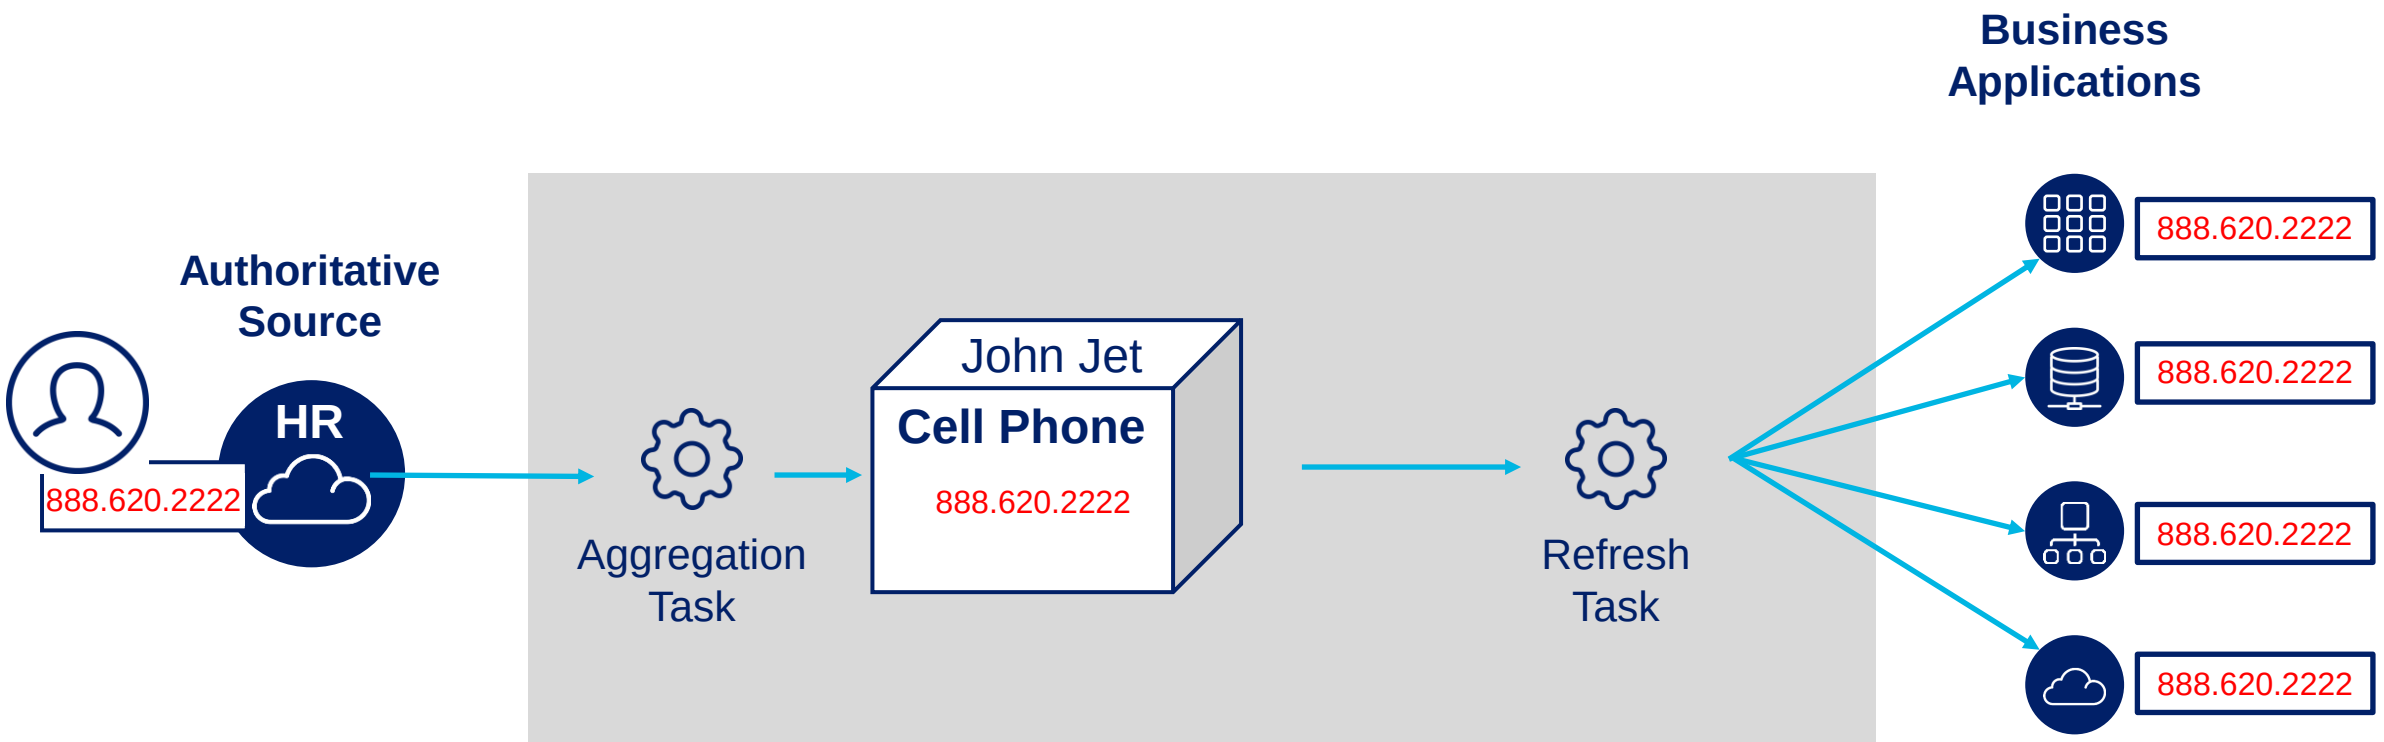


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Attribute Synchronization

Configuration

- Add target mappings to identity attribute definitions

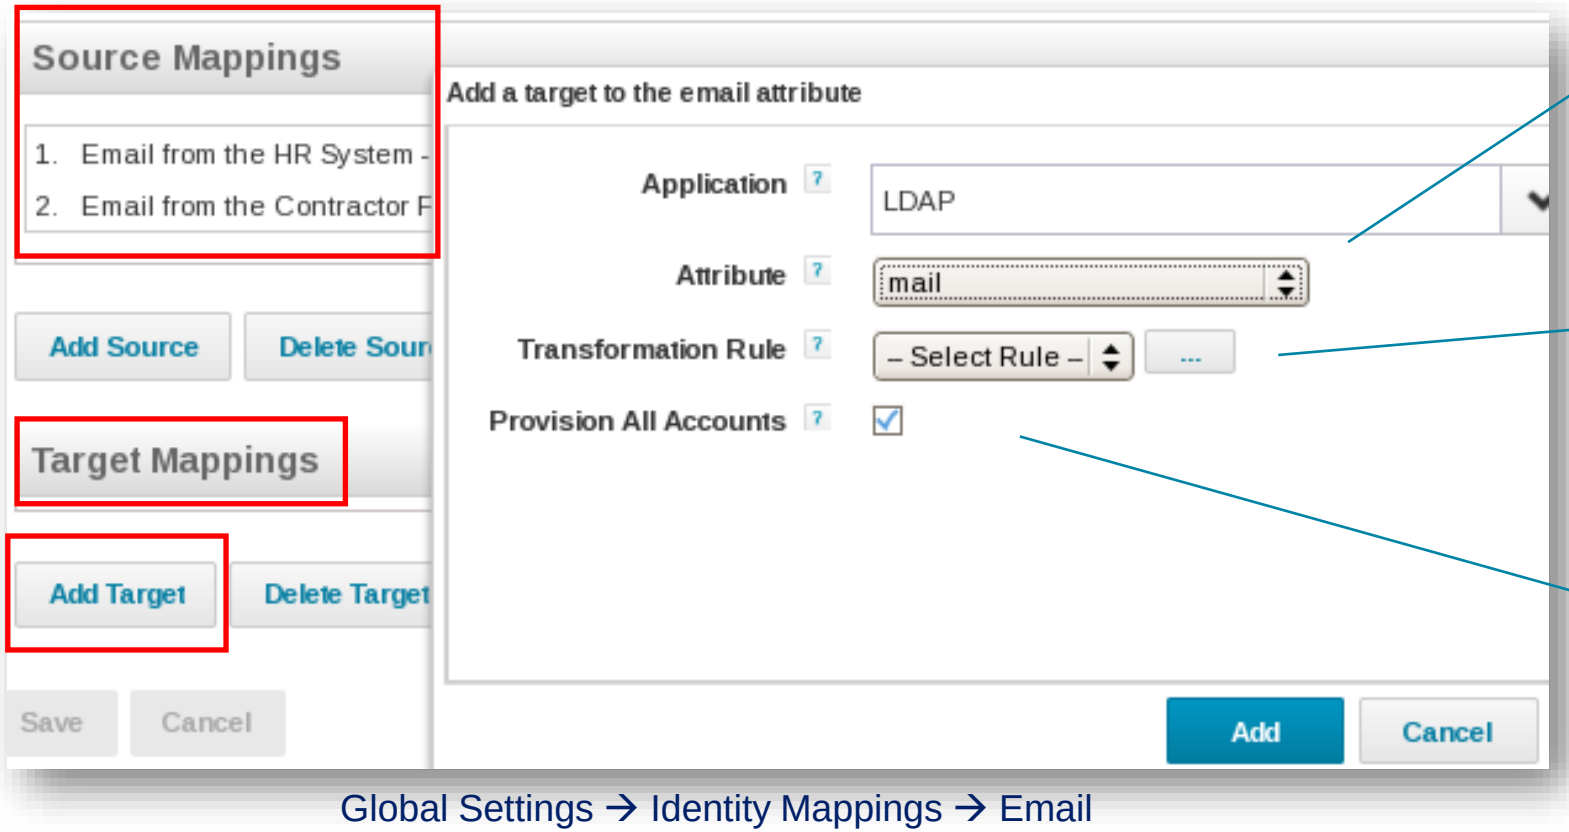

Application and attribute to synchronize to

BeanShell rule for data transformation

Instructions for handling multiple accounts

Global Settings → Identity Mappings → Email

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Attribute Synchronization

Operation

- Edit identity
  - LCM: Manage Identity → Edit Identity
  - Immediately invoke provisioning to target mapping(s)
- Aggregate changed identity attribute
  - **Identity Refresh** Task with **Synchronize attributes**




Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Password Interception

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Password Interception

Architecture

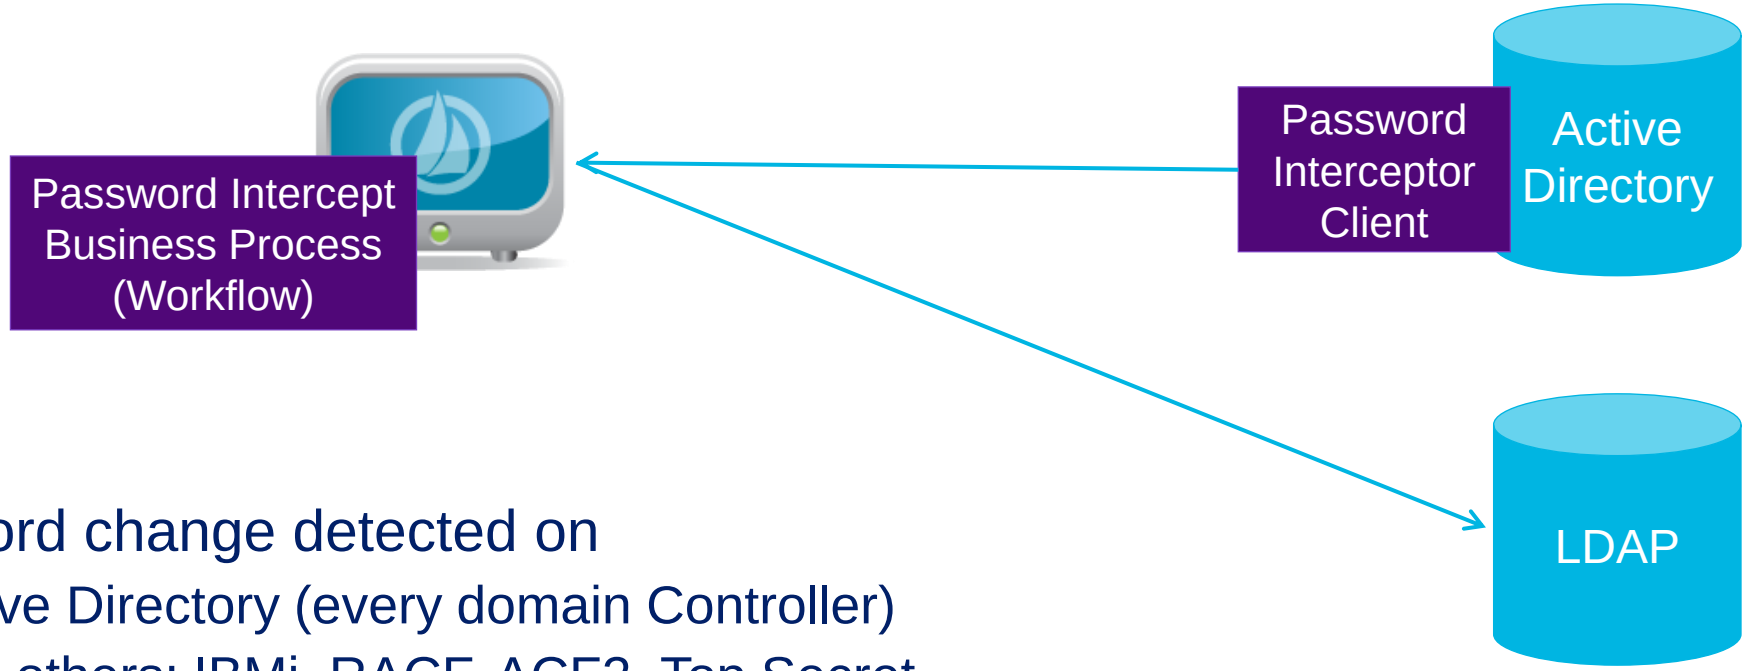


- Password change detected on
  - Active Directory (every domain Controller)
  - And others: IBMi, RACF, ACF2, Top Secret
- Password Interceptor Client sends password change to IdentityIQ
- IdentityIQ runs configurable Business Process (Workflow)

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Password Interception

Configuration

- Install interceptor client
  - Instructions: Password Interceptor Installation and Configuration guide
- Configure Password Intercept business process
  - Options
    - Sync to all applications that support password updates (default)
    - Specify target applications

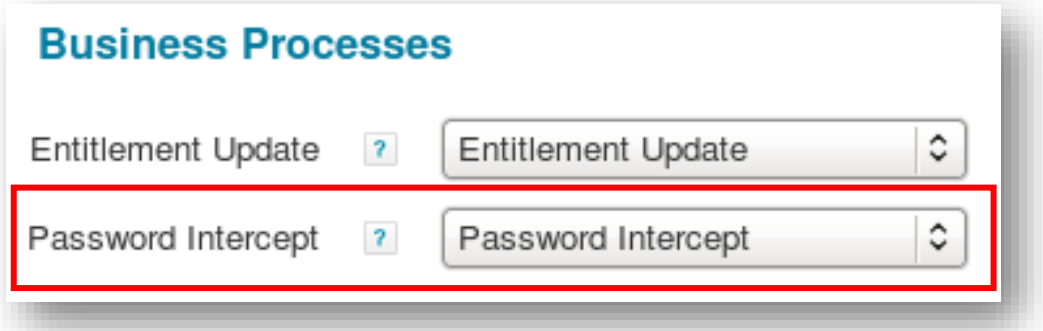

Global Settings → IdentityIQ Configuration → Miscellaneous

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Native Changes

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Native Change

Definition

- A data change that is discovered at the application account level, during an aggregation process
  - Undesired, unexpected
  - Not following normal process

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Native Change Detection Events

Response Options


- Automatically start a certification
  - Setup→Certifications→Certification Events→Add New Certification Event
- Lifecycle Event
  - Provided workflows
    - Lifecycle Event - Email manager for all native changes
    - Lifecycle Event - Manager approval for all native changes
  - Custom workflow


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Native Change Detection

Configuration

- Configure native change detection per application
- Create a Native Change Lifecycle Event

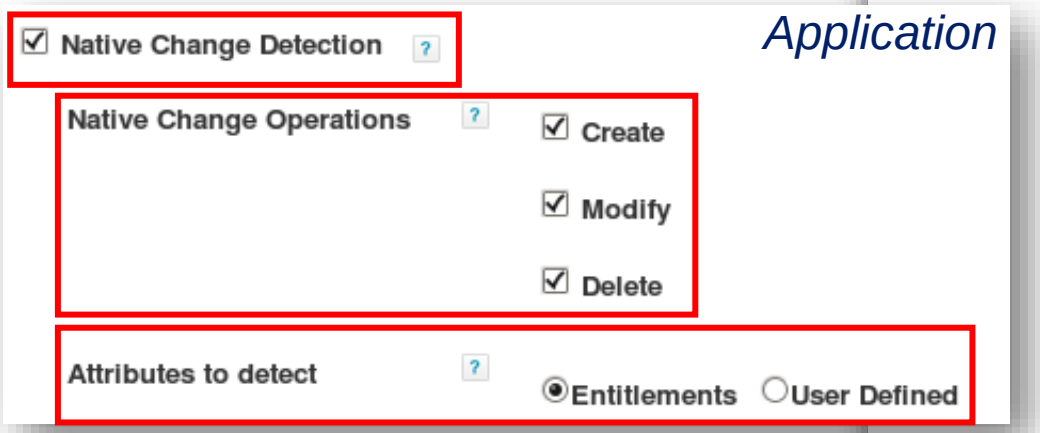

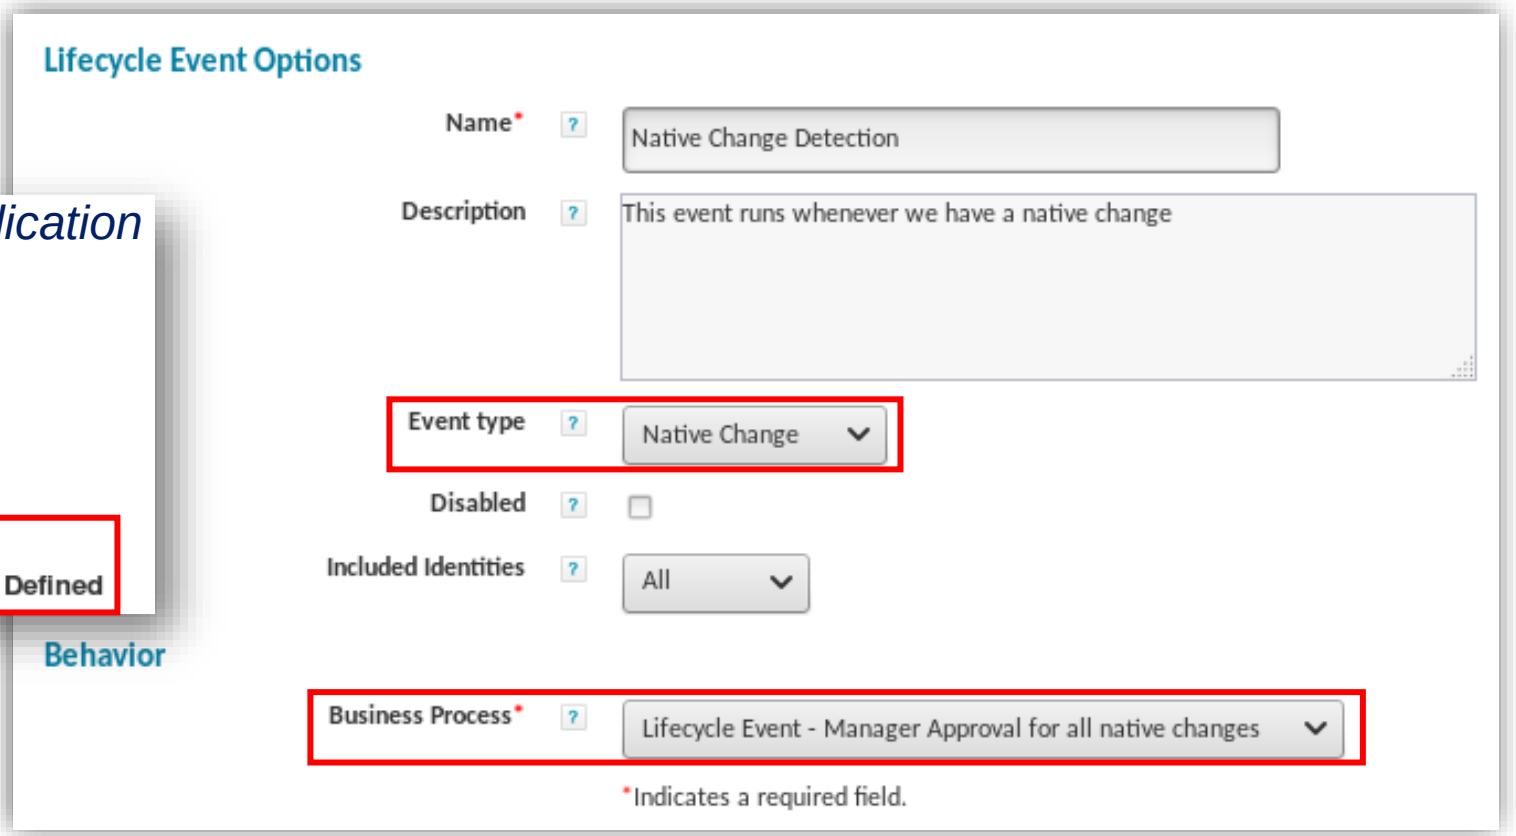

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Native Change Detection


Operation

- Run aggregation task to mark changed cubes

Process Changes



- Run Identity Refresh with “Process Events” checked
  - Runs workflow

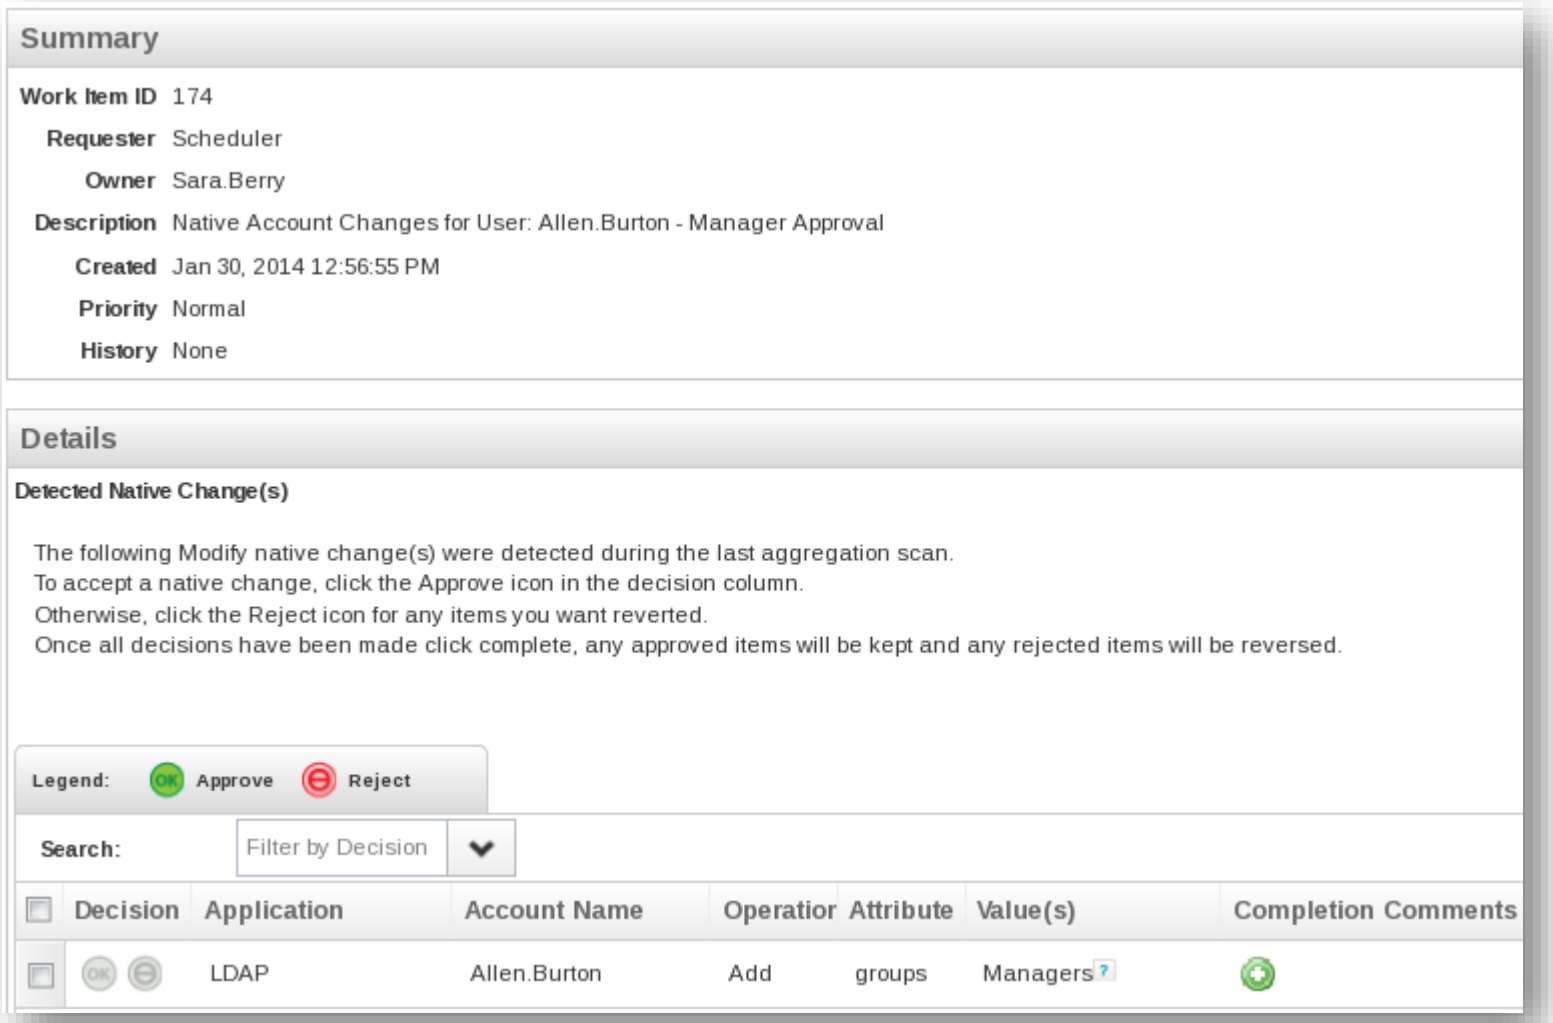

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Lifecycle Event: Native Change Detection

Best Practices

- Aggregate all accounts without native change detection, then activate
- Process changes regularly
- Avoid monitoring native change for applications where native changes are expected

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 4, Exercise 8

- Define and Test Attribute Synchronization
  - Configure Attribute Synchronization
  - Test Attribute Synchronization

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Other Provisioning Requests

IdentityIQ Essentials

Overview

Other Provisioning Requests

- Account Group Provisioning
- Batch Requests
- Rapid Setup Identity Termination

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Account Group Provisioning

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Account Group Provisioning

Overview


- Create new groups
- Update group definitions

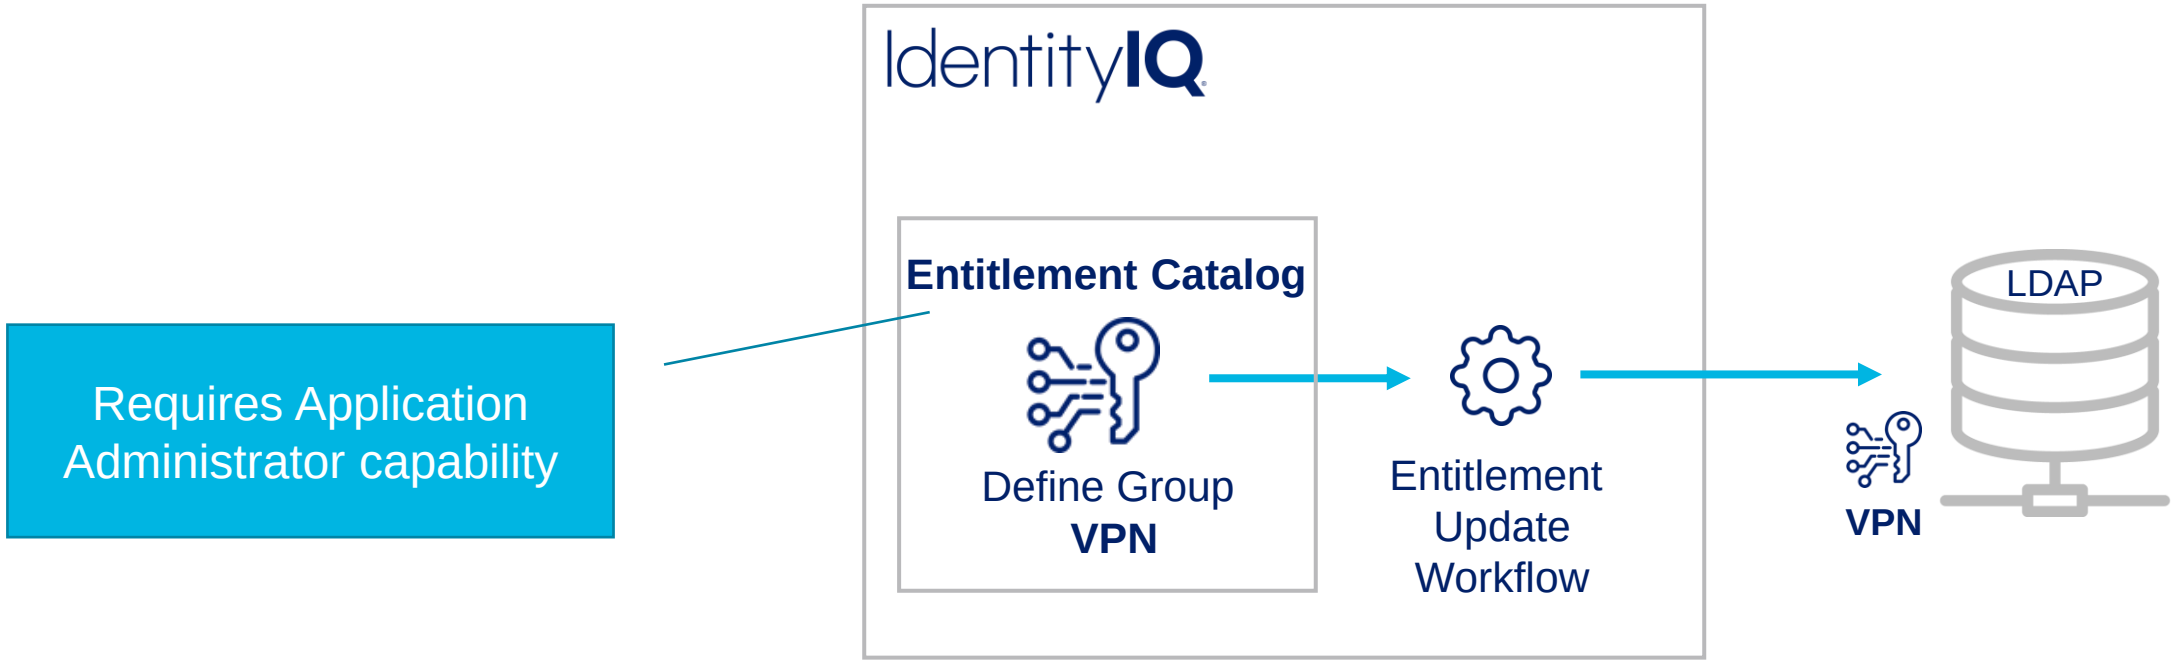

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Account Group Provisioning

Configuration

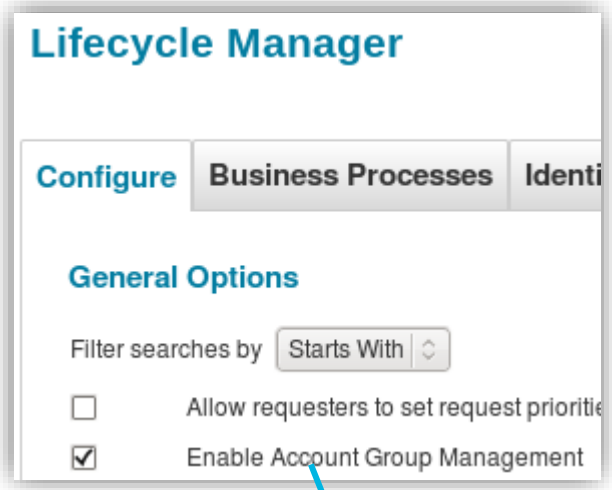


1 Enable group provisioning

Application

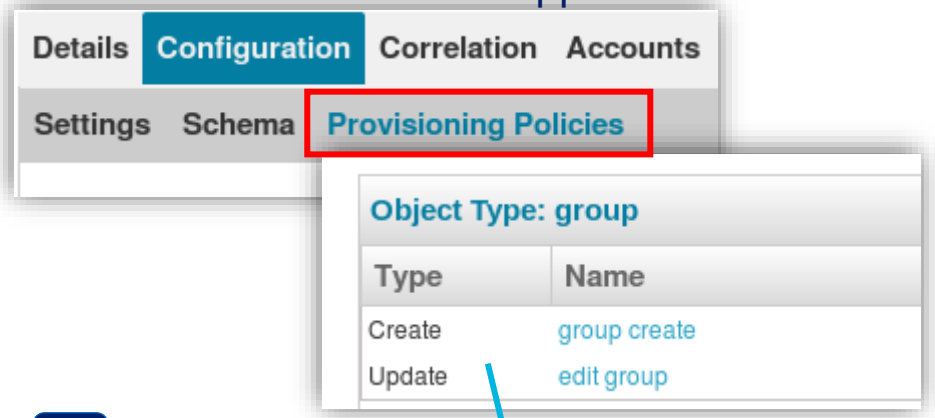

2 Configure group Create and Update

Usage

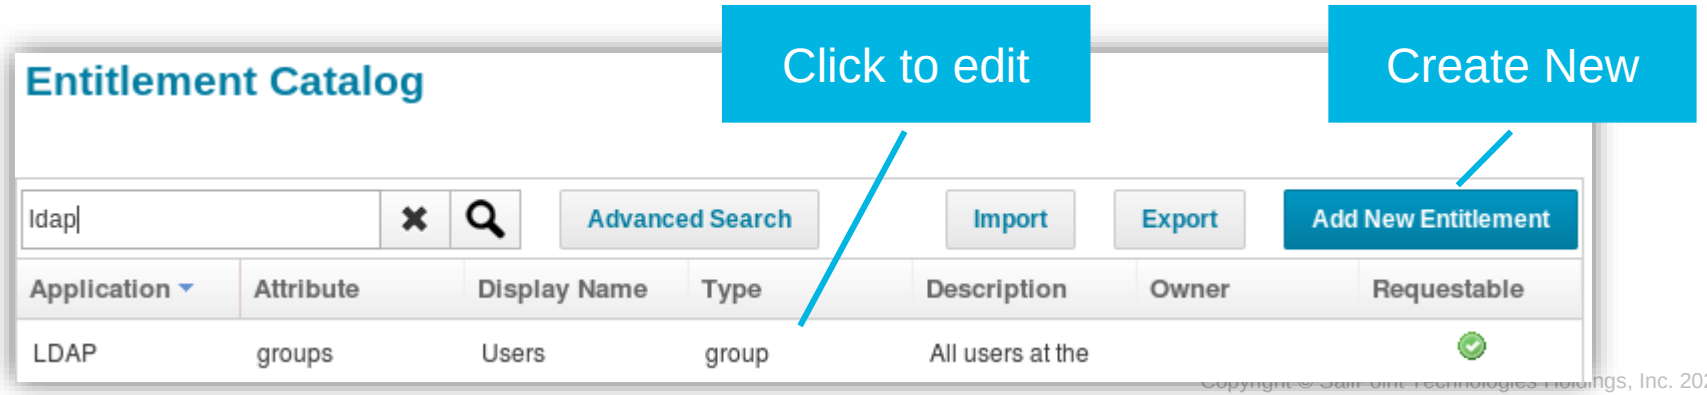


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Batch Requests

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Batch Request

- Support mass identity change requests via file upload
- Supplemental to aggregation or access request processes

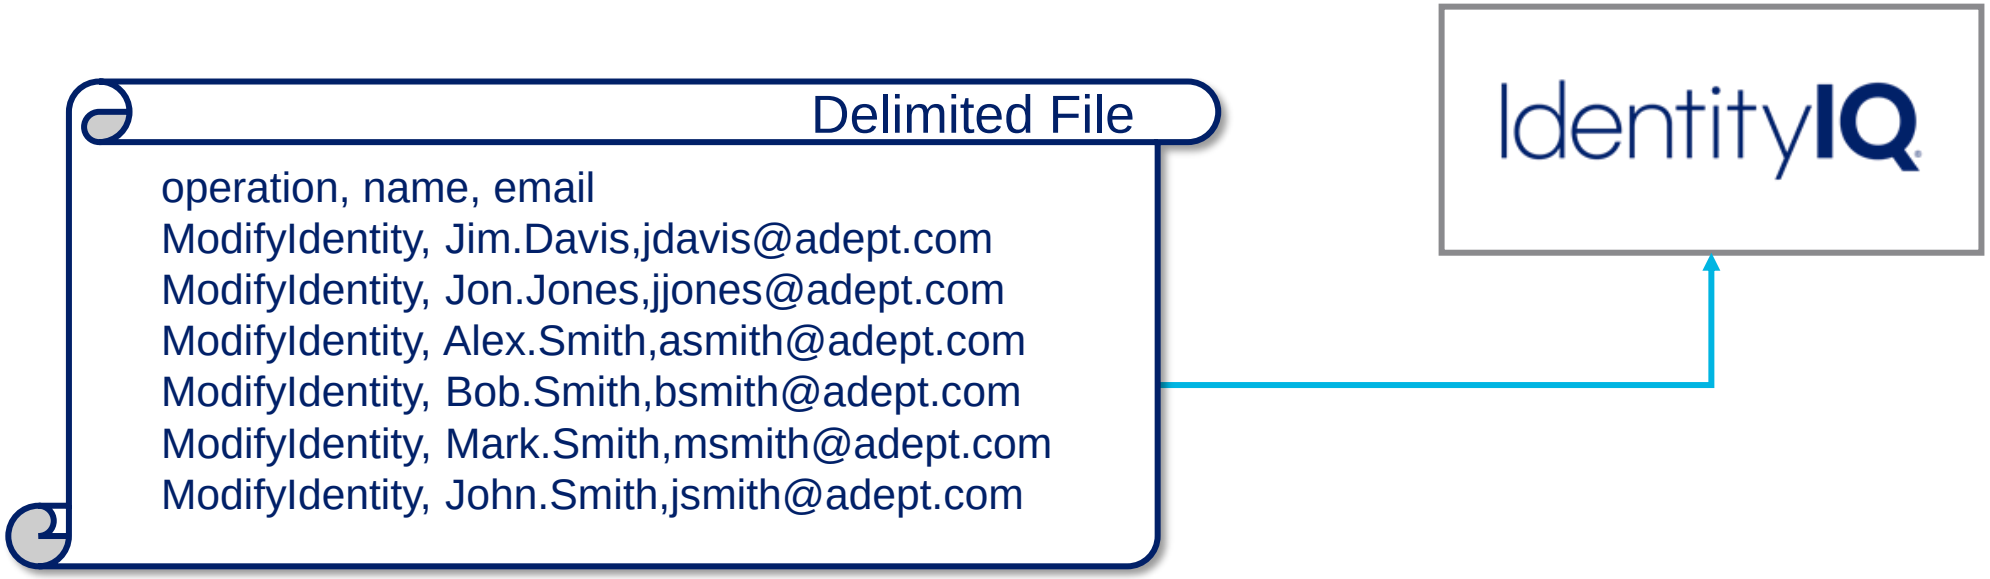


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Batch Request

- Batch request management
  - Process mass identity changes via a file upload
- Operations Supported
  - Create/Modify Identity
  - Create/Delete Account
  - Enable/Disable Account
  - Unlock Account
  - Add/Remove Role
  - Add/Remove Entitlement
  - Change Password

Required Capabilities:
System Administrator or
Batch Request Administrator

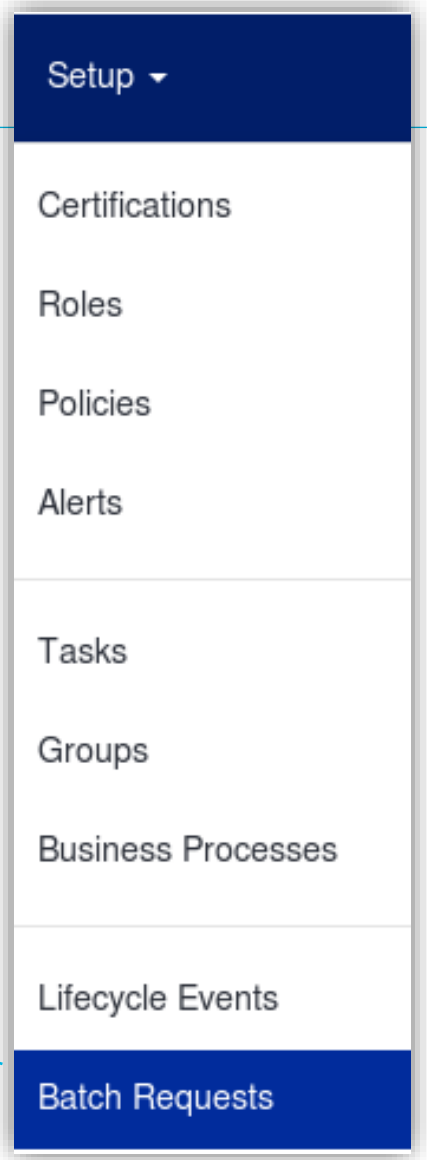

Setup → Batch Requests

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Batch Request Data Format

Example 1

operation, name, location, email, department
CreateIdentity, Alex Smith, Austin, asmith@adept.com, Accounting
CreateIdentity, Bob Smith, Austin, bsmith@adept.com, Engineering
CreateIdentity, Mark Smith, Austin, msmith@adept.com, Accounting
CreateIdentity, John Smith, Austin, jsmith@adept.com, Finance

Example 2

operation, name, location, email, department
ModifyIdentity, Rojit Patel, Austin, rpatel@adept.com, Accounting
ModifyIdentity, Cindi Yu, Austin, cyu@adept.com, Engineering
ModifyIdentity, Jessie Johnson, Austin, jjohnson@adept.com, Accounting
ModifyIdentity, Ewin James, Austin, ejames@adept.com, Finance

Documentation

- *Users Guide*


SailPoint


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Identity Termination

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Identity Termination

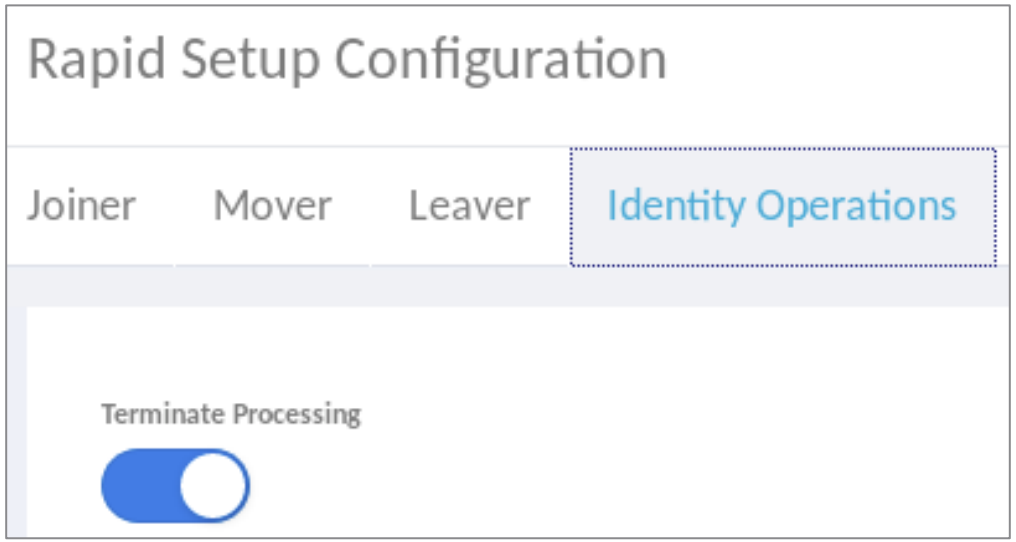

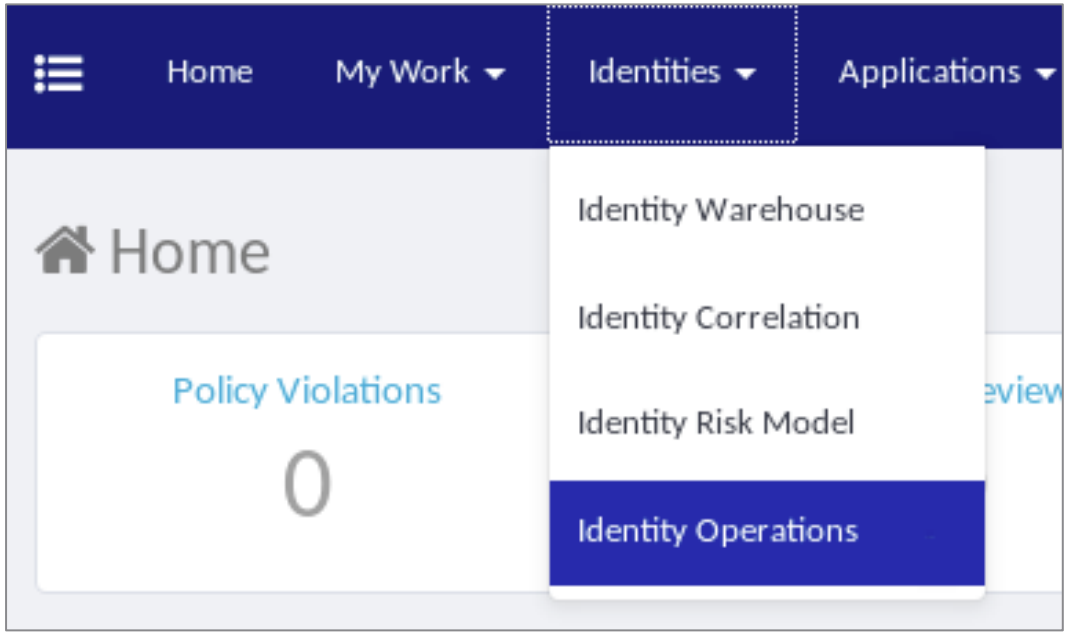

Required Capabilities:


- System Administrator
- Rapid Setup Identity Operations Administrator

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Identity Termination

Global Configuration

- IdentityIQ-internal actions
  - Remove assigned roles
  - Reassign owned artifacts
    - Which ones, to whom
  - Reassign RPA/Service Identities
- Approvals
- Notification
  - Manager or workgroup
  - Email templates
- Logic Controls
  - Business process
  - Post leaver rule

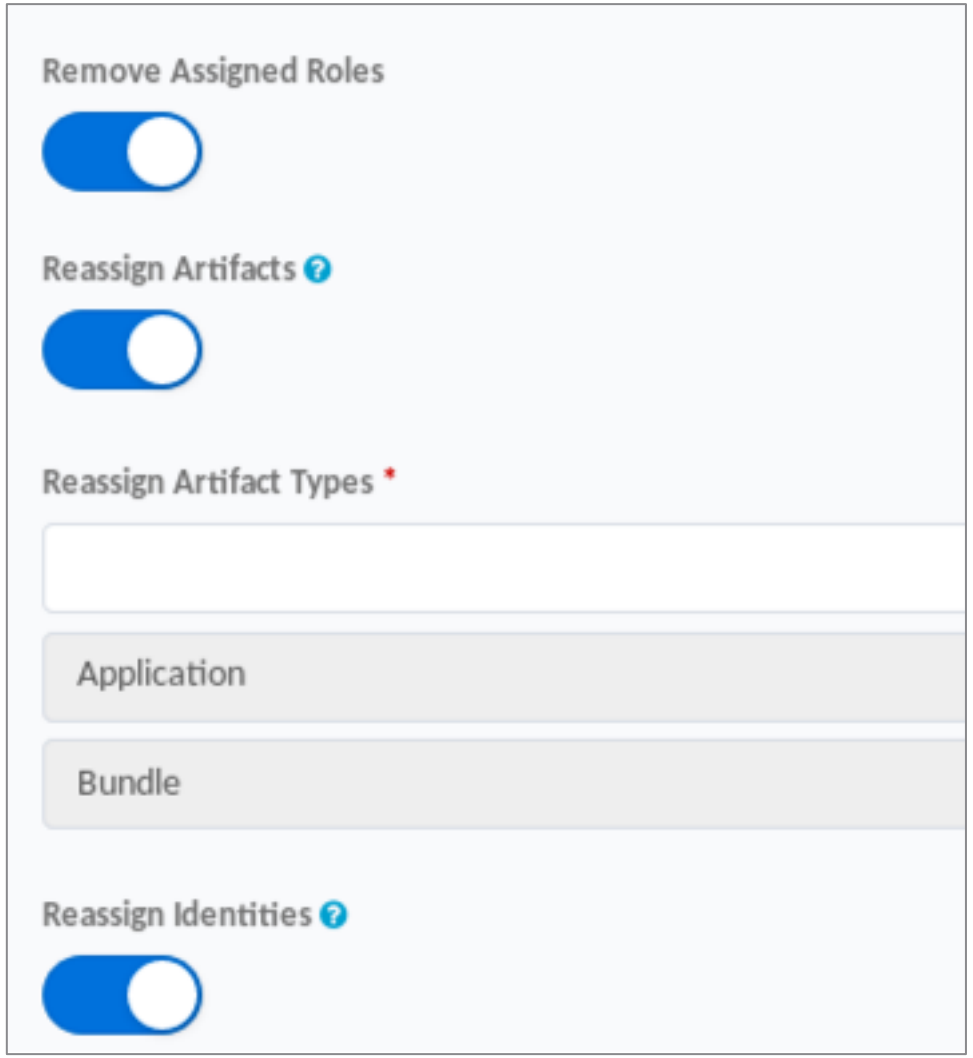

Global Settings → Rapid Setup Configuration → Identity Operations


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Identity Termination

Per Application Configuration

- Delete account
- Disable account
- Scramble password
- Remove entitlements
  - Keep certain entitlements
- Add comments
- Active Directory only: Move OU

- Immediate or delayed (# of days)

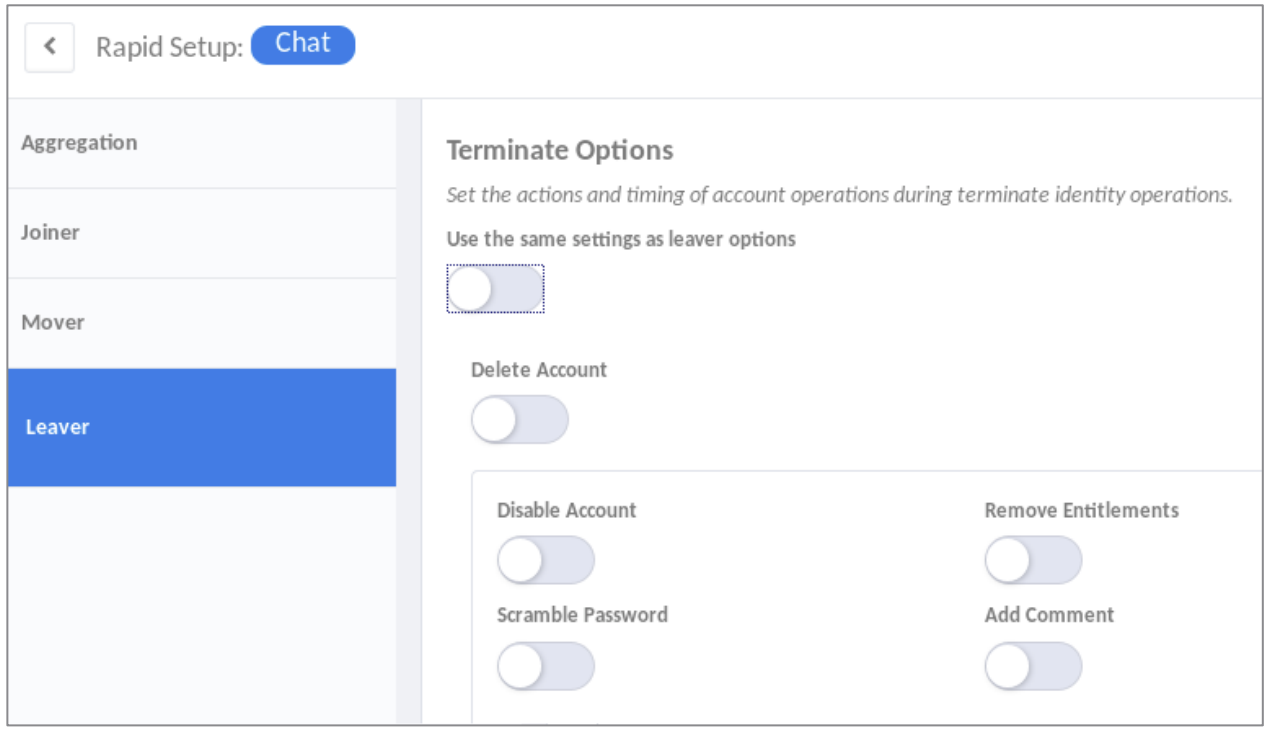


Applications → Rapid Setup → [Application] → Leaver

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Rapid Setup Identity Termination

Termination Process

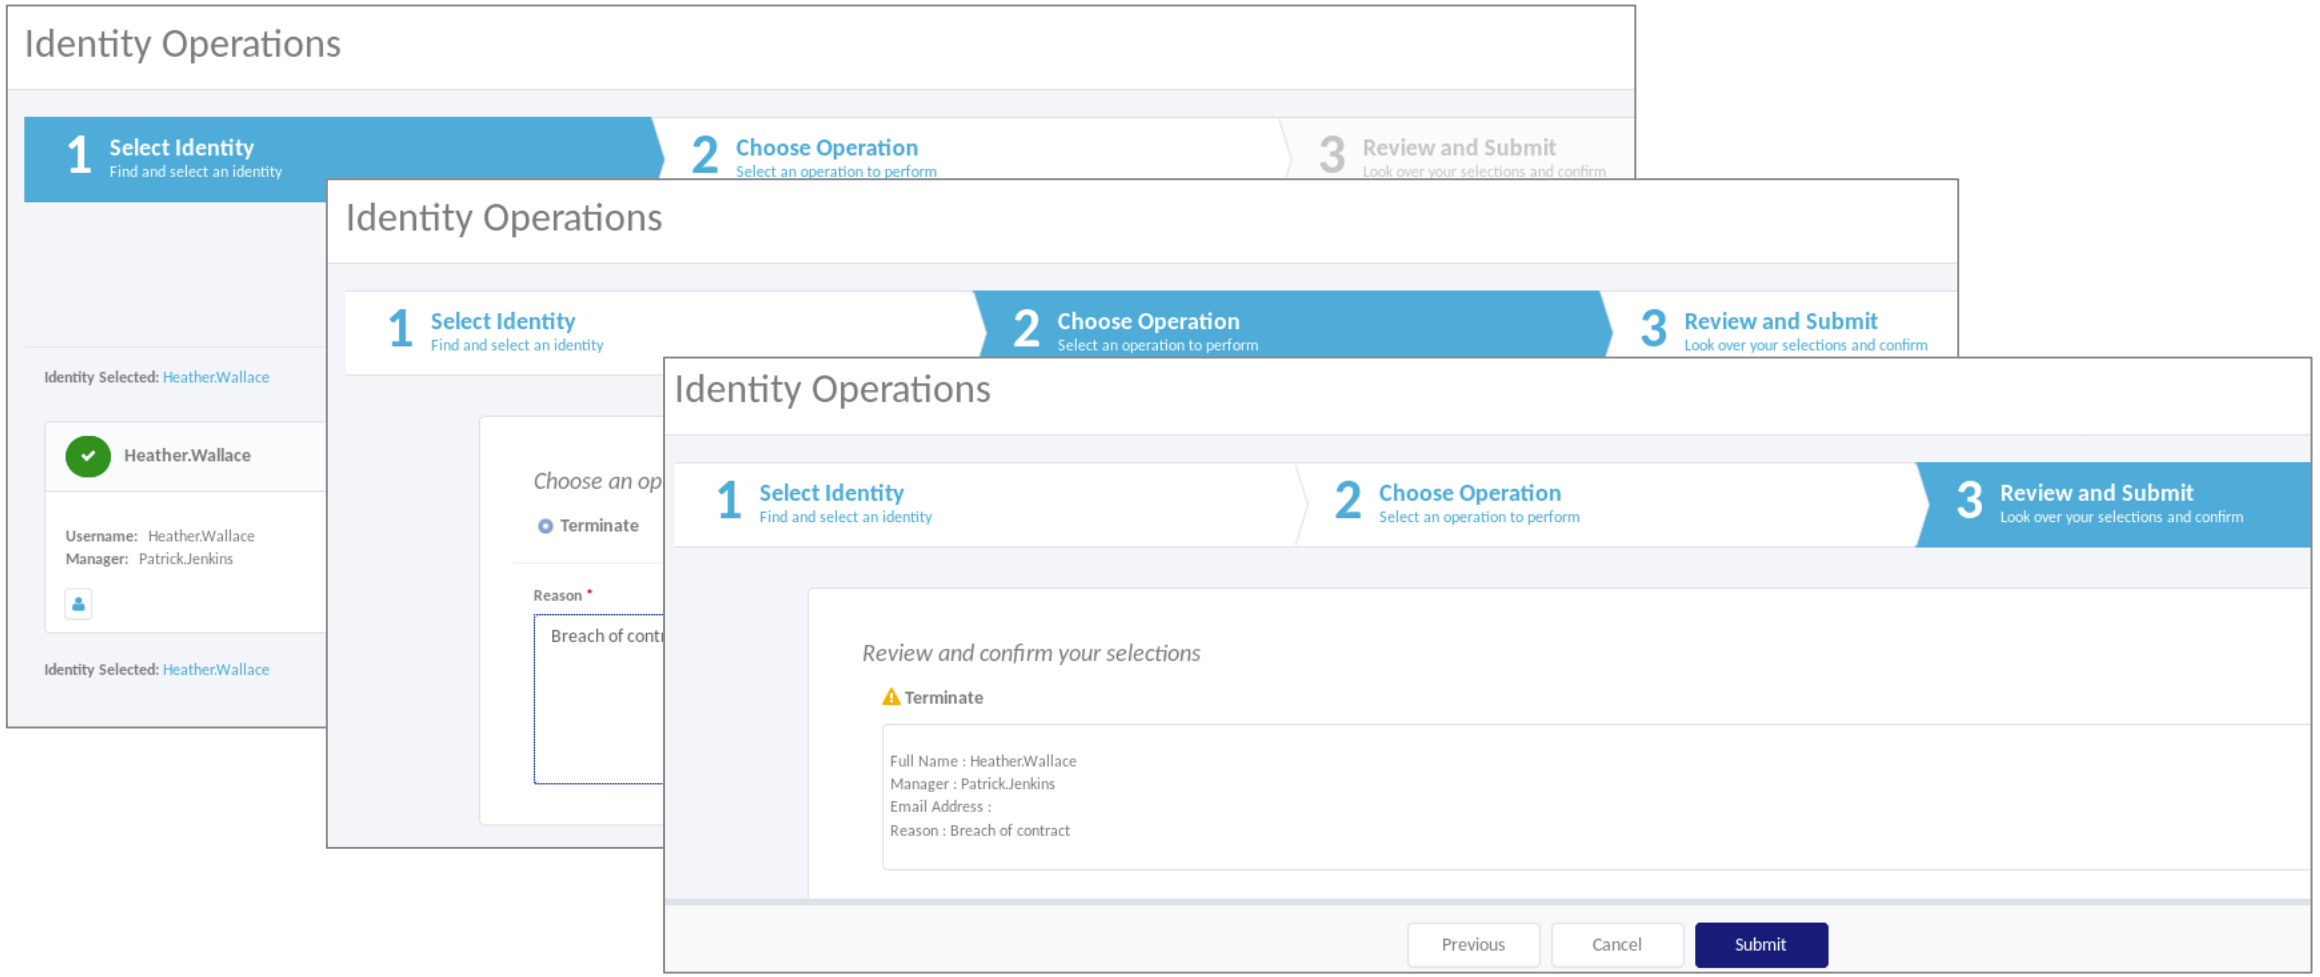

Identities → Identity Operations

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Practice Exercises

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Exercise Preview

Section 4, Exercise 9

- Define and Test Leaver Processes
  - Configure Rapid Setup Leaver process
  - Execute Leaver process
  - Configure Rapid Setup Identity Termination
  - Execute immediate termination

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



System Architecture and Deployment

IdentityIQ Essentials

Overview


System Architecture and Deployment

- Server Architectures
- Deployment Options

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Architecture

Simplest Model

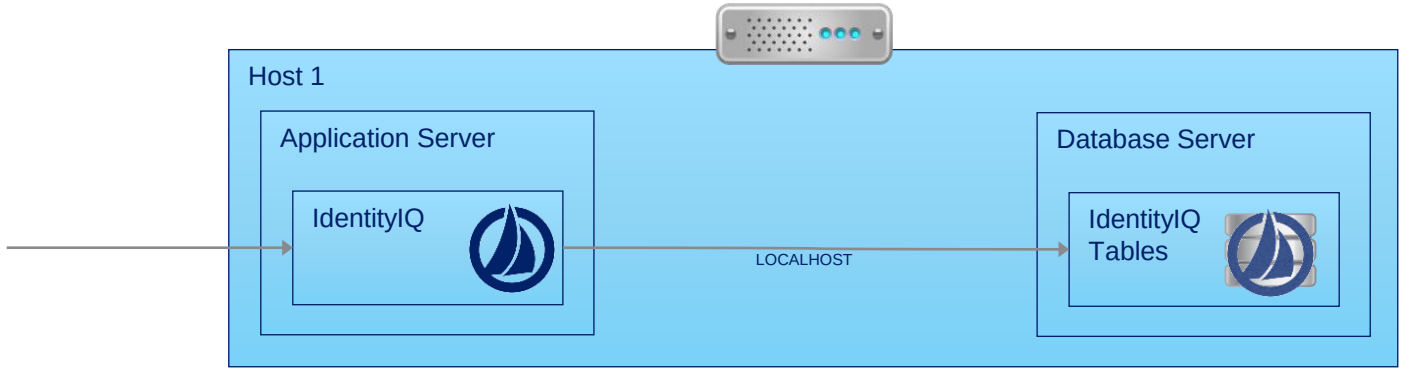

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Architecture

Processing and Storage Segregation




Application Server Tier

Database Tier

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Architecture

Application Server Availability / Redundancy

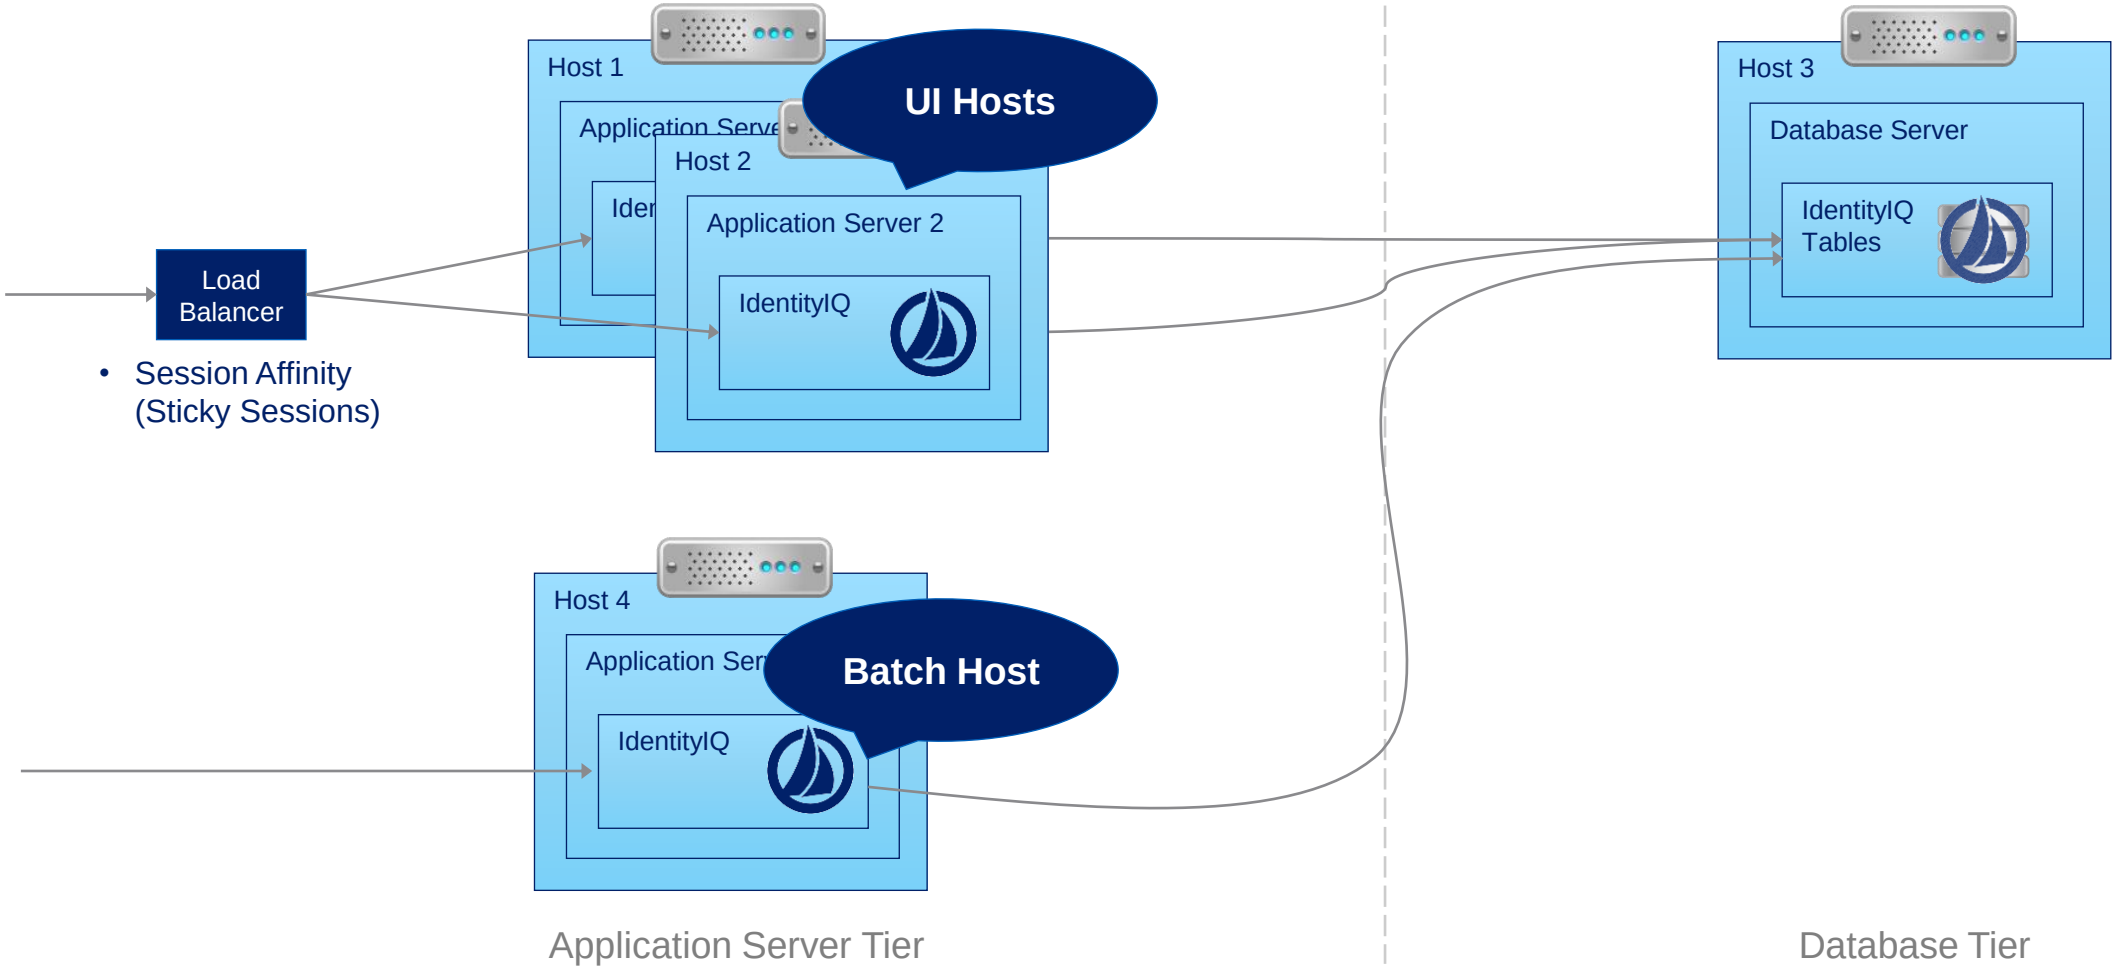

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Multi-host Deployments

UI versus Batch Hosts

	Batch hosts	UI hosts
What's processed?	• Tasks/reports • Workflows • Certification generation • Etcetera	• Access Requests • Access Reviews (certifications) • Dynamic Analytics • Etcetera
What designates host type?	Named in task and request service definitions	Pointed to by load balancer

```
<ServiceDefinition created="1388105905701" hosts="HostA,HostB"
id="ff80808143318eba0143318f362500f8" name="Request">
```

```
<ServiceDefinition created="1388105905677" hosts="HostA,HostB"
id="ff80808143318eba0143318f360d00f7" name="Task">
```

Batch hosts


For more details see Compass article: *Background Processing in IdentityIQ: The TaskScheduler and RequestScheduler*

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Architecture


Disaster Recovery Redundancy

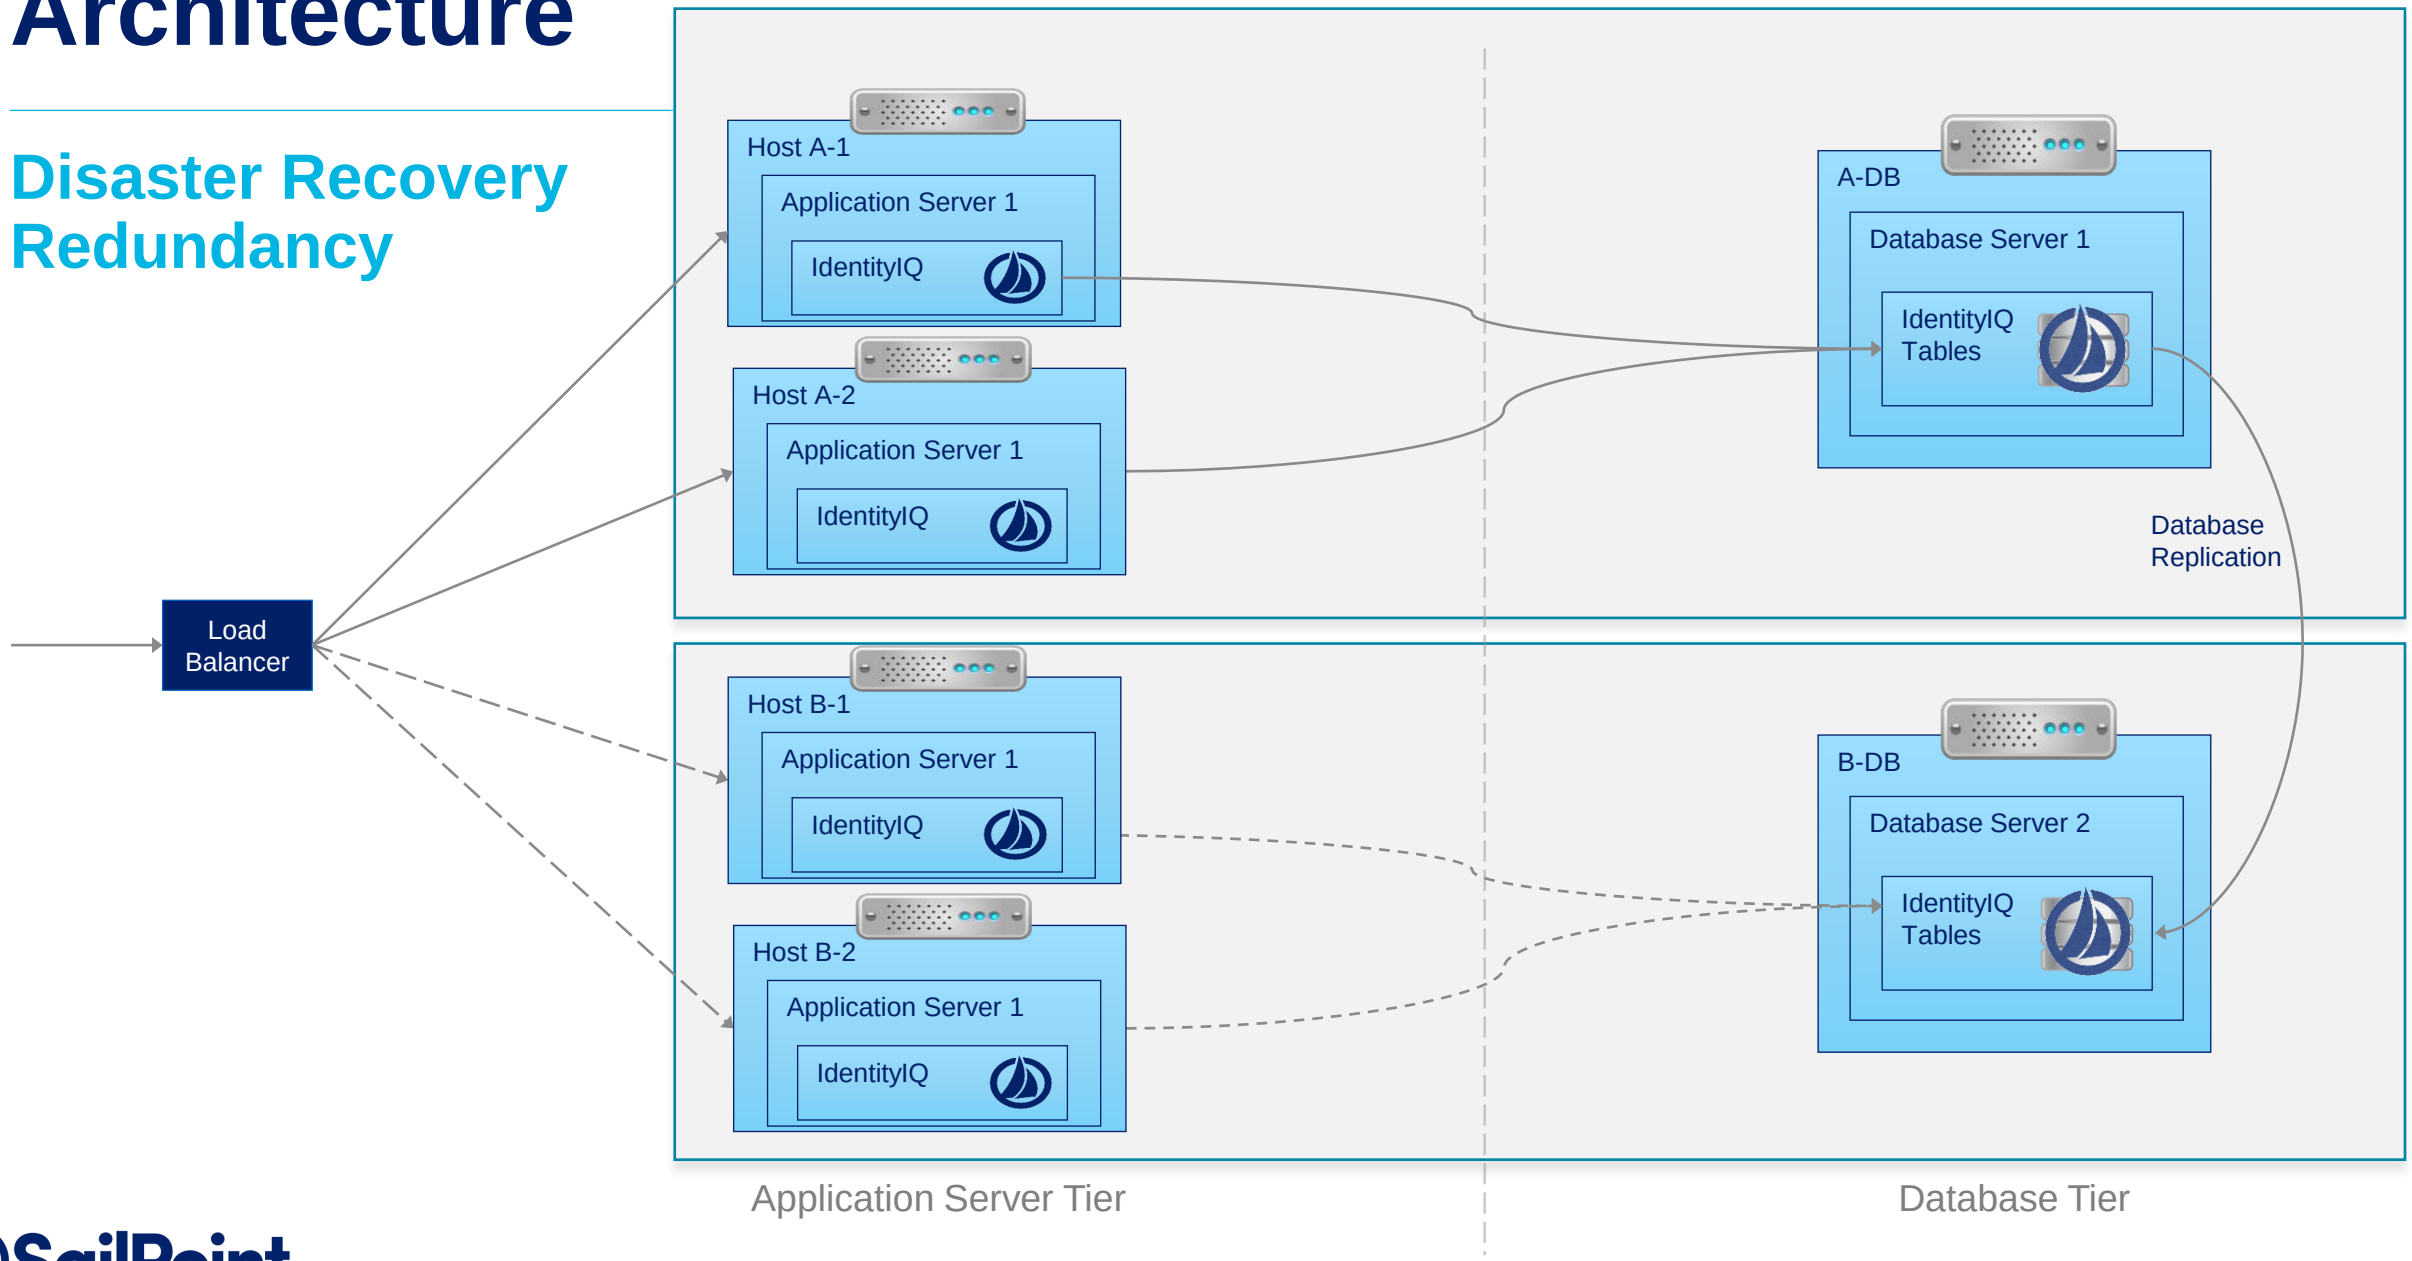

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Other Architectures

Database Clustering

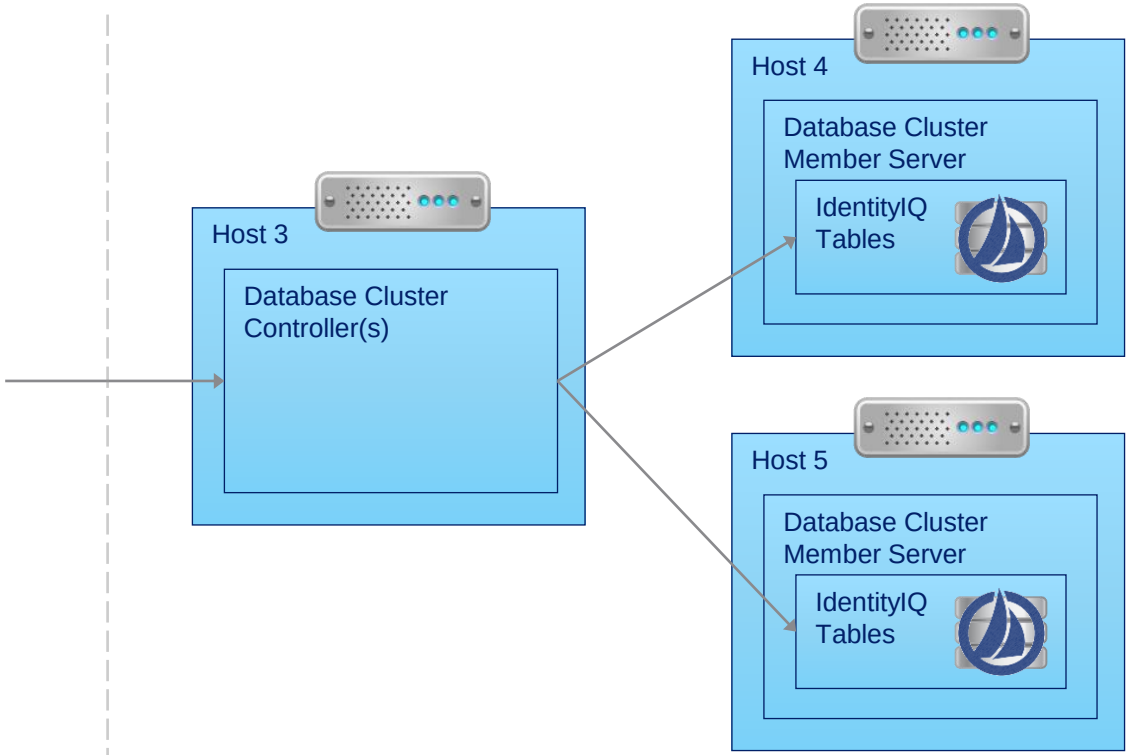


Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Deployment Database Considerations

Network

- Latency between the Application tier to the Database tier is extremely important for IdentityIQ

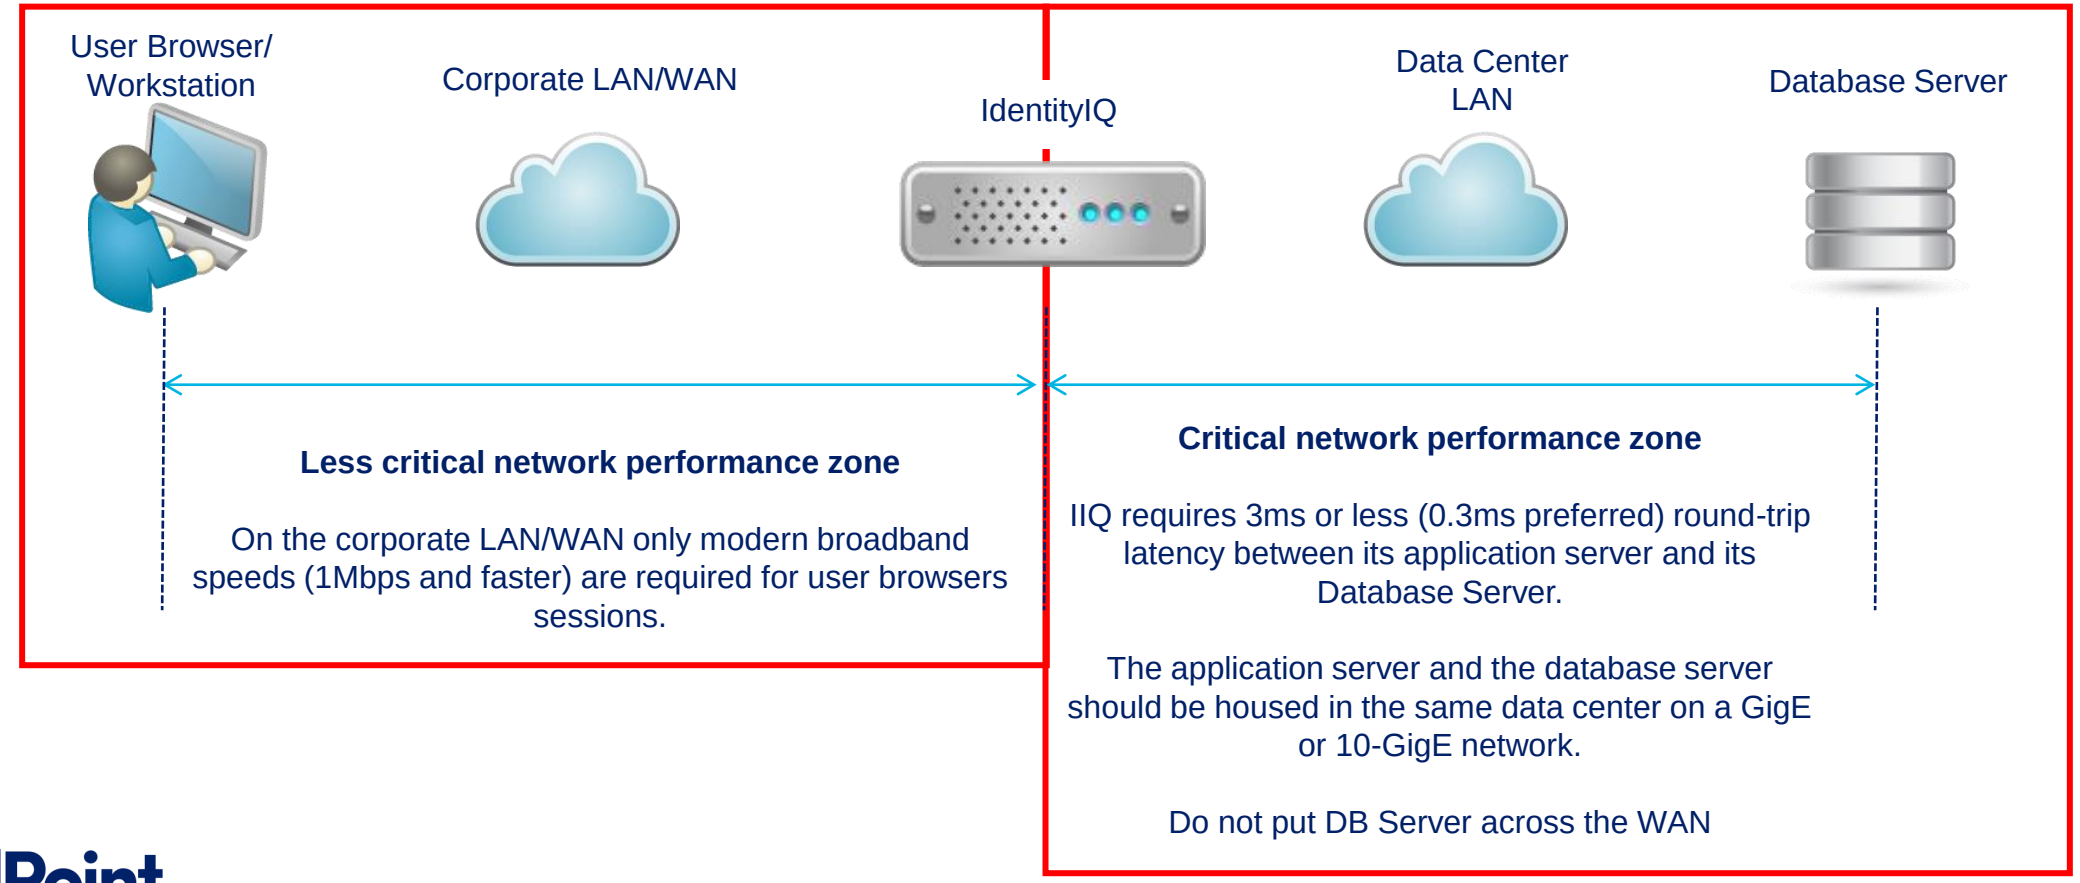

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Deployment Options

Data Center

- Delivered from your own data center
- Managed by your own team

Public Cloud

- Hosted on a cloud platform
- Managed by your own team

Cloud Managed Service

- Delivered and administered by a trusted provider

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Cloud Managed Service

Typical Service Offerings

- IdentityIQ
  - Upgrading
  - Patching
- Monitoring and support of infrastructure
  - Operating system
  - Application server
  - Database

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Deployment Process Management

IdentityIQ Essentials

Deployment Strategy


- Sandbox – Developer Environment
  - Individual IdentityIQ system per developer
  - Typically limited memory, disk space and running in a VM
  - Load small amount of representative data
- Development – Unit Test Environment
  - System for multiple developers to test code together
  - Load small amount of representative data
- Staging –Test Environment
  - User acceptance, functional testing, etc.
  - Similar to production
  - Can be used for performance and stress testing
- Production Environment
  - Incorporates redundancy and failover

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Deployment Strategy

Environment Management

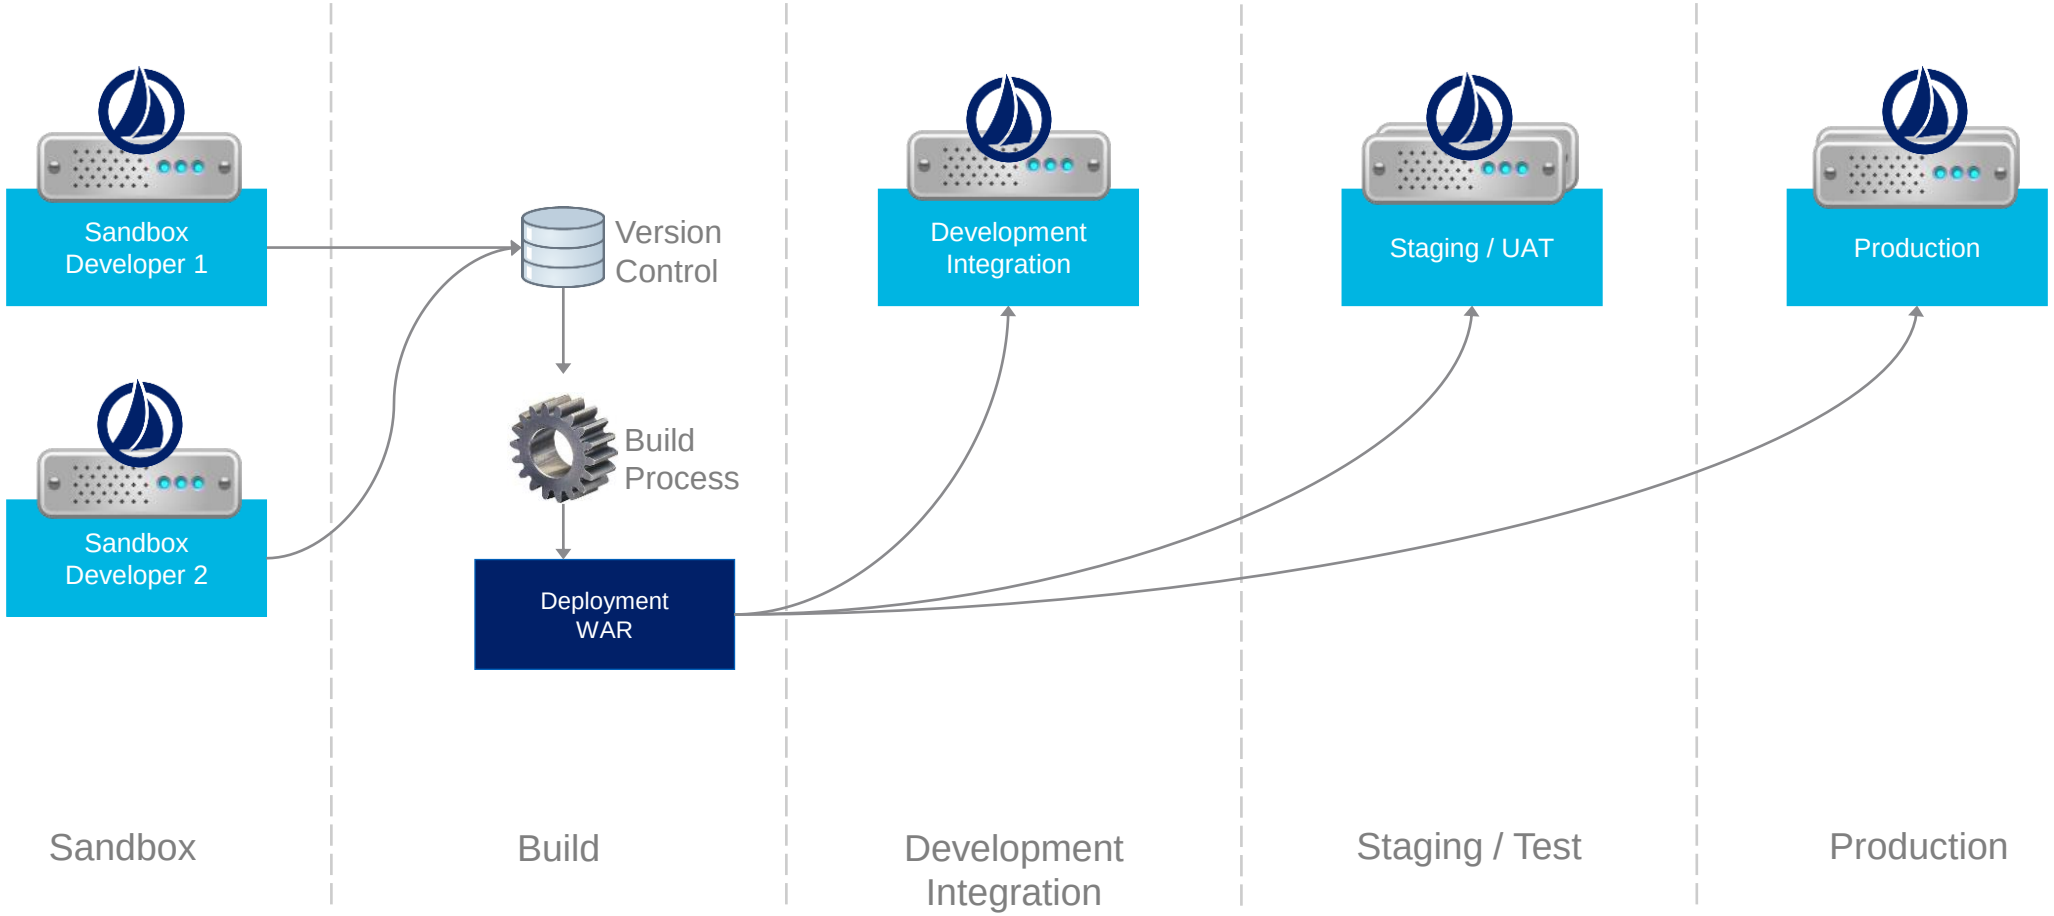

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Build Process

Services Standard Build (SSB)

- Created and used by SailPoint Professional Services
- Automates packaging and deployment of custom objects and code
  - Supports token replacement – useful for dissimilar environments
- Build configuration for Apache Ant build tool
- Utilize directly or as a model for creating a build process

- Available on Compass

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

Knowledge Check

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint



Getting Help

IdentityIQ Essentials

Compass – A Valuable Resource

- Compass is the SailPoint collaborative customer and partner community for sharing product knowledge and experience
  - https://community.sailpoint.com
- Compass includes
  - Discussion forums
  - Product releases for download
  - Technical whitepapers
  - Support cases
  - Redirect to Identity University for self-paced training materials, schedules and registration for open enrollment courses
    - https://university.sailpoint.com

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

When Compass isn’t Enough


Options

- SailPoint support
  - Assistance with product issues
- SailPoint Expert Services
  - Augment your technical team
- Customer Success Manager / Partner Success Manager
  - Your SailPoint advocate

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


Continuing Education

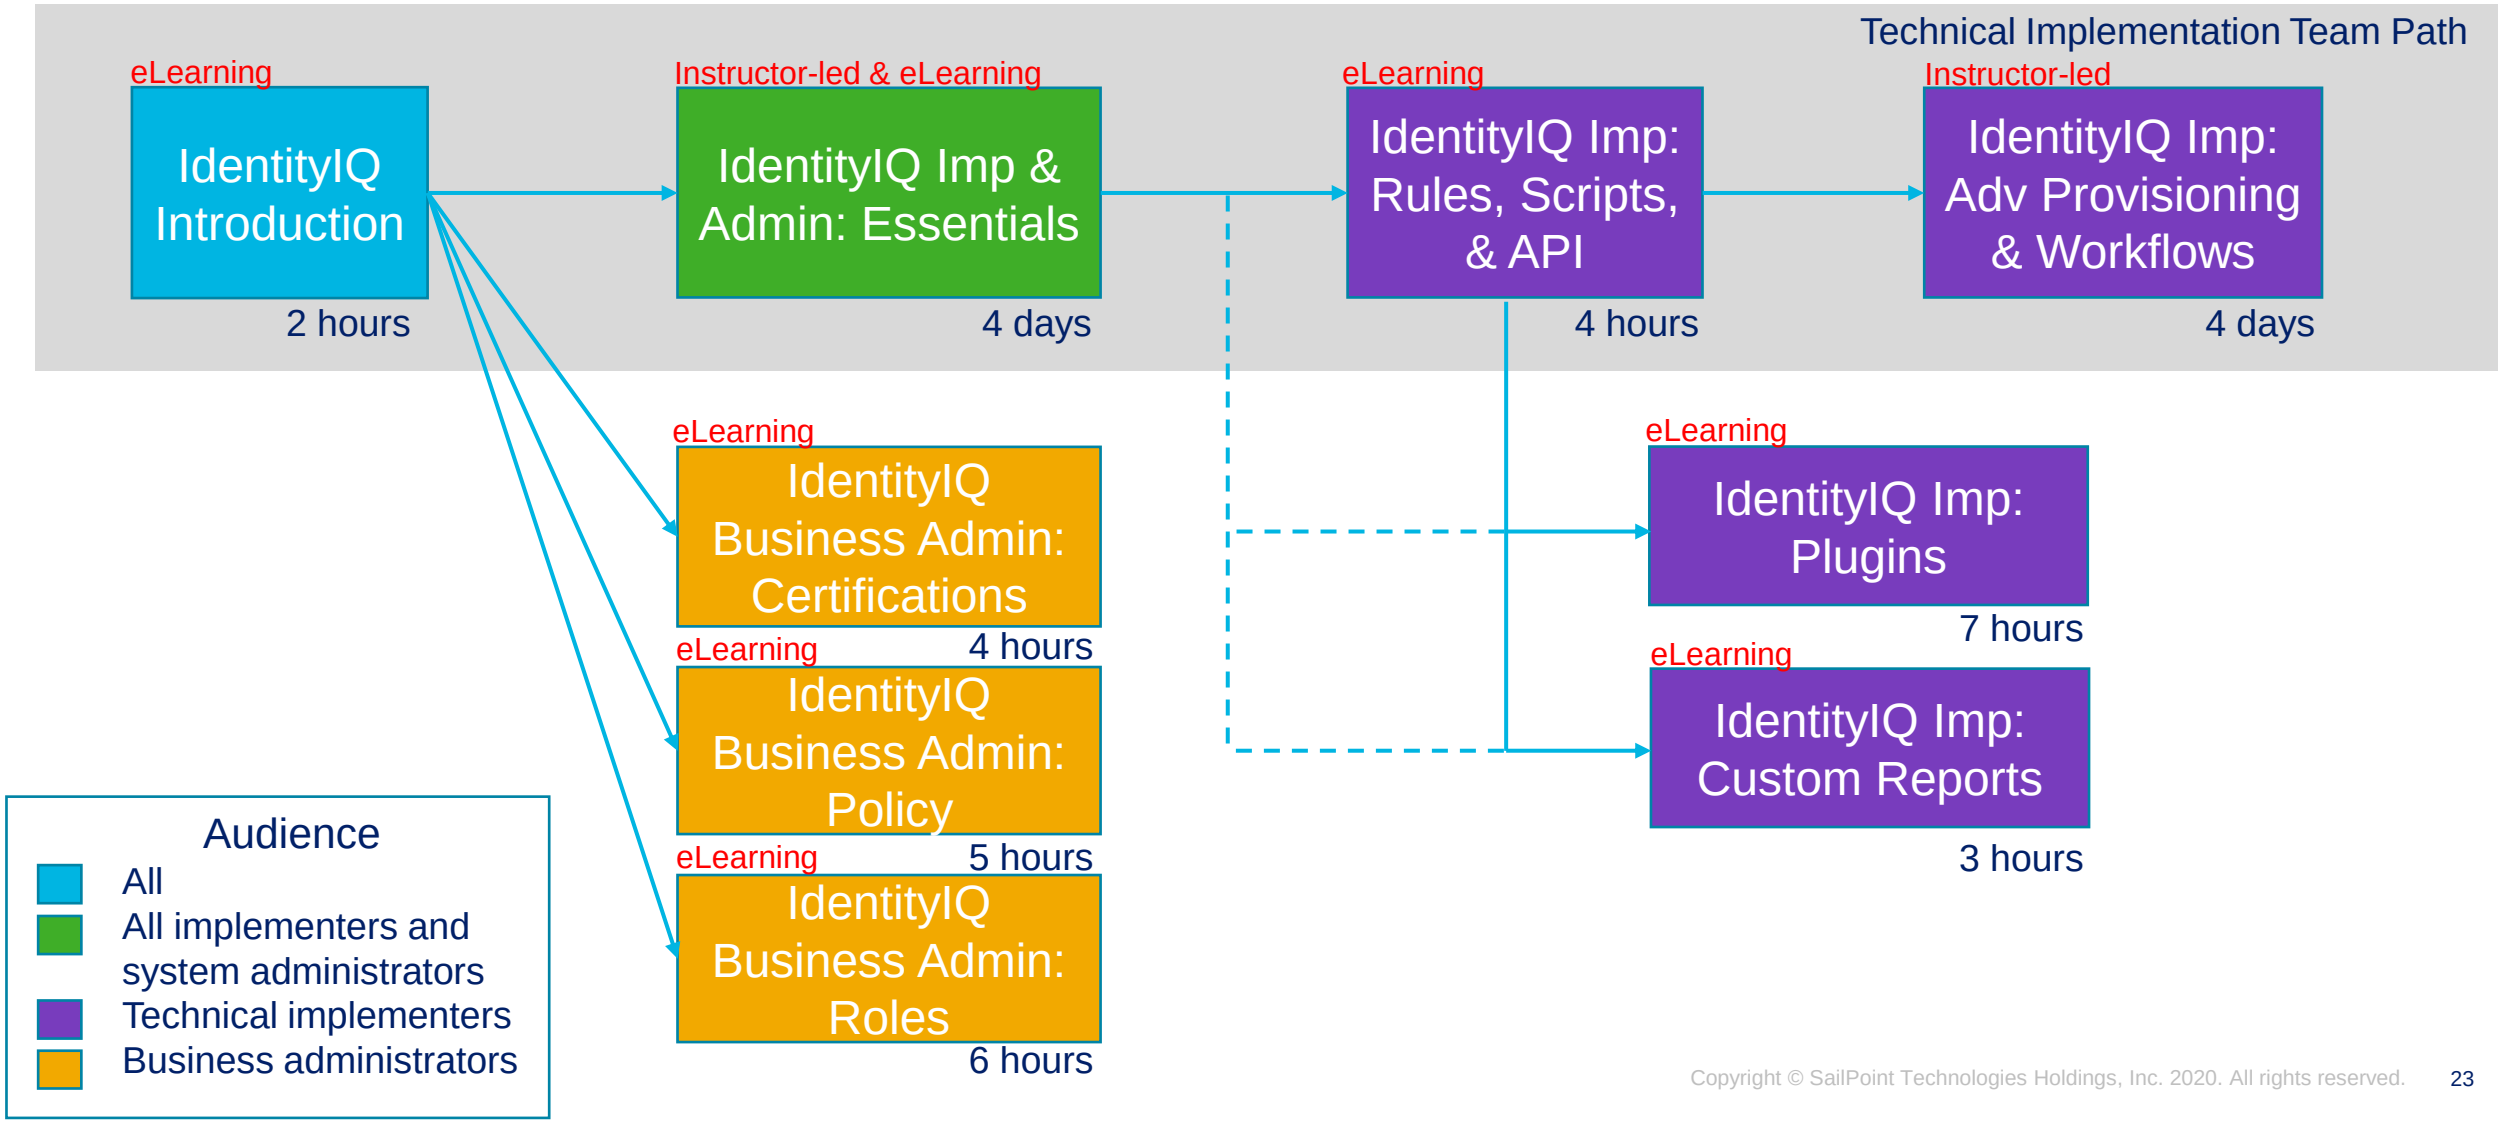

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.

New Training Validation Certifications

SailPoint Associate and SailPoint Professional

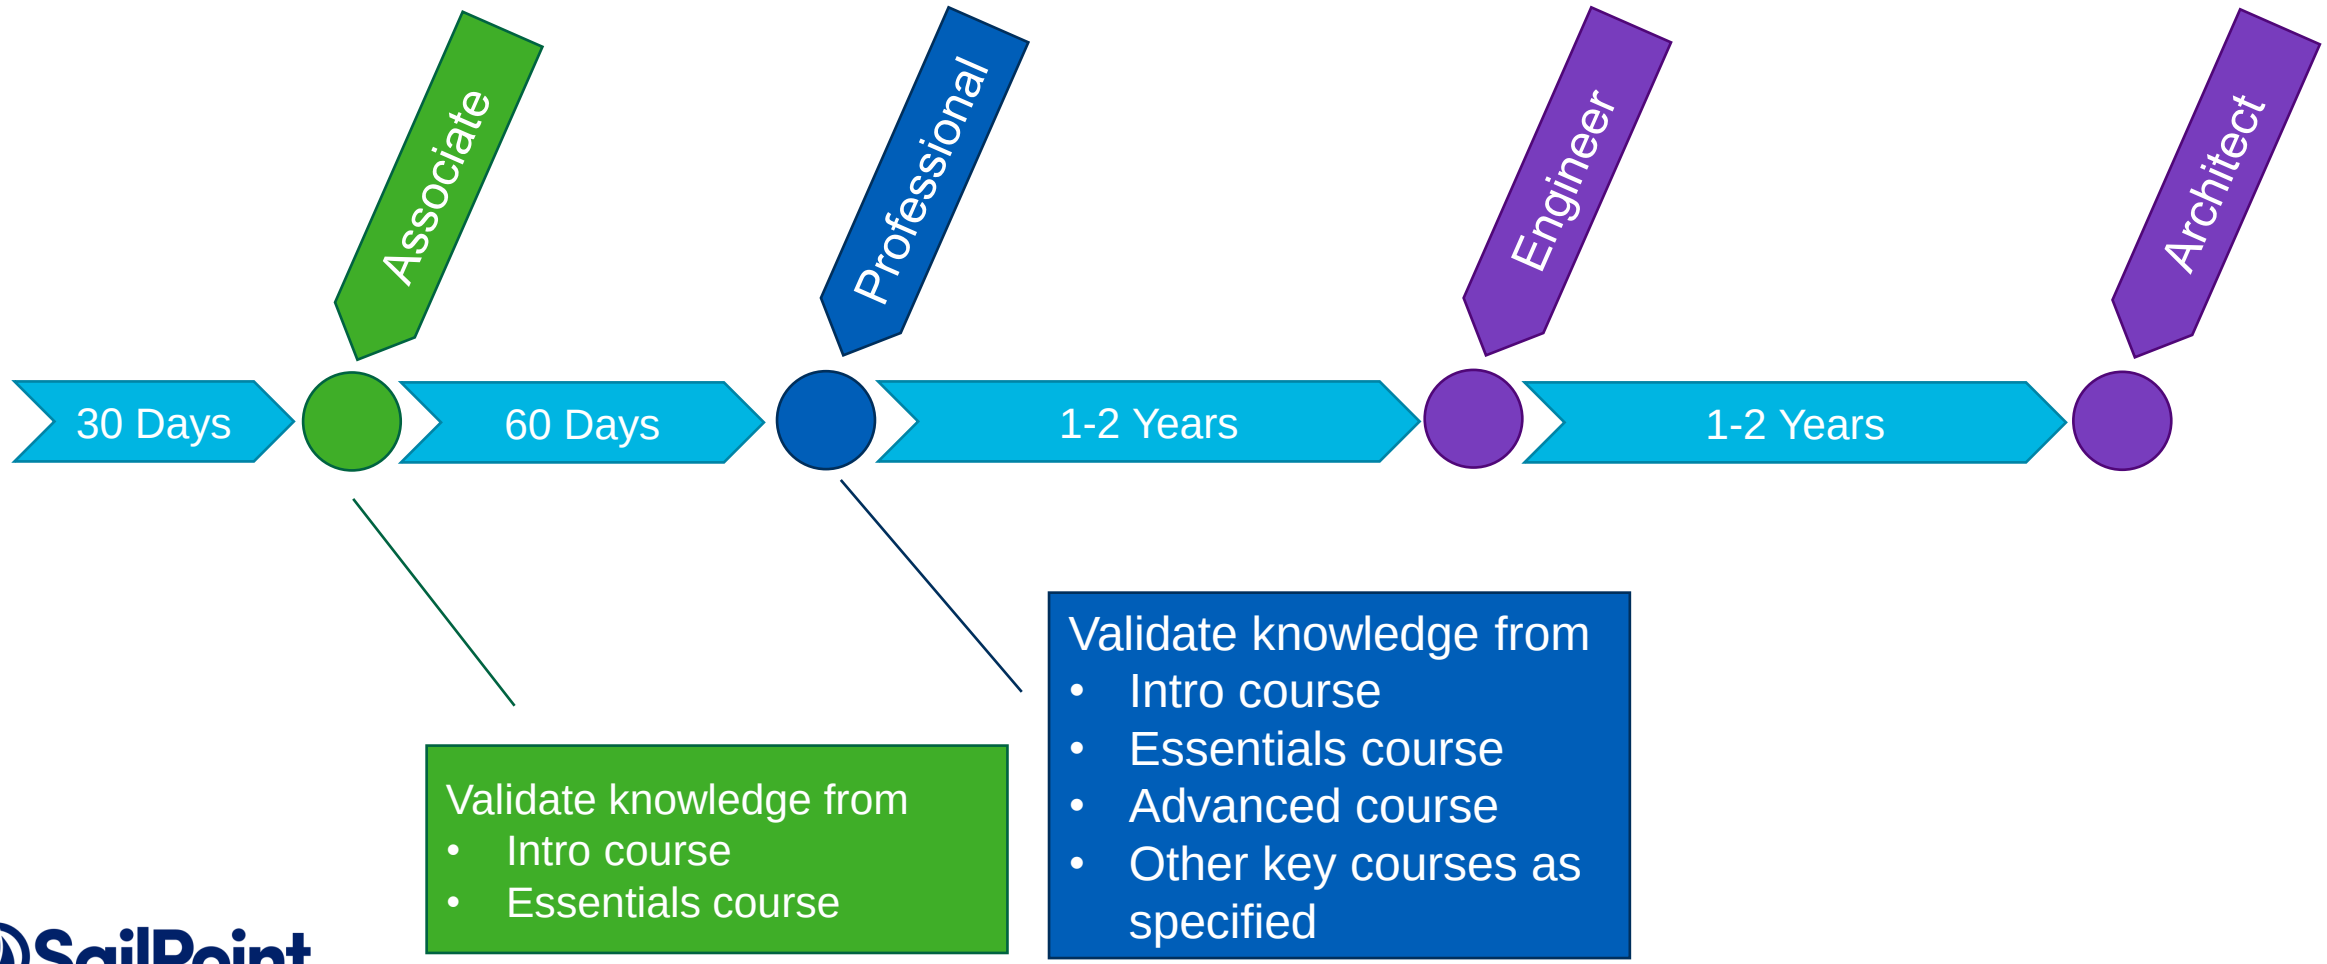

SailPoint

Copyright © SailPoint Technologies Holdings, Inc. 2020. All rights reserved.


SailPoint