



Template version: 1.0

[[doc-title]]

[[doc-subtitle]]

[[doc-type]]

[[doc-company]]

[[doc-company-url]]

Document Number: [[doc-id]]

Version: [[doc-version]]

Release Date: [[release-date]]



Document History

Author Name: [[doc-author]]

Author Contact: [[doc-author-email]]

Document Revision

Version Number	Release Date	Status	Change Description	Author
[[doc-version]]	[[doc-release-date]]	Draft	[[change-description]]	[[doc-author-name]]

Intellectual Property Rights

This document is exclusive property of [[doc-company]] and all rights are reserved.



Table of Contents

Introduction 4

References 4

rucni chapter 6

markdown6.md 7

h1 Heading 8-) 7

h2 Heading 7

h3 Heading 7

h4 Heading 7

h5 Heading 7

h6 Heading 7

Horizontal Rules 7

Typographic replacements 7

Emphasis 7

Blockquotes 7

Lists 7

Code 8

Tables 8

Links 8

Images 8

Plugins 10

Emojies 10

Subscript / Superscript 10

<ins> 10

<mark> 11

Footnotes 11

Definition lists 11

Abbreviations 11

Custom containers 11

Table of Tables

Table 1: Document references 4

Table of Figures



1 Introduction

1.1 References

Referenced documents in creation of this document are listed in the Table 1.

Document Reference	Document Title	Version	Filename
[1]	[[reference-doc-title]]		[[reference-doc-filename]]
[2]			
[3]			
[4]			
[5]			
[6]			
[7]			
[8]			

Table 1: Document references





2 rucni chapter



3 markdown6.md

3.1 h1 Heading 8-)

3.1.1 h2 Heading

3.1.1.1 h3 Heading

3.1.1.1.1 h4 Heading

3.1.1.1.1.1 h5 Heading

3.1.1.1.1.1.1 h6 Heading

3.1.2 Horizontal Rules

3.1.3 Typographic replacements

Enable typographer option to see result.

(c) (C) (r) (R) (tm) (TM) (p) (P) +-
test.. test... test..... test?..... test!....

!!!!!! ???? , -- ---

!!!!!! ???? , -- ---

"Smartypants, double quotes" and 'single quotes'

3.1.4 Emphasis

This is bold text

This is bold text

This is italic text

This is italic text

~~Strikethrough~~

3.1.5 Blockquotes

Blockquotes can also be nested...

...by using additional greater-than signs right next to each other...

...or with spaces between arrows.

3.1.6 Lists

Unordered

Create a list by starting a line with +, -, or *

Sub-lists are made by indenting 2 spaces:

1. Marker character change forces new list start:

Ac tristique libero volutpat at

Facilisis in pretium nisl aliquet

Nulla volutpat aliquam velit

Very easy!

Ordered

1. Lorem ipsum dolor sit amet

2. Consectetur adipiscing elit

3. Integer molestie lorem at massa

4. You can use sequential numbers...

5. ...or keep all the numbers as 1.

Orderd list with text between elements

6. Lorem ipsum dolor sit amet

7. Consectetur adipiscing elit

8. Integer molestie lorem at massa aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa



9. You can use sequential numbers...
 10. ...or keep all the numbers as 1.
- Start numbering with offset:
11. foo
 12. bar

3.1.7 Code

Inline code

Indented code

```
// Some comments line 1 of code line 2 of code line 3 of code
```

Block code "fences"

```
|Sample text here...|
```

Syntax highlighting

```
|var foo = function (bar) { return bar++; }; console.log(foo(5));|
```

3.1.8 Tables

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

Right aligned columns

Option	Description
data	path to data files to supply the data that will be passed into templates.
engine	engine to be used for processing templates. Handlebars is the default.
ext	extension to be used for dest files.

3.1.9 Links

[link text](#)

[link with title](#)

Autoconverted link <https://github.com/nodeca/pica> (enable linkify to see)

3.1.10 Images



Like links, Images also have a footnote style syntax



With a reference later in the document defining the URL location:

3.1.11 *Plugins*

The killer feature of `markdown-it` is very effective support of [syntax plugins](#).

3.1.11.1 *[Emojies](#)*

Classic markup: `:wink: :crush: :cry: :tear: :laughing: :yum:`

Shortcuts (emoticons): `:-) :-(8-) ;)`

see [how to change output](#) with `twemoji`.

3.1.11.2 *[Subscript](#) / [Superscript](#)*

19th

H₂O

3.1.11.3 *[<ins>](#)*


Inserted text




3.1.11.4 *<mark>*


==Marked text==

3.1.11.5 *Footnotes*

Footnote 1 link .

Footnote 2 link .

Inline footnote^[Text of inline footnote] definition.

Duplicated footnote reference .

3.1.11.6 *Definition lists*

Term 1

Definition 1 with lazy continuation.

Term 2 with *inline markup*

Definition 2

|{ some code, part of Definition 2 }

Third paragraph of definition 2.

Compact style:

Term 1 ~ Definition 1

Term 2 ~ Definition 2a ~ Definition 2b

3.1.11.7 *Abbreviations*

This is HTML abbreviation example.

It converts "HTML", but keep intact partial entries like "xxxHTMLyyy" and so on.

*[HTML]: Hyper Text Markup Language

3.1.11.8 *Custom containers*

::: warning *here be dragons* :::

13. Footnote **can have markup**
and multiple paragraphs.



14. Footnote text.



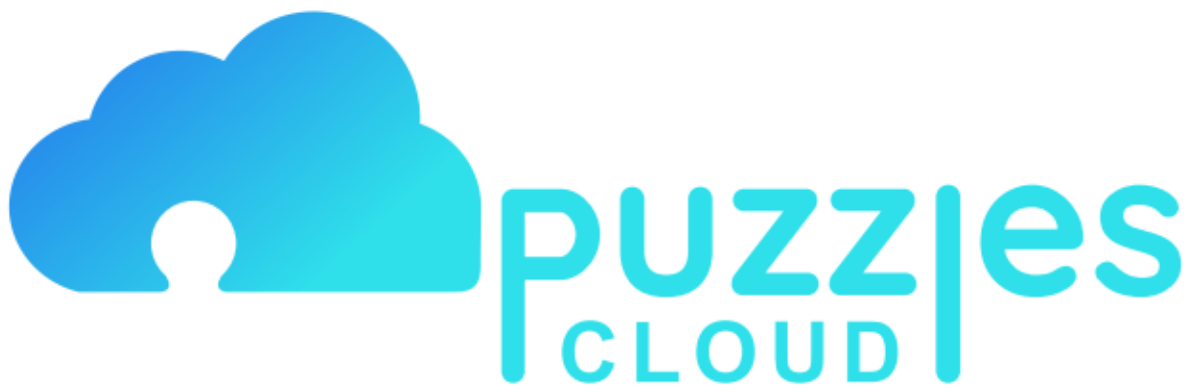


Figure 1: Last Page