



The parent BASE transaction tested at admission

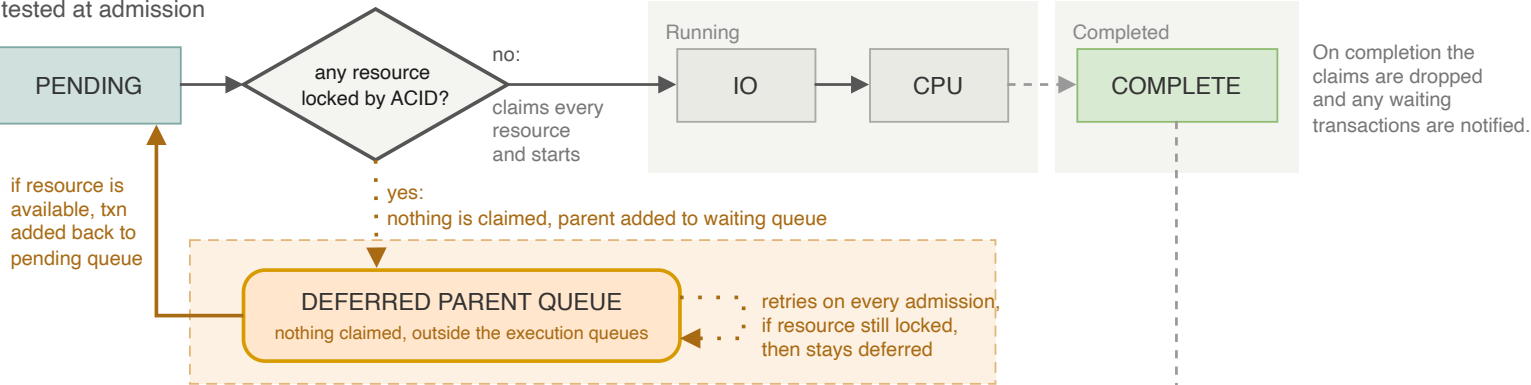

Each reconciliation repair, tested at rule expansion

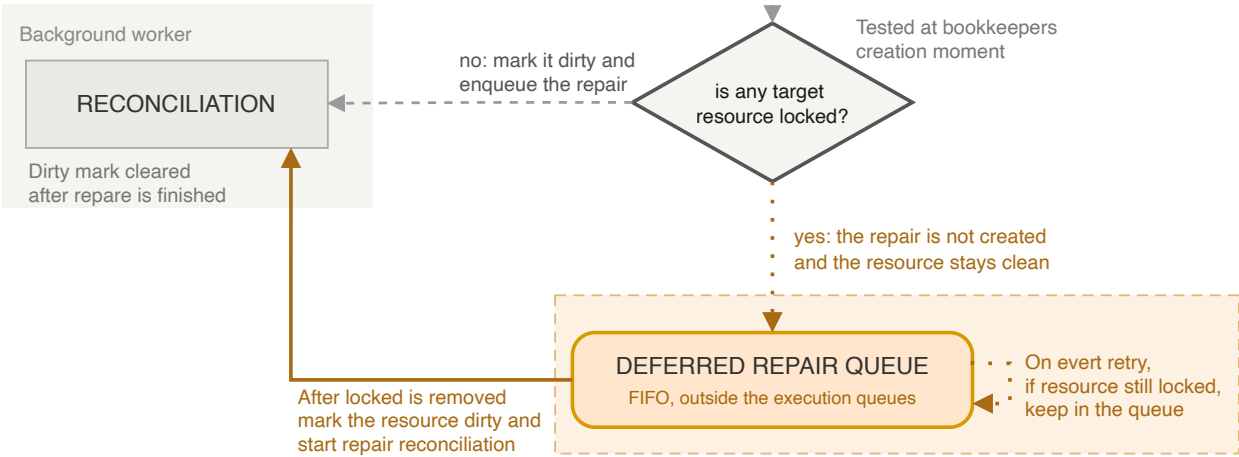

None deferred queue is woken by an event. In ACID case, the dirty-clear event wakes waiting transactions directly. On the BASE side, both queues are polled instead. The parent transactions in queue are retried again at every admission step. The repair queue is drained every repair batch, each ACID completion that releases locks, and each simulation step. The fixed step retry is needed because locks can also be released, for example when a group aborts.