



NEO4J Desktop APOC CONFIGURATION

Installing the APOC library can be done within the plugins tab of the project representing your database:

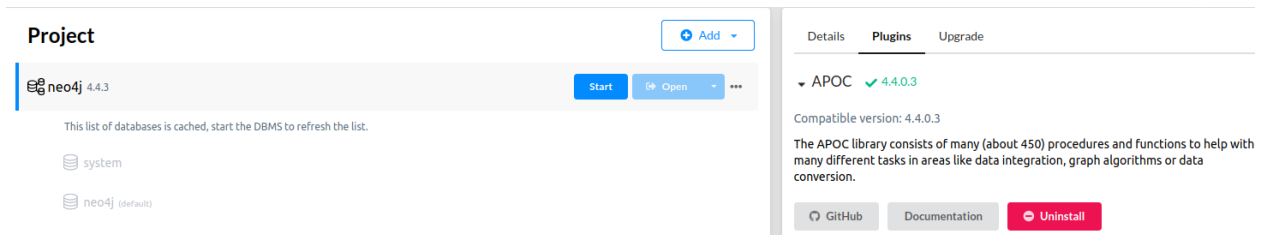

Next, we have to go into the database's local files in order to set up an 'apoc.conf' that allows our Python driver to run Cypher commands. This can be done by opening the local database files by clicking the three dots next to the project, clicking 'open folder', and clicking 'DBMS':

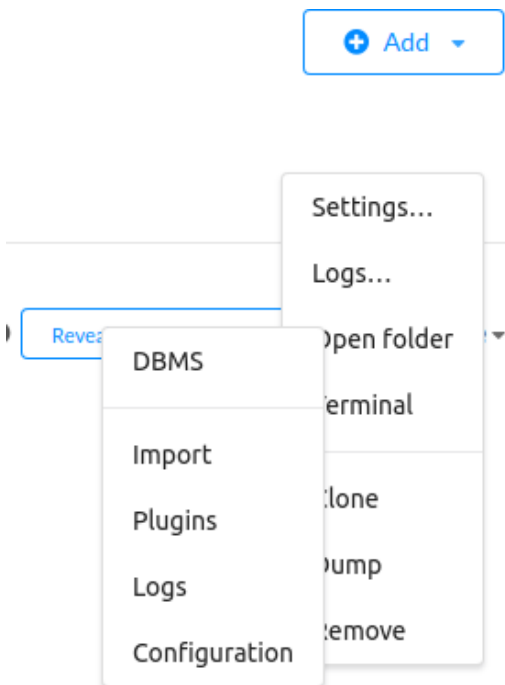

Next, you have to open the 'conf' directory and create a new file named 'apoc.conf'. This file should contain the following three lines:



This should configure the APOC settings to work correctly. All exported CSV files will be sent to the 'import' directory which can be found in the same directory as the 'conf' directory.