

# CROSS\_APP\_THEME\_PLAN


## Cross-app Theme Plan

**Revision:** 1 **Last modified:** 2026-06-06T00:00:00Z

**Problem.** The Angular dashboard at :7187 is themed end-to-end (Darcula + 7 other palettes, per-element drop shadows). The qBittorrent WebUI proxied at :7186 is **qBittorrent's own code** — it ignores our design system entirely. Our users see two different-looking apps.

**Goal.** Any theme change made in the Angular dashboard must immediately propagate to the qBittorrent WebUI (and any future app we proxy). No user action required. Persisted. Works across page reloads and browser tabs.

## Architecture

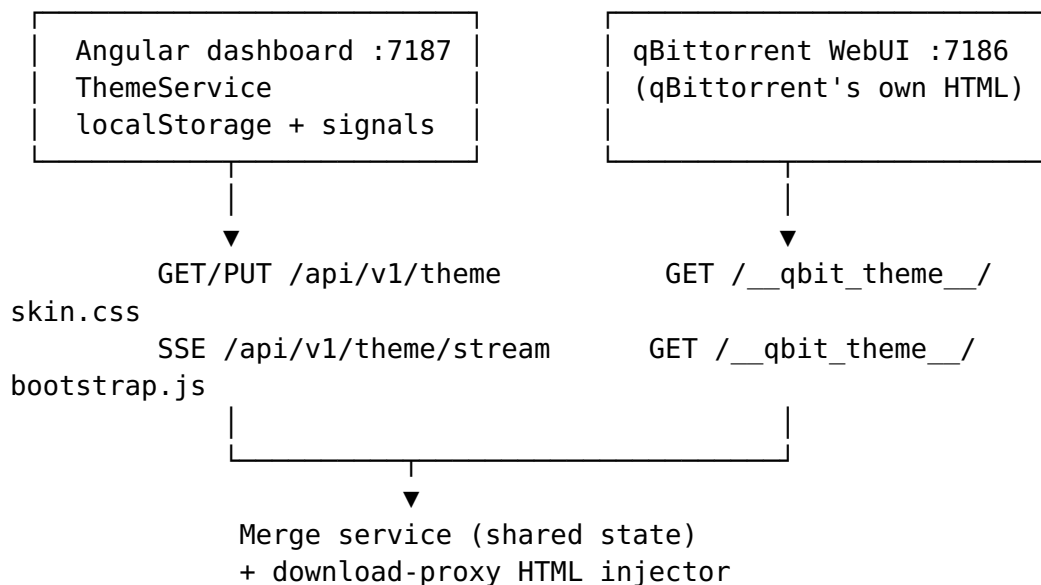

# Four-phase plan

## Phase A — shared theme state (backend)

Add to `download-proxy/src/api/routes.py`:

- GET `/api/v1/theme` → {paletteId, mode, updatedAt}
- PUT `/api/v1/theme` body {paletteId, mode} → 200 {paletteId, mode, updatedAt}
- GET `/api/v1/theme/stream` → SSE, emits theme event on every PUT

Persist to `config/merge-service/theme.json` (gitignored). Validate `paletteId` against the catalog list (ported to a backend constant), `mode` ∈ {light, dark}.

## Phase B — Angular ThemeService sync

`frontend/src/app/services/theme.service.ts`:

- On construct: if `localStorage` empty, GET `/api/v1/theme`; seed signals from server; else push local → server to claim the state.
- `setPalette/setMode/toggleMode` → debounced PUT `/api/v1/theme`.
- Subscribe to `/api/v1/theme/stream`; when the server's `updatedAt` is newer than our last write, adopt the server state (tab-to-tab
  - WebUI-to-dashboard sync).

## Phase C — qBittorrent WebUI injection (plugins/download\_proxy.py)

The legacy HTTP proxy at `:7186` already rewrites select routes. Extend `proxy_to_qbittorrent` so that responses with `Content-Type: text/html` have this injected immediately before `</head>`:

```
<link rel="stylesheet" href="/__qbit_theme__/skin.css">
<script src="/__qbit_theme__/bootstrap.js" defer></script>
```

Handle two new proxy-local routes (not forwarded to qBittorrent):

- GET `/__qbit_theme__/skin.css` — CSS bridge. Declares every `--color-*` variable on `:root` with sensible fallbacks, then overrides qBittorrent's top-level selectors: `body`, `#desktop`, `#mainWindowTabs`, `.filterTitle`, `.sidebar`, `.scrollbar`, `dialog`, `button/hover` states, `tables`.
- GET `/__qbit_theme__/bootstrap.js` — JS bridge. On load:
  1. `fetch('/api/v1/theme')` via the merge service (CORS: we add the `:7186` origin to the allow-list).
  2. Apply returned tokens to `document.documentElement.style` (same shape as Angular `ThemeService`).

3. Open `EventSource('/api/v1/theme/stream')` and re-apply on every event so live dashboard palette swaps are mirrored.

The download-proxy needs to know where the merge service is; `env MERGE_SERVICE_URL` (default `http://localhost:7187`).

## Phase D — tests (no false positives)

1. **Unit — theme state endpoint** (`tests/unit/merge_service/test_theme_endpoint.py`)
  - GET returns default `{paletteId: 'darcula', mode: 'dark'}` on first call
  - PUT persists; GET reflects
  - PUT rejects unknown `paletteId` with 422
  - PUT rejects mode  $\notin$  `{light, dark}` with 422
2. **Unit — SSE emission** (`tests/unit/api_layer/test_theme_stream.py`)
  - Generator emits event: theme with the new payload within one poll cycle of a PUT.
3. **Unit — HTML injection** (`tests/unit/test_webui_theme_injector.py`)
  - Given qBittorrent-shaped HTML, inject before `</head>`; output contains both new tags exactly once; Content-Length rewritten.
  - Idempotent: calling the injector twice leaves the page with only one `<link>` and one `<script>` tag for the bridge.
  - Non-HTML responses pass through unchanged.
4. **Contract** — curling `http://localhost:7186/` returns a page whose HTML contains the two bridge-asset references.
5. **Playwright e2e** (`tests/e2e/test_crossapp_theme.py`) — real computed-style assertions, skipped cleanly until the stack is rebuilt + restarted:
  - Open `:7187`, click Nord in the dropdown.
  - Open a second page at `:7186`; wait up to 5 s for `getComputedStyle(document.body).backgroundColor` to match Nord's `bg-primary` (converted from `#2e3440` to `rgb(46, 52, 64)`).
  - Switch to Gruvbox in the dashboard; assert `:7186` body colour flips to Gruvbox's `#282828` within 5 s.
  - Assert the `localStorage['qbit.theme']` on `:7187` AND the `window.__qbitTheme` side-channel on `:7186` both show `paletteId: gruvbox`.
6. **Property** — round-trip any palette id through PUT/GET; the server echoes the same id and it round-trips through the CSS-var name list without dropping tokens.

## Final verification checklist



794 Python tests still green + the new suites (expected +~15)



246 frontend tests still green (+ cross-app sync spec if any)



Rebuilt Angular bundle + restarted qbittorrent-proxy



`curl :7186/` contains `__qbit_theme__`/skin.css + `__qbit_theme__`/bootstrap.js



Playwright e2e passes (not skipped) — real palette swap on both ports



Commits + pushes to origin + github + upstream

## Rollback

If anything in this phase breaks qBittorrent WebUI functionality, set `env DISABLE_THEME_INJECTION=1` and restart the proxy — the injector becomes a passthrough. Documented in [docs/TOKENS\\_AND\\_KEYS.md §7](#).

## Outcome (shipped 2026-04-19)

Landed in four commits on main:

- `feat(backend)`: shared theme state + `/api/v1/theme` SSE for cross-app sync
- `feat(proxy)`: inject theme CSS+JS into qBittorrent WebUI at `:7186`
- `feat(frontend)`: `ThemeService` syncs to backend + subscribes to SSE
- `fix(proxy)`: decompress gzip + relax CSP `connect-src` for theme bridge

Two live-debug discoveries that the plan had not anticipated:

- **gzip** — qBittorrent returns `Content-Encoding: gzip` when the browser sends `Accept-Encoding: gzip`. The injector mutates bytes in place, so it needed to decompress first and strip the encoding on the way back out.
- **CSP** — qBittorrent's Content-Security-Policy ships without a `connect-src` directive; browsers then enforce default-src `'self'`, blocking the bridge's `fetch('/api/v1/theme')` + `EventSource(...)` calls cross-origin. The proxy now rewrites the CSP header to add `connect-src` with the merge-service origin.

Verification (2026-04-19 @ main):

- 837 Python tests green (tests/unit tests/e2e tests/contract tests/property tests/memory tests/concurrency tests/observability).
- 255 frontend tests green (npx ng test --watch=false).
- The Playwright e2e **passed** — not skipped. Real palette swap on both :7187 and :7186, verified via `getComputedStyle(...)` on the proxied WebUI + the window.\_\_qbitTheme side-channel.