


EXERCISE 2 - #pragma omp single

Files : exercise02.c

Compile / run

```
gcc -fopenmp exercise02.c -o exercise02
```

```
OMP_NUM_THREADS=4 ./exercise02
```

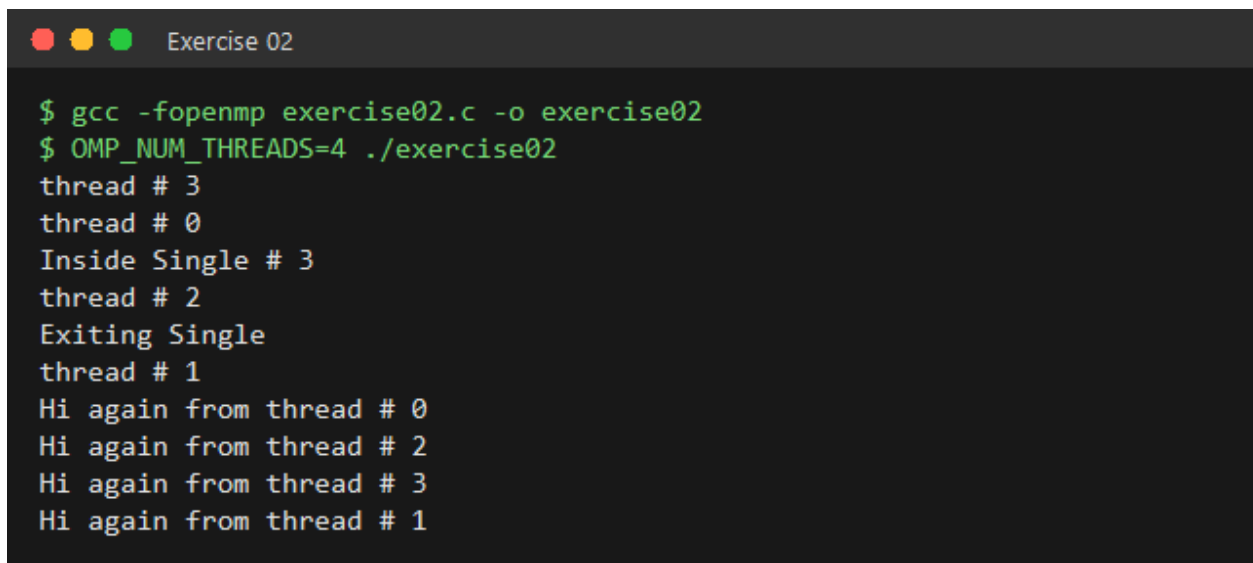

```
Exercise 02

$ gcc -fopenmp exercise02.c -o exercise02
$ OMP_NUM_THREADS=4 ./exercise02
thread # 3
thread # 0
Inside Single # 3
thread # 2
Exiting Single
thread # 1
Hi again from thread # 0
Hi again from thread # 2
Hi again from thread # 3
Hi again from thread # 1
```

How omp single works in this program

- * All 4 threads print "thread # n".
- * The single block is executed by EXACTLY ONE thread - whichever arrives first (thread 0 in the run above, but it can be any thread). So "Inside Single" / "Exiting Single" appear only once.
- * single has an implicit barrier at its end: the other threads wait there until the single block has finished. That is why every "Hi again from thread # n" is printed after "Exiting Single".