


Key-value Storage Mechanism

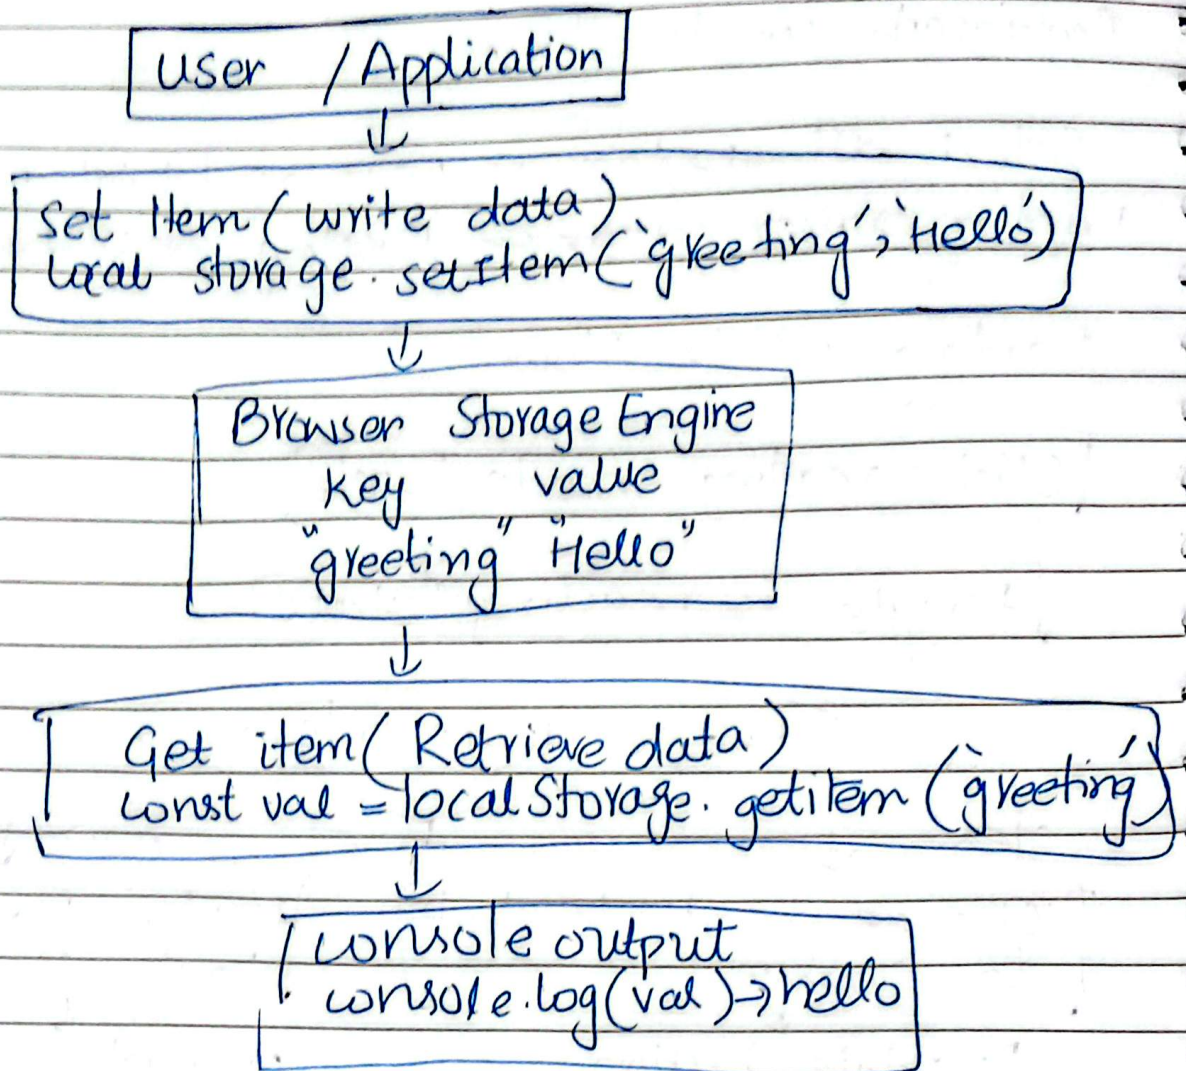

Logic flow:

Data formatting: - Data is stored as pairs where **key** is the unique identifier and **value** is the stored content.

Storage Execution: - Calling `localStorage.setItem(key, value)` saves the entry in the browser memory.

If the key already exists, it updates the value.

3-Retrieval Execution: Calling `localStorage.getItem(key)` searches the storage table. It returns the string value if found or null if the key does not exist.

4-Console output: The retrieved value is passed to `console.log()` to display it in the browser developer tools.