

class10

Mina Wu(PID: A59013200)

2024-02-09

What is in the PDB?

Download a CSV file with current composition data from: <https://www.rcsb.org/stats/summary>

```
pdbstats <- read.csv("Data Export Summary.csv", row.names=1)
pdbstats
```

	X.ray	EM	NMR	Multiple.methods	Neutron	Other
Protein (only)	161,663	12,592	12,337	200	74	32
Protein/Oligosaccharide	9,348	2,167	34	8	2	0
Protein/NA	8,404	3,924	286	7	0	0
Nucleic acid (only)	2,758	125	1,477	14	3	1
Other	164	9	33	0	0	0
Oligosaccharide (only)	11	0	6	1	0	4
Total						
Protein (only)	186,898					
Protein/Oligosaccharide	11,559					
Protein/NA	12,621					
Nucleic acid (only)	4,378					
Other	206					
Oligosaccharide (only)	22					

```
#x<- "2,2222"

#sub <- as.numeric(gsub(",", "", x))
#sub
```

Create a function to remove commas.

```

commasum<- function (x){
  #Remove comma, convert to numeric and sum
  sum(as.numeric(gsub(",", "", x)))
}

```

```
commasum(pdbstats$X.ray)
```

```
[1] 182348
```

I can now 'apply()' this function to my wee table to get all the numbers I need.

```
round(apply(pdbstats,2, commasum)/commasum(pdbstats$Total)*100,2)
```

X.ray	EM	NMR	Multiple.methods
84.54	8.72	6.57	0.11
Neutron	Other	Total	
0.04	0.02	100.00	

Q1: What percentage of structures in the PDB are solved by X-Ray and Electron Microscopy.

84.54% for xray and 8.72% for EM.

```
commasum(pdbstats$Total[1])/commasum(pdbstats$Total)
```

```
[1] 0.8665362
```

Q2: What proportion of structures in the PDB are protein?

0.8665362

Q3 class: How does the total number of protein structures in the PDB relate to the total number of protein sequences in Uniprot?

$(186898/250,322,721)*100 = 0.074\%$

Q3: Type HIV in the PDB website search box on the home page and determine how many HIV-1 protease structures are in the current PDB?

There are 4,410 structures.

Visualizing the HIV-1 protease structure

We will use the Mol* (mol-star) homepage at: <https://molstar.org/viewer/>

Looking at 1HSG

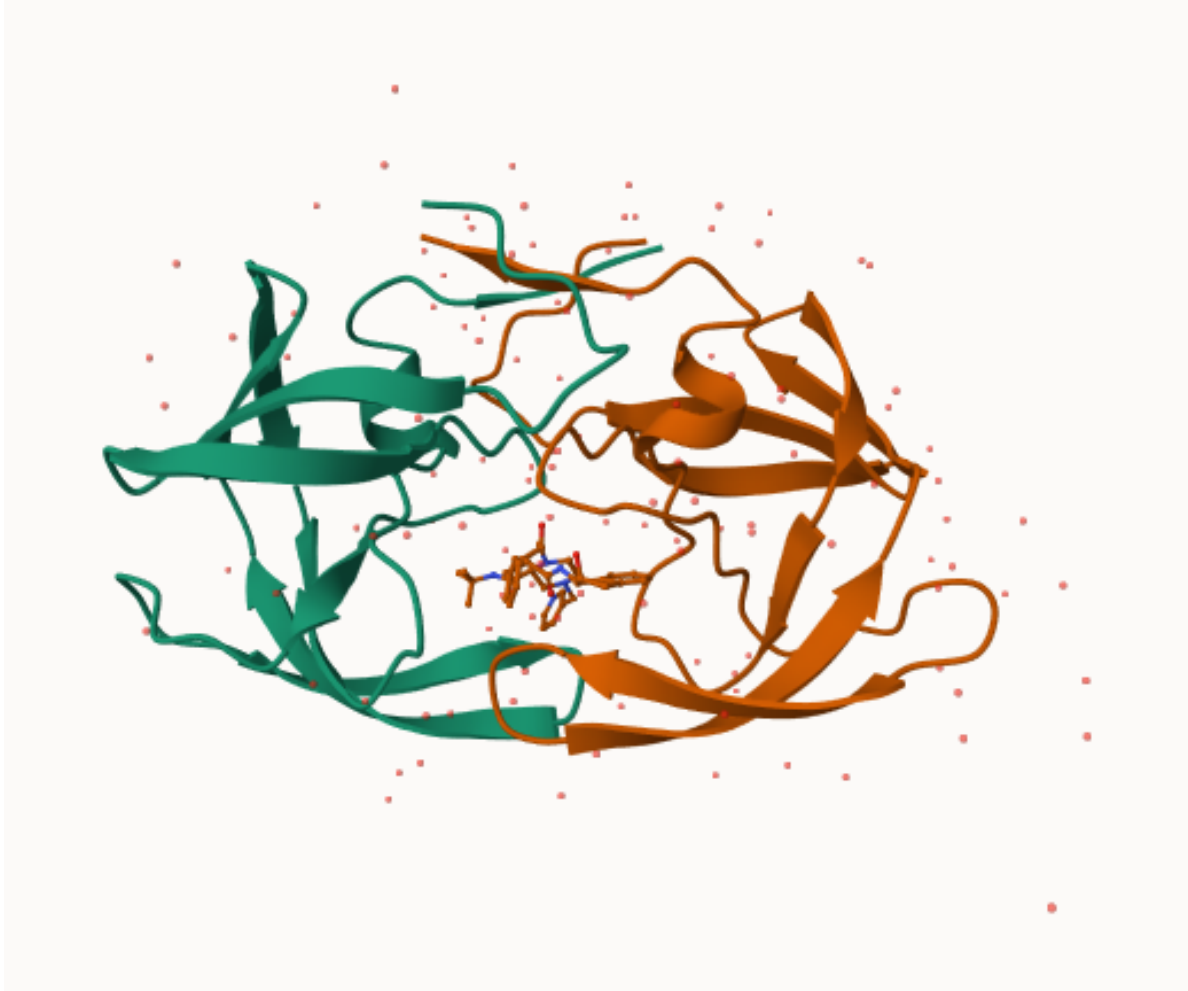


Figure 1: Figure 1HSG

Looking at the aspartic acid at position 25 for both the A and B chain. It's represented as space-fill.

Working with structures in R

We will use the bio3d package for structural bioinformatics

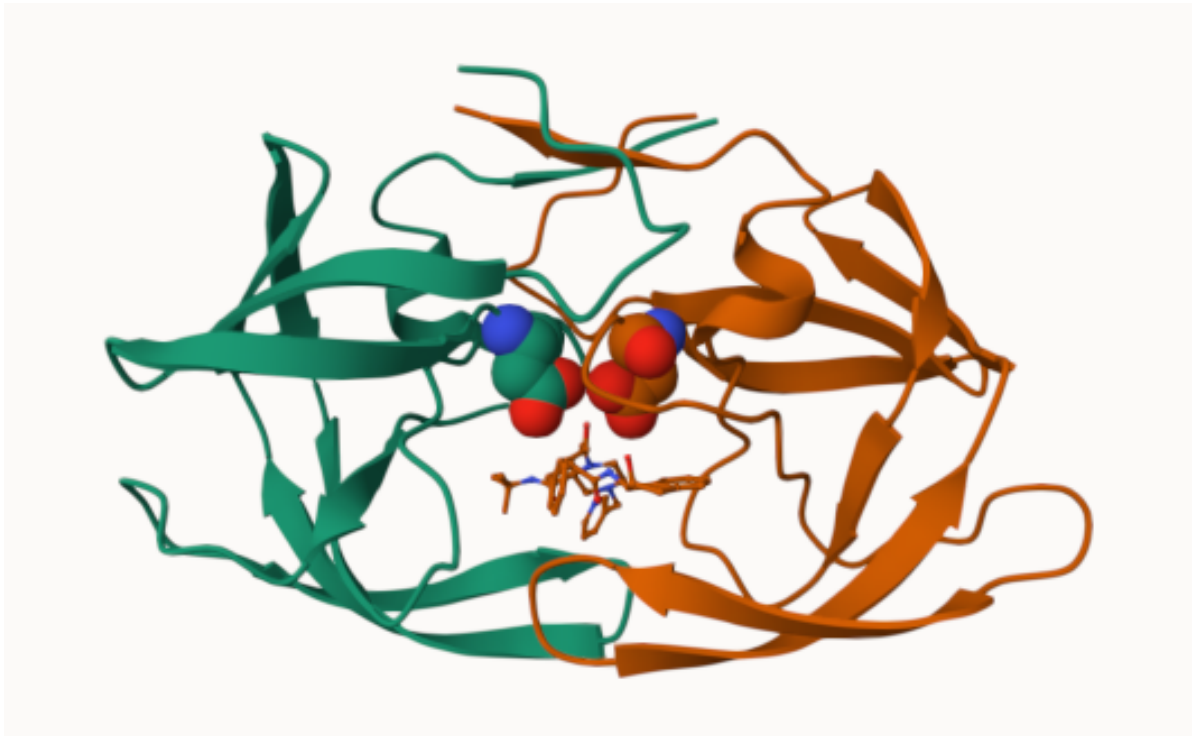


Figure 2: Figure 1HSG

```
library(bio3d)
```

Warning: package 'bio3d' was built under R version 4.0.5

```
hiv<- read.pdb("1hsg")
```

Note: Accessing on-line PDB file

```
hiv
```

```
Call: read.pdb(file = "1hsg")
```

Total Models#: 1

Total Atoms#: 1686, XYZs#: 5058 Chains#: 2 (values: A B)

Protein Atoms#: 1514 (residues/Calpha atoms#: 198)

Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)

Non-protein/nucleic Atoms#: 172 (residues: 128)

Non-protein/nucleic resid values: [HOH (127), MK1 (1)]

Protein sequence:

```
PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYD
QILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFPQITLWQRPLVTIKIGGQLKE
ALLDTGADDTVLEEMSLPGRWKPKMIGGIGGFIKVRQYDQILIEICGHKAIGTVLVGPTP
VNIIGRNLLTQIGCTLNF
```

```
+ attr: atom, xyz, seqres, helix, sheet,
      calpha, remark, call
```

```
head (hiv$atom)
```

	type	eleno	elety	alt	resid	chain	resno	insert	x	y	z	o	b
1	ATOM	1	N	<NA>	PRO	A	1	<NA>	29.361	39.686	5.862	1	38.10
2	ATOM	2	CA	<NA>	PRO	A	1	<NA>	30.307	38.663	5.319	1	40.62
3	ATOM	3	C	<NA>	PRO	A	1	<NA>	29.760	38.071	4.022	1	42.64

```

4 ATOM      4      O <NA>  PRO      A      1      <NA> 28.600 38.302 3.676 1 43.40
5 ATOM      5      CB <NA>  PRO      A      1      <NA> 30.508 37.541 6.342 1 37.87
6 ATOM      6      CG <NA>  PRO      A      1      <NA> 29.296 37.591 7.162 1 38.40
  segid elesy charge
1  <NA>      N  <NA>
2  <NA>      C  <NA>
3  <NA>      C  <NA>
4  <NA>      O  <NA>
5  <NA>      C  <NA>
6  <NA>      C  <NA>

```

```

pdbseq(hiv)

```

```

  1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20
"P" "Q" "I" "T" "L" "W" "Q" "R" "P" "L" "V" "T" "I" "K" "I" "G" "G" "Q" "L" "K"
21  22  23  24  25  26  27  28  29  30  31  32  33  34  35  36  37  38  39  40
"E" "A" "L" "L" "D" "T" "G" "A" "D" "D" "T" "V" "L" "E" "E" "M" "S" "L" "P" "G"
41  42  43  44  45  46  47  48  49  50  51  52  53  54  55  56  57  58  59  60
"R" "W" "K" "P" "K" "M" "I" "G" "G" "I" "G" "G" "F" "I" "K" "V" "R" "Q" "Y" "D"
61  62  63  64  65  66  67  68  69  70  71  72  73  74  75  76  77  78  79  80
"Q" "I" "L" "I" "E" "I" "C" "G" "H" "K" "A" "I" "G" "T" "V" "L" "V" "G" "P" "T"
81  82  83  84  85  86  87  88  89  90  91  92  93  94  95  96  97  98  99   1
"P" "V" "N" "I" "I" "G" "R" "N" "L" "L" "T" "Q" "I" "G" "C" "T" "L" "N" "F" "P"
  2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21
"Q" "I" "T" "L" "W" "Q" "R" "P" "L" "V" "T" "I" "K" "I" "G" "G" "Q" "L" "K" "E"
22  23  24  25  26  27  28  29  30  31  32  33  34  35  36  37  38  39  40  41
"A" "L" "L" "D" "T" "G" "A" "D" "D" "T" "V" "L" "E" "E" "M" "S" "L" "P" "G" "R"
42  43  44  45  46  47  48  49  50  51  52  53  54  55  56  57  58  59  60  61
"W" "K" "P" "K" "M" "I" "G" "G" "I" "G" "G" "F" "I" "K" "V" "R" "Q" "Y" "D" "Q"
62  63  64  65  66  67  68  69  70  71  72  73  74  75  76  77  78  79  80  81
"I" "L" "I" "E" "I" "C" "G" "H" "K" "A" "I" "G" "T" "V" "L" "V" "G" "P" "T" "P"
82  83  84  85  86  87  88  89  90  91  92  93  94  95  96  97  98  99
"V" "N" "I" "I" "G" "R" "N" "L" "L" "T" "Q" "I" "G" "C" "T" "L" "N" "F"

```

```

aa123(pdbseq(hiv)[25])

```

```

[1] "ASP"

```

```

adk <- read.pdb("6s36")

```

Note: Accessing on-line PDB file
PDB has ALT records, taking A only, rm.alt=TRUE

```
adk
```

```
Call: read.pdb(file = "6s36")
```

```
Total Models#: 1
```

```
Total Atoms#: 1898, XYZs#: 5694 Chains#: 1 (values: A)
```

```
Protein Atoms#: 1654 (residues/Calpha atoms#: 214)
```

```
Nucleic acid Atoms#: 0 (residues/phosphate atoms#: 0)
```

```
Non-protein/nucleic Atoms#: 244 (residues: 244)
```

```
Non-protein/nucleic resid values: [ CL (3), HOH (238), MG (2), NA (1) ]
```

```
Protein sequence:
```

```
MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMRLRAAVKSGSELGKQAKDIMDAGKLV  
DELVIALVKERIAQEDCRNGFLLDGFPRTPQADAMKEAGINVDYVLEFDVPDELIVDKI  
VGRRVHAPSGRVYHVKFNPVKVEGKDDVTGEELTTRKDDQEETVRKRLVEYHQMTAPLIG  
YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG
```

```
+ attr: atom, xyz, seqres, helix, sheet,  
      calpha, remark, call
```


Normal mode analysis (NMA) a bioinformatics method to predict functional motions and large-scale structure changes.

```
m <- nma(adk)
```

```
Building Hessian... Done in 0.042 seconds.
```

```
Diagonalizing Hessian... Done in 0.503 seconds.
```

```
plot(m)
```

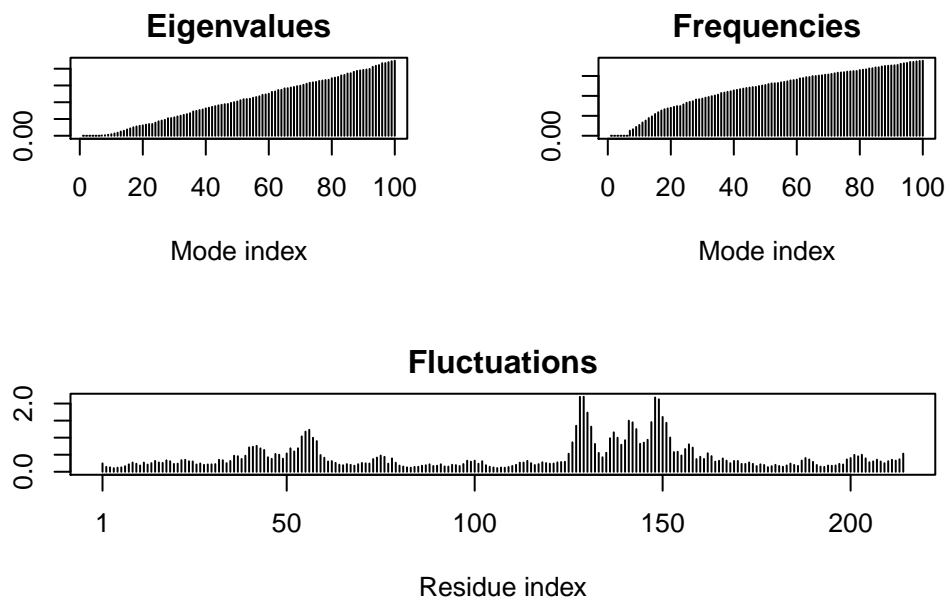

Make a wee move (a.k.a “trajectory”) of this predicted motions

```
mktrj(m, file="adk_movie.pdb")
```

Quick comparative Structure analysis of Adenylate kinase

Extract sequence and run a BLAST search

```
s<- pdbseq(adk)
blast<- blast.pdb(s)
```

Searching ... please wait (updates every 5 seconds) RID = WDH5K2Y6016

.....


Reporting 83 hits

```
hits<- plot(blast)
```

```
* Possible cutoff values: 196 9
    Yielding Nhits:      17 83
```



```
* Chosen cutoff value of: 196
    Yielding Nhits: 17
```

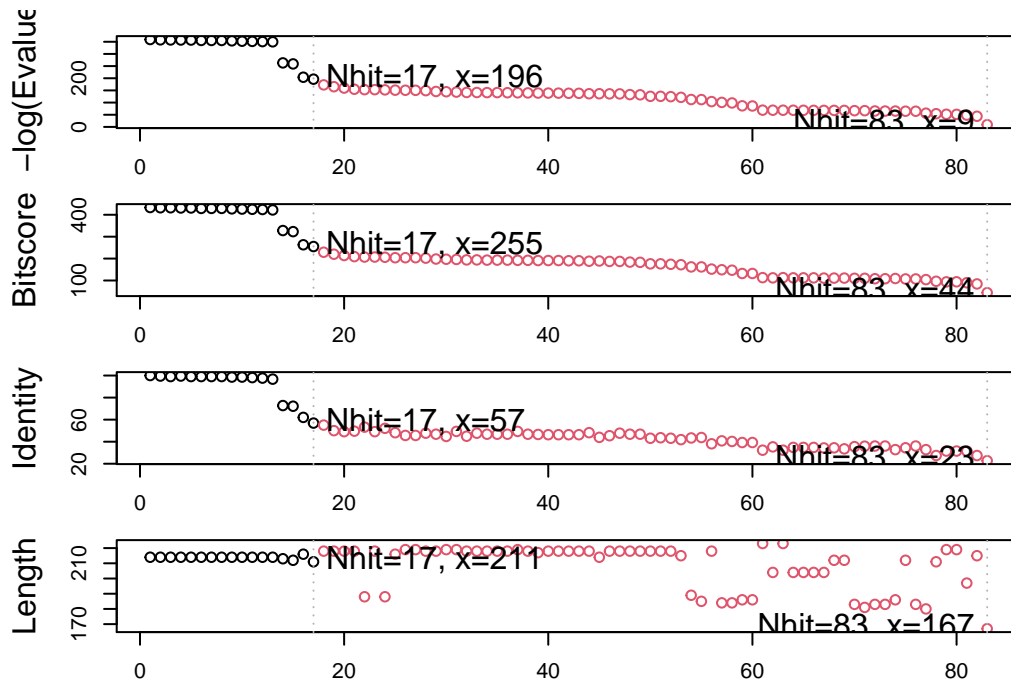

Get the results from BLAST and download all the top hits.

```
hits$ pdb.id
```

```
[1] "6S36_A" "1AKE_A" "8BQF_A" "6RZE_A" "4X8M_A" "4X8H_A" "1E4V_A" "3HPR_A"
[9] "5EJE_A" "1E4Y_A" "3X2S_A" "6HAP_A" "6HAM_A" "4K46_A" "4NP6_A" "3GMT_A"
[17] "4PZL_A"
```

```
# Download related PDB files
files <- get.pdb(hits$ pdb.id, path="pds", split=TRUE, gzip=TRUE)
```

```
Warning in get.pdb(hits$ pdb.id, path = "pds", split = TRUE, gzip = TRUE):
pds/6S36.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pds", split = TRUE, gzip = TRUE):
pds/1AKE.pdb.gz exists. Skipping download
```

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/8BQF.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6RZE.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4X8M.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4X8H.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1E4V.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3HPR.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/5EJE.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1E4Y.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3X2S.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6HAP.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6HAM.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4K46.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4NP6.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3GMT.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4PZL.pdb.gz exists. Skipping download

	0%
====	6%
=====	12%
=====	18%
=====	24%
=====	29%
=====	35%
=====	41%
=====	47%
=====	53%
=====	59%
=====	65%
=====	71%
=====	76%
=====	82%
=====	88%
=====	94%

|=====| 100%

```
# Align related PDBs
pdb<- pdbaln(files, fit = TRUE, exefile="msa")
```

Reading PDB files:

```
pdb/split_chain/6S36_A.pdb
pdb/split_chain/1AKE_A.pdb
pdb/split_chain/8BQF_A.pdb
pdb/split_chain/6RZE_A.pdb
pdb/split_chain/4X8M_A.pdb
pdb/split_chain/4X8H_A.pdb
pdb/split_chain/1E4V_A.pdb
pdb/split_chain/3HPR_A.pdb
pdb/split_chain/5EJE_A.pdb
pdb/split_chain/1E4Y_A.pdb
pdb/split_chain/3X2S_A.pdb
pdb/split_chain/6HAP_A.pdb
pdb/split_chain/6HAM_A.pdb
pdb/split_chain/4K46_A.pdb
pdb/split_chain/4NP6_A.pdb
pdb/split_chain/3GMT_A.pdb
pdb/split_chain/4PZL_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.... PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.... PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
....
```


Extracting sequences

```
pdb/seq: 1   name: pdb/split_chain/6S36_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 2   name: pdb/split_chain/1AKE_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 3   name: pdb/split_chain/8BQF_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
```

```
pdb/seq: 4    name: pdbc/split_chain/6RZE_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 5    name: pdbc/split_chain/4X8M_A.pdb
pdb/seq: 6    name: pdbc/split_chain/4X8H_A.pdb
pdb/seq: 7    name: pdbc/split_chain/1E4V_A.pdb
pdb/seq: 8    name: pdbc/split_chain/3HPR_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 9    name: pdbc/split_chain/5EJE_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 10   name: pdbc/split_chain/1E4Y_A.pdb
pdb/seq: 11   name: pdbc/split_chain/3X2S_A.pdb
pdb/seq: 12   name: pdbc/split_chain/6HAP_A.pdb
pdb/seq: 13   name: pdbc/split_chain/6HAM_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 14   name: pdbc/split_chain/4K46_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 15   name: pdbc/split_chain/4NP6_A.pdb
pdb/seq: 16   name: pdbc/split_chain/3GMT_A.pdb
pdb/seq: 17   name: pdbc/split_chain/4PZL_A.pdb
```

PCA of all these ADK structures

```
pc.xray <- pca(pdbc)
plot(pc.xray)
```

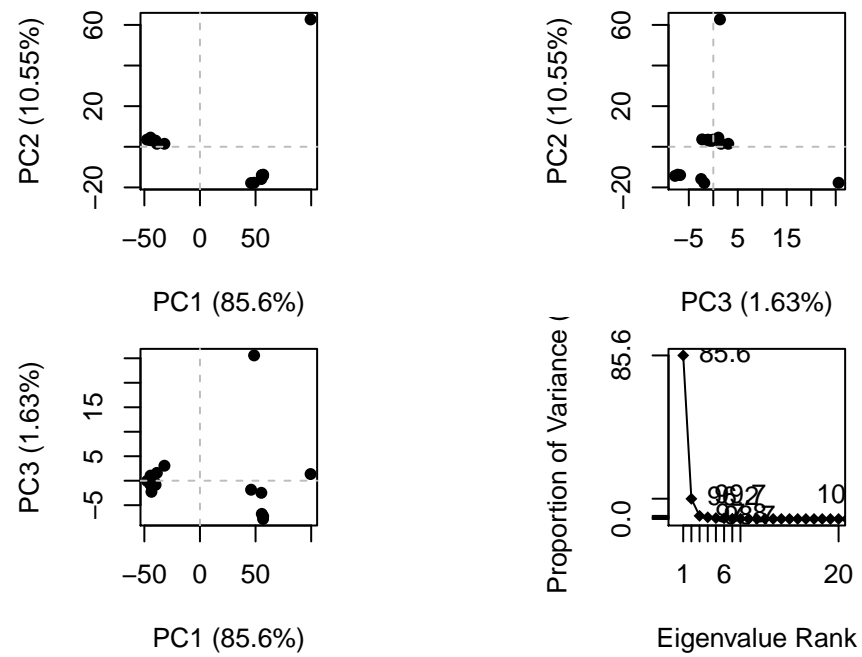

```
mktrj(pc.xray, file="pco_movie.pdb")
```