
# Ontypology

- From same/difference to split/join, from split/join to type, from type to understanding — the brain walked this road for eons.
- Logic was philosophy a century ago; once seen clearly, it became a science.
- Today "type" (a concept of the brain) is still philosophy. Ontypology sees it clearly, turns it into a science, and puts it into practice as Mind AI.

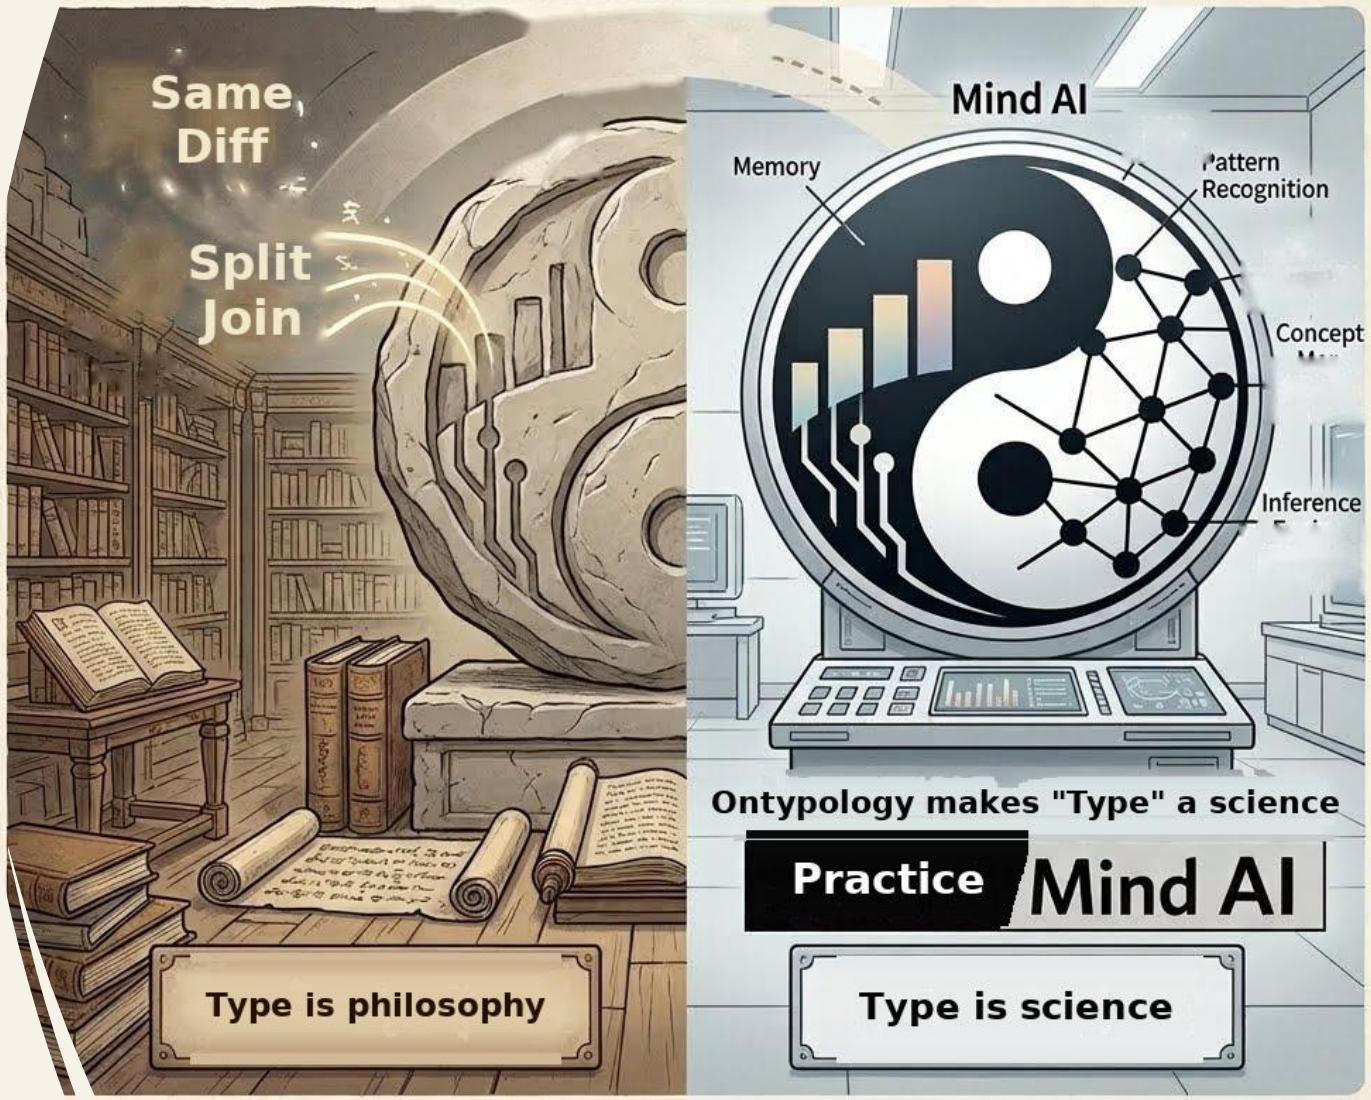


ONTYPOLOGY

# SPACE FRAMEWORK

A repeatable method

Turning the derivation process into a repeatable method

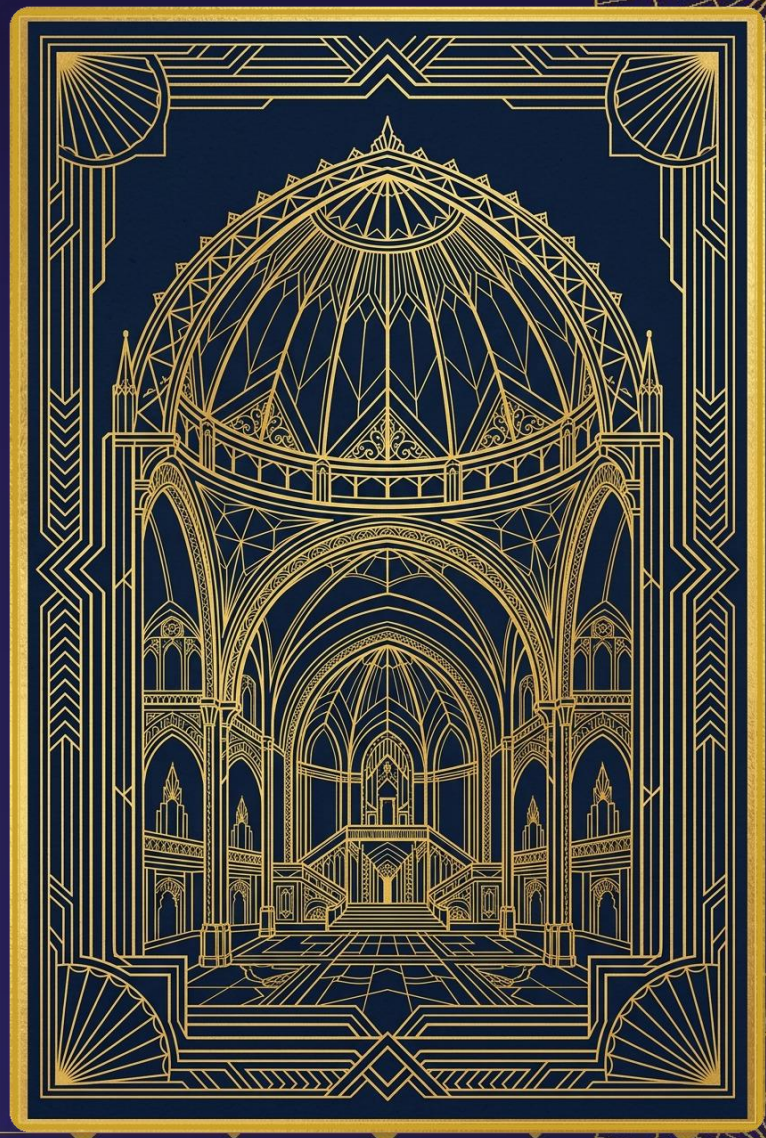

# ❖ CONTENTS



❖ Introduction — Turning the derivation into a repeatable method

◆ Chapter 1 — The Four Steps of a Framework

◆ Chapter 2 — Ways of Unfolding a Framework

◆ Chapter 3 — Universality: the Case of Biological Taxonomy


❖ Review — The Framework's Operating Loop

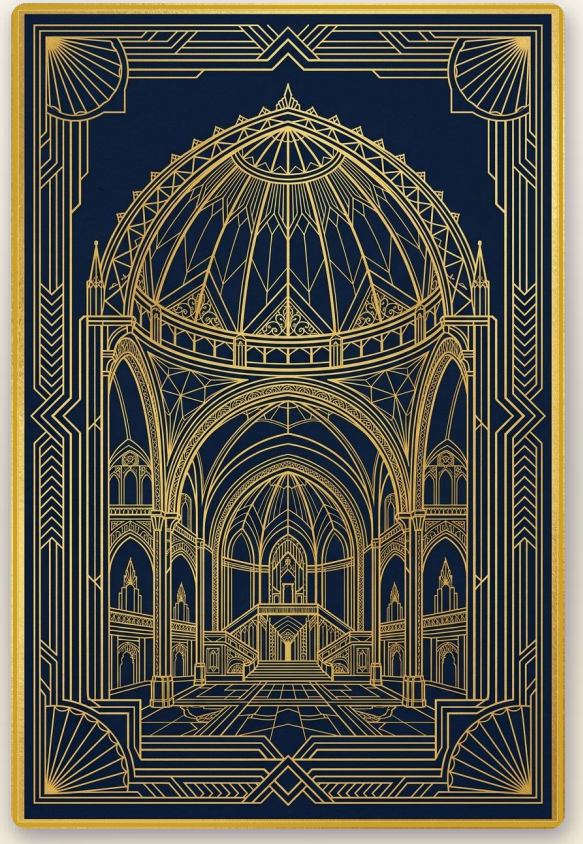*Space Framework · Arch key visual*

# ❖ Introduction — What Is a Framework?

- ✦ The basic structure, format and rules of a thing or a system — a skeleton and a standardised process that help you build systems, organise information and analyse problems.
- ✦ The last chapter used cups, deriving four attributes — color, material, handle, lid — from "this is not that".
- ✦ The real prize is not the master table but the whole process of growing dimensions out of a pile of differences.
- ✦ A framework lifts that process out and turns it into a method you can reapply to cups, clothes, living things — anything at all.

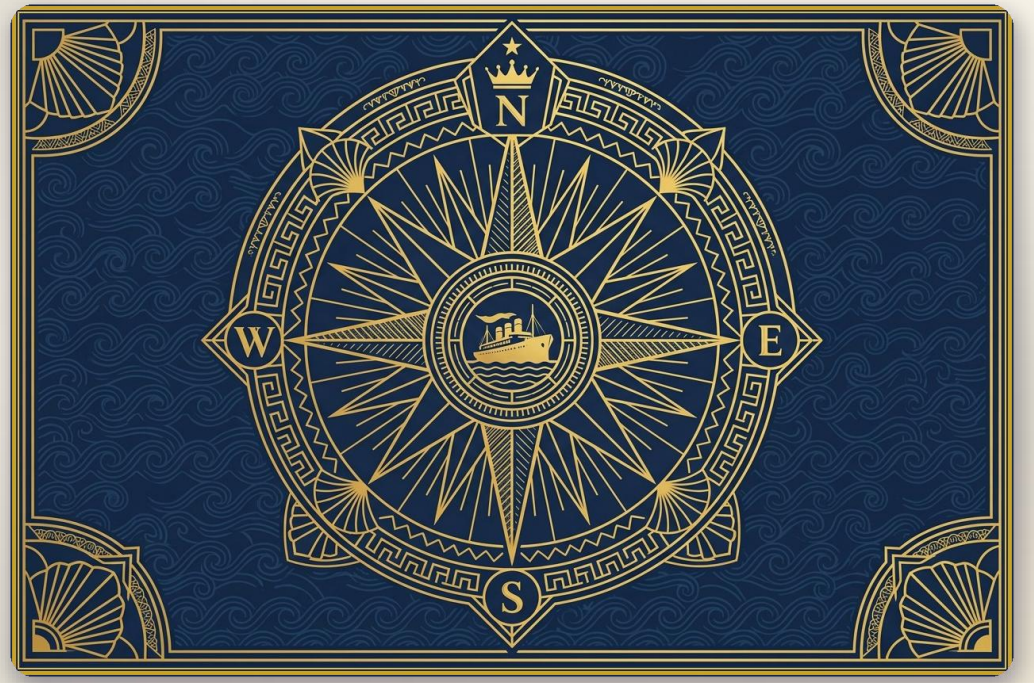


*Chapter image · The framework's rudder — turning derivation into a repeatable route*

### A framework is a fishing route

"Attributes and values" give you a fish; a framework gives you the route — a method that lets the derivation be replayed again and again.

# ❖ Introduction — Map of This Chapter

① Start from cups

Lift out "this whole derivation process" and turn it into a method that works for anything

② What if a difference matches no existing dimension?

Chapter 1 · The Four Steps

③ Once the dimensions are laid out, how can they be arranged?

Chapter 2 · Ways of Unfolding

④ Does the framework only work for cups?

Chapter 3 · Universality: Biological Taxonomy


Key line of the book

A framework supplies the fact of which dimensions exist; how to arrange them is the user's freedom.

CHAPTER 01

# Chapter 1 — The Four Steps of a Framework

Tell apart · Trigger abstraction · Name dimensions · Decide attribution —
a machine forced out by failed comparison, able to run again and again.

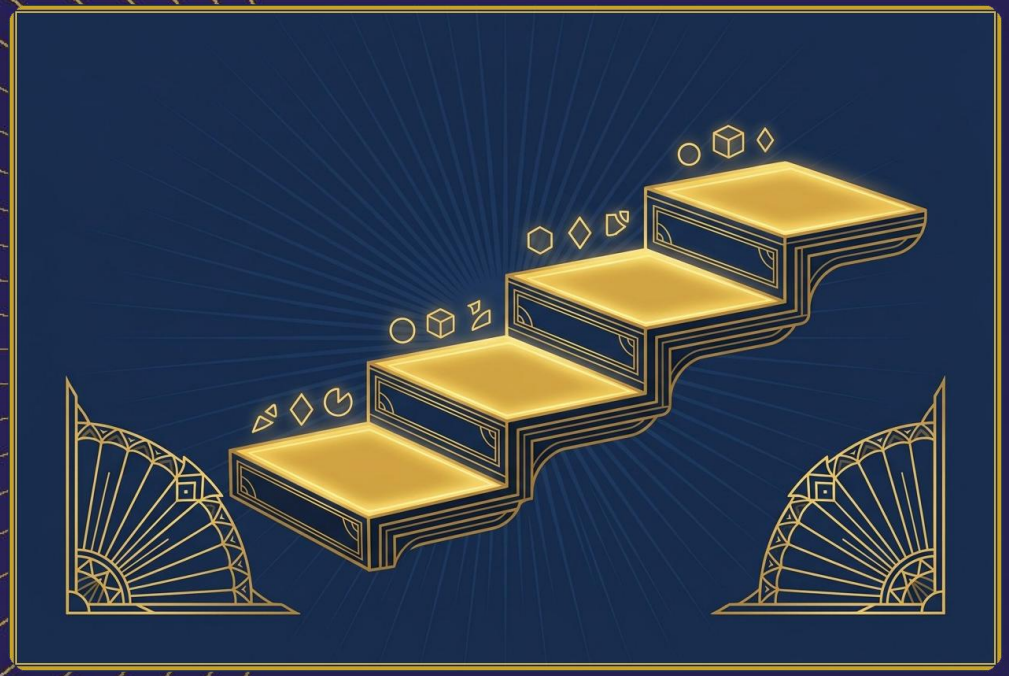

*Chapter image · The four-step stair — from telling apart to deciding attribution*

# ❖ 1-1 Starting from "failed comparison"

I The first two cups

Clear and blue: being able to tell "this is not that" is enough — no higher name for the difference is needed yet

II A third cup appears

Ceramic, blue, with a handle: material is nothing like color, and the handle cannot even be explained by material

III Failed comparison

"This batch of difference matches no existing dimension" — so each gets its own name: material stands alone, then the handle too

Abstraction does not emerge by putting things together; it is a response forced out by failed comparison.

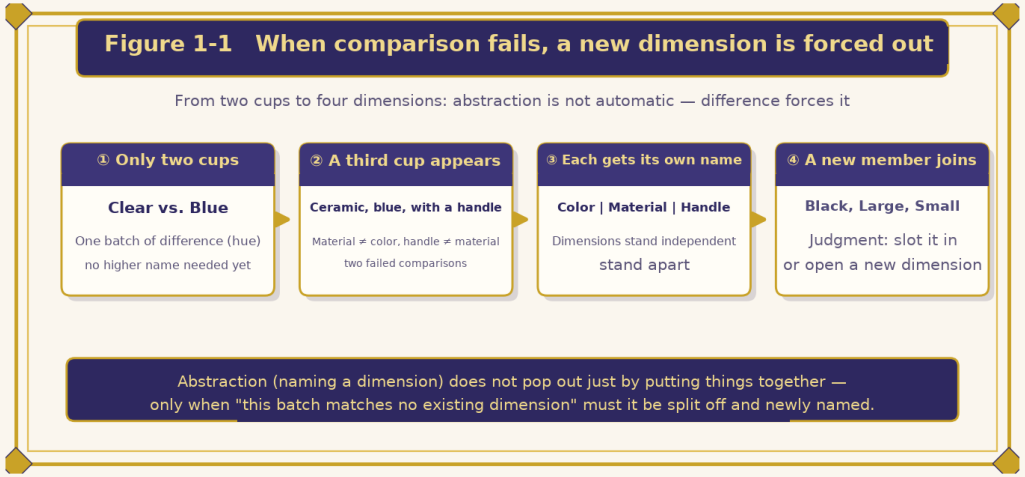



*Figure 1-1 How failed comparison forces out a new dimension*

# ❖ 1-2 The four steps of a framework

I
Tell apart
Given a group of things, being able to tell "this is not that" is enough; call them x, y, z if you like

II
Trigger abstraction
A second batch of difference with a different nature appears; it matches nothing old and no single standard explains it

III
Name dimensions
Each batch gets its own name and label and is circled into a separate dimension — this is the act of abstraction itself

IV
Decide attribution
Something new arrives: can its difference be explained by the existing dimensions?

The four steps cause each other

The first three steps establish dimensions and names, which makes the fourth step's judgement possible; the fourth eventually meets a "no match" and forces the first three to run again — a loop that can turn forever.

# ❖ Table 1-1 The four steps at a glance

| | | |
|---|---|---|
| I · Tell apart | Given a group of things, you can tell "this is not that" | No abstraction yet; call them x, y, z (the most primitive "has / has not") |
| II · Trigger abstraction | A second batch of difference with a different nature appears | The new difference does not match the old ones; no single standard explains it |
| III · Name dimensions | The two batches must be understood separately | Each is named and labelled, circled into its own dimension |
| IV · Decide attribution | Something new arrives | Judge whether its difference is explained by the existing dimensions |

The flow of attribution

Failed comparison → abstract and name → dimensions stand apart → decide attribution: a match slots into an existing dimension, a miss opens a new one.

# ❖ 1-3 The two cases of attribution

Case 1 Matches an existing dimension → slot it straight in

After red, blue and gold comes "black": also a difference in hue, matching the nature of "color", so it goes under the color axis {red, blue, gold, black} with no new abstraction.

Case 2 Matches nothing → open a new dimension

Same color, same material, yet one big and one small: neither color nor material explains it — so abstraction runs again, circles it, names it "size" {large, medium, small} and sets up a third dimension.

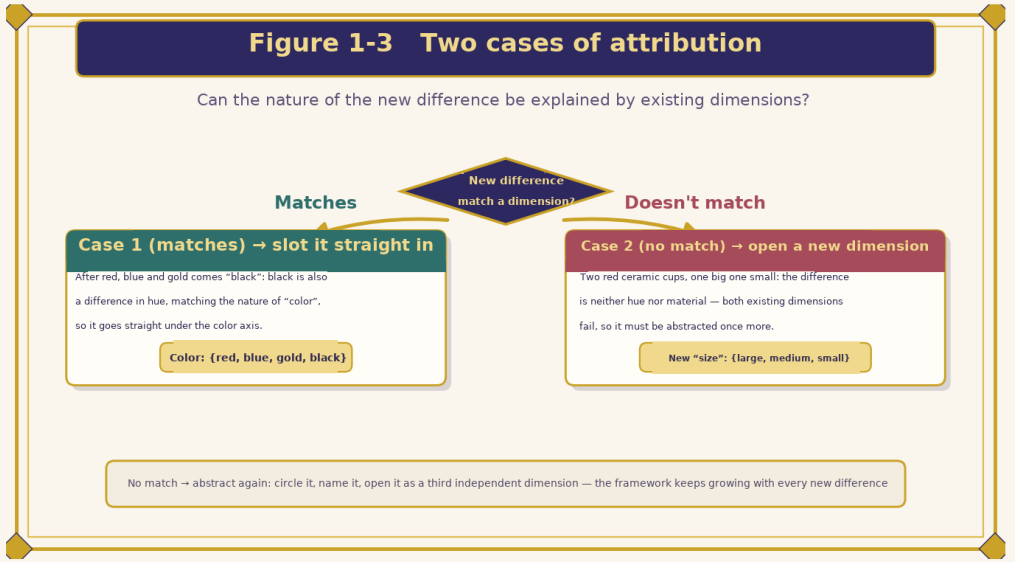



*Figure 1-3 The two cases of attribution*

# ❖ A framework is not a fixed list but a machine that keeps growing

"No match" → the framework grows a skeleton

Every failed comparison runs abstraction once more and adds one more dimension — the skeleton expands.

"A match" → the skeleton grows flesh

Every successful judgement adds one more value to an existing dimension — the flesh on the skeleton expands.

**Tell apart** › **Trigger abstraction** › **Name dimensions** › **Decide attribution**

- *Back to the start: the loop turns, and can be reapplied*

❖ Chapter summary

Abstraction is not a gift that appears when you stare at the world; it is a response forced out by failed comparison. The four steps — tell apart, trigger abstraction, name dimensions, decide attribution — freeze that forced response into a mechanism that can run again and again.

CHAPTER 02

# Chapter 2 — Ways of Unfolding a Framework

One master table, a different entry angle, a different tree —
Framework and arrangement are two different things.



*Chapter image · Parallel and branching — one master table, many shapes*

# ❖ 2-1 Parallel-attribute type and nested-branch type

Parallel-attribute type

Four attributes hang side by side under the cup with no ordering — the most direct way to draw what the four steps produce, stressing which independent dimensions exist.

Nested-branch type

Branch by material first, then split color, handle and lid below — each path to the end is one concrete cup; color can go first instead, echoing the order in which the attributes were forced out.

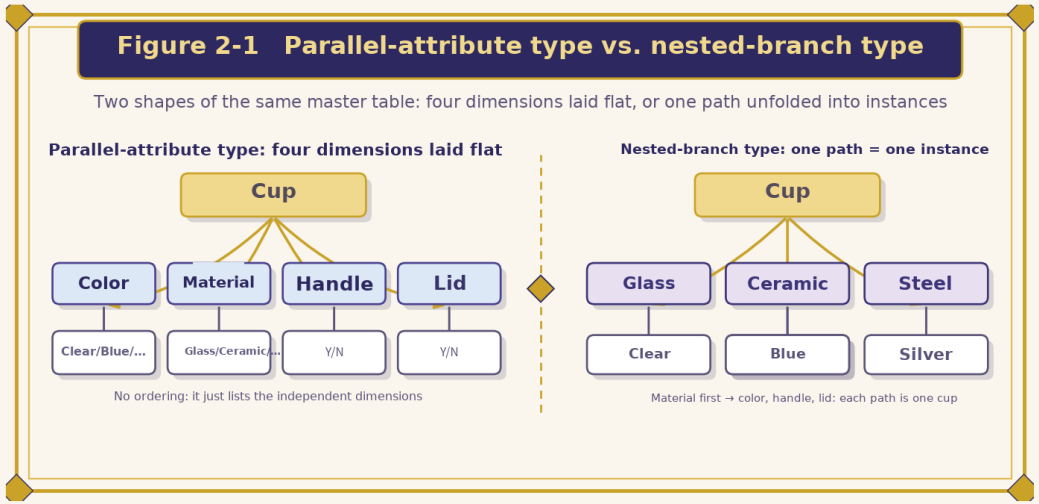



*Figure 2-1 Parallel-attribute vs. nested-branch — comparing two attribute structures*

The parallel type draws the structure itself; the nested type draws the unfolded result.

# ❖ 2-2 Four entry angles for unfolding

*Different unfoldings draw the same master table — only the attribute at the top of the tree differs.*

| | | | |
|---|---|---|---|
| Parallel-attribute | No ordering; four dimensions laid flat | Laid side by side, unordered | "Which dimensions exist" — the structure itself |
| Nested · material first | Material branches first | Making angle | "How it is made" |
| Nested · color first | Color branches first | The order the attributes emerged | "The attribute that came first" |
| Nested · function first | Function branches first | Use angle | "What it is for" |

Which one to choose?

It depends on what you want the reader to see first: "how it is made", "what it looks like" or "what it is for" — the dimensions never change, only the ordering.

# ❖ 2-3 The clothing example: one master table, different trees

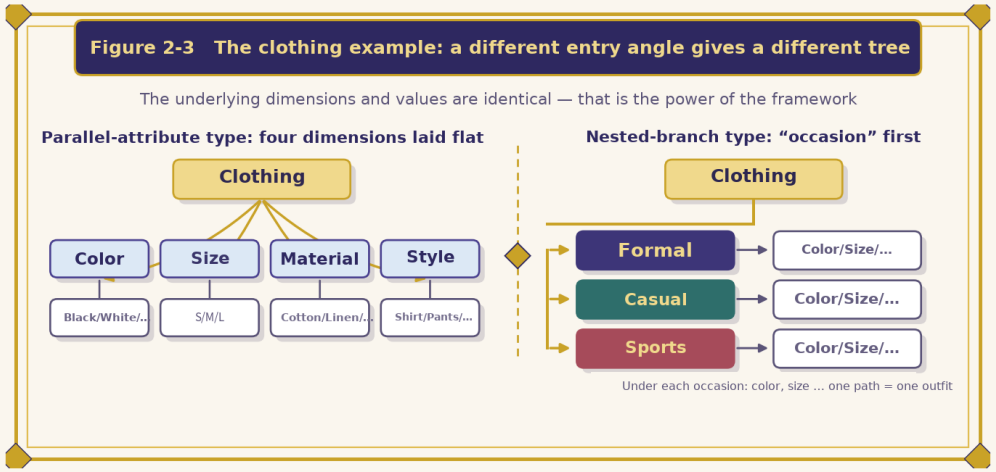



*Figure 2-3 Clothing: a different entry angle gives a different tree*

- ✦ Parallel-attribute: color, size, material, style — four dimensions with no ordering
- ✦ Nested (occasion first): formal → casual → sports, each split again by color and size
- ✦ The list of dimensions never changes — only who stands at the top of the tree

One master table, different trees

The underlying dimensions and values are identical; the framework answers which dimensions exist, the arrangement answers what you want the reader to see first.

# ❖ Framework and arrangement are two different things

The framework answers

"Which dimensions exist and what each one is" — it supplies the fact of which dimensions there are.

The arrangement answers

"What I want the reader to see first" — how to order the dimensions is the user's freedom.

A factory SOP

"How it is made" — material first

A store catalogue

"What it looks like" — color first

A design textbook

"What it is for" — function first

*One cup framework grows into three completely different trees — the extracted dimension facts are the same.*

❖ Chapter summary

Confuse framework with arrangement and you will think a new drawing means a new framework — only the entry angle changed.

CHAPTER 03

# Chapter 3 — Universality

Biological taxonomy as the example — species is the rawest material,
the concrete precedes the abstract.



*Chapter image · The ladder of life — from concrete species to abstract ranks*

# ❖ 3-1 Species is the raw material; the concrete precedes the abstract

- ✦ Tigers, lions, house cats, wolves, salmon … all were concrete individuals observed first — species
- ✦ Species is the rawest material: without species nothing above it can be extracted
- ✦ Only with species can commonality be drawn upward level by level: kingdom → phylum → class → order → family → genus
- ✦ Each level keeps asking, inside the range already sorted by the level above, whether one more commonality can be drawn out


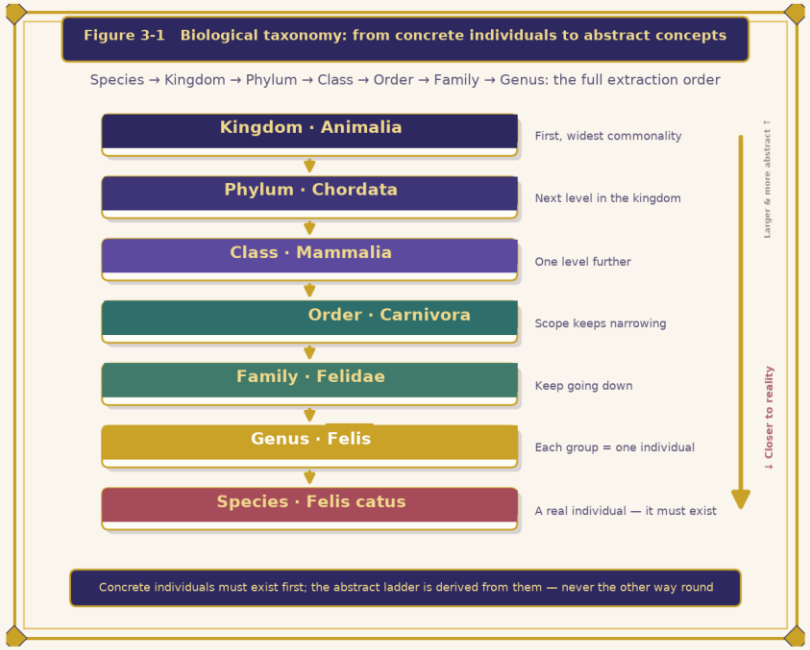



*Figure 3-1 Biological taxonomy: building from concrete individuals to abstract concepts*

Concrete individuals must exist before an abstract ladder can be drawn — the order cannot be reversed.

# ❖ 3-2 The extraction funnel: start from species, return to species

Species › Kingdom › Phylum › Class › Order › Family › Genus

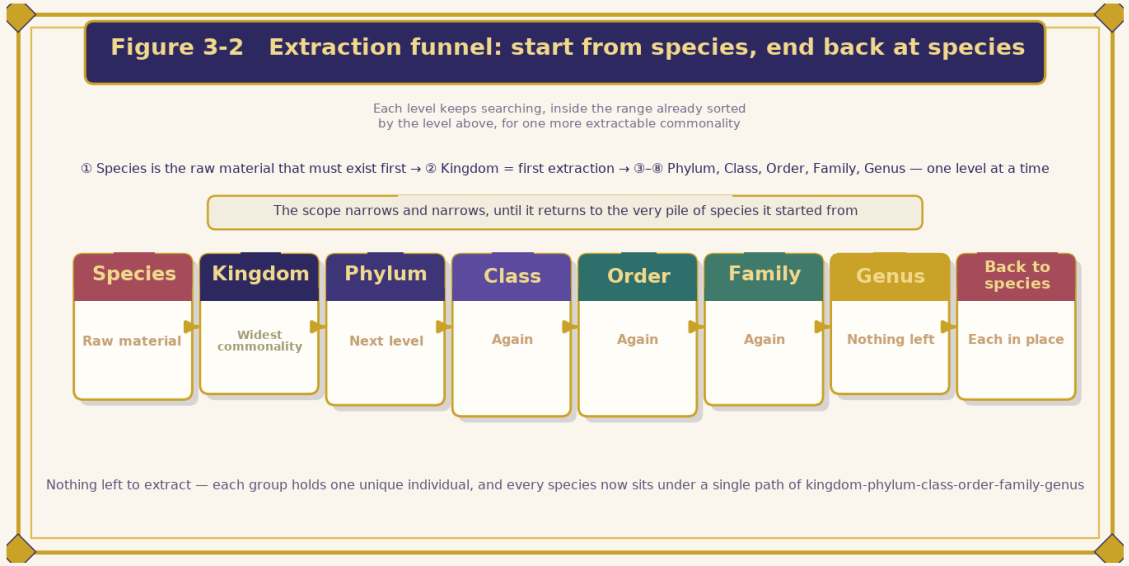


The funnel's end is its start

The scope narrows and narrows until every group holds a single unique individual — and you are back at the original species. Only now each species sits under one path of kingdom-phylum-class-order-family-genus. A framework does not have just one shape: it depends on whether attributes are independent or nested.

*Figure 3-2 The extraction funnel: start from species, end back at species*

# ❖ Table 3-1 Kingdom to species — from concrete to abstract

| Rank | Role |
|---|---|
| Species | The rawest material: concrete individuals that must exist first (tigers, lions, house cats, wolves, salmon …); without species nothing above can be extracted |
| Kingdom | The first and widest extraction of commonality from the pile of species |
| Phylum | The next level of commonality found within one kingdom |
| Class · Order · Family · Genus | Level by level, inside the range already sorted above, the scope keeps narrowing |
| Back to species | Until each group holds a single unique individual — every species now sits under one kingdom-phylum-class-order-family-genus path |

Concrete individuals must exist first for the abstract ladder to be derived — never the other way round.

# ❖ Cups × biological taxonomy: different scale, same machine

Cups — small scale, quick steps

Four dimensions stand up within a few failed comparisons: color, material, handle, lid.

=

Biological taxonomy — vast scale

It runs the same machine: when a difference does not match, draw one more level of names upward, all the way to genus and back to species.

**The same machine**


*More important, the order cannot be reversed: concrete individuals come first, the abstract ladder is drawn from them — identical for cups and for taxonomy.*

❖ Chapter summary

A framework's universality is not that it has only one shape but that the path from difference to dimension is the same everywhere. Every derivation from difference to dimension must travel that one road.

# ❖ Review: the framework's operating loop

*A framework is not a fixed list but a machine that keeps growing with every new difference.*

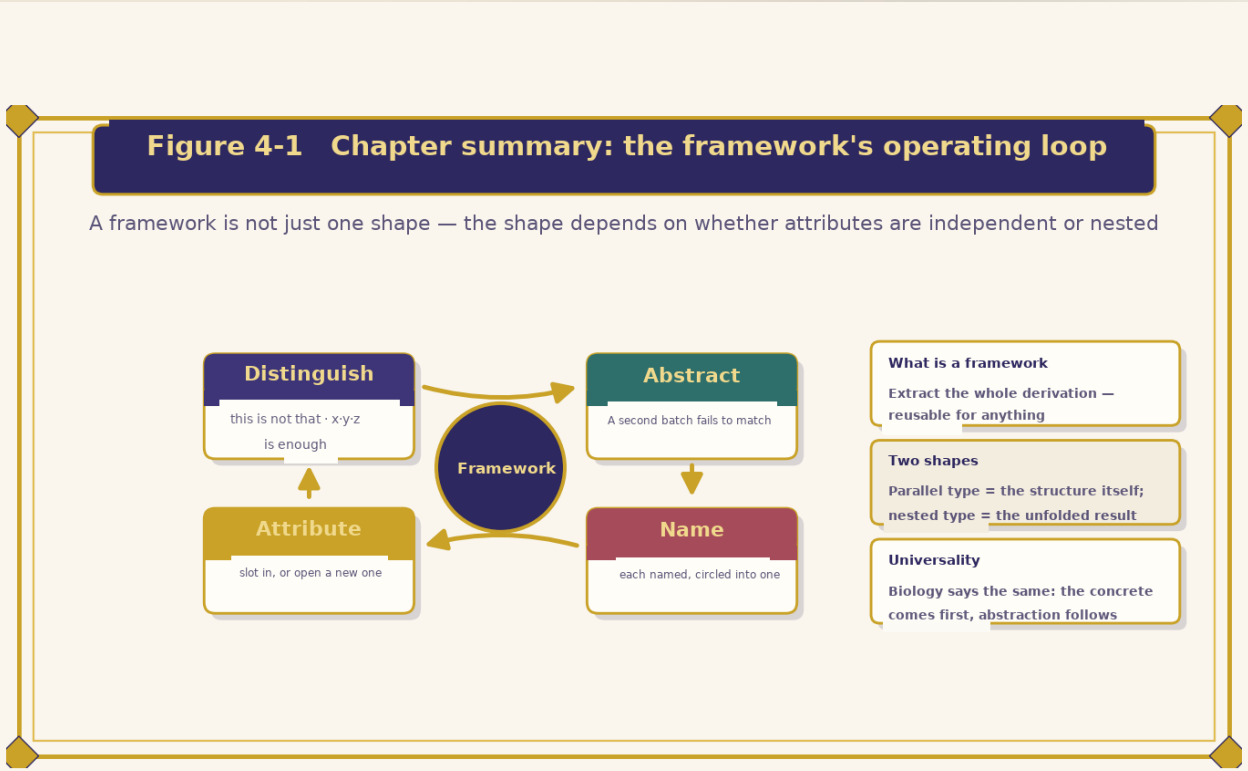


No match
Abstraction runs again → new dimension

A match
Existing dimension → add a new value

The loop turns
Four steps cause each other → reusable

*Figure 4-1 Chapter summary: the framework's operating loop*

# ❖ Chapter review

❖ What is a framework

Lifting a whole derivation out and turning it into a method that works whatever the subject — that is what a framework leaves behind once it has run.

◆ The four steps (Chapter 1)

Tell apart → failed comparison triggers abstraction → each is named into a dimension → new differences are attributed; a match slots in, a miss opens a new dimension.

◆ Ways of unfolding (Chapter 2)

The parallel type draws the structure, the nested type draws the unfolded result; one master table, free choice of entry angle.


◆ Universality (Chapter 3)

Kingdom-to-species taxonomy works the same way: concrete individuals must exist first for the abstract ladder to be derived.

To derive once is a harvest;
to turn the derivation into a framework lets
the harvest happen again and again.

—— Ontypology Series · Space Framework ——

# LonGreat Vision: to create intelligent life that understands the essence of the world

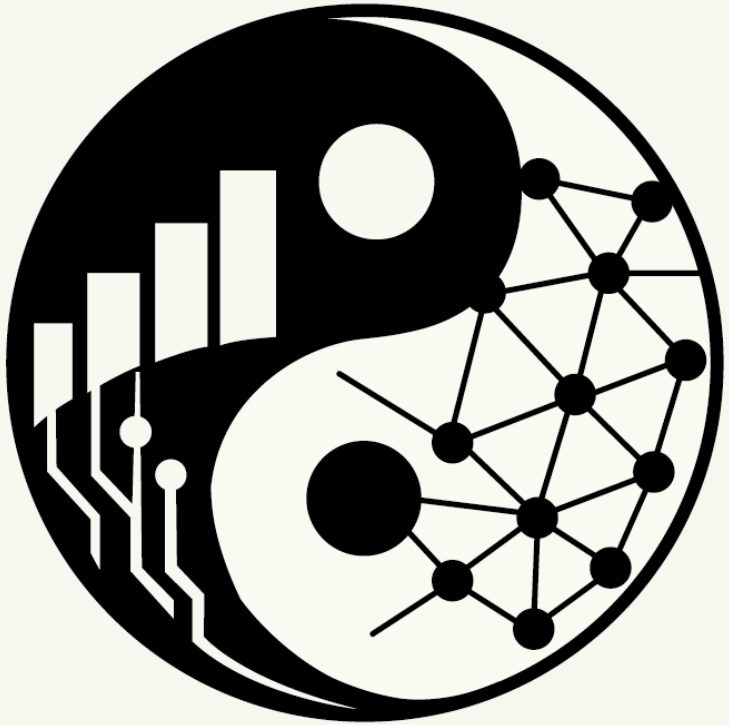

MIND AI

"So that AI is not merely a tool but a truly intelligent life system with the ability to understand, reason, learn and create."

From unified knowledge to unified thinking, and finally to unified intelligence — the eternal path of AGI that LonGreat pursues.


www.longreat.net

Chang Changfeng
gamma@livemail.tw

Chang Tingying
mindaiworks@gmail.com