A Two-axis regime taxonomy

Inference-time context

Training-time cohort visibility	Cohort-visible	Strict single-query
present	**P0 / R0-T** **PRIMARY** query nodes visible during training	not part of primary contrast
	PRIMARY CONTRAST	
absent	**P1 / R1-C** **PRIMARY** train-only graph	**P3 / R2-Q** secondary campaign strict single-query

P2 / P4 / P5
secondary context/site-sensitivity regimes

B Visibility is not supervision

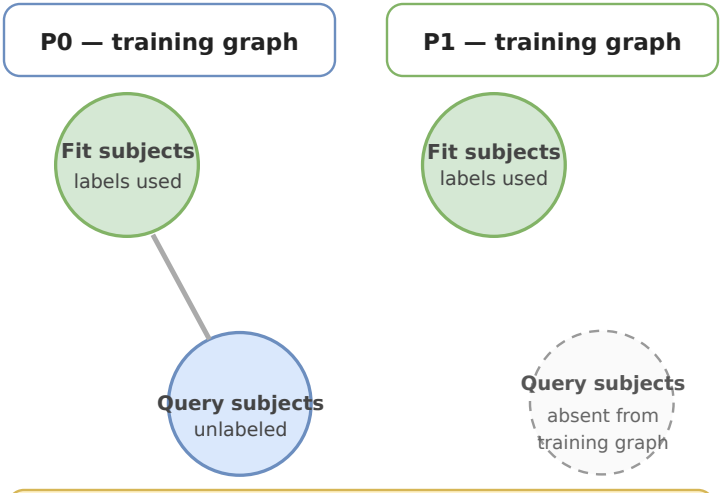

Same supervised fit set and validation-based selection.
Intervention: graph visibility, not label supervision.

C Primary estimand and replication scope

ΔΔAUC = ΔAUC(EV-GCN) − ΔAUC(Parisot-GCN)

ΔAUC(model) = AUC(P0) − AUC(P1)

Split 666	Split 1024	Split 2024
frozen prior audit	M4.5-S1 extension	M4.5-S1 extension

Two primary + one historical split
No pooling · no cross-split mean
No arbitrary-split invariance claim
M4.5-S1 extension: 1024 + 2024 only (120 cells)