When Perfect Validation Scores Reflect Test Construction: An Audit of Semantic and State Invariant Benchmarks

Working draft – October 22, 2026

Abstract

Invariant-aware validators can outperform structural baselines on constructed errors without establishing their performance on independently labeled records. We examine this distinction in two finite synthetic validation designs and a failed external-fixture attempt. The invariant-aware method has balanced accuracy 1, while the baseline has 0.5 and 0.5980. A separate, protocol-locked exploratory audit recomputes 195 overall split/method metric comparisons from frozen prediction artifacts; all agree within declared serialization tolerances. Exact finite score-group Brier decomposition shows that improved resolution accounts for lower Brier scores even as empirical reliability worsens. A binary-probability ablation has zero Brier score and zero expected calibration error with unchanged decisions. We find one distinct cluster-statistic signature among 64 evaluation clusters in the first design and six among 48 in the second. These counts describe limits of the resampling evidence without estimating effective sample size. Conditional arguments connect perfect finite agreement, Laplace smoothing and degenerate resampling to test construction. The contribution is an auditable methods case study, rather than a new validator or evidence of production accuracy.

1. Introduction

A structural validator may verify required fields and primitive types, while an invariant checker may also compare identities, conservation relations or state transitions. A benchmark that injects violations of the additional relations will often favor the invariant-aware method. The scientific question is what that comparison establishes beyond correct handling of the selected construction.

We examine our own benchmark artifacts, rather than an unrelated deployed system. The initial comparison produced large improvements and perfect invariant-aware decisions. However, benchmark truth, fault inventory and validator were developed under closely related specifications. Probability-score improvements were also easy to overinterpret: lower Brier scores appeared alongside higher expected calibration error (ECE). An attempted extension to public event fixtures later stopped before evaluation because its source contract rejected repeated IDs.

We ask three questions. RQ1: do separately recomputed metrics and alignment checks support the reported finite comparisons? RQ2: which components explain the probability-score changes? RQ3: what do repeated cluster statistics and the external source failure imply about the scope of evidence?

The contribution combines a traceable case study, a standalone artifact audit and conditional explanations of the observed behavior. Invariant checking, the oracle problem, Brier decomposition and calibration caveats are established ideas. We do not present them as new. The empirical

contribution is their application to these particular versioned constructions, including the negative calibration finding and preservation of an invalid external attempt.

2. Related work and position

Schelter et al. [1] combine declarative data-quality constraints with user-defined checks and scalable execution. Breck et al. [2] study validation for machine-learning data pipelines. Practical validation thus extends beyond primitive record shapes; our narrow structural baseline does not represent all schema languages or data-quality systems. We make no comparative performance claim against these systems.

Barr et al. [3] examine the difficulty of deciding whether observed software behavior is correct. Our case illustrates a related distinction: separate implementations of an oracle and checker reduce shared-code risk while potentially retaining a shared specification. Agreement does not establish that this specification captures an external task.

Murphy [4] separates probability-score behavior into reliability, resolution and uncertainty. We use an exact finite binary score-group form and provide its algebra below. Guo et al. [5] study confidence calibration; Nixon et al. [6] examine how calibration-measure choices affect conclusions. Our validators are deterministic rule systems, not neural networks. These sources ground measurement terminology rather than supply evidence about our methods. Our ECE compares positive-class probability with observed positive frequency, not maximum-class confidence with classification correctness.

This is a focused comparison with relevant foundations, not a systematic literature review. The case documents an instance of known measurement concerns, with arithmetic that can be checked from frozen rows. It does not establish a new general limitation of validation systems.

3. Designs and evidence status

3.1. Methods and positive class

The positive class is **valid**. A false positive is an invalid case accepted; a false negative is a valid case rejected. We use

$$\mathrm{BA} = \tfrac{1}{2}\left(\frac{TP}{TP+FN} + \frac{TN}{TN+FP}\right), \quad \mathrm{FPR} = \frac{FP}{TN+FP}, \quad \mathrm{FNR} = \frac{FN}{TP+FN}.$$

B0 applies each protocol's structural rules. M1 adds its selected semantic and state relations. The no-semantic and no-state ablations remove the corresponding predicates. The no-calibration ablation preserves M1's decisions and reports each binary decision as its probability. B0 is deliberately limited; the study does not show that relational validation is impossible with richer schemas or existing constraint systems.

Each calibrated method fits a calibration-only lookup on raw score s:

$$\widehat{p}(y = 1 \mid s) = \frac{k_s + 1}{n_s + 2},$$

where n_s is the calibration score-group size and k_s its positive count. An unseen score uses the formula on all calibration cases. This is Laplace-smoothed empirical lookup, not isotonic regression. It does not change classification decisions.

3.2. Synthetic constructions

E001 creates entity, ledger and event bundles with identity, conservation, transition-legality and revision-consistency relations. Its complete synthetic oracle is coupled to its recipes. E002 adds six heterogeneous cluster types, bounded multiple-fault recipes and a separately implemented replay/conservation oracle. Omitted conservation, overconstraints and stale transitions are deliberate specification stressors.

Table 1. Original case counts and evaluation clusters. Clusters group related cases from one constructed base or template instance.

Design	Development	Calibration	Evaluation	Evaluation clusters
E001	256	256	512	64
E002	228	228	456	48

The evaluation split is historically named `confirmatory`. Original protocols were locked before their valid runs. E005, the audit in this paper, was locked after those results had been inspected and is explicitly exploratory. It does not create an untouched replication. E002's earlier invalid run is excluded; its valid run followed a report-validator correction preserved in the repository.

3.3. External sources

E003-v1 selected three fixed GH Archive hourly files [7], with 67,145, 90,940 and 117,780 records. It planned oracle-filtered clean bases and artificial mutations. Even success would not estimate naturally occurring error prevalence. The run stopped on repeated event IDs in the 2021 file before generating predictions or performance metrics. It supplies no external hypothesis outcome.

A separately locked E004 diagnostic found 537 extra occurrences in 537 groups of size two. Every extra occurrence matched its first raw line byte for byte, excluding line endings. No conflicting repeated-ID group or cross-file repeated ID was found in these files. The cause of the duplicates is unknown. E003-v2's revised policy is informed by those observations and remains unexecuted; reused sources cannot become a pristine holdout by renaming a split. We retain the failed attempt as a limitation.

4. Exploratory audit protocol

E005-v1 was committed before implementation and one data execution. Its four immutable inputs contain 5,120 E001 and 7,296 E002 prediction rows, plus 75 and 243 metric rows. SHA-256 pins are verified before parsing. The audit imports neither original metric implementation and does not rerun the old experiments or bootstraps.

Serialized probabilities are parsed as exact decimal rationals. The audit rejects duplicate JSON or case/method keys, invalid types, incomplete method coverage, and per-case disagreement in truth, input hash or cluster identity. It checks split disjointness of bases/clusters and counts cross-split input-hash overlap. None was found here; that does not exclude every form of leakage.

Every overall split/method row is checked. Confusion counts must agree exactly; absolute metric tolerances are 10^{-9} for E001 and 2×10^{-9} for E002, allowing serialization and displayed rounding. ECE uses ten equal-width bins, lower bound included and upper bound excluded, except that the final bin includes 1:

$$\mathrm{ECE}_{10} = \sum_{b=0}^{9} \frac{N_b}{N} |\overline{p}_b - \overline{y}_b|.$$

The audit reconstructs lookups using calibration rows only and checks every stored probability. Success establishes compatibility with that rule, not historical proof of which rows were used during fitting. Binary-ablation probabilities must equal decisions exactly.

For each distinct serialized probability p_g, let $w_g = N_g/N$ and let f_g be its group's observed positive frequency. With overall frequency $\bar{y}$,

$$\mathrm{REL} = \sum_g w_g(p_g - f_g)^2, \quad \mathrm{RES} = \sum_g w_g(f_g - \bar{y})^2,$$
$$\mathrm{UNC} = \bar{y}(1-\bar{y}), \qquad \mathrm{BS} = \mathrm{REL} - \mathrm{RES} + \mathrm{UNC}.$$

These are exact score groups, not ECE bins. Within-group mean squared error is $(p_g - f_g)^2 + f_g(1 - f_g)$. Weighted outcome variances satisfy

$$\sum_g w_g f_g(1-f_g) = \bar{y}(1-\bar{y}) - \sum_g w_g(f_g - \bar{y})^2.$$

Substitution proves the stated binary Brier identity. The audit requires zero rational residual. This finite-sample identity does not make REL a consistent population-calibration estimate in arbitrary small or singleton groups.

For each method, we also count distinct cluster-statistic signatures: TP/TN/FP/FN, summed squared probability error, and each ECE bin's count, probability sum and truth sum. IDs and row order are omitted. This diagnoses statistic diversity and does not estimate effective sample size.

The implementation passed 21 synthetic tests, covering mixed-label score groups, bin boundaries, lookup fallback, rounding and late write failures. All four outputs are built twice and compared byte for byte before the report is published last. Tests and the separate implementation share an author and environment; independent scientific acceptance remains absent.

5. Results

5.1. Metric agreement and finite performance

All 195 overall split/method metric comparisons pass. Maximum absolute differences from frozen CSV values are 1.013×10^{-15} for E001 and 4.706×10^{-10} for E002. Confusion counts agree exactly. Alignment, split disjointness and lookup-compatibility checks pass. Every one of the 39 split/method rows satisfies the Brier identity exactly.

Table 2. Evaluation metrics recomputed from frozen rows. Binary is the no-calibration ablation with unchanged decisions.

Design	Method	BA	FPR	FNR	Brier	ECE
E001	B0	0.500000	1.000000	0	0.25000000	0
E001	M1	1.000000	0	0	0.00005917	0.00769231
E001	Binary	1.000000	0	0	0	0
E002	B0	0.598039	0.803922	0	0.09193743	0.00740887
E002	M1	1.000000	0	0	0.00024790	0.01263163
E002	Binary	1.000000	0	0	0	0

The original 10,000-replicate paired cluster bootstrap gives E001 point intervals for BA difference 0.5 and FPR difference -1. E002 intervals are [0.383254717, 0.422077922] for BA difference and [-0.844327177, -0.767281106] for FPR difference. FNR difference is zero in both designs. These are original finite-design intervals, not new E005 estimates for a sampled deployment population.

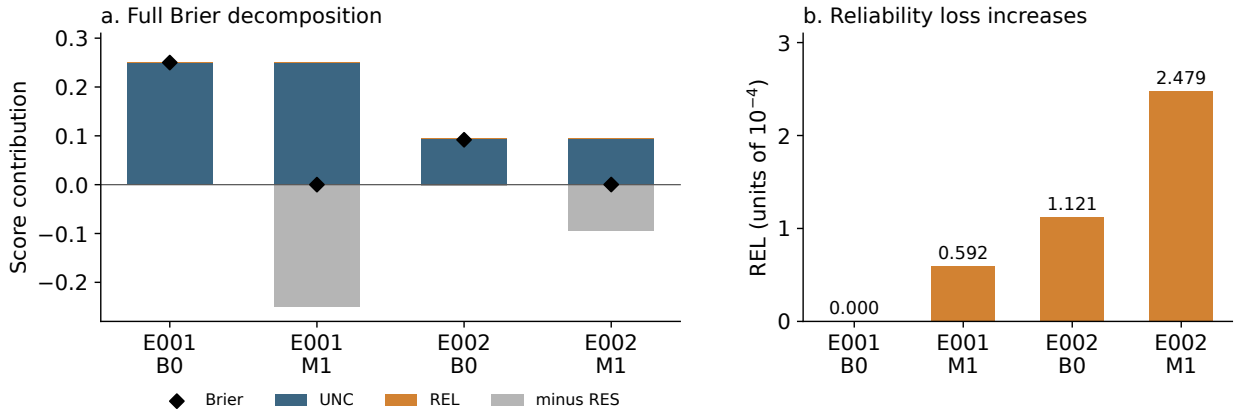


Figure 1: Evaluation Brier decomposition: bars show REL, minus RES and UNC; dots mark their sum, the Brier score. A separate reliability panel reveals its small increases. Source: E005-v1-summary.csv, evaluation rows.

In E002, omitted conservation yields FPR 0.117647; overconstraint and stale-transition checkers each yield FNR 0.833333. These bounded failures expose dependence on the selected contract. They do not establish robustness to arbitrary incorrect specifications.

5.2. Resolution explains lower Brier

Table 3. Exact-score decomposition on evaluation rows. Lower REL indicates lower empirical group reliability loss; higher RES distinguishes groups with different outcome frequencies. Display rounding can obscure the exact identity.

Design	Method	REL	RES	UNC	Brier
E001	B0	0	0	0.250000000	0.250000000
E001	M1	0.000059172	0.250000000	0.250000000	0.000059172
E002	B0	0.000112121	0.002357518	0.094182825	0.091937429
E002	M1	0.000247903	0.094182825	0.094182825	0.000247903

E001 B0 reports 0.5 on a balanced evaluation set: ECE and REL are zero but resolution is absent. M1 separates labels perfectly, increasing RES to 0.25. Smoothed probabilities remain inside the endpoints, giving positive REL. The resolution increase dominates the Brier change.

In E002, RES increases by approximately 0.091825308 and REL by 0.000135781. The net Brier change is approximately -0.091689527. Lower Brier therefore coexists with worse empirical score-group reliability and higher ten-bin ECE. This is a result about these rows, not population calibration.

5.3. Statistic diversity and uncertainty

For every method, E001 has one distinct signature among 64 evaluation clusters. Every bootstrap draw therefore repeats the same vector in the same number of clusters. More replicates cannot introduce variation absent from the resampling units.

E002 has six signatures among 48 clusters for every method. Variation in baseline behavior permits nondegenerate paired intervals, while perfect M1 decisions persist across its constructed

fault inventory. Six signatures alone do not imply six independent observations or an effective sample size of six.

6. Conditional explanations and falsification

6.1. Agreement on constructed support

Let S be finite evaluated support with oracle labels $O(x)$. If checker V agrees with O on every $x \in S$, and both labels occur, then FP=FN=0 and BA=1 on S. This follows directly from the confusion definitions and makes no statement about $x \notin S$.

When one specification supplies labels and injected violations, perfect agreement may show conformance to that construction without validating the specification against external truth. This is conditional: separate oracle code does not force perfect agreement, and either implementation could be wrong. Our empirical result is rowwise agreement; attributing its limited external reach to shared design is an interpretation. Independently supplied labels exposing disagreements would falsify an extension of agreement beyond S.

6.2. Smoothing a perfect binary predictor

Suppose each raw-score group has a common label in both calibration and evaluation. With n_g calibration cases, smoothing predicts $1/(n_g + 2)$ or $1 - 1/(n_g + 2)$. Each evaluation error is then $1/(n_g + 2)^2$, while the perfect binary predictor has zero error:

$$\mathrm{BS}_{\mathrm{smooth}} = \sum_g \frac{N_g^{\mathrm{eval}}}{N^{\mathrm{eval}}} \frac{1}{(n_g + 2)^2} > 0.$$

If each ECE bin combines only groups whose errors have the same sign, ECE is the corresponding weighted average of $1/(n_g + 2)$. These formulas concern lookup probabilities before serialization; the audit checks stored decimals within declared tolerances. The observed pure M1 probability groups exhibit this pattern. It does not show that smoothing is harmful under noise, score overlap, sampling uncertainty or deployment shift. Hard probabilities are not justified without knowledge that agreement continues outside the evaluated support.

6.3. Repeated-cluster resampling

If all clusters have the same sufficient-statistic vector, drawing the original number of clusters always gives the same sum. Any statistic computed solely from that sum is constant. This explains E001's degenerate intervals without implying that deployment error is known. A distinct vector changing the aggregate would falsify this explanation; none occurs in the locked E005 measurement.

7. Threats to validity and implications

Only two hand-designed benchmark families are analyzed. They are not randomly sampled tasks, validators or error mechanisms. E001 truth is recipe-coupled; E002's separate oracle shares its specified world with M1. E005 questions were motivated by already inspected results. Locking E005 prevents subsequent protocol adjustment but cannot remove this exploratory selection.

Exact arithmetic addresses numerical agreement, not specification correctness or independent review. One author can reproduce a conceptual error in multiple implementations. Hashes establish

identity and lookup reconstruction establishes compatibility; neither proves universal absence of leakage or historical fitting order.

REL can misleadingly suggest calibration quality in small score groups; ECE can hide within-bin heterogeneity. Their direction agrees here but both limitations remain. Class balance and selected corruption mix shape the results. Original intervals are conditional on synthetic constructions, not a deployment population.

External provenance also does not supply independent labels. Oracle-filtering public records and injecting known violations remains a controlled-error evaluation. Stronger transfer evidence requires independently justified labels and a protocol preserving selection effects and failures. The invalid E003 attempt and its source diagnostic do not provide that evidence.

The practical implication is to report decision errors, score components, specification dependence and resampling diversity together. These are interpretive checks, not universal numeric acceptance thresholds. A wider study of independent labels and additional validator families would be needed to establish how common these effects are.

8. Conclusion

The finite B0/M1 differences survive a separate metric reimplementation. Their interpretation changes when score and resampling structure are explicit: higher resolution explains lower Brier while empirical reliability and ECE worsen; repeated statistics explain degenerate intervals. Perfect classification remains evidence of agreement on selected support. The case supports a bounded audit of benchmark evidence and leaves performance against independently labeled external records unresolved.

Reproducibility and provenance

The local companion artifact preserves original predictions, metrics, protocols and valid result records. E005 protocol commit is `2e6f7c2ec236ebce2bf72f3a026b2ea6de3a80e1`; implementation commit is `167f721565d68cc80b54340a3533e3b414deedd8`; result and bounded computational verification are recorded at `8692937` and milestone M18. It produces 39 summary rows, 12 score groups and a JSON check record with 195 signed differences and input identities.

Use a separate checkout at the implementation commit and run `python3experiments/E005-benchmark-evidence-audit/code/audit.py`. It uses the standard library, checks pinned inputs, compares two full builds and refuses existing outputs. The figure derives from the audit summary; no raw GH Archive payload is included. Independent assessment, owner-reviewed author metadata and public release of the new analysis remain pending.

Use of generative AI

Generative AI tools were used substantially for research planning, code implementation, audit analysis and manuscript drafting. The original harnesses and the separate metric audit share AI authorship and an environment; agreement is not independent human validation. This working draft still requires responsible human author review before submission.

References

1. Sebastian Schelter, Dustin Lange, Philipp Schmidt, Meltem Celikel, Felix Biessmann and Andreas Grafberger. 2018. *Automating Large-Scale Data Quality Verification*. PVLDB 11(12), 1781-1794. DOI: 10.14778/3229863.3229867. Publisher paper.
2. Eric Breck, Marty Zinkevich, Neoklis Polyzotis, Steven Whang and Sudip Roy. 2019. *Data Validation for Machine Learning*. Proceedings of SysML. Author organization record.
3. Earl T. Barr, Mark Harman, Phil McMinn, Muzammil Shahbaz and Shin Yoo. 2015. *The Oracle Problem in Software Testing: A Survey*. IEEE TSE 41(5), 507-525. DOI: 10.1109/TSE.2014.2372785. Institutional record.
4. Allan H. Murphy. 1973. *A New Vector Partition of the Probability Score*. Journal of Applied Meteorology 12(4), 595-600. DOI: 10.1175/1520-0450(1973)012<0595:ANVPOT>2.0.CO;2. Publisher record.
5. Chuan Guo, Geoff Pleiss, Yu Sun and Kilian Q. Weinberger. 2017. *On Calibration of Modern Neural Networks*. PMLR 70, 1321-1330. Proceedings paper.
6. Jeremy Nixon, Mike Dusenberry, Ghassen Jerfel, Timothy Nguyen, Jeremiah Liu, Linchuan Zhang and Dustin Tran. 2020. *Measuring Calibration in Deep Learning*. arXiv:1904.01685v2 (first submitted 2019). Author manuscript.
7. GH Archive. *Public GitHub timeline archive*. Accessed 22 October 2026. Official project.