

Provided proper attribution is provided, Google hereby grants permission to reproduce the tables and figures in this paper solely for use in journalistic or scholarly works.

---

# Attention Is All You Need

---

**Ashish Vaswani\***  
Google Brain  
avaswani@google.com

**Noam Shazeer\***  
Google Brain  
noam@google.com

**Niki Parmar\***  
Google Research  
nikip@google.com

**Jakob Uszkoreit\***  
Google Research  
usz@google.com

**Llion Jones\***  
Google Research  
llion@google.com

**Aidan N. Gomez\*<sup>†</sup>**  
University of Toronto  
aidan@cs.toronto.edu

**Lukasz Kaiser\***  
Google Brain  
lukaszkaizer@google.com

**Illia Polosukhin\*<sup>‡</sup>**  
illia.polosukhin@gmail.com

## Abstract

The dominant sequence transduction models are based on complex recurrent or convolutional neural networks that include an encoder and a decoder. The best performing models also connect the encoder and decoder through an attention mechanism. We propose a new simple network architecture, the Transformer, based solely on attention mechanisms, dispensing with recurrence and convolutions entirely. Experiments on two machine translation tasks show these models to be superior in quality while being more parallelizable and requiring significantly less time to train. Our model achieves 28.4 BLEU on the WMT 2014 English-to-German translation task, improving over the existing best results, including ensembles, by over 2 BLEU. On the WMT 2014 English-to-French translation task, our model establishes a new single-model state-of-the-art BLEU score of 41.8 after training for 3.5 days on eight GPUs, a small fraction of the training costs of the best models from the literature. We show that the Transformer generalizes well to other tasks by applying it successfully to English constituency parsing both with large and limited training data.

---

\*Equal contribution. Listing order is random. Jakob proposed replacing RNNs with self-attention and started the effort to evaluate this idea. Ashish, with Illia, designed and implemented the first Transformer models and has been crucially involved in every aspect of this work. Noam proposed scaled dot-product attention, multi-head attention and the parameter-free position representation and became the other person involved in nearly every detail. Niki designed, implemented, tuned and evaluated countless model variants in our original codebase and tensor2tensor. Llion also experimented with novel model variants, was responsible for our initial codebase, and efficient inference and visualizations. Lukasz and Aidan spent countless long days designing various parts of and implementing tensor2tensor, replacing our earlier codebase, greatly improving results and massively accelerating our research.

<sup>†</sup>Work performed while at Google Brain.

<sup>‡</sup>Work performed while at Google Research.

当前主导的序列转导模型基于复杂的递归神经网络或卷积神经网络，这些网络包括编码器和解码器。表现最好的模型通过注意机制将编码器和解码器连接起来。我们提出了一种新的简单网络架构——Transformer，这种架构完全基于注意机制，完全不依赖于递归和卷积。对两个机器翻译任务的实验表明，这些模型在质量上更优，同时更具并行性，并且所需的训练时间显著较少。我们的模型在 WMT 2014 英德翻译任务上达到了 28.4 BLEU，相较于现有的最佳结果（包括集成模型）提高了超过 2 BLEU。在 WMT 2014 英法翻译任务上，我们的模型经过在八个 GPU 上训练 3.5 天后，建立了新的单模型最先进的 BLEU 得分 41.8，这只是文献中最佳模型训练成本的一小部分。我们通过成功将 Transformer 应用于英语成分解析，证明了其在其他任务上的良好泛化能力，无论是大规模还是有限训练数据。

## 1 Introduction

Recurrent neural networks, long short-term memory [13] and gated recurrent [7] neural networks in particular, have been firmly established as state of the art approaches in sequence modeling and transduction problems such as language modeling and machine translation [35, 2, 5]. Numerous efforts have since continued to push the boundaries of recurrent language models and encoder-decoder architectures [38, 24, 15].

递归神经网络，尤其是长短期记忆网络 [13] 和门控递归神经网络 [7]，已被确立为序列建模和转换问题（如语言建模和机器翻译）中的最先进方法 [35, 2, 5]。自那时以来，许多努力继续推动递归语言模型和编码器-解码器架构的边界 [38, 24, 15]。

Recurrent models typically factor computation along the symbol positions of the input and output sequences. Aligning the positions to steps in computation time, they generate a sequence of hidden states  $h_t$ , as a function of the previous hidden state  $h_{t-1}$  and the input for position  $t$ . This inherently sequential nature precludes parallelization within training examples, which becomes critical at longer sequence lengths, as memory constraints limit batching across examples.

递归模型通常沿着输入和输出序列的符号位置进行计算。通过将位置与计算时间步骤对齐，它们生成一个隐状态序列  $h_t$ ，这是前一个隐状态  $h_{t-1}$  和位置  $t$  的输入的函数。这种固有的顺序特性排除了在训练示例中进行并行化的可能性，这在序列长度较长时变得至关重要，因为内存限制限制了跨示例的批处理。

Recent work has achieved significant improvements in computational efficiency through factorization tricks [21] and conditional computation [32], while also improving model performance in case of the latter. The fundamental constraint of sequential computation, however, remains.

最近的研究通过因式分解技巧 [21] 和条件计算 [32] 实现了计算效率的显著提升，同时在后者的情况下也提高了模型性能。然而，顺序计算的基本限制依然存在。

Attention mechanisms have become an integral part of compelling sequence modeling and transduction models in various tasks, allowing modeling of dependencies without regard to their distance in the input or output sequences [2, 19]. In all but a few cases [27], however, such attention mechanisms are used in conjunction with a recurrent network.

注意机制已成为各种任务中引人注目的序列建模和转导模型的一个重要组成部分，使得在输入或输出序列中建模依赖关系时不考虑它们之间的距离 [2, 19]。然而，在几乎所有情况下 [27]，这些注意机制都是与递归网络结合使用的。

In this work we propose the Transformer, a model architecture eschewing recurrence and instead relying entirely on an attention mechanism to draw global dependencies between input and output. The Transformer allows for significantly more parallelization and can reach a new state of the art in translation quality after being trained for as little as twelve hours on eight P100 GPUs.

在这项工作中，我们提出了 Transformer，一种模型架构，它摒弃了递归，而是完全依赖注意力机制来建立输入和输出之间的全局依赖关系。Transformer 允许显著更多的并行化，并且在经过仅十二小时在八个 P100 GPU 上的训练后，能够达到翻译质量的新兴技术水平。

## 2 Background

The goal of reducing sequential computation also forms the foundation of the Extended Neural GPU [16], ByteNet [18] and ConvS2S [9], all of which use convolutional neural networks as basic building block, computing hidden representations in parallel for all input and output positions. In these models, the number of operations required to relate signals from two arbitrary input or output positions grows in the distance between positions, linearly for ConvS2S and logarithmically for ByteNet. This makes it more difficult to learn dependencies between distant positions [12]. In the Transformer this is reduced to a constant number of operations, albeit at the cost of reduced effective resolution due to averaging attention-weighted positions, an effect we counteract with Multi-Head Attention as described in section 3.2.

减少顺序计算的目标也是扩展神经 GPU [16]、ByteNet [18] 和 ConvS2S [9] 的基础，这些模型都使用卷积神经网络作为基本构建块，能够并行计算所有输入和输出位置的隐藏表示。在这些模型中，关联两个任意输入或输出位置的信号所需的操作数量随着位置之间的距离而增加，对于 ConvS2S 是线性增加，而对于 ByteNet 是以对数方式增加。这使得学习遥远位置之间的依赖关系变得更加困难 [12]。在 Transformer 中，这一操作数量被减少到一个常数，尽管这以降低有效分辨率为代价，因为它对注意力加权位置进行平均，这一效果我们通过在第 3.2 节中描述的多头注意力机制来抵消。

Self-attention, sometimes called intra-attention is an attention mechanism relating different positions of a single sequence in order to compute a representation of the sequence. Self-attention has been used successfully in a variety of tasks including reading comprehension, abstractive summarization, textual entailment and learning task-independent sentence representations [4, 27, 28, 22].

自注意力，有时称为内部注意力，是一种注意机制，它将单个序列的不同位置联系起来，以计算序列的表示。自注意力已经成功应用于多种任务，包括阅读理解、抽象总结、文本蕴涵和学习任务无关的句子表示 [4, 27, 28, 22]。

End-to-end memory networks are based on a recurrent attention mechanism instead of sequence-aligned recurrence and have been shown to perform well on simple-language question answering and language modeling tasks [34].

端到端记忆网络基于递归注意机制，而不是序列对齐的递归，并且已被证明在简单语言问答和语言建模任务中表现良好 [34]。

To the best of our knowledge, however, the Transformer is the first transduction model relying entirely on self-attention to compute representations of its input and output without using sequence-aligned RNNs or convolution. In the following sections, we will describe the Transformer, motivate self-attention and discuss its advantages over models such as [17, 18] and [9].

然而，据我们所知，Transformer 是第一个完全依赖自注意力来计算其输入和输出表示的转换模型，而不使用序列对齐的 RNN 或卷积。在接下来的章节中，我们将描述 Transformer，阐明自注意力的动机，并讨论其相对于 [17, 18] 和 [9] 等模型的优势。

## 3 Model Architecture

Most competitive neural sequence transduction models have an encoder-decoder structure [5, 2, 35]. Here, the encoder maps an input sequence of symbol representations  $(x_1, \dots, x_n)$  to a sequence of continuous representations  $\mathbf{z} = (z_1, \dots, z_n)$ . Given  $\mathbf{z}$ , the decoder then generates an output sequence  $(y_1, \dots, y_m)$  of symbols one element at a time. At each step the model is auto-regressive [10], consuming the previously generated symbols as additional input when generating the next.

大多数具有竞争力的神经序列转导模型采用编码器-解码器结构 [5, 2, 35]。在这里，编码器将符号表示的输入序列  $(x_1, \dots, x_n)$  映射到连续表示的序列  $\mathbf{z} = (z_1, \dots, z_n)$ 。给定  $\mathbf{z}$ ，解码器随后一次生成一个元素的输出符号序列  $(y_1, \dots, y_m)$ 。在每一步中，该模型是自回归的 [10]，在生成下一个符号时将先前生成的符号作为额外输入。

The Transformer follows this overall architecture using stacked self-attention and point-wise, fully connected layers for both the encoder and decoder, shown in the left and right halves of Figure 1, respectively.

Transformer 采用这种总体架构，使用堆叠自注意力和逐点完全连接层，分别用于编码器和解码器，如图 1 的左半部分和右半部分所示。

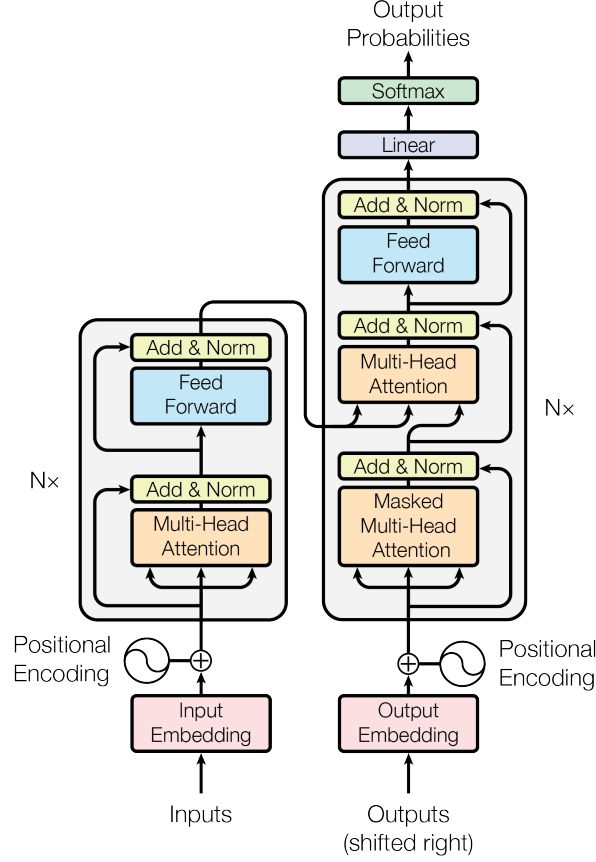


Figure 1: The Transformer - model architecture. 变压器 - 模型架构。

### 3.1 Encoder and Decoder Stacks

**Encoder:** The encoder is composed of a stack of  $N = 6$  identical layers. Each layer has two sub-layers. The first is a multi-head self-attention mechanism, and the second is a simple, position-wise fully connected feed-forward network. We employ a residual connection [11] around each of the two sub-layers, followed by layer normalization [1]. That is, the output of each sub-layer is  $\text{LayerNorm}(x + \text{Sublayer}(x))$ , where  $\text{Sublayer}(x)$  is the function implemented by the sub-layer itself. To facilitate these residual connections, all sub-layers in the model, as well as the embedding layers, produce outputs of dimension  $d_{\text{model}} = 512$ .

**Decoder:** The decoder is also composed of a stack of  $N = 6$  identical layers. In addition to the two sub-layers in each encoder layer, the decoder inserts a third sub-layer, which performs multi-head attention over the output of the encoder stack. Similar to the encoder, we employ residual connections around each of the sub-layers, followed by layer normalization. We also modify the self-attention sub-layer in the decoder stack to prevent positions from attending to subsequent positions. This masking, combined with fact that the output embeddings are offset by one position, ensures that the predictions for position  $i$  can depend only on the known outputs at positions less than  $i$ .

### 3.2 Attention

An attention function can be described as mapping a query and a set of key-value pairs to an output, where the query, keys, values, and output are all vectors. The output is computed as a weighted sum of the values, where the weight assigned to each value is computed by a compatibility function of the query with the corresponding key.

注意力函数可以描述为将查询和一组键值对映射到输出，其中查询、键、值和输出都是向量。输出作为值的加权和计算，其中分配给每个值的权重由查询与相应键的兼容性函数计算得出。

### 3.2.1 Scaled Dot-Product Attention

We call our particular attention "Scaled Dot-Product Attention" (Figure 2). The input consists of queries and keys of dimension  $d_k$ , and values of dimension  $d_v$ . We compute the dot products of the query with all keys, divide each by  $\sqrt{d_k}$ , and apply a softmax function to obtain the weights on the values.

我们称我们的特定注意力机制为“缩放点积注意力”（图 2）。输入由维度为  $d_k$  的查询和键，以及维度为  $d_v$  的值组成。我们计算查询与所有键的点积，将每个点积除以  $\sqrt{d_k}$ ，并应用 softmax 函数以获得值的权重。

In practice, we compute the attention function on a set of queries simultaneously, packed together into a matrix  $Q$ . The keys and values are also packed together into matrices  $K$  and  $V$ . We compute the matrix of outputs as:

在实践中，我们同时对一组查询计算注意力函数，这些查询被打包在一个矩阵  $Q$  中。键和值也被打包成矩阵  $K$  和  $V$ 。我们将输出矩阵计算为：

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{d_k}}\right)V \quad (1)$$

The two most commonly used attention functions are additive attention [2], and dot-product (multiplicative) attention. Dot-product attention is identical to our algorithm, except for the scaling factor of  $\frac{1}{\sqrt{d_k}}$ . Additive attention computes the compatibility function using a feed-forward network with a single hidden layer. While the two are similar in theoretical complexity, dot-product attention is much faster and more space-efficient in practice, since it can be implemented using highly optimized matrix multiplication code.

最常用的两种注意力机制是加性注意力 [2] 和点积（乘法）注意力。点积注意力与我们的算法相同，唯一的区别在于缩放因子  $\frac{1}{\sqrt{d_k}}$ 。加性注意力使用具有单隐藏层的前馈网络来计算兼容性函数。尽管这两者在理论复杂性上相似，但在实践中，点积注意力要快得多且空间效率更高，因为它可以使用高度优化的矩阵乘法代码来实现。

While for small values of  $d_k$  the two mechanisms perform similarly, additive attention outperforms dot product attention without scaling for larger values of  $d_k$  [3]. We suspect that for large values of  $d_k$ , the dot products grow large in magnitude, pushing the softmax function into regions where it has extremely small gradients<sup>4</sup>. To counteract this effect, we scale the dot products by  $\frac{1}{\sqrt{d_k}}$ .

对于小值的  $d_k$ ，这两种机制的表现相似，但在较大值的  $d_k$  下，加性注意力的表现优于未缩放的点积注意力 [3]。我们怀疑对于较大值的  $d_k$ ，点积的绝对值变大，使得 softmax 函数进入具有极小梯度的区域。为了说明为何点积会变大，假设  $q$  和  $k$  的分量是均值为 0 和方差为 1 的独立随机变量。那么它们的点积  $q \cdot k = \sum_{i=1}^{d_k} q_i k_i$  的均值为 0，方差为  $d_k$ 。为了抵消这一影响，我们将点积缩放为  $\frac{1}{\sqrt{d_k}}$ 。


### 3.2.2 Multi-Head Attention

Instead of performing a single attention function with  $d_{\text{model}}$ -dimensional keys, values and queries, we found it beneficial to linearly project the queries, keys and values  $h$  times with different, learned linear projections to  $d_k$ ,  $d_k$  and  $d_v$  dimensions, respectively. On each of these projected versions of queries, keys and values we then perform the attention function in parallel, yielding  $d_v$ -dimensional output values. These are concatenated and once again projected, resulting in the final values, as depicted in Figure 2.

我们发现，与其使用  $d_{\text{model}}$  维的键、值和查询单独执行一个注意力函数，不如将查询、键和值通过不同的、学习得来的线性映射分别线性投影  $h$  次到  $d_k$ 、 $d_k$  和  $d_v$  维度。在每个这些投影后的查询、键和值上，我们再并行执行注意力函数，生成  $d_v$  维的输出值。这些输出值被拼接并再次投影，最终得到结果值，如图 2 所示。

<sup>4</sup>To illustrate why the dot products get large, assume that the components of  $q$  and  $k$  are independent random variables with mean 0 and variance 1. Then their dot product,  $q \cdot k = \sum_{i=1}^{d_k} q_i k_i$ , has mean 0 and variance  $d_k$ .

Scaled Dot-Product Attention



Multi-Head Attention

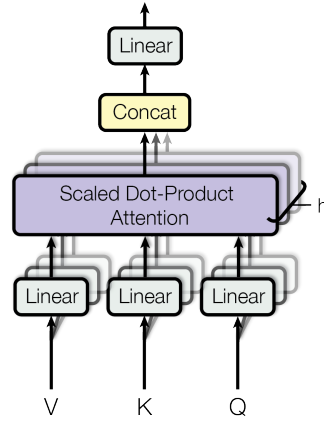


Figure 2: (left) Scaled Dot-Product Attention. (right) Multi-Head Attention consists of several attention layers running in parallel. (左) 缩放点积注意力。(右) 多头注意力由多个并行运行的注意力层组成。

Multi-head attention allows the model to jointly attend to information from different representation subspaces at different positions. With a single attention head, averaging inhibits this.

多头注意力机制使模型能够在不同位置共同关注来自不同表示子空间的信息。使用单个注意力头时，平均化会抑制这一点。

MultiHead(Q, K, V) &= Concat(head\_1, ..., head\_h)WO

where  $\text{head}_i = \text{Attention}(QW_i^Q, KW_i^K, VW_i^V)$

其中  $\text{head}_i \&= \text{Attention}(QW_i^Q, KW_i^K, VW_i^V)$

Where the projections are parameter matrices  $W_i^Q \in \mathbb{R}^{d_{\text{model}} \times d_k}$ ,  $W_i^K \in \mathbb{R}^{d_{\text{model}} \times d_k}$ ,  $W_i^V \in \mathbb{R}^{d_{\text{model}} \times d_v}$  and  $W^O \in \mathbb{R}^{hd_v \times d_{\text{model}}}$ .

投影是参数矩阵  $W_i^Q \in \mathbb{R}^{d_{\text{model}} \times d_k}$ 、 $W_i^K \in \mathbb{R}^{d_{\text{model}} \times d_k}$ 、 $W_i^V \in \mathbb{R}^{d_{\text{model}} \times d_v}$  和  $W^O \in \mathbb{R}^{hd_v \times d_{\text{model}}}$ 。

In this work we employ  $h = 8$  parallel attention layers, or heads. For each of these we use  $d_k = d_v = d_{\text{model}}/h = 64$ . Due to the reduced dimension of each head, the total computational cost is similar to that of single-head attention with full dimensionality.

在这项工作中，我们使用了  $h = 8$  个并行注意力层或头。对于每一个头，我们使用  $d_k = d_v = d_{\text{model}}/h = 64$ 。由于每个头的维度降低，整体计算成本与具有完整维度的单头注意力相似。

### 3.2.3 Applications of Attention in our Model

The Transformer uses multi-head attention in three different ways:

- In "encoder-decoder attention" layers, the queries come from the previous decoder layer, and the memory keys and values come from the output of the encoder. This allows every position in the decoder to attend over all positions in the input sequence. This mimics the typical encoder-decoder attention mechanisms in sequence-to-sequence models such as [38, 2, 9].

Transformer 在三种不同的方式使用多头注意力：

- 在“编码器-解码器注意力”层中，查询来自前一个解码器层，而记忆键和值来自编码器的输出。这使得解码器中的每个位置都能够关注输入序列中的所有位置。这模仿了序列到序列模型中典型的编码器-解码器注意力机制，如 [38, 2, 9]。
- The encoder contains self-attention layers. In a self-attention layer all of the keys, values and queries come from the same place, in this case, the output of the previous layer in the encoder. Each position in the encoder can attend to all positions in the previous layer of the encoder.
- 编码器包含自注意力层。在自注意力层中，所有的键、值和查询都来自同一个地方，在这里指的是编码器前一层的输出。编码器中的每个位置可以关注编码器前一层中的所有位置。
- Similarly, self-attention layers in the decoder allow each position in the decoder to attend to all positions in the decoder up to and including that position. We need to prevent leftward information flow in the decoder to preserve the auto-regressive property. We implement this inside of scaled dot-product attention by masking out (setting to  $-\infty$ ) all values in the input of the softmax which correspond to illegal connections. See Figure 2.
- 类似地，解码器中的自注意力层允许解码器中的每个位置关注到该位置之前的所有位置。我们需要防止解码器中向左的信息流，以保持自回归特性。我们在缩放点积注意力中实现这一点，通过对软最大值输入中对应非法连接的所有值进行屏蔽（设置为  $-\infty$ ）。见图 2。

### 3.3 Position-wise Feed-Forward Networks

In addition to attention sub-layers, each of the layers in our encoder and decoder contains a fully connected feed-forward network, which is applied to each position separately and identically. This consists of two linear transformations with a ReLU activation in between.

除了注意力子层，我们的编码器和解码器中的每一层还包含一个全连接的前馈网络，该网络对每个位置分别且相同地应用。这包括两个线性变换，中间有一个 ReLU 激活。

$$\text{FFN}(x) = \max(0, xW_1 + b_1)W_2 + b_2 \quad (2)$$

While the linear transformations are the same across different positions, they use different parameters from layer to layer. Another way of describing this is as two convolutions with kernel size 1. The dimensionality of input and output is  $d_{\text{model}} = 512$ , and the inner-layer has dimensionality  $d_{\text{ff}} = 2048$ .

虽然线性变换在不同的位置是相同的，但它们在层与层之间使用不同的参数。另一种描述方式是将其视为两个卷积，卷积核大小为 1。输入和输出的维度为  $d_{\text{model}} = 512$ ，而内层的维度为  $d_{\text{ff}} = 2048$ 。

### 3.4 Embeddings and Softmax

Similarly to other sequence transduction models, we use learned embeddings to convert the input tokens and output tokens to vectors of dimension  $d_{\text{model}}$ . We also use the usual learned linear transformation and softmax function to convert the decoder output to predicted next-token probabilities. In our model, we share the same weight matrix between the two embedding layers and the pre-softmax linear transformation, similar to [30]. In the embedding layers, we multiply those weights by  $\sqrt{d_{\text{model}}}$ .

与其他序列转换模型类似，我们使用学习到的嵌入将输入标记和输出标记转换为维度为  $d_{\text{model}}$  的向量。我们还使用通常的学习线性变换和 softmax 函数将解码器输出转换为预测的下一个标记概率。在我们的模型中，我们在两个嵌入层和预 softmax 线性变换之间共享相同的权重矩阵，类似于 [30]。在嵌入层中，我们将这些权重乘以  $\sqrt{d_{\text{model}}}$ 。

### 3.5 Positional Encoding

Since our model contains no recurrence and no convolution, in order for the model to make use of the order of the sequence, we must inject some information about the relative or absolute position of the tokens in the sequence. To this end, we add “positional encodings” to the input embeddings at the bottoms of the encoder and decoder stacks. The positional encodings have the same dimension  $d_{\text{model}}$  as the embeddings, so that the two can be summed. There are many choices of positional encodings, learned and fixed [9].

由于我们的模型不包含递归和卷积，因此为了使模型能够利用序列的顺序，我们必须注入一些关于序列中标记的相对或绝对位置的信息。为此，我们在编码器和解码器堆栈的底部向输入嵌入添加“位置编码”。位置编码与嵌入具有相同的维度  $d_{\text{model}}$ ，以便可以将两者相加。位置编码有很多选择，包括学习型和固定型 [9]。

In this work, we use sine and cosine functions of different frequencies:

在这项工作中，我们使用不同频率的正弦和余弦函数：

$$PE_{(pos, 2i)} = \sin(pos/10000^{2i/d_{\text{model}}})$$

$$PE_{(pos, 2i+1)} = \cos(pos/10000^{2i/d_{\text{model}}})$$

$$PE_{(pos, 2i)} = (\sin(pos / 10000^{2i/d_{\text{model}}}))PE_{(pos, 2i+1)} = (\cos(pos/10000^{2i/d_{\text{model}}}))$$

where  $pos$  is the position and  $i$  is the dimension. That is, each dimension of the positional encoding corresponds to a sinusoid. The wavelengths form a geometric progression from  $2\pi$  to  $10000 \cdot 2\pi$ . We chose this function because we hypothesized it would allow the model to easily learn to attend by relative positions, since for any fixed offset  $k$ ,  $PE_{pos+k}$  can be represented as a linear function of  $PE_{pos}$ .

其中  $pos$  是位置， $i$  是维度。即，每个位置编码的维度对应于一个正弦函数。波长从  $2\pi$  到  $10000 \cdot 2\pi$  形成几何级数。我们选择这个函数是因为我们假设这将使模型更容易通过相对位置进行注意，因为对于任何固定的偏移量  $k$ ， $PE_{pos+k}$  可以表示为  $PE_{pos}$  的线性函数。

We also experimented with using learned positional embeddings [9] instead, and found that the two versions produced nearly identical results (see Table 3 row (E)). We chose the sinusoidal version because it may allow the model to extrapolate to sequence lengths longer than the ones encountered during training.

我们还实验使用学习的位置信息嵌入 [9]，发现这两种版本产生的结果几乎相同（见表 3，第 (E) 行）。我们选择了正弦版本，因为它可能使模型能够推断出比训练期间遇到的序列长度更长的序列。

## 4 Why Self-Attention

In this section we compare various aspects of self-attention layers to the recurrent and convolutional layers commonly used for mapping one variable-length sequence of symbol representations  $(x_1, \dots, x_n)$  to another sequence of equal length  $(z_1, \dots, z_n)$ , with  $x_i, z_i \in \mathbb{R}^d$ , such as a hidden layer in a typical sequence transduction encoder or decoder. Motivating our use of self-attention we consider three desiderata.

在本节中，我们比较自注意力层与常用于将一个变长符号表示序列  $(x_1, \dots, x_n)$  映射到另一个等长度序列  $(z_1, \dots, z_n)$  的循环层和卷积层的各个方面，涉及  $x_i, z_i \in \mathbb{R}^d$ ，例如典型序列转导编码器或解码器中的隐藏层。为了激励我们使用自注意力，我们考虑了三个期望条件。

One is the total computational complexity per layer. Another is the amount of computation that can be parallelized, as measured by the minimum number of sequential operations required.

一个是每层的总计算复杂度。另一个是可以并行化的计算量，具体通过所需的最小顺序操作数来衡量。

The third is the path length between long-range dependencies in the network. Learning long-range dependencies is a key challenge in many sequence transduction tasks. One key factor affecting the ability to learn such dependencies is the length of the paths forward and backward signals have to traverse in the network. The shorter these paths between any combination of positions in the input and output sequences, the easier it is to learn long-range dependencies [12]. Hence we also compare the maximum path length between any two input and output positions in networks composed of the different layer types.

第三个因素是网络中长程依赖之间的路径长度。在许多序列转导任务中，学习长程依赖是一个关键挑战。影响学习此类依赖能力的一个关键因素是前向和后向信号在网络中所需经过的路径长度。输入序列和输出序列中的任意位置组合之间的路径越短，学习长程依赖就越容易 [12]。因此，我们还比较了不同层类型组成的网络中任意两个输入和输出位置之间的最大路径长度。

As noted in Table 1, a self-attention layer connects all positions with a constant number of sequentially executed operations, whereas a recurrent layer requires  $O(n)$  sequential operations. In terms of computational complexity, self-attention layers are faster than recurrent layers when the sequence length  $n$  is smaller than the representation dimensionality  $d$ , which is most often the case with sentence representations used by state-of-the-art models in machine translations, such as word-piece [38] and byte-pair [31] representations. To improve computational performance for tasks involving very long sequences, self-attention could be restricted to considering only a neighborhood of size  $r$  in the input sequence centered around the respective output position. This would increase the maximum path length to  $O(n/r)$ . We plan to investigate this approach further in future work.



Table 1: Maximum path lengths, per-layer complexity and minimum number of sequential operations for different layer types.  $n$  is the sequence length,  $d$  is the representation dimension,  $k$  is the kernel size of convolutions and  $r$  the size of the neighborhood in restricted self-attention. 不同层类型的最大路径长度、每层复杂度和最小顺序操作数。 $n$  是序列长度,  $d$  是表示维度,  $k$  是卷积的核大小, 而  $r$  是受限自注意力中的邻域大小。

| Layer Type                  | Complexity per Layer     | Sequential Operations | Maximum Path Length |
|-----------------------------|--------------------------|-----------------------|---------------------|
| Self-Attention              | $O(n^2 \cdot d)$         | $O(1)$                | $O(1)$              |
| Recurrent                   | $O(n \cdot d^2)$         | $O(n)$                | $O(n)$              |
| Convolutional               | $O(k \cdot n \cdot d^2)$ | $O(1)$                | $O(\log_k(n))$      |
| Self-Attention (restricted) | $O(r \cdot n \cdot d)$   | $O(1)$                | $O(n/r)$            |

如表1所示, 自注意力层通过一组常数数量的顺序执行操作连接所有位置, 而递归层则需要  $O(n)$  个顺序操作。在计算复杂度方面, 当序列长度  $n$  小于表示维度  $d$  时, 自注意力层比递归层更快, 这个情况在机器翻译的最先进模型中经常出现, 比如词片 [38] 和字节对 [31] 表示。为了提高处理非常长序列的任务的计算性能, 自注意力可以限制只考虑输入序列中围绕相应输出位置的大小为  $r$  的邻域。这将把最大路径长度增加到  $O(n/r)$ 。我们计划在未来的工作中进一步研究这种方法。

A single convolutional layer with kernel width  $k < n$  does not connect all pairs of input and output positions. Doing so requires a stack of  $O(n/k)$  convolutional layers in the case of contiguous kernels, or  $O(\log_k(n))$  in the case of dilated convolutions [18], increasing the length of the longest paths between any two positions in the network. Convolutional layers are generally more expensive than recurrent layers, by a factor of  $k$ . Separable convolutions [6], however, decrease the complexity considerably, to  $O(k \cdot n \cdot d + n \cdot d^2)$ . Even with  $k = n$ , however, the complexity of a separable convolution is equal to the combination of a self-attention layer and a point-wise feed-forward layer, the approach we take in our model.

一个具有核宽度  $k < n$  的单一卷积层并不能连接所有输入和输出位置的对。做到这一点需要一堆  $O(n/k)$  个卷积层 (在连续核的情况下), 或者  $O(\log_k(n))$  个卷积层 (在扩张卷积的情况下) [18], 这会增加网络中任意两个位置之间的最远路径长度。与递归层相比, 卷积层通常更昂贵, 因子为  $k$ 。然而, 分离卷积 [6] 显著降低了复杂度, 降至  $O(k \cdot n \cdot d + n \cdot d^2)$ 。即使在  $k = n$  的情况下, 分离卷积的复杂度仍然等于自注意力层和逐点前馈层的组合, 这是我们模型中采用的方法。

As side benefit, self-attention could yield more interpretable models. We inspect attention distributions from our models and present and discuss examples in the appendix. Not only do individual attention heads clearly learn to perform different tasks, many appear to exhibit behavior related to the syntactic and semantic structure of the sentences.

作为附带好处, 自注意力可能产生更可解释的模型。我们检查了模型的注意力分布, 并在附录中呈现和讨论了示例。单个注意力头不仅显然学会执行不同的任务, 许多头似乎还表现出与句子的句法和语义结构相关的行为。

## 5 Training

This section describes the training regime for our models.

本节描述了我们模型的训练方案。

### 5.1 Training Data and Batching

We trained on the standard WMT 2014 English-German dataset consisting of about 4.5 million sentence pairs. Sentences were encoded using byte-pair encoding [3], which has a shared source-target vocabulary of about 37000 tokens. For English-French, we used the significantly larger WMT 2014 English-French dataset consisting of 36M sentences and split tokens into a 32000 word-piece vocabulary [38]. Sentence pairs were batched together by approximate sequence length. Each training batch contained a set of sentence pairs containing approximately 25000 source tokens and 25000 target tokens.

我们使用标准的 WMT 2014 英语-德语数据集进行训练, 该数据集包含约 450 万对句子。句子采用字节对编码 [3] 进行编码, 具有约 37000 个共享的源-目标词汇。对于英语-法语, 我们使用了规模更大的 WMT 2014 英语-法语数据集, 该数据集包含 3600 万个句子, 并将词元拆分为一个 32000 词汇的字片词表 [38]。句子对按大约的序列长度进行批处理。每个训练批次包含一组句子对, 约有 25000 个源词元和 25000 个目标词元。

Table 2: The Transformer achieves better BLEU scores than previous state-of-the-art models on the English-to-German and English-to-French newstest2014 tests at a fraction of the training cost. Transformer 在英语到德语和英语到法语的新测试 2014 测试中, 取得了比以前的最新模型更好的 BLEU 分数, 并且训练成本仅为其一小部分。

| Model                           | BLEU        |              | Training Cost (FLOPs)                 |                     |
|---------------------------------|-------------|--------------|---------------------------------------|---------------------|
|                                 | EN-DE       | EN-FR        | EN-DE                                 | EN-FR               |
| ByteNet [18]                    | 23.75       |              |                                       |                     |
| Deep-Att + PosUnk [39]          |             | 39.2         |                                       | $1.0 \cdot 10^{20}$ |
| GNMT + RL [38]                  | 24.6        | 39.92        | $2.3 \cdot 10^{19}$                   | $1.4 \cdot 10^{20}$ |
| ConvS2S [9]                     | 25.16       | 40.46        | $9.6 \cdot 10^{18}$                   | $1.5 \cdot 10^{20}$ |
| MoE [32]                        | 26.03       | 40.56        | $2.0 \cdot 10^{19}$                   | $1.2 \cdot 10^{20}$ |
| Deep-Att + PosUnk Ensemble [39] |             | 40.4         |                                       | $8.0 \cdot 10^{20}$ |
| GNMT + RL Ensemble [38]         | 26.30       | 41.16        | $1.8 \cdot 10^{20}$                   | $1.1 \cdot 10^{21}$ |
| ConvS2S Ensemble [9]            | 26.36       | <b>41.29</b> | $7.7 \cdot 10^{19}$                   | $1.2 \cdot 10^{21}$ |
| Transformer (base model)        | 27.3        | 38.1         | <b><math>3.3 \cdot 10^{18}</math></b> |                     |
| Transformer (big)               | <b>28.4</b> | <b>41.8</b>  | $2.3 \cdot 10^{19}$                   |                     |

## 5.2 Hardware and Schedule

We trained our models on one machine with 8 NVIDIA P100 GPUs. For our base models using the hyperparameters described throughout the paper, each training step took about 0.4 seconds. We trained the base models for a total of 100,000 steps or 12 hours. For our big models, (described on the bottom line of table 3), step time was 1.0 seconds. The big models were trained for 300,000 steps (3.5 days).

我们在一台配备 8 个 NVIDIA P100 GPU 的机器上训练了我们的模型。对于我们在整篇论文中描述的超参数的基础模型, 每个训练步骤大约需要 0.4 秒。我们共训练基础模型 100,000 步, 耗时 12 小时。对于我们的“大模型”(在表3的底线中描述), 每个步骤的时间为 1.0 秒。大模型被训练了 300,000 步 (3.5 天)。

## 5.3 Optimizer

We used the Adam optimizer [20] with  $\beta_1 = 0.9$ ,  $\beta_2 = 0.98$  and  $\epsilon = 10^{-9}$ . We varied the learning rate over the course of training, according to the formula:

$$lr_{rate} = d_{model}^{-0.5} \cdot \min(step\_num^{-0.5}, step\_num \cdot warmup\_steps^{-1.5}) \quad (3)$$

This corresponds to increasing the learning rate linearly for the first  $warmup\_steps$  training steps, and decreasing it thereafter proportionally to the inverse square root of the step number. We used  $warmup\_steps = 4000$ .

这对应于在前  $warmup\_steps$  次训练步骤中线性增加学习率, 然后根据步骤数的倒数平方根成比例地减少学习率。我们使用了  $warmup\_steps = 4000$ 。

## 5.4 Regularization

We employ three types of regularization during training:

我们在训练过程中采用三种类型的正则化:

**Residual Dropout** We apply dropout [33] to the output of each sub-layer, before it is added to the sub-layer input and normalized. In addition, we apply dropout to the sums of the embeddings and the positional encodings in both the encoder and decoder stacks. For the base model, we use a rate of  $P_{drop} = 0.1$ .

**Label Smoothing** During training, we employed label smoothing of value  $\epsilon_{ls} = 0.1$  [36]. This hurts perplexity, as the model learns to be more unsure, but improves accuracy and BLEU score.

## 6 Results

### 6.1 Machine Translation

On the WMT 2014 English-to-German translation task, the big transformer model (Transformer (big) in Table 2) outperforms the best previously reported models (including ensembles) by more than 2.0 BLEU, establishing a new state-of-the-art BLEU score of 28.4. The configuration of this model is listed in the bottom line of Table 3. Training took 3.5 days on 8 P100 GPUs. Even our base model surpasses all previously published models and ensembles, at a fraction of the training cost of any of the competitive models.

在 WMT 2014 英语到德语翻译任务中, 大型变换器模型 (表 2 中的 Transformer (big)) 的表现超过了之前报告的最佳模型 (包括集成模型) 超过 2.0 BLEU, 建立了新的最先进的 BLEU 得分 28.4。该模型的配置列在表 3 的底线。训练在 8 P100 GPU 上花费了 3.5 天。即使我们的基础模型也超越了所有之前发布的模型和集成模型, 且训练成本仅为任何竞争模型的一小部分。

On the WMT 2014 English-to-French translation task, our big model achieves a BLEU score of 41.0, outperforming all of the previously published single models, at less than 1/4 the training cost of the previous state-of-the-art model. The Transformer (big) model trained for English-to-French used dropout rate  $P_{drop} = 0.1$ , instead of 0.3.

在 WMT 2014 英语到法语翻译任务中, 我们的大模型达到了 BLEU 分数 41.0, 超越了所有之前发布的单一模型, 并且其训练成本不到之前最先进模型的 1/4。用于英语到法语翻译的 Transformer (大) 模型使用了丢弃率  $P_{drop} = 0.1$ , 而不是 0.3。

For the base models, we used a single model obtained by averaging the last 5 checkpoints, which were written at 10-minute intervals. For the big models, we averaged the last 20 checkpoints. We used beam search with a beam size of 4 and length penalty  $\alpha = 0.6$  [38]. These hyperparameters were chosen after experimentation on the development set. We set the maximum output length during inference to input length + 50, but terminate early when possible [38].

对于基础模型, 我们使用了一个通过平均最后 5 个检查点获得的单一模型, 这些检查点是在 10 分钟间隔内写入的。对于大型模型, 我们平均了最后 20 个检查点。我们使用了束搜索, 束大小为 4, 长度惩罚为  $\alpha = 0.6$  [38]。这些超参数是在开发集上实验后选择的。在推理过程中, 我们将最大输出长度设置为输入长度 + 50, 但在可能的情况下提前终止 [38]。

Table 2 summarizes our results and compares our translation quality and training costs to other model architectures from the literature. We estimate the number of floating point operations used to train a model by multiplying the training time, the number of GPUs used, and an estimate of the sustained single-precision floating-point capacity of each GPU<sup>5</sup>.

表 2 总结了我们的结果, 并将我们的翻译质量和训练成本与文献中的其他模型架构进行了比较。我们通过将训练时间、使用的 GPU 数量与每个 GPU 的持续单精度浮点运算能力的估算值相乘, 来估计训练模型所需的浮点运算数量。我们使用了 K80、K40、M40 和 P100 的值分别为 2.8、3.7、6.0 和 9.5 TFLOPS。

### 6.2 Model Variations

To evaluate the importance of different components of the Transformer, we varied our base model in different ways, measuring the change in performance on English-to-German translation on the development set, newstest2013. We used beam search as described in the previous section, but no checkpoint averaging. We present these results in Table 3.

为了评估 Transformer 的不同组件的重要性, 我们以不同方式改变了基础模型, 测量了在开发集 newstest2013 上英语到德语翻译性能的变化。我们使用了前面部分描述的束搜索, 但没有进行检查点平均。我们在表格 3 中展示了这些结果。

In Table 3 rows (A), we vary the number of attention heads and the attention key and value dimensions, keeping the amount of computation constant, as described in Section 3.2.2. While single-head attention is 0.9 BLEU worse than the best setting, quality also drops off with too many heads.

在表格 3 的行 (A) 中, 我们改变了注意力头的数量以及注意力键和值的维度, 同时保持计算量不变, 如第 3.2.2 节所述。虽然单头注意力比最佳设置低 0.9 BLEU, 但当注意力头过多时, 质量也会下降。

In Table 3 rows (B), we observe that reducing the attention key size  $d_k$  hurts model quality. This suggests that determining compatibility is not easy and that a more sophisticated compatibility function than dot product may be beneficial. We further observe in rows (C) and (D) that, as expected, bigger models are better, and dropout is very helpful in avoiding over-fitting. In row (E) we replace our sinusoidal positional encoding with learned positional embeddings [9], and observe nearly identical results to the base model.

<sup>5</sup>We used values of 2.8, 3.7, 6.0 and 9.5 TFLOPS for K80, K40, M40 and P100, respectively.

Table 3: Variations on the Transformer architecture. Unlisted values are identical to those of the base model. All metrics are on the English-to-German translation development set, newstest2013. Listed perplexities are per-wordpiece, according to our byte-pair encoding, and should not be compared to per-word perplexities. 变压器架构的变体。未列出的值与基模型相同。所有指标均来自英德翻译开发集 newstest2013。列出的困惑度是按字词片段计算的，根据我们的字节对编码，不应与按单词计算的困惑度进行比较。

|      | $N$ | $d_{\text{model}}$                        | $d_{\text{ff}}$ | $h$ | $d_k$ | $d_v$ | $P_{\text{drop}}$ | $\epsilon_{ls}$ | train steps | PPL (dev)   | BLEU (dev)  | params $\times 10^6$ |
|------|-----|-------------------------------------------|-----------------|-----|-------|-------|-------------------|-----------------|-------------|-------------|-------------|----------------------|
| base | 6   | 512                                       | 2048            | 8   | 64    | 64    | 0.1               | 0.1             | 100K        | 4.92        | 25.8        | 65                   |
| (A)  |     |                                           |                 | 1   | 512   | 512   |                   |                 |             | 5.29        | 24.9        |                      |
|      |     |                                           |                 | 4   | 128   | 128   |                   |                 |             | 5.00        | 25.5        |                      |
|      |     |                                           |                 | 16  | 32    | 32    |                   |                 |             | 4.91        | 25.8        |                      |
|      |     |                                           |                 | 32  | 16    | 16    |                   |                 |             | 5.01        | 25.4        |                      |
| (B)  |     |                                           |                 | 16  |       |       |                   |                 |             | 5.16        | 25.1        | 58                   |
|      |     |                                           |                 | 32  |       |       |                   |                 |             | 5.01        | 25.4        | 60                   |
| (C)  | 2   |                                           |                 |     |       |       |                   |                 |             | 6.11        | 23.7        | 36                   |
|      | 4   |                                           |                 |     |       |       |                   |                 |             | 5.19        | 25.3        | 50                   |
|      | 8   |                                           |                 |     |       |       |                   |                 |             | 4.88        | 25.5        | 80                   |
|      |     | 256                                       |                 |     | 32    | 32    |                   |                 |             | 5.75        | 24.5        | 28                   |
|      |     | 1024                                      |                 |     | 128   | 128   |                   |                 |             | 4.66        | 26.0        | 168                  |
|      |     |                                           | 1024            |     |       |       |                   |                 |             | 5.12        | 25.4        | 53                   |
|      |     |                                           | 4096            |     |       |       |                   |                 |             | 4.75        | 26.2        | 90                   |
|      |     |                                           |                 |     |       |       | 0.0               |                 |             | 5.77        | 24.6        |                      |
| (D)  |     |                                           |                 |     |       |       | 0.2               |                 |             | 4.95        | 25.5        |                      |
|      |     |                                           |                 |     |       |       |                   | 0.0             |             | 4.67        | 25.3        |                      |
|      |     |                                           |                 |     |       |       |                   | 0.2             |             | 5.47        | 25.7        |                      |
| (E)  |     | positional embedding instead of sinusoids |                 |     |       |       |                   |                 |             | 4.92        | 25.7        |                      |
| big  | 6   | 1024                                      | 4096            | 16  |       |       | 0.3               |                 | 300K        | <b>4.33</b> | <b>26.4</b> | 213                  |

Table 4: The Transformer generalizes well to English constituency parsing (Results are on Section 23 of WSJ) Transformer 模型在英语成分句法分析中表现良好（结果见 WSJ 第 23 节）。

| Parser                              | Training                 | WSJ 23 F1 |
|-------------------------------------|--------------------------|-----------|
| Vinyals & Kaiser et al. (2014) [37] | WSJ only, discriminative | 88.3      |
| Petrov et al. (2006) [29]           | WSJ only, discriminative | 90.4      |
| Zhu et al. (2013) [40]              | WSJ only, discriminative | 90.4      |
| Dyer et al. (2016) [8]              | WSJ only, discriminative | 91.7      |
| Transformer (4 layers)              | WSJ only, discriminative | 91.3      |
| Zhu et al. (2013) [40]              | semi-supervised          | 91.3      |
| Huang & Harper (2009) [14]          | semi-supervised          | 91.3      |
| McClosky et al. (2006) [26]         | semi-supervised          | 92.1      |
| Vinyals & Kaiser et al. (2014) [37] | semi-supervised          | 92.1      |
| Transformer (4 layers)              | semi-supervised          | 92.7      |
| Luong et al. (2015) [23]            | multi-task               | 93.0      |
| Dyer et al. (2016) [8]              | generative               | 93.3      |

在表 3 的行 (B) 中，我们观察到减少注意力键的大小  $d_k$  会损害模型质量。这表明确定兼容性并不容易，可能需要比点乘更复杂的兼容性函数。我们进一步在行 (C) 和 (D) 中观察到，正如预期的那样，更大的模型表现更好，并且丢弃法在避免过拟合方面非常有帮助。在行 (E) 中，我们用学习的位置信息嵌入 [9] 替换了我们的正弦位置编码，并观察到与基础模型几乎相同的结果。

### 6.3 English Constituency Parsing

To evaluate if the Transformer can generalize to other tasks we performed experiments on English constituency parsing. This task presents specific challenges: the output is subject to strong structural constraints and is

significantly longer than the input. Furthermore, RNN sequence-to-sequence models have not been able to attain state-of-the-art results in small-data regimes [37].

为了评估 Transformer 是否能够泛化到其他任务，我们对英语成分句法解析进行了实验。这个任务提出了特定的挑战：输出受到强结构约束，并且显著长于输入。此外，RNN 序列到序列模型在数据较少的情况下未能获得最先进的结果 [37]。

We trained a 4-layer transformer with  $d_{model} = 1024$  on the Wall Street Journal (WSJ) portion of the Penn Treebank [25], about 40K training sentences. We also trained it in a semi-supervised setting, using the larger high-confidence and BerkeleyParser corpora from with approximately 17M sentences [37]. We used a vocabulary of 16K tokens for the WSJ only setting and a vocabulary of 32K tokens for the semi-supervised setting.

我们在宾夕法尼亚树库的华尔街日报 (WSJ) 部分上训练了一个 4 层的变换器，使用了  $d_{model} = 1024$ ，大约 40K 训练句子。我们还在半监督环境中进行了训练，使用了来自更大高置信度的数据集和 BerkeleyParser 语料库，约有 17M 句子 [37]。对于仅 WSJ 设置，我们使用了 16K 个词汇，而对于半监督设置，我们使用了 32K 个词汇。

We performed only a small number of experiments to select the dropout, both attention and residual (section 5.4), learning rates and beam size on the Section 22 development set, all other parameters remained unchanged from the English-to-German base translation model. During inference, we increased the maximum output length to input length + 300. We used a beam size of 21 and  $\alpha = 0.3$  for both WSJ only and the semi-supervised setting.

我们仅进行了少量实验来选择丢失率，关注机制和残差（第 5.4 节），学习率和束大小，所有其他参数仍保持不变，来自英德基础翻译模型。在推理过程中，我们将最大输出长度增加到输入长度 + 300。我们在仅使用 WSJ 和半监督设置中都使用了束大小为 21 和  $\alpha = 0.3$ 。

Our results in Table 4 show that despite the lack of task-specific tuning our model performs surprisingly well, yielding better results than all previously reported models with the exception of the Recurrent Neural Network Grammar [8].

我们在表 4 中的结果表明，尽管缺乏特定任务的调优，我们的模型表现出乎意料地好，结果优于所有之前报告的模型，唯一的例外是循环神经网络语法 [8]。

In contrast to RNN sequence-to-sequence models [37], the Transformer outperforms the BerkeleyParser [29] even when training only on the WSJ training set of 40K sentences.

与 RNN 序列到序列模型 [37] 相比，即使仅在包含 40K 句子的 WSJ 训练集上训练，Transformer 也优于 BerkeleyParser [29]。

## 7 Conclusion

In this work, we presented the Transformer, the first sequence transduction model based entirely on attention, replacing the recurrent layers most commonly used in encoder-decoder architectures with multi-headed self-attention.

在这项工作中，我们提出了 Transformer，这是一种完全基于注意力的序列转换模型，取代了在编码器-解码器架构中最常用的递归层，使用多头自注意力机制。

For translation tasks, the Transformer can be trained significantly faster than architectures based on recurrent or convolutional layers. On both WMT 2014 English-to-German and WMT 2014 English-to-French translation tasks, we achieve a new state of the art. In the former task our best model outperforms even all previously reported ensembles.

对于翻译任务，Transformer 的训练速度显著快于基于循环或卷积层的架构。在 WMT 2014 英德翻译任务和 WMT 2014 英法翻译任务中，我们达到了新的最好成绩。在前一个任务中，我们最佳模型的表现甚至超过了所有先前报道的集成模型。

We are excited about the future of attention-based models and plan to apply them to other tasks. We plan to extend the Transformer to problems involving input and output modalities other than text and to investigate local, restricted attention mechanisms to efficiently handle large inputs and outputs such as images, audio and video. Making generation less sequential is another research goals of ours.

我们对基于注意力的模型的未来感到兴奋，并计划将其应用于其他任务。我们计划将 Transformer 扩展到涉及文本以外的输入和输出模态的问题，并调查局部、受限的注意力机制，以有效处理大型输入和输出，如图像、音频和视频。减少生成的顺序性是我们的另一个研究目标。

The code we used to train and evaluate our models is available at <https://github.com/tensorflow/tensor2tensor>.

我们用于训练和评估模型的代码可以在 <https://github.com/tensorflow/tensor2tensor> 找到。

**Acknowledgements** We are grateful to Nal Kalchbrenner and Stephan Gouws for their fruitful comments, corrections and inspiration.

他们富有成效的评论、纠正和启发。

## References

- [1] Jimmy Lei Ba, Jamie Ryan Kiros, and Geoffrey E Hinton. Layer normalization. *arXiv preprint arXiv:1607.06450*, 2016.  
layernorm2016 Jimmy Lei Ba, Jamie Ryan Kiros, 和 Geoffrey E Hinton. 层归一化. *arXiv 预印本 arXiv:1607.06450*, 2016.
- [2] Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. Neural machine translation by jointly learning to align and translate. *CoRR*, abs/1409.0473, 2014.  
bahdanau2014neural Dzmitry Bahdanau, Kyunghyun Cho, 和 Yoshua Bengio. 通过共同学习对齐和翻译的神经机器翻译. *CoRR*, abs/1409.0473, 2014.
- [3] Denny Britz, Anna Goldie, Minh-Thang Luong, and Quoc V. Le. Massive exploration of neural machine translation architectures. *CoRR*, abs/1703.03906, 2017.  
DBLP:journals/corr/BritzGLL17 Denny Britz, Anna Goldie, Minh-Thang Luong, 和 Quoc V. Le. 神经机器翻译架构的大规模探索. *CoRR*, abs/1703.03906, 2017.
- [4] Jianpeng Cheng, Li Dong, and Mirella Lapata. Long short-term memory-networks for machine reading. *arXiv preprint arXiv:1601.06733*, 2016.  
cheng2016long Jianpeng Cheng, Li Dong, 和 Mirella Lapata. 用于机器阅读的长短期记忆网络. *arXiv 预印本 arXiv:1601.06733*, 2016.
- [5] Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using rnn encoder-decoder for statistical machine translation. *CoRR*, abs/1406.1078, 2014.  
cho2014learning Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Fethi Bougares, Holger Schwenk, 和 Yoshua Bengio. 使用 RNN 编码器-解码器学习短语表示用于统计机器翻译. *CoRR*, abs/1406.1078, 2014.
- [6] Francois Chollet. Xception: Deep learning with depthwise separable convolutions. *arXiv preprint arXiv:1610.02357*, 2016.  
xception2016 Francois Chollet. Xception: 使用深度可分离卷积的深度学习. *arXiv 预印本 arXiv:1610.02357*, 2016.
- [7] Junyoung Chung, Çağlar Gülçehre, Kyunghyun Cho, and Yoshua Bengio. Empirical evaluation of gated recurrent neural networks on sequence modeling. *CoRR*, abs/1412.3555, 2014.  
gruEval14 Junyoung Chung, Çağlar Gülçehre, Kyunghyun Cho, 和 Yoshua Bengio. 门控循环神经网络在序列建模上的经验评估. *CoRR*, abs/1412.3555, 2014.
- [8] Chris Dyer, Adhiguna Kuncoro, Miguel Ballesteros, and Noah A. Smith. Recurrent neural network grammars. In *Proc. of NAACL*, 2016.  
dyer-rnn:16 Chris Dyer, Adhiguna Kuncoro, Miguel Ballesteros, 和 Noah A. Smith. 循环神经网络文法. 在 *NAACL 会议论文集*, 2016.
- [9] Jonas Gehring, Michael Auli, David Grangier, Denis Yarats, and Yann N. Dauphin. Convolutional sequence to sequence learning. *arXiv preprint arXiv:1705.03122v2*, 2017.  
JonasFaceNet2017 Jonas Gehring, Michael Auli, David Grangier, Denis Yarats, 和 Yann N. Dauphin. 卷积序列到序列学习. *arXiv 预印本 arXiv:1705.03122v2*, 2017.
- [10] Alex Graves. Generating sequences with recurrent neural networks. *arXiv preprint arXiv:1308.0850*, 2013.  
graves2013generating Alex Graves. 使用递归神经网络生成序列. *arXiv 预印本 arXiv:1308.0850*, 2013.
- [11] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 770–778, 2016.  
he2016deep Kaiming He, Xiangyu Zhang, Shaoqing Ren, 和 Jian Sun. 深度残差学习用于图像识别. 在 *IEEE 计算机视觉与模式识别会议论文集*, 第 770–778 页, 2016 年.
- [12] Sepp Hochreiter, Yoshua Bengio, Paolo Frasconi, and Jürgen Schmidhuber. Gradient flow in recurrent nets: the difficulty of learning long-term dependencies, 2001.  
hochreiter2001gradient Sepp Hochreiter, Yoshua Bengio, Paolo Frasconi, 和 Jürgen Schmidhuber. 在循环神经网络中的梯度流: 学习长期依赖关系的困难, 2001.

- [13] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.  
hochreiter1997 Sepp Hochreiter 和 Jürgen Schmidhuber. 长短期记忆. 神经计算, 9(8):1735–1780, 1997.
- [14] Zhongqiang Huang and Mary Harper. Self-training PCFG grammars with latent annotations across languages. In *Proceedings of the 2009 Conference on Empirical Methods in Natural Language Processing*, pages 832–841. ACL, August 2009.  
huang-harper:2009:EMNLP 钟强·黄和玛丽·哈珀. 自训练 PCFG 语法及其跨语言潜在注释. 在 第 2009 年自然语言处理实证方法会议论文集, 第 832–841 页. ACL, 2009 年 8 月.
- [15] Rafal Jozefowicz, Oriol Vinyals, Mike Schuster, Noam Shazeer, and Yonghui Wu. Exploring the limits of language modeling. *arXiv preprint arXiv:1602.02410*, 2016.  
jozefowicz2016exploring Rafal Jozefowicz, Oriol Vinyals, Mike Schuster, Noam Shazeer, and Yonghui Wu. 探索语言建模的极限. *arXiv 预印本 arXiv:1602.02410*, 2016.
- [16] Łukasz Kaiser and Samy Bengio. Can active memory replace attention? In *Advances in Neural Information Processing Systems, (NIPS)*, 2016.  
extendedngpu·凯瑟和萨米·本吉奥. 活动内存能否替代注意力? 在 神经信息处理系统进展, (NIPS), 2016.
- [17] Łukasz Kaiser and Ilya Sutskever. Neural GPUs learn algorithms. In *International Conference on Learning Representations (ICLR)*, 2016.  
neural\_gpu lukasz Kaiser 和 Ilya Sutskever. 神经 GPUs 学习算法. 在国际学习表征会议 (ICLR), 2016.
- [18] Nal Kalchbrenner, Lasse Espeholt, Karen Simonyan, Aaron van den Oord, Alex Graves, and Koray Kavukcuoglu. Neural machine translation in linear time. *arXiv preprint arXiv:1610.10099v2*, 2017.  
NalBytenet2017 Nal Kalchbrenner, Lasse Espeholt, Karen Simonyan, Aaron van den Oord, Alex Graves, and Koray Kavukcuoglu. 线性时间内的神经机器翻译. *arXiv 预印本 arXiv:1610.10099v2*, 2017.
- [19] Yoon Kim, Carl Denton, Luong Hoang, and Alexander M. Rush. Structured attention networks. In *International Conference on Learning Representations*, 2017.  
structuredAttentionNetworks Yoon Kim, Carl Denton, Luong Hoang, 和 Alexander M. Rush. 结构化注意力网络. 在国际学习表征会议, 2017.
- [20] Diederik Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *ICLR*, 2015.  
kingma2014adam Diederik Kingma 和 Jimmy Ba. Adam: 一种随机优化的方法. 在 ICLR, 2015.
- [21] Oleksii Kuchaiev and Boris Ginsburg. Factorization tricks for LSTM networks. *arXiv preprint arXiv:1703.10722*, 2017.  
Kuchaiev2017Factorization Oleksii Kuchaiev 和 Boris Ginsburg. LSTM 网络的分解技巧. *arXiv 预印本 arXiv:1703.10722*, 2017.
- [22] Zhouhan Lin, Minwei Feng, Cicero Nogueira dos Santos, Mo Yu, Bing Xiang, Bowen Zhou, and Yoshua Bengio. A structured self-attentive sentence embedding. *arXiv preprint arXiv:1703.03130*, 2017.  
lin2017structured Zhouhan Lin, Minwei Feng, Cicero Nogueira dos Santos, Mo Yu, Bing Xiang, Bowen Zhou, 和 Yoshua Bengio. 一种结构化自注意句嵌入. *arXiv 预印本 arXiv:1703.03130*, 2017.
- [23] Minh-Thang Luong, Quoc V. Le, Ilya Sutskever, Oriol Vinyals, and Łukasz Kaiser. Multi-task sequence to sequence learning. *arXiv preprint arXiv:1511.06114*, 2015.  
multiseg2seq Minh-Thang Luong, Quoc V. Le, Ilya Sutskever, Oriol Vinyals, 和 Łukasz Kaiser. 多任务序列到序列学习. *arXiv 预印本 arXiv:1511.06114*, 2015.
- [24] Minh-Thang Luong, Hieu Pham, and Christopher D Manning. Effective approaches to attention-based neural machine translation. *arXiv preprint arXiv:1508.04025*, 2015.  
luong2015effective Minh-Thang Luong, Hieu Pham, 和 Christopher D Manning. 基于注意力的神经机器翻译的有效方法. *arXiv 预印本 arXiv:1508.04025*, 2015.
- [25] Mitchell P Marcus, Mary Ann Marcinkiewicz, and Beatrice Santorini. Building a large annotated corpus of english: The penn treebank. *Computational linguistics*, 19(2):313–330, 1993.  
marcus1993building Mitchell P Marcus, Mary Ann Marcinkiewicz, 和 Beatrice Santorini. 建立一个大型带注释的英语语料库: 宾州树库. 计算语言学, 19(2):313–330, 1993.
- [26] David McClosky, Eugene Charniak, and Mark Johnson. Effective self-training for parsing. In *Proceedings of the Human Language Technology Conference of the NAACL, Main Conference*, pages 152–159. ACL, June 2006.  
mcclosky-etAl:2006:NAACL David McClosky, Eugene Charniak, 和 Mark Johnson. 高效的自我训练解析方法. 在 NAACL 人类语言技术会议, 主要会议录, 页码 152–159. ACL, 2006 年 6 月.

- [27] Ankur Parikh, Oscar Täckström, Dipanjan Das, and Jakob Uszkoreit. A decomposable attention model. In *Empirical Methods in Natural Language Processing*, 2016.  
decomposableAttnModel Ankur Parikh, Oscar Täckström, Dipanjan Das, 和 Jakob Uszkoreit. 一种可分解的注意力模型. 在 自然语言处理中的实证方法, 2016.
- [28] Romain Paulus, Caiming Xiong, and Richard Socher. A deep reinforced model for abstractive summarization. *arXiv preprint arXiv:1705.04304*, 2017.  
paulus2017deep 罗曼·保卢斯, 蔡明·熊, 和理查德·索彻. 一种深度强化模型用于抽象摘要. *arXiv 预印本 arXiv:1705.04304*, 2017.
- [29] Slav Petrov, Leon Barrett, Romain Thibaux, and Dan Klein. Learning accurate, compact, and interpretable tree annotation. In *Proceedings of the 21st International Conference on Computational Linguistics and 44th Annual Meeting of the ACL*, pages 433–440. ACL, July 2006.  
petrov-EtAl:2006:ACL Slav Petrov, Leon Barrett, Romain Thibaux, 和 Dan Klein. 学习准确、紧凑且可解释的树结构标注. 在 第 21 届国际计算语言学会议和第 44 届 ACL 年会的论文集, 页码 433–440. ACL, 2006 年 7 月.
- [30] Ofir Press and Lior Wolf. Using the output embedding to improve language models. *arXiv preprint arXiv:1608.05859*, 2016.  
press2016using Ofir Press 和 Lior Wolf. 使用输出嵌入改进语言模型. *arXiv 预印本 arXiv:1608.05859*, 2016 年.
- [31] Rico Sennrich, Barry Haddow, and Alexandra Birch. Neural machine translation of rare words with subword units. *arXiv preprint arXiv:1508.07909*, 2015.  
sennrich2015neural Rico Sennrich, Barry Haddow, 和 Alexandra Birch. 使用子词单元进行稀有词汇的神经机器翻译. *arXiv 预印本 arXiv:1508.07909*, 2015.
- [32] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538*, 2017.  
shazeer2017outrageously Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton 和 Jeff Dean. 极其庞大的神经网络: 稀疏门控混合专家层. *arXiv 预印本 arXiv:1701.06538*, 2017.
- [33] Nitish Srivastava, Geoffrey E Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. Dropout: a simple way to prevent neural networks from overfitting. *Journal of Machine Learning Research*, 15(1):1929–1958, 2014.  
srivastava2014dropout Nitish Srivastava, Geoffrey E Hinton, Alex Krizhevsky, Ilya Sutskever, 和 Ruslan Salakhutdinov. Dropout: 一种简单的方法来防止神经网络过拟合. 机器学习研究期刊, 15(1):1929–1958, 2014.
- [34] Sainbayar Sukhbaatar, Arthur Szlam, Jason Weston, and Rob Fergus. End-to-end memory networks. In C. Cortes, N. D. Lawrence, D. D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems 28*, pages 2440–2448. Curran Associates, Inc., 2015.  
sukhbaatar2015 Sainbayar Sukhbaatar, Arthur Szlam, Jason Weston, 和 Rob Fergus. 端到端记忆网络. 在 C. Cortes, N. D. Lawrence, D. D. Lee, M. Sugiyama, 和 R. Garnett 主编的 神经信息处理系统进展 28 中, 第 2440–2448 页. Curran Associates, Inc., 2015.
- [35] Ilya Sutskever, Oriol Vinyals, and Quoc VV Le. Sequence to sequence learning with neural networks. In *Advances in Neural Information Processing Systems*, pages 3104–3112, 2014.  
sutskever14 Ilya Sutskever, Oriol Vinyals, 和 Quoc VV Le. 利用神经网络进行序列到序列的学习. 在 神经信息处理系统的进展, 第 3104–3112 页, 2014.
- [36] Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jonathon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. *CoRR*, abs/1512.00567, 2015.  
DBLP:journals/corr/SzegedyVISW15 Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jonathon Shlens, 和 Zbigniew Wojna. 重新思考计算机视觉中的 inception 架构. *CoRR*, abs/1512.00567, 2015.
- [37] Vinyals & Kaiser, Koo, Petrov, Sutskever, and Hinton. Grammar as a foreign language. In *Advances in Neural Information Processing Systems*, 2015.  
KVparse15 Vinyals & Kaiser, Koo, Petrov, Sutskever, 和 Hinton. 语法作为外语. 在 神经信息处理系统的进展, 2015.
- [38] Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, et al. Google’s neural machine translation system: Bridging the gap between human and machine translation. *arXiv preprint arXiv:1609.08144*, 2016.  
wu2016google Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, 等. 谷歌的神经机器翻译系统: 弥合人类与机器翻译之间的差距. *arXiv 预印本 arXiv:1609.08144*, 2016.



- [39] Jie Zhou, Ying Cao, Xuguang Wang, Peng Li, and Wei Xu. Deep recurrent models with fast-forward connections for neural machine translation. *CoRR*, abs/1606.04199, 2016.  
DBLP:journals/corr/ZhouCWLX16 Jie Zhou, Ying Cao, Xuguang Wang, Peng Li, 和 Wei Xu. 用于神经机器翻译的具有快速连接的深度递归模型. *CoRR*, abs/1606.04199, 2016.

- [40] Muhua Zhu, Yue Zhang, Wenliang Chen, Min Zhang, and Jingbo Zhu. Fast and accurate shift-reduce constituent parsing. In *Proceedings of the 51st Annual Meeting of the ACL (Volume 1: Long Papers)*, pages 434–443. ACL, August 2013.  
zhu-EtAl:2013:ACL 朱沐华、张跃、陈文亮、张敏和朱静波。快速且准确的移位-归约成分解析。在 第 51 届 ACL 年会论文集（第一卷：长篇论文）中，页面 434–443。ACL, 2013 年 8 月。

## Attention Visualizations

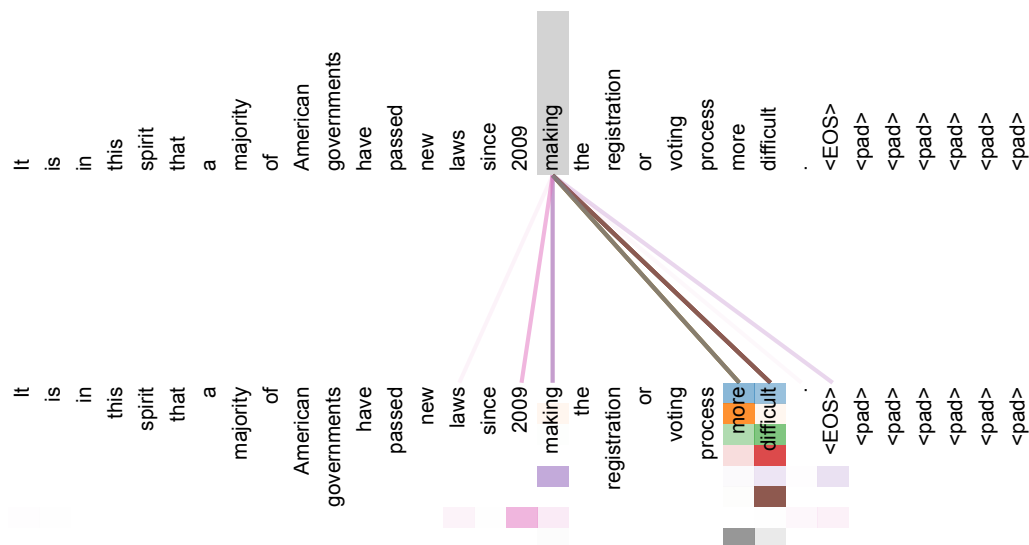


Figure 3: An example of the attention mechanism following long-distance dependencies in the encoder self-attention in layer 5 of 6. Many of the attention heads attend to a distant dependency of the verb 'making', completing the phrase 'making...more difficult'. Attentions here shown only for the word 'making'. Different colors represent different heads. Best viewed in color. 在第 5 层的编码器自注意力机制中，一个遵循长距离依赖的注意力机制示例。在这里，许多注意力头关注于动词 'making' 的一个远距离依赖，完成短语 'making...more difficult'。这里的注意力仅针对单词 'making' 显示。不同的颜色代表不同的头。建议使用彩色查看。

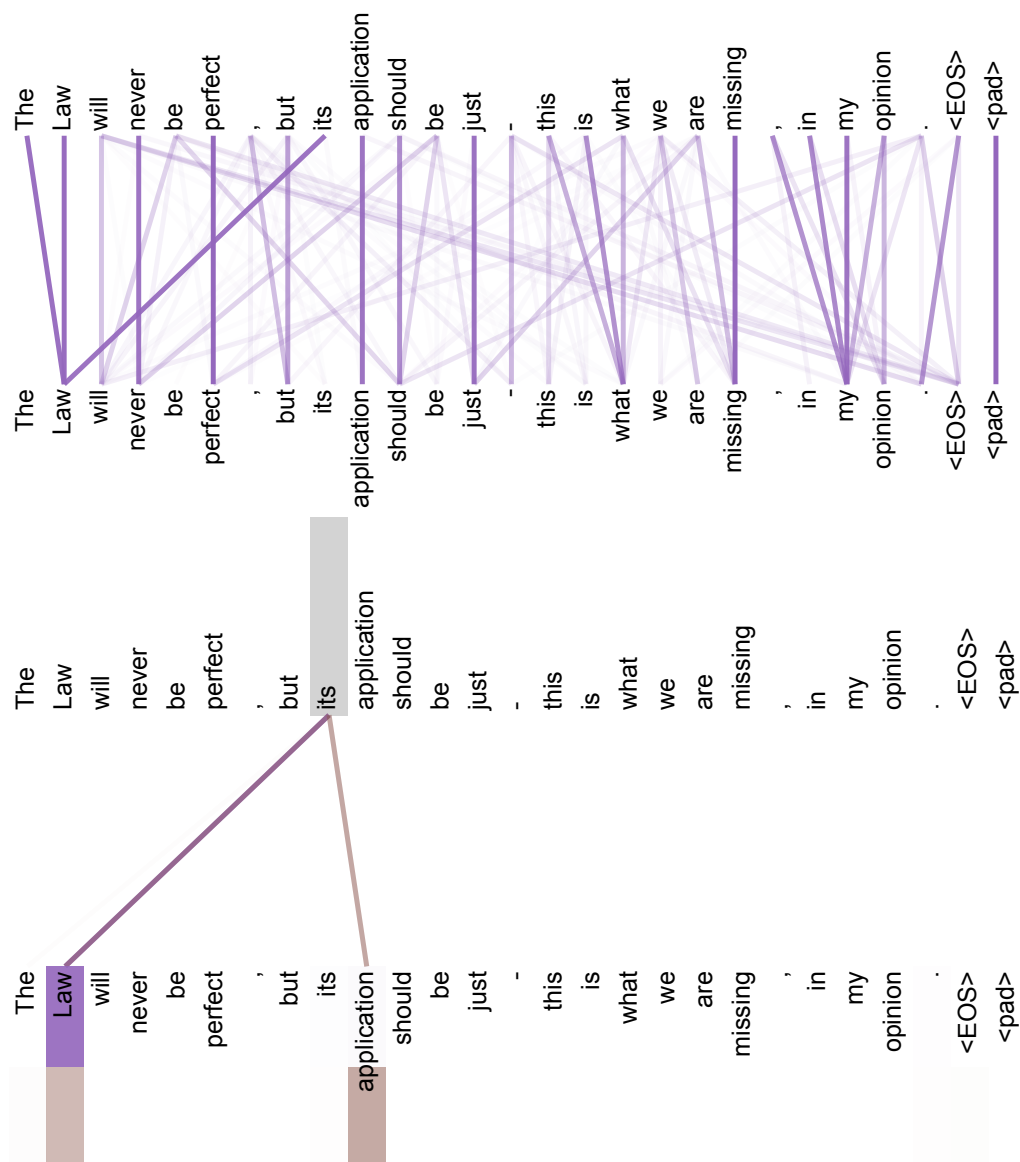


Figure 4: Two attention heads, also in layer 5 of 6, apparently involved in anaphora resolution. Top: Full attentions for head 5. Bottom: Isolated attentions from just the word 'its' for attention heads 5 and 6. Note that the attentions are very sharp for this word. 两个注意力头，位于6层中的第5层，显然涉及指代消解。顶部：第5头的完整注意力。底部：仅来自单词'its'的第5和第6头的孤立注意力。请注意，这个词的注意力非常集中。

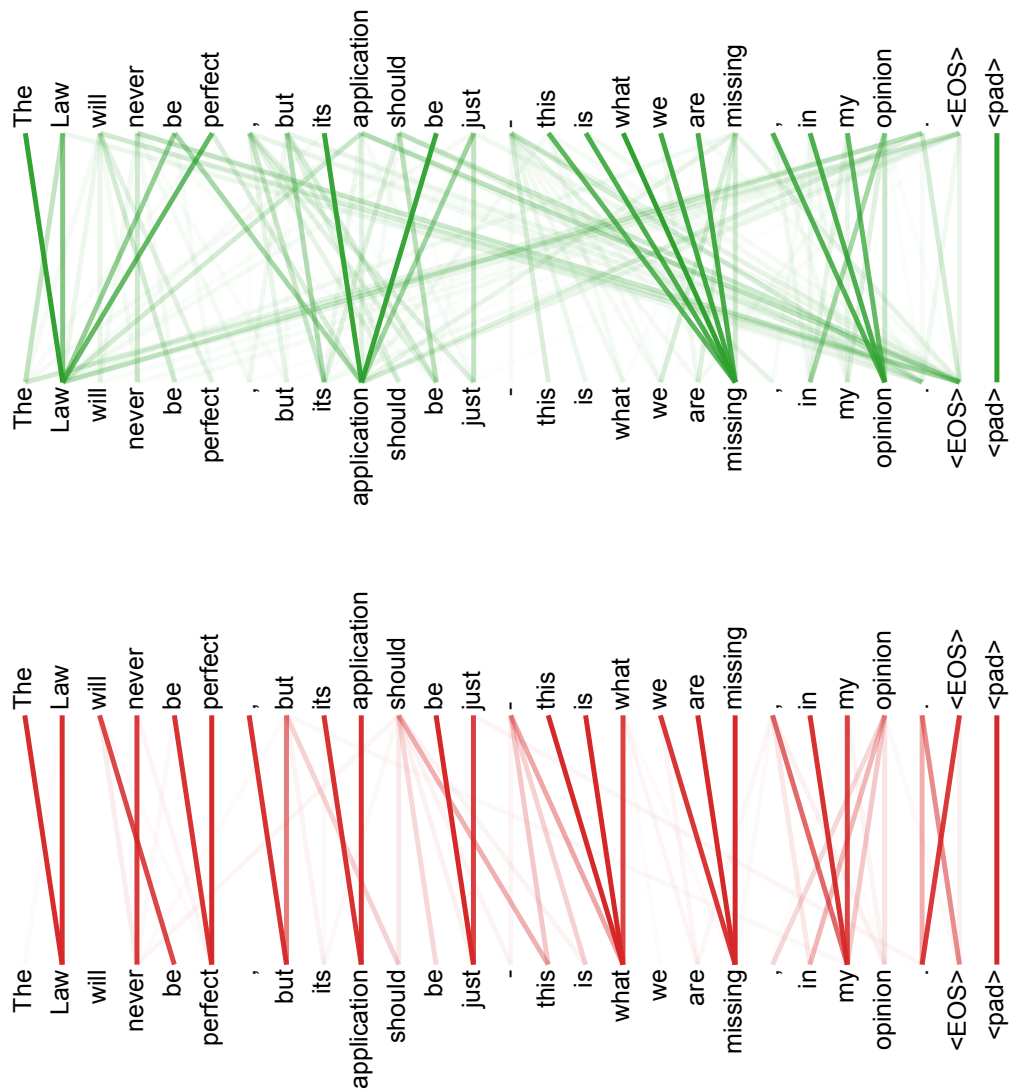


Figure 5: Many of the attention heads exhibit behaviour that seems related to the structure of the sentence. We give two such examples above, from two different heads from the encoder self-attention at layer 5 of 6. The heads clearly learned to perform different tasks. 许多注意力头的表现似乎与句子的结构相关。我们在上面给出了两个这样的例子，来自 6 层中编码器自注意力的第 5 层的两个不同的头。各个头显然学会了执行不同的任务。

## Contents

|          |                                        |           |
|----------|----------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                    | <b>2</b>  |
| <b>2</b> | <b>Background</b>                      | <b>3</b>  |
| <b>3</b> | <b>Model Architecture</b>              | <b>3</b>  |
| 3.1      | Encoder and Decoder Stacks             | 4         |
| 3.2      | Attention                              | 4         |
| 3.2.1    | Scaled Dot-Product Attention           | 5         |
| 3.2.2    | Multi-Head Attention                   | 5         |
| 3.2.3    | Applications of Attention in our Model | 6         |
| 3.3      | Position-wise Feed-Forward Networks    | 7         |
| 3.4      | Embeddings and Softmax                 | 7         |
| 3.5      | Positional Encoding                    | 7         |
| <b>4</b> | <b>Why Self-Attention</b>              | <b>8</b>  |
| <b>5</b> | <b>Training</b>                        | <b>9</b>  |
| 5.1      | Training Data and Batching             | 9         |
| 5.2      | Hardware and Schedule                  | 10        |
| 5.3      | Optimizer                              | 10        |
| 5.4      | Regularization                         | 10        |
| <b>6</b> | <b>Results</b>                         | <b>11</b> |
| 6.1      | Machine Translation                    | 11        |
| 6.2      | Model Variations                       | 11        |
| 6.3      | English Constituency Parsing           | 12        |
| <b>7</b> | <b>Conclusion</b>                      | <b>13</b> |
|          | <b>List of Tables</b>                  | <b>21</b> |
|          | <b>List of Figures</b>                 | <b>22</b> |

## List of Tables

|   |                                                                                                                                                                                                                                                                                                                                                                                  |    |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1 | Maximum path lengths, per-layer complexity and minimum number of sequential operations for different layer types. $n$ is the sequence length, $d$ is the representation dimension, $k$ is the kernel size of convolutions and $r$ the size of the neighborhood in restricted self-attention. 不同层类型的最大路径长度、每层复杂度和最小顺序操作数。 $n$ 是序列长度, $d$ 是表示维度, $k$ 是卷积的核大小, 而 $r$ 是受限自注意力中的邻域大小。 | 9  |
| 2 | The Transformer achieves better BLEU scores than previous state-of-the-art models on the English-to-German and English-to-French newstest2014 tests at a fraction of the training cost. Transformer 在英语到德语和英语到法语的新测试 2014 测试中, 取得了比以前的最新模型更好的 BLEU 分数, 并且训练成本仅为其一小部分。                                                                                                            | 10 |

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                    |    |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 3 | Variations on the Transformer architecture. Unlisted values are identical to those of the base model. All metrics are on the English-to-German translation development set, newstest2013. Listed perplexities are per-wordpiece, according to our byte-pair encoding, and should not be compared to per-word perplexities. 变压器架构的变体。未列出的值与基模型相同。所有指标均来自英德翻译开发集 newstest2013。列出的困惑度是按字词片段计算的，根据我们的字节对编码，不应与按单词计算的困惑度进行比较。 . . . . . | 12 |
| 4 | The Transformer generalizes well to English constituency parsing (Results are on Section 23 of WSJ) Transformer 模型在英语成分句法分析中表现良好 (结果见 WSJ 第 23 节)。 . . . .                                                                                                                                                                                                                                                                         | 12 |

## List of Figures

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |    |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1 | The Transformer - model architecture. 变压器 - 模型架构。 . . . .                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 4  |
| 2 | (left) Scaled Dot-Product Attention. (right) Multi-Head Attention consists of several attention layers running in parallel. (左) 缩放点积注意力。(右) 多头注意力由多个并行运行的注意力层组成。 . . . .                                                                                                                                                                                                                                                                                                                                                             | 6  |
| 3 | An example of the attention mechanism following long-distance dependencies in the encoder self-attention in layer 5 of 6. Many of the attention heads attend to a distant dependency of the verb ‘making’, completing the phrase ‘making...more difficult’. Attentions here shown only for the word ‘making’. Different colors represent different heads. Best viewed in color. 在第 5 层的编码器自注意力机制中，一个遵循长距离依赖的注意力机制示例。在这里，许多注意力头关注于动词 ‘making’ 的一个远距离依赖，完成短语 ‘making...more difficult’。这里的注意力仅针对单词 ‘making’ 显示。不同的颜色代表不同的头。建议使用彩色查看。 . | 18 |
| 4 | Two attention heads, also in layer 5 of 6, apparently involved in anaphora resolution. Top: Full attentions for head 5. Bottom: Isolated attentions from just the word ‘its’ for attention heads 5 and 6. Note that the attentions are very sharp for this word. 两个注意力头，位于 6 层中的第 5 层，显然涉及指代消解。顶部：第 5 头的完整注意力。底部：仅来自单词 ‘its’ 的第 5 和第 6 头的孤立注意力。请注意，这个词的注意力非常集中。 . . . . .                                                                                                                                                            | 19 |
| 5 | Many of the attention heads exhibit behaviour that seems related to the structure of the sentence. We give two such examples above, from two different heads from the encoder self-attention at layer 5 of 6. The heads clearly learned to perform different tasks. 许多注意力头的表现似乎与句子的结构相关。我们在上面给出了两个这样的例子，来自 6 层中编码器自注意力的第 5 层的两个不同的头。各个头显然学会了执行不同的任务。 . . . . .                                                                                                                                                                       | 20 |