

Individual Assignment 5

Minh Tri Ngo

1. Set up

Packages

```
# general use and cleaning
library(tidyverse)
library(here)
library(janitor)
library(snakecase)

# wrapping axis labels
library(scales)

# reading in .xlsx files
library(readxl)

# visualizing missing data
library(naniar)

# arranging plots
library(patchwork)
```

Data


Importing other graphs

```

# base layer
salinity <- ggplot(data = aq_ins_clean,
  # x-axis: site
  # y-axis: mean salinity
  mapping = aes(x = site_full,
    y = med_sal)) +
# first layer: salinity measurements at each survey
geom_jitter(height = 0,
  width = 0.1,
  shape = 21) +
# wrapping x-axis text
scale_x_discrete(labels = label_wrap(width = 15)) +
# second layer: points to represent means
stat_summary(fun = median,
  color = "red",
  size = 1) +
# relabelling x- and y-axes
labs(x = "Site",
  y = "Median salinity (ppt)",
  title = "Site salinity") +
# different theme
theme_bw()

# displaying object
salinity


```

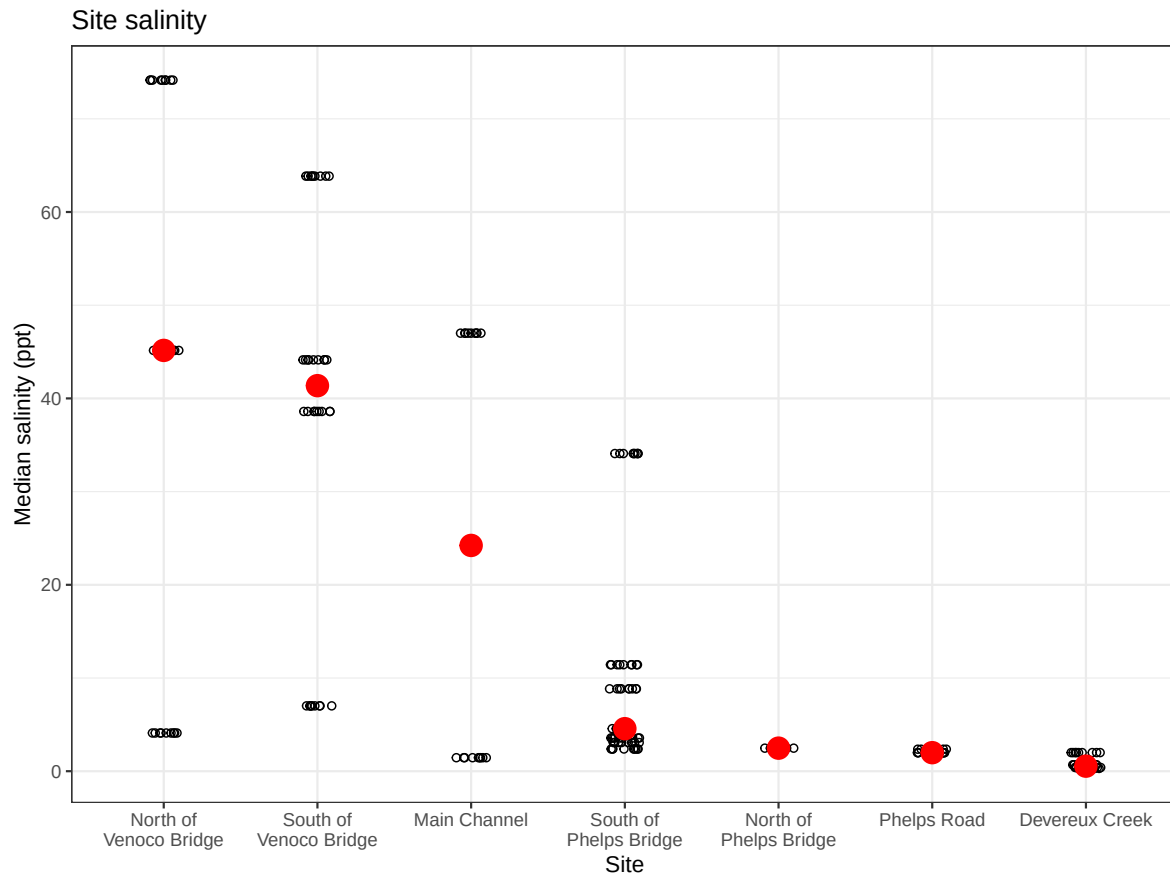

```
# base layer
copepods_plot <- ggplot(data = copepods_df,
  # x-axis: site
  # y-axis: mean abundance/L
  mapping = aes(x = site_full,
    y = log_ave_lit)) +
  # first layer: points to represent observations
  geom_jitter(height = 0,
    shape = 21,
    width = 0.1) +
  # second layer: points to represent medians
  stat_summary(geom = "point",
    fun = "median",
    size = 4,
    color = "blue") +
  # wrapping x-axis text
  scale_x_discrete(labels = label_wrap(15)) +
```

```
# relabelling x- and y-axis, adding title
labs(x = "Site",
     y = "log + 1 transformed average abundance/L",
     title = "Copepods") +
# different theme
theme_bw()

# displaying object
copepods_plot
```

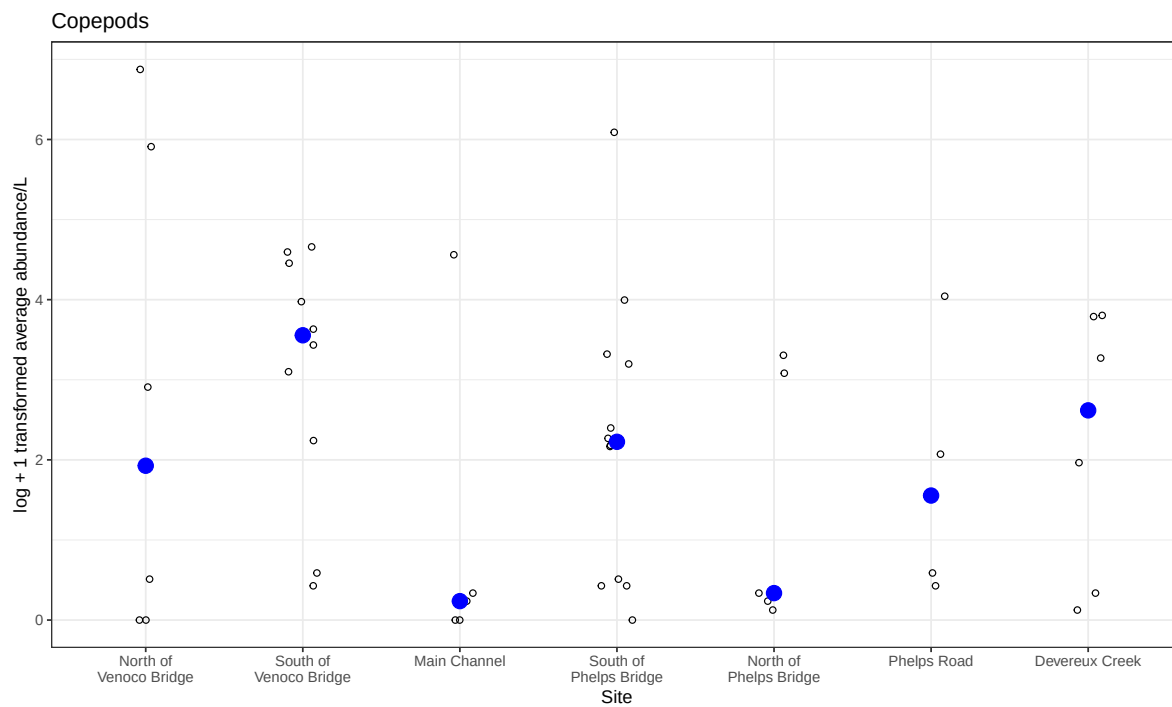

Question 1

A: Planning

- x axis: Site
- y axis: log transformed Ostracod abundance
- geometry abundance: `geom_jitter()`
- geometry median: `stat_summary()`

B: Wrangle Data

```
#new object from aq_ins_clean
ostracod <- aq_ins_clean |>
  # filter to only include ostracod
  filter(taxon == "ostracod") |>
  # log + 1 transform mean abundance per liter
  mutate(log_ave_lit = log(ave_lit + 1))

# display 10 random rows
slice_sample(ostracod, n=10)
```

```
# A tibble: 10 x 24
  date_site      date            site taxon ave_lit med_ph med_sal med_do
  <chr>          <dtm>          <chr> <chr>  <dbl>  <dbl>  <dbl>  <dbl>
1 2023-06-06_NPB1 2023-06-06 00:00:00 NPB1 ostr~  0.533   7.48   NA     2.38
2 2022-05-06_NMC 2022-05-06 00:00:00 NMC  ostr~    0    9.96   1.45  16.5
3 2023-02-28_NPB 2023-02-28 00:00:00 NPB  ostr~  2.53   NA     NA     NA
4 2022-08-10_NPB 2022-08-10 00:00:00 NPB  ostr~  2.67   8.28   8.84  9.81
5 2022-02-23_NVBR 2022-02-23 00:00:00 NVBR ostr~    0    8.86  45.2  10.2
6 2023-11-14_NPB 2023-11-14 00:00:00 NPB  ostr~  18    NA     NA     NA
7 2023-05-04_NMC 2023-05-04 00:00:00 NMC  ostr~  1.87   8.32   NA    10.3
8 2023-09-15_NMC 2023-09-15 00:00:00 NMC  ostr~  0.4    NA     NA    14.2
9 2022-11-18_NVBR 2022-11-18 00:00:00 NVBR ostr~    0    NA     NA     NA
10 2023-09-12_NVBR 2023-09-12 00:00:00 NVBR ostr~    0    9.14   NA    20.3
# i 16 more variables: taxonRank <chr>, scientificName <chr>, kingdom <chr>,
#   Phylum <chr>, Class <chr>, Subclass <chr>, Superorder <chr>, Order <chr>,
#   Infraorder <chr>, Family <chr>, Subfamily <chr>, Tribe <chr>, Genus <chr>,
#   comments <chr>, site_full <fct>, log_ave_lit <dbl>
```

C: Code Figure


```
# base layer
ostracods_plot <- ggplot(data = ostracod,
  # x-axis: site
  # y-axis: mean abundance/L
  mapping = aes(x = site_full,
    y = log_ave_lit)) +
  # first layer: points to represent observations
```

```

geom_jitter(height = 0,
            shape = 21,
            width = 0.1) +
# second layer: points to represent medians
stat_summary(geom = "point",
            fun = "median",
            size = 4,
            color = "blue") +
# wrapping x-axis text
scale_x_discrete(labels = label_wrap(15)) +
# relabelling x- and y-axis, adding title
labs(x = "Site",
     y = "log + 1 transformed average abundance/L",
     title = "Ostracods") +
# different theme
theme_bw()


# displaying object
ostracods_plot

```

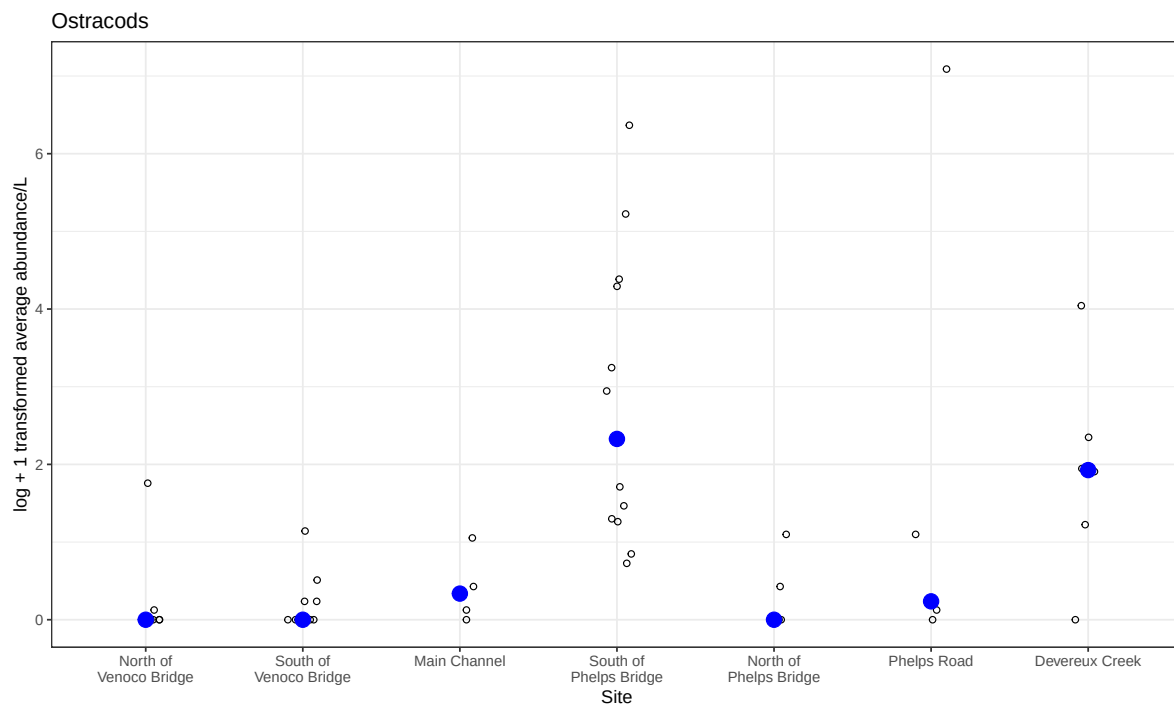

D: create multipanel figure

```
#combining plots  
salinity/(copepods_plot+ostracods_plot)
```

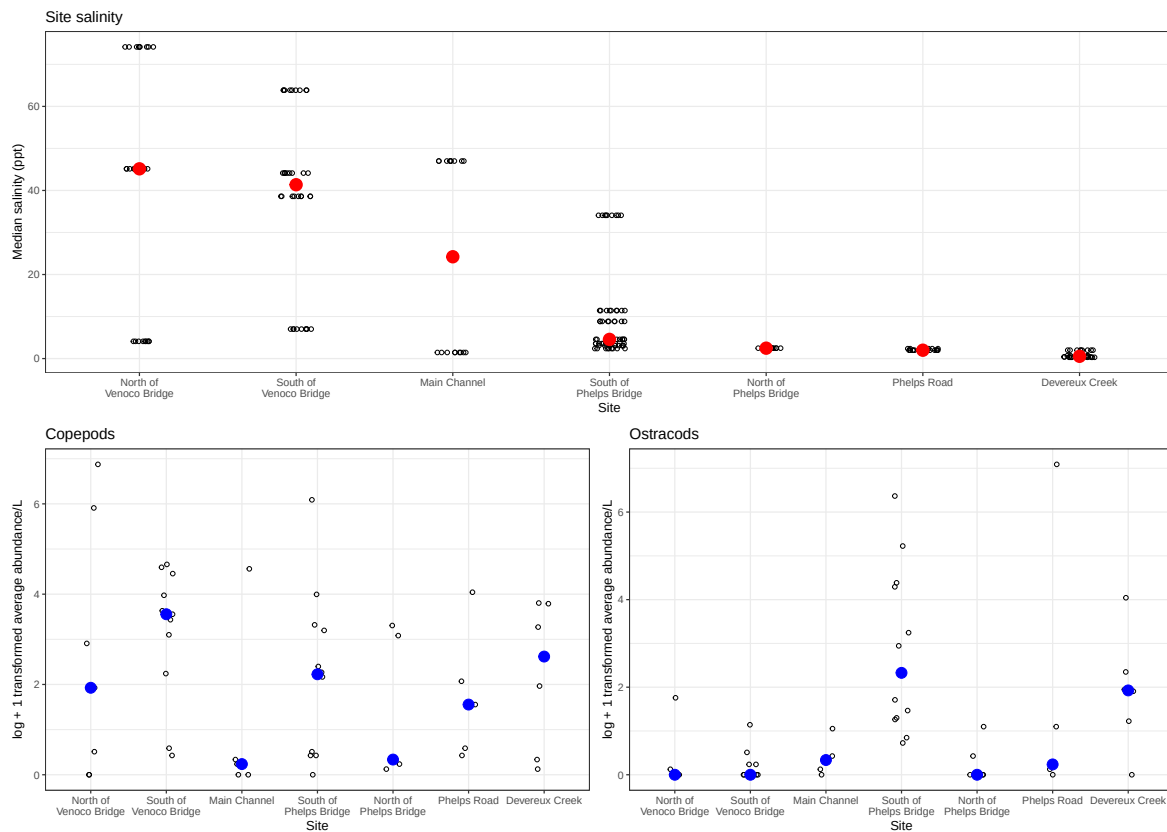

E: Analysis

Question 2

A: Planning

- x axis: salinity
- y axis: log transformed abundance
- color: taxon
- geometry: geom_point()

- facets: `facet_Wrap(~taxon, scales="free")`