
/persons/<nomsNumber>/recalls/<recallId>/prison-police

NO ERRORS

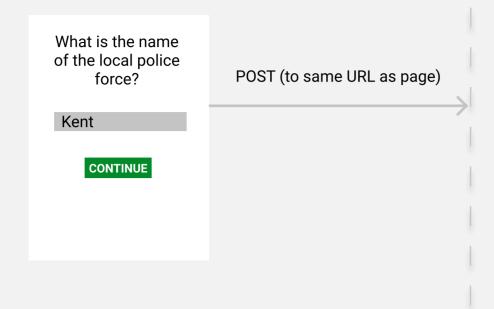


routes/index.ts

handleRecallFormPost

- 1. <u>validatePolice</u>
 - a. Validate form submission
 - b. No errors, so return valuesToSave
- 2. update recall in API
- 3. redirect to next page

/persons/<nomsNumber>/recalls/<recallId>/issues-needs

1. POST INVALID FORM

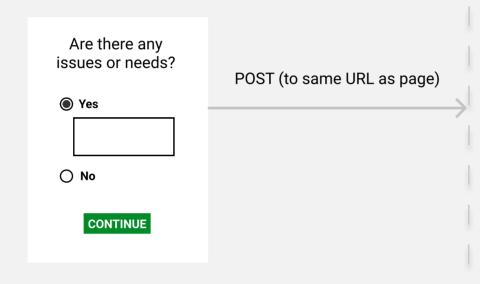

routes/index.ts

handleRecallFormPost

- 1. validatePolice
 - a. Validate form submission
 - b. Error & unsavedValues returned
- 2. add errors and unsavedValues to request session
- 3. redirect to current page

GET /persons/<nomsNumber>/recalls/<recallId>/issues-needs 2. GET AFTER POST



sessionErrors middleware

copy req.session.errors and unsavedValues to
 res.locals then delete from req.session

routes/index.ts

GET Person

viewWithRecallAndPerson

GET Recall

getFormValues

For each form field, decide which value to show:

- if an error, show the invalid input
- if a valid input, show the unsaved value
- if input hasn't been edited, show the value from the API
- 2. Render view