## Module 0.1 - Fundamentals

### Module 0.1

**Fundamentals** 

## Today's Class

- Intro: Module 0
- Development Setup
- Property Testing
- Functional Python

### The Guidebook

#### MiniTorch

Full description of the material

### Module 0: Fundamentals

#### Learning Goals:

- Setup
- Testing
- Modules
- Visualization
- No ML yet! We'll get to it.

# Code Setup: Interactive

### GitHub

• http://github.com/minitorch/Module-0

## Graduating to Code

Why not notebooks?

- Style
- Version Control
- Testing

### Base Repo Template

- Each repo starts with a template
- https://github.com/minitorch/Module-0

## Tour of Repo

- minitorch/
- tests/
- project/

#### Recommendations

- Development Setup
- Github Tutorials
- Speed of Debugging

### **VS** Code

- Popular choice for the class
- Test
- Debugging

# Contributing Guidelines

## Contributing

#### **Torch Contrib**

• Style, guidelines, typing, etc.

### Precommit

Command to run before commit.

>>> pre-commit run --all

## Consistent Styling

#### Standardized formatting

>>> black minitorch/ tests/ project/

### Linting


Checks for any style or documentation errors

>>> flake8 minitorch/ tests/ project/

### Continuous Integration

Runs behind the scenes on every commit.

#### Torch CI

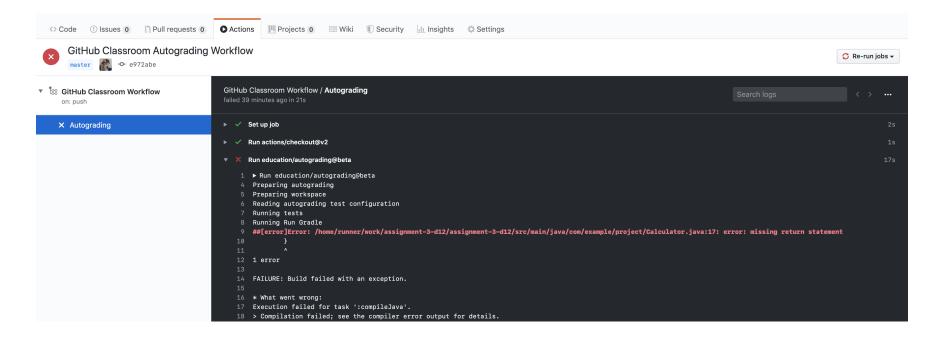

### Documentation

#### Doc style - Google

```
def index(ls, i):
    """
    List indexing.

Args:
    ls: A list of any type.
    i: An index into the list

Returns:
    Value at ls[i].
    """
...
```

### Type Checks

#### Modern Python support static type checks

```
>>> mypy

def mul(x: float, y: float) -> float:
...
```

# Type Checks

#### Compound types

```
from typing import Iterable

def negList(ls: Iterable[float]) -> Iterable[float]:
```

# Testing

# PyTorch Testing

**PyTorch Tests** 

# Running Tests

#### Run tests

>>> pytest

### Or per task

>>> pytest -m task0\_1

# PyTest

- Finds files that begin with test
- Finds functions that begin with test
- Select based on filters

### Gotchas

- Test output is verbose
- Read tests

# Helpful Filters

#### Specific task

>>> pytest -m task0\_1

### Specific test

>>> pytest -k test\_sum

### How do unit tests work?

- Tries to run code
- If there is a False assert it fails
- Only prints if test fails!
- assert and assert close

### Module 0 Functions

```
def relu(x):
    f(x) = x if x is greater than 0, else 0
    """
```

# Mathematical Testing

How do we know that it works?

### Standard Unit Test

- Test for values with given inputs
- PyTest succeeds if no assertions are called

```
def test_relu():
    assert operators.relu(10.0) == 10.0
    assert operators.relu(-10.0) == 0.0
```

### Ideal: Property Test

#### Test that all values satisfy property

```
def test_relu():
    for a in range(0, 1e9):
        assert operators.relu(a) == a

for a in range(-1e9, 0):
        assert operators.relu(a) == 0.0
```

### QuickCheck / Hypothesis

- https://en.wikipedia.org/wiki/QuickCheck
- https://hypothesis.readthedocs.io/en/latest/

# Compromise: Randomized Property Test

Test that sampled values satisfy property.

```
from hypothesis import example, given
from hypothesis.strategies import floats

@given(floats())
@example(1.0)
def test_relu(a: float):
    value = relu(a)
    if a >= 0:
        assert value == a
    else:
        assert value == 0.0
```

### **Custom Generators**

- Can provide your own randomized generators
- Future assignments will utilize this feature.

# Functional Python

### Functional Programming

- Style of programming where functions can be passed and used like other objects.
- One of several programming styles supported in Python.
- Good paradigm for mathematical programming

### Function Type

```
from typing import Callable

def add(a: float, b: float) -> float:
    return a + b

def mul(a: float, b: float) -> float:
    return a * b

v: Callable[[float, float], float] = add
```

# Functions as Arguments

```
def combine3(
    fn: Callable[[float, float], float], a: float, b: float, c: float
) -> float:
    return fn(fn(a, b), c)

print(combine3(add, 1, 3, 5))
print(combine3(mul, 1, 3, 5))
```

9 15

### Functional Python

#### Functions as Returns

```
def combine3(
    fn: Callable[[float, float], float]
) -> Callable[[float, float, float], float]:
    def new fn(a: float, b: float, c: float) -> float:
        return fn(fn(a, b), c)
    return new fn
add3: Callable[[float, float, float], float] = combine3(add)
mul3: Callable[[float, float, float], float] = combine3(mul)
print(add3(1, 3, 5))
9
type(add3)
function
```

Loading [MathJax]/extensions/Safe.js

## Higher-order Filter

### Extended example

```
def filter(fn: Callable[[float], bool]) -> Callable[[Iterable[float]], Iterable[f'
    def apply(ls: Iterable[float]):
        ret = []
        for x in ls:
            if fn(x):
                ret.append(x)
        return ret

return apply
```

## Higher-order Filter

### Extended example

```
def more_than_4(x: float) -> bool:
    return x > 4

filter_for_more_than_4: Callable[[Iterable[float]], Iterable[float]] = filter(
    more_than_4
)
filter_for_more_than_4([1, 10, 3, 5])

[10, 5]
```

### **Functional Python**

#### Rules of Thumbs:

- When in doubt, write out defs
- Document the arguments that functions take and send
- Write tests in for loops to sanity check

# Q&A