

Lecture #14. 게임 프레임웍

2D 게임 프로그래밍

이대현 교수




한국공학대학교
TECH UNIVERSITY OF KOREA

학습 내용

- 게임 모드
- 게임 프레임웍
- 로고 화면의 구현
- 타이틀 화면의 구현
- 메인 게임 구현

오늘 만들어 볼 것

로고화면

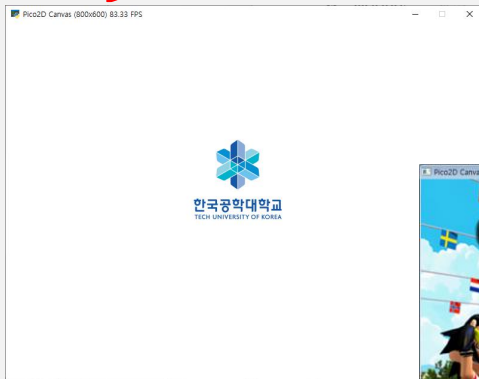

타이틀화면



메인플레이





리팩토링

리팩토링 (1) - 기존 코드를 play_mode.py 로 정리

```
from pico2d import *  
  
import game_world  
from grass import Grass  
from boy import Boy
```

control_boy.py

```
def handle_events():  
    global running  
  
    events = get_events()  
    for event in events:  
        if event.type == SDL_QUIT:  
            running = False  
        elif event.type == SDL_KEYDOWN and event.key == SDLK_ESCAPE:  
            running = False  
        else:  
            boy.handle_event(event)
```

```
def reset_world():  
    global running  
    global boy  
  
    running = True  
  
    grass = Grass()  
    game_world.add_object(grass, 0)  
  
    boy = Boy()  
    game_world.add_object(boy, 1)
```

```
open_canvas()  
reset_world()  
while running:  
    handle_events()  
    game_world.update()  
    clear_canvas()  
    game_world.render()  
    update_canvas()  
    delay(0.01)  
close_canvas()
```

수정

play_mode.py

앞부분 생략

```
def init():  
    global running  
    global boy  
  
    running = True  
  
    grass = Grass()  
    game_world.add_object(grass, 0)  
  
    boy = Boy()  
    game_world.add_object(boy, 1)
```

```
def finish():  
    pass
```

```
def update():  
    game_world.update()
```

```
def draw():  
    clear_canvas()  
    game_world.render()  
    update_canvas()
```

```
open_canvas()  
init()  
while running:  
    handle_events()  
    update()  
    draw()  
    delay(0.01)  
finish()  
close_canvas()
```

리팩토링 (2) – play_mode.py 에서 메인 코드 분리하여 main.py 생성

play_mode.py

```
# 앞부분 생략

def init():
    global running
    global boy

    running = True

    grass = Grass()
    game_world.add_object(grass, 0)

    boy = Boy()
    game_world.add_object(boy, 1)

def finish():
    pass

def update():
    game_world.update()

def draw():
    clear_canvas()
    game_world.render()
    update_canvas()

open_canvas()
init()
while running:
    handle_events()
    update()
    draw()
    delay(0.01)
finish()
close_canvas()
```

main.py

```
import pico2d
import play_mode

pico2d.open_canvas()

play_mode.init()

while play_mode.running:
    play_mode.handle_events()
    play_mode.update()
    play_mode.draw()
    pico2d.delay(0.01)

play_mode.finish()

pico2d.close_canvas()
```

분리



로그 모드 구현

로고 모드 구현: logo_mode.py

```
from pico2d import load_image, delay, clear_canvas, update_canvas, get_events, get_time

def init():
    global image
    global running
    global logo_start_time

    image = load_image('tuk_credit.png')
    running = True
    logo_start_time = get_time()

def finish():
    global image
    del image

def update():
    global running
    global logo_start_time
    if get_time() - logo_start_time >= 2.0:
        logo_start_time = get_time()
        running = False

def draw():
    clear_canvas()
    image.draw(400, 300)
    update_canvas()

def handle_events():
    events = get_events()
```







```
import pico2d
import logo_mode

pico2d.open_canvas()
logo_mode.init()
# game loop
while logo_mode.running:
    logo_mode.handle_events()
    logo_mode.update()
    logo_mode.draw()
    pico2d.delay(0.01)
logo_mode.finish()
pico2d.close_canvas()
```

실행 - main.py 를 실행

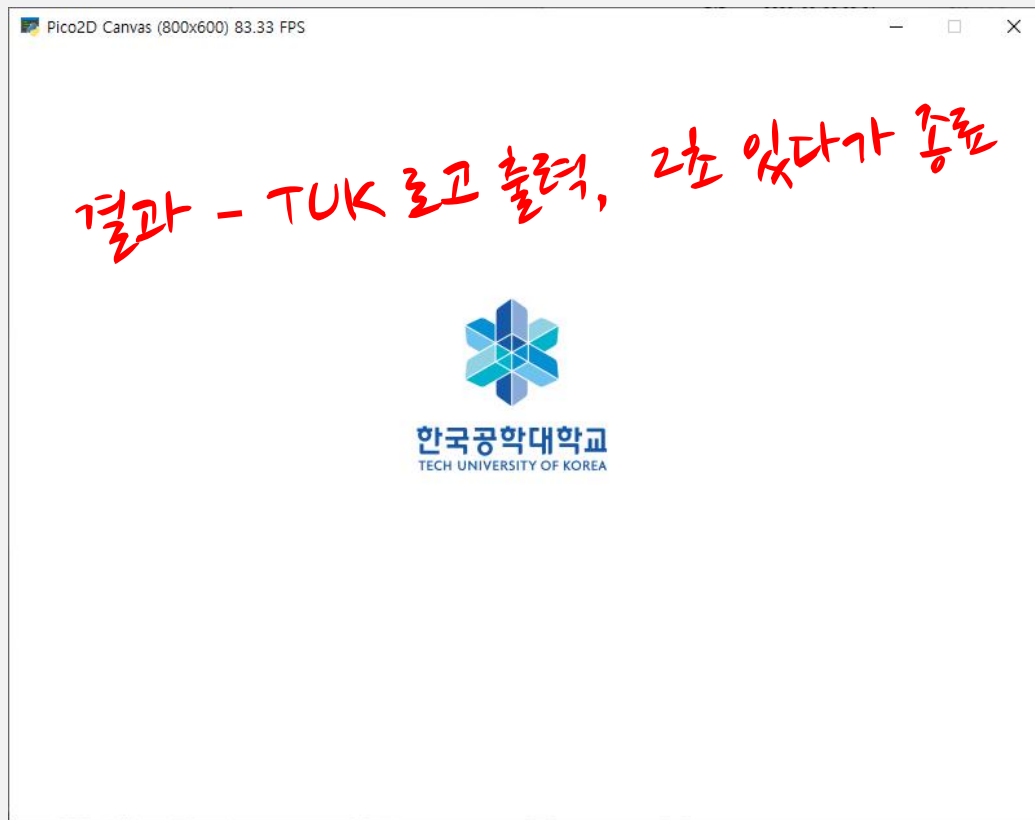

로고 화면 후에 플레이 모드로 가려면?

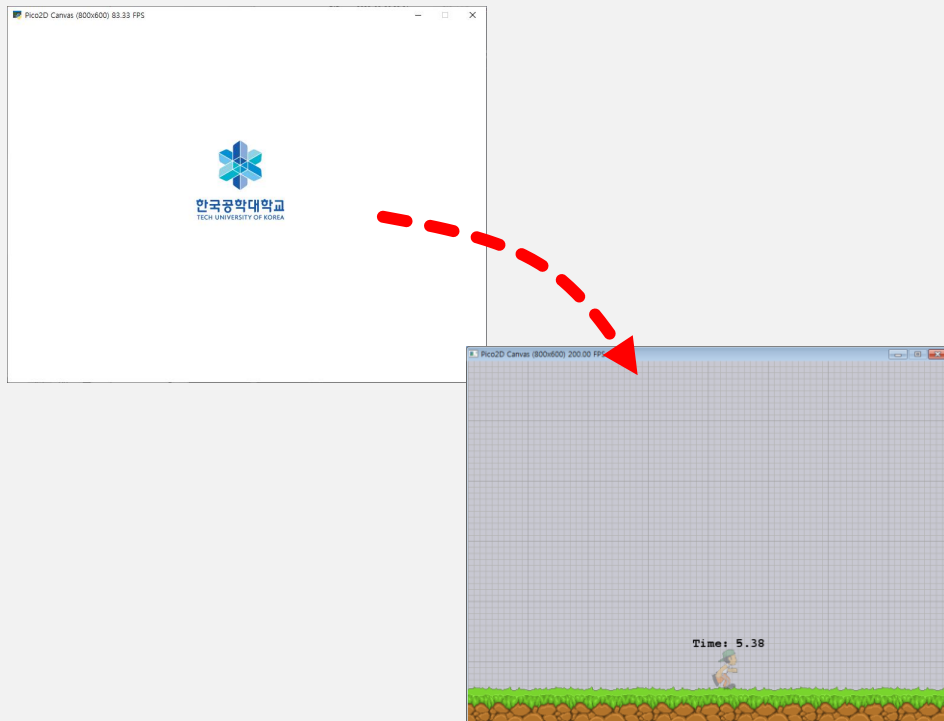

게임 모드의 이해 (1)

■ 게임 모드란?

- 게임 프로그램 실행 중에 지속적으로 머물러 있는 특정 상황, 씬,
- 사용자 입력(키보드 또는 마우스 입력)에 대한 대응 방식은 게임 모드에 따라 달라짐.
- 작은 게임 루프로 볼 수 있음.




- 맵 선택 모드.
- 방향키는 맵 선택을 처리.

- 게임 메인 플레이 모드.
- 방향키는 캐릭터의 이동을 처리.

게임 모드의 이해 (2)

- 게임 프로그램은 여러 개의 게임 모드들의 연결로 구현됨.
- 예) 테트리스 게임

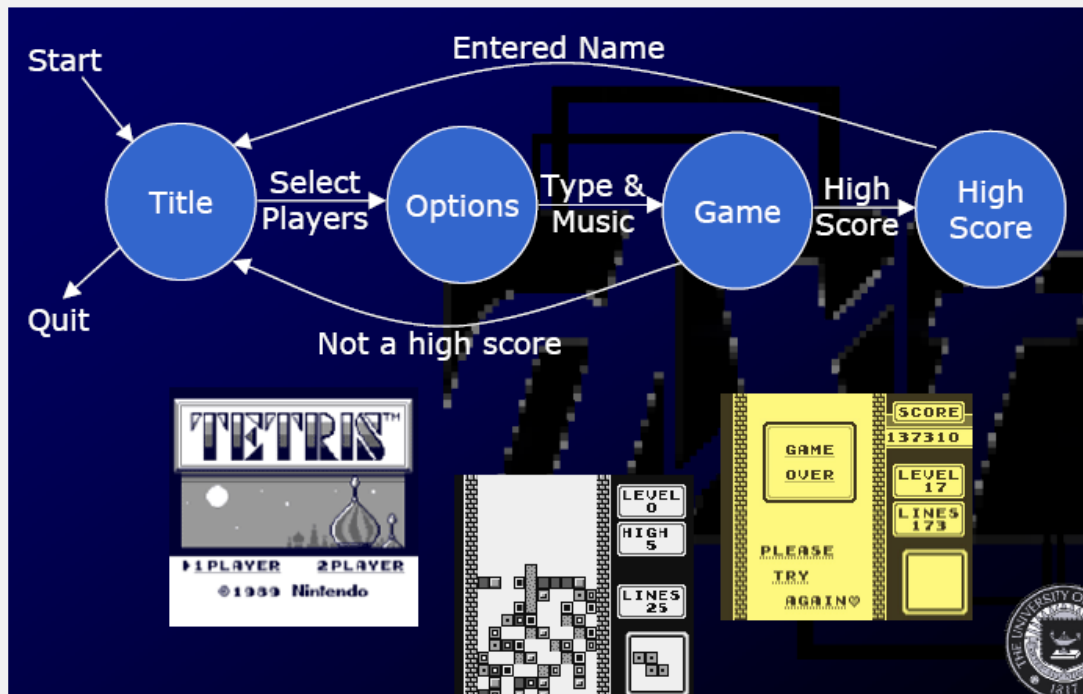


게임 프레임워크

- 게임 모드들을 효과적으로 연결하는 소프트웨어 구조.
- 일종의 Task Switching System
- 디자인 패턴 중, State Pattern 혹은 Strategy Pattern에 해당됨.


게임 프레임워크 활용 순서 #1. 각각의 모드를 구현



게임 프레임워크 활용 순서 #2. 모드 간의 이동을 구현.

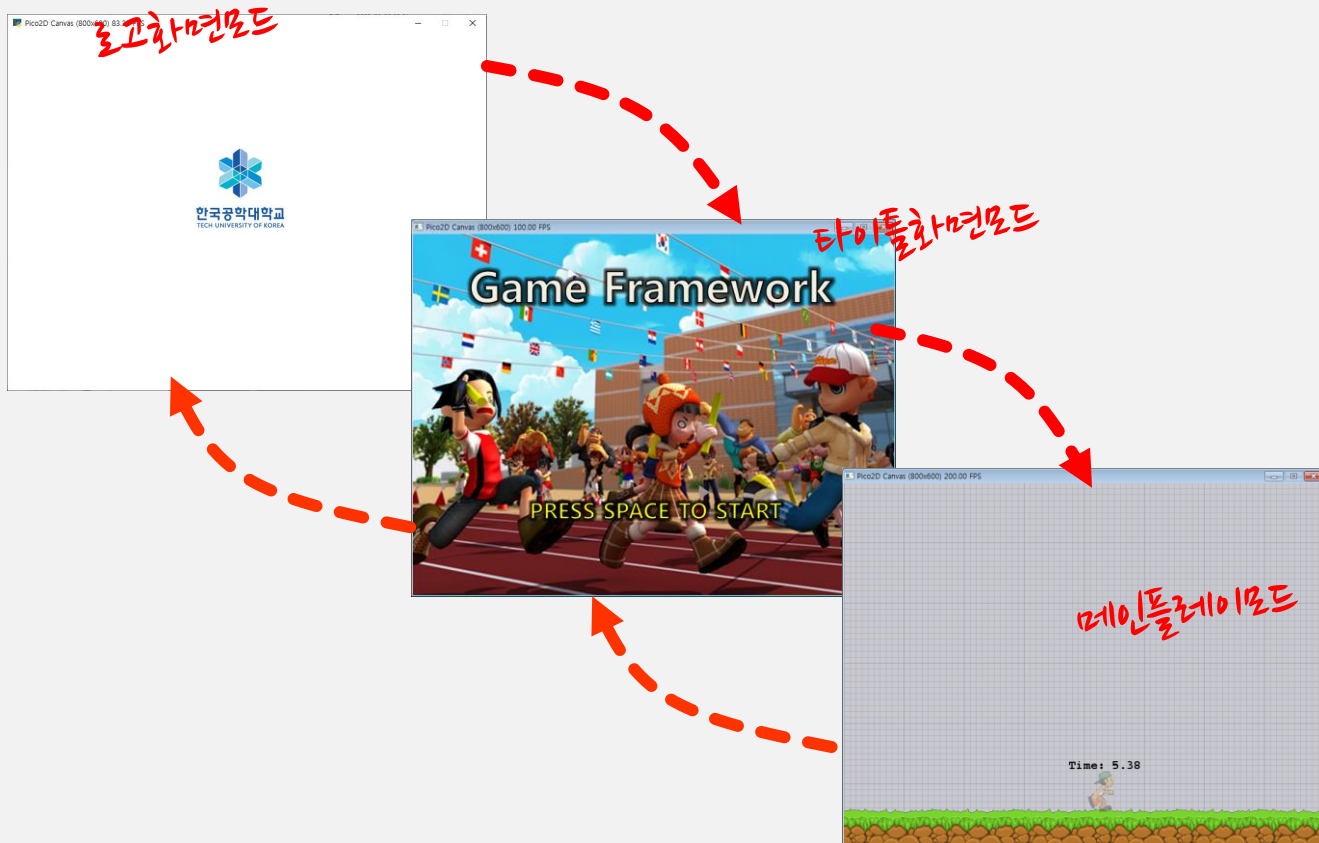

게임 모드의 구현

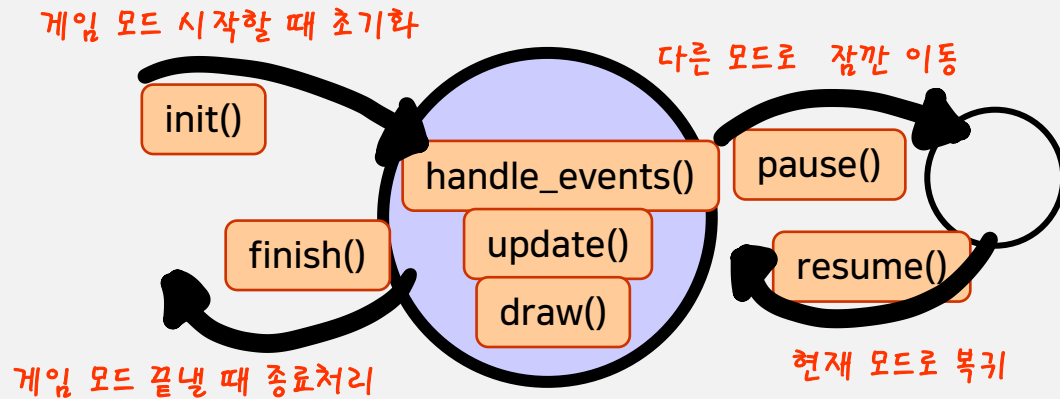

모드 이동: game_framework을 이용

run(mode):

mode를 시작 게임 모드로 하여, 게임 실행을 시작함.

quit(): 게임을 중단

change_mode(mode):

게임 모드를 mode로 이동. 이전 게임 모드를 완전히 나옴.

push_mode(mode):

게임 모드를 mode로 이동. 단, 이전 게임 모드 데이터는 남아 있음.

pop_mode(): 이전 게임 모드로 복귀



로그 화면 구현 (2)

로고 모드 구현: logo_mode.py 수정



```
import game_framework
from pico2d import load_image, delay, clear_canvas, update_canvas, get_events, get_time

def init():
    global image
    global running
    global logo_start_time

    image = load_image('tuk_credit.png')
    running = True
    logo_start_time = get_time()

def finish():
    global image
    del image


def update():
    global logo_start_time
    if get_time() - logo_start_time >= 2.0:
        logo_start_time = get_time()
        game_framework.quit()
```



```
import pico2d
import game_framework
import logo_mode

pico2d.open_canvas()
game_framework.run(logo_mode)
pico2d.close_canvas()
```

실행 - main.py 를 실행

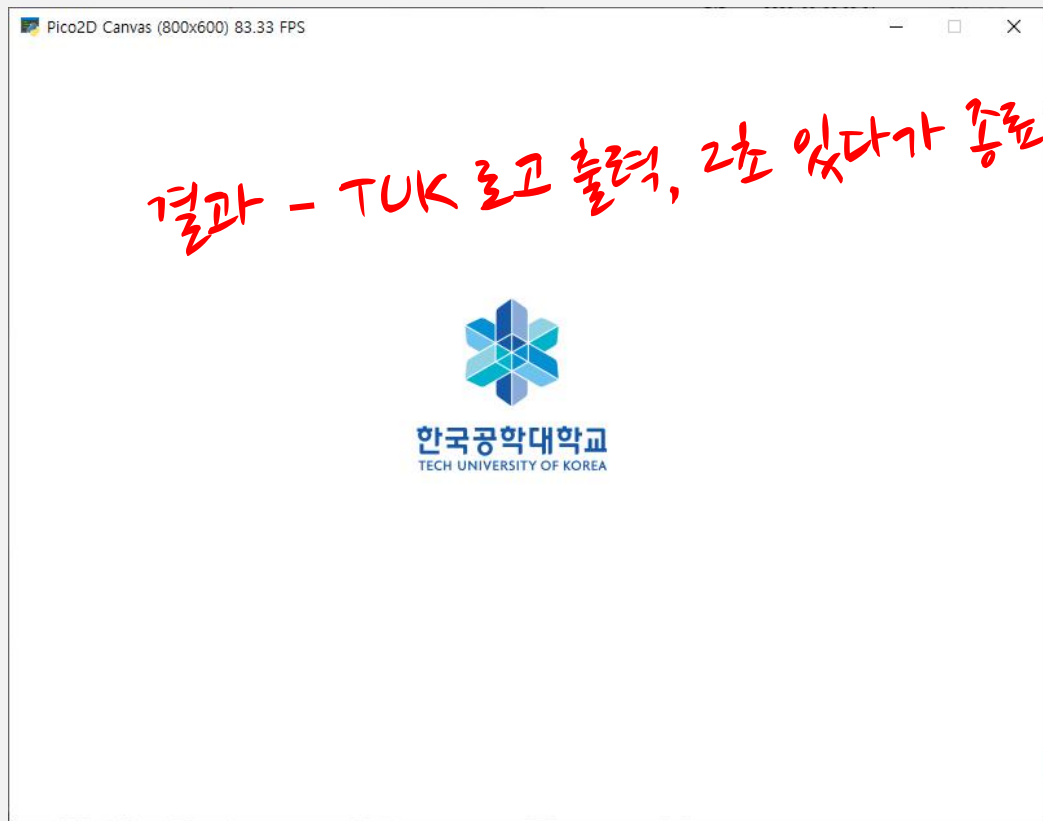

게임 모드의 뼈대

```
def init(): pass

def finish(): pass

def update(): pass

def draw(): pass



def handle_events(): pass

def pause(): pass

def resume(): pass
```

0000_mode 의 구현과 활용

1. 0000_mode.py 를 만든다
2. 0000_mode.py의 내부 함수들을 작성한다.
3. 다른 소스에서 import 0000_mode 를 해서 활용한다.

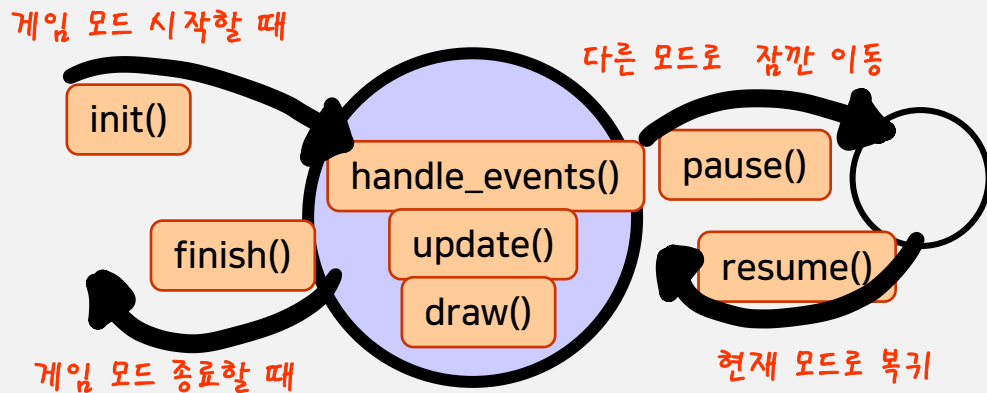

게임의 구성과 시작 - 게임프레임워크 활용

- `game_framework` 를 import 한다.
- 시작 게임 모드를 import 한다.
- 시작 게임 모드를 지정한 후, `game_framework` 를 시작한다.

```
import game_framework
import pico2d

import start_mode


pico2d.open_canvas()
game_framework.run(start_mode)
pico2d.close_canvas()
```



타이틀 모드 추가

로고 화면에 이어지는 타이틀 화면

logo_mode.py

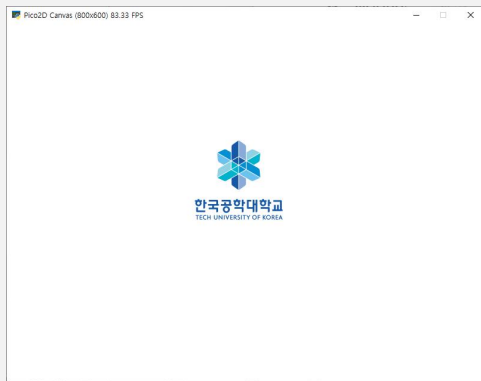

title_mode.py





```
def init():
    global image
    image = load_image('title.png')

def finish():
    global image
    del image

def handle_events():
    events = get_events()
    for event in events:
        if event.type == SDL_QUIT:
            game_framework.quit()
        elif event.type == SDL_KEYDOWN and event.key == SDLK_ESCAPE:
            game_framework.quit()

def draw():
    clear_canvas()
    image.draw(400, 300)
    update_canvas()
```

logo_mode.py 의 수정



```
import title_mode

# ... 종락 ...

def update():
    global logo_start_time
    if get_time() - logo_start_time >= 2.0:
        logo_start_time = get_time()
        game_framework.change_mode(title_mode)
```



```
import pico2d
import game_framework
import logo_mode as start_mode


pico2d.open_canvas()
game_framework.run(start_mode)
pico2d.close_canvas()
```



게임 플레이 모드 추가

로고 화면에 이어지는 타이틀 화면


logo_mode.py

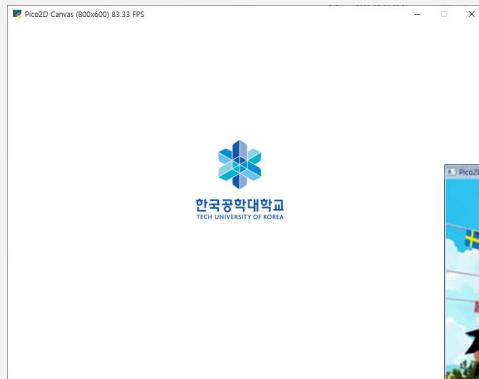

title_mode.py



play_mode.py

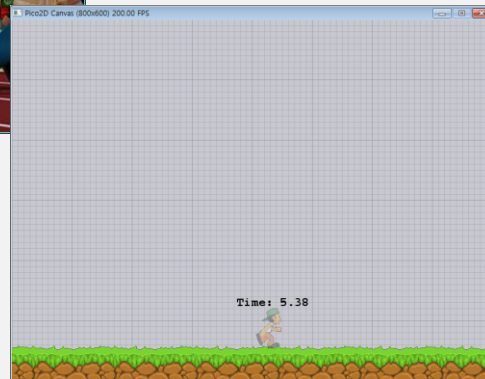

play_mode.py 의 수정



```
def handle_events():  
    events = get_events()  
    for event in events:  
        if event.type == SDL_QUIT:  
            game_framework.quit()  
        elif event.type == SDL_KEYDOWN and event.key == SDLK_ESCAPE:  
            game_framework.change_mode(title_mode)  
        else:  
            boy.handle_event(event)
```

title_mode.py 의 수정



```
def handle_events():
    events = get_events()
    for event in events:
        if event.type == SDL_QUIT:
            game_framework.quit()
        elif event.type == SDL_KEYDOWN and event.key == SDLK_ESCAPE:
            game_framework.quit()
        elif (event.type, event.key) == (SDL_KEYDOWN, SDLK_SPACE):
            game_framework.change_mode(play_mode)
```

game world clear 필요

play_mode.py

```
def finish():  
    game_world.clear()  
    pass
```

game_framework.py

```
def clear():  
    for layer in objects:  
        layer.clear()
```



아이템 모드 구현





```
class Boy:
    def __init__(self):
        # 중략
        self.item = None

    def fire_ball(self):

        if self.item == 'Ball':
            ball = Ball(self.x, self.y, self.face_dir*10)
            game_world.add_object(ball)
        elif self.item == 'BigBall':
            ball = BigBall(self.x, self.y, self.face_dir*10)
            game_world.add_object(ball)
```



```
def handle_events():
    events = get_events()
    for event in events:
        if event.type == SDL_QUIT:
            game_framework.quit()
        elif event.type == SDL_KEYDOWN and event.key == SDLK_ESCAPE:
            game_framework.change_mode(title_mode)
        elif event.type == SDL_KEYDOWN and event.key == SDLK_i:
            game_framework.push_mode(item_mode)
        else:
            boy.handle_event(event)
```

play_mode.py - pause 와 resume 추가



- push_mode 와 pop_mode 를 호출하면, pause와 resume 이 call back 되므로 실제 내용은 없더라도 뼈대는 만들어줘야 함.

```
def pause():  
    pass  
  
def resume():  
    pass
```




```
def init():  
    global pannel  
    pannel = Pannel()  
    game_world.add_object(pannel, 3)  
  
def finish():  
    game_world.remove_object(pannel)
```




```
def handle_events():
    events = get_events()
    for event in events:
        if event.type == SDL_QUIT:
            game_framework.quit()
        elif event.type == SDL_KEYDOWN:
            match event.key:
                case pico2d.SDLK_ESCAPE:
                    game_framework.pop_mode()
                case pico2d.SDLK_0:
                    play_mode.boy.item = None
                    game_framework.pop_mode()
                case pico2d.SDLK_1:
                    play_mode.boy.item = 'Ball'
                    game_framework.pop_mode()
                case pico2d.SDLK_2:
                    play_mode.boy.item = 'BigBall'
                    game_framework.pop_mode()
```




게임 프레임워크 분석

Stack 자료 구조

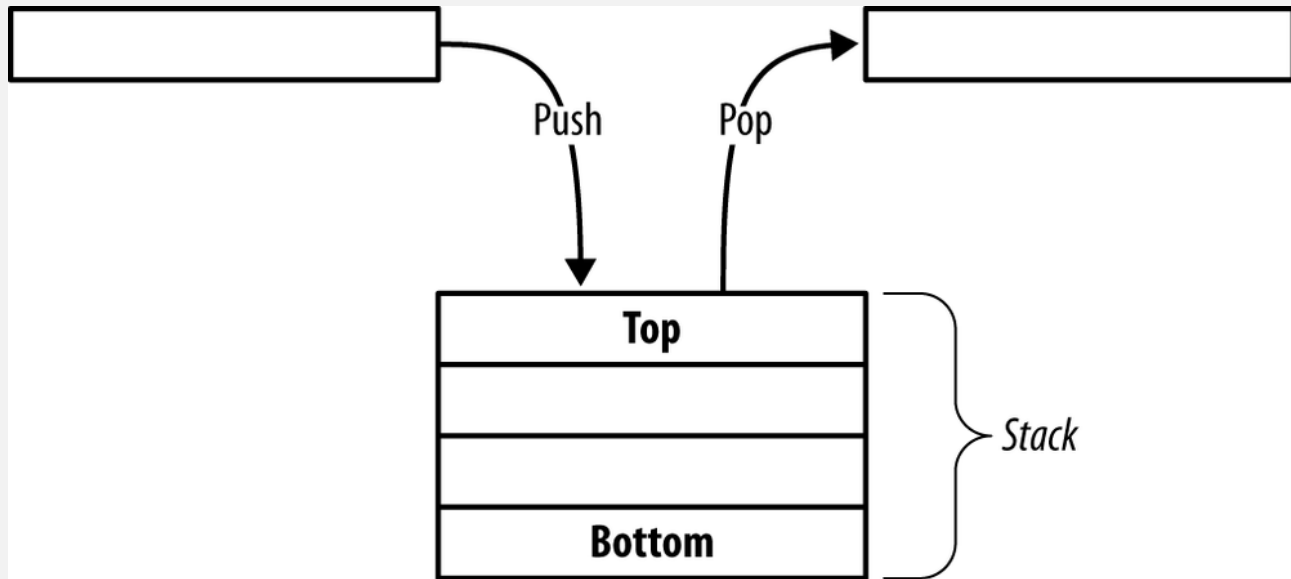

list 를 이용한 스택

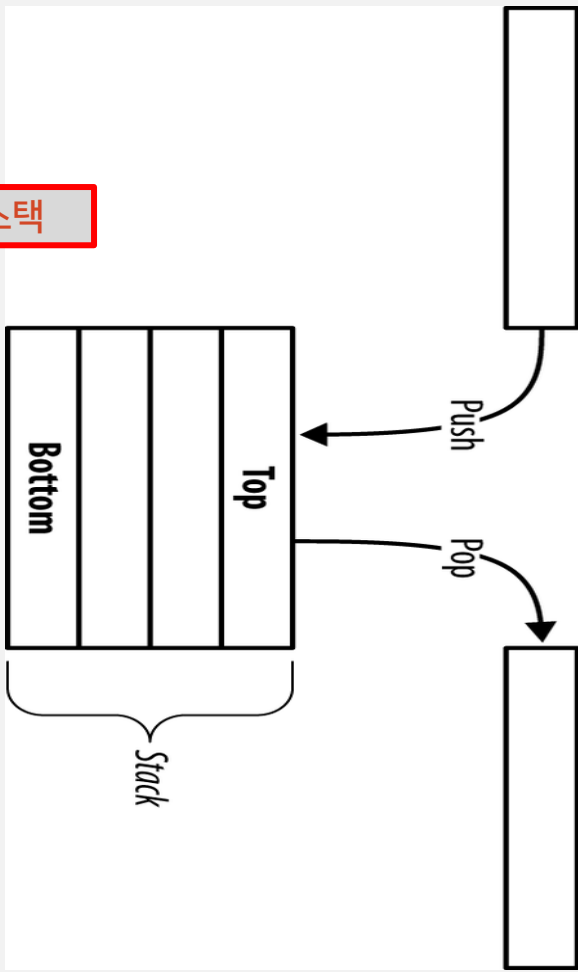

game_framework.py 분석(1)

```
def run(start_mode):  
    global running, stack  
    running = True  
    stack = [start_mode]  
    start_mode.init()
```

start_mode 를 담고 있는 스택을 생성

```
    while running:  
        stack[-1].handle_events()  
        stack[-1].update()  
        stack[-1].draw()
```

현재 게임 모드(다시 말하면, stack top에 있는 게임 모드)에 대한 게임 루프를 진행

```
    # repeatedly delete the top of the stack  
    while (len(stack) > 0):  
        stack[-1].finish()  
        stack.pop()
```

스택에 남아있는 모든 게임 모드들을 차례로 제거

game_framework.py 분석 (2)

```
def change_mode(mode):  
    global stack  
    if (len(stack) > 0):  
        # execute the current mode's finish function  
        stack[-1].finish()  
        # remove the current mode  
        stack.pop()  
    stack.append(mode)  
    mode.init()
```

현재 모드를 삭제한 후,
새로운 모드를 추가하고, init를 호출한다.

```
def push_mode(mode):  
    global stack  
    if (len(stack) > 0):  
        stack[-1].pause()  
    stack.append(mode)  
    mode.init()
```

현재 모드의 pause를 호출하고, 새로운 모드를 스택에
추가한 후, init 로 초기화함.

game_framework.py 분석 (3)

```
def pop_mode():
    global stack
    if (len(stack) > 0):
        # execute the current mode's finish function
        stack[-1].finish()
        # remove the current mode
        stack.pop()

    # execute resume function of the previous mode
    if (len(stack) > 0):
        stack[-1].resume()

def quit():
    global running
    running = False
```

현재 모드를 finish 한 후, 현재 모드를 제거함.
이제 Stack Top에는 이전 모드가 있으므로, 이전
모드에 대해서 resume 을 호출함.