
Model: $MRR_g = a_g \cdot f(x) + b_g$

f is shared by both tables; a_g, b_g are fitted per table (A-456, B-456)

Train+Val wafers split into 5 folds

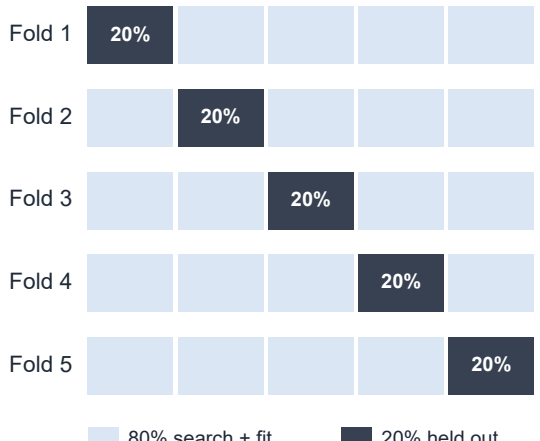

× 5

In each fold (equation re-discovered from scratch)

1. **Joint SR search on the 80%**
   PySR template, 14 candidate variables, 10 seeds × 500 iterations
2. **Select f by inner 4-fold CV**
   1-standard-error rule on the 80% only
3. **Refit f constants and a_g, b_g**
   on the 80%
4. **Predict MRR of the held-out 20%**
   held-out labels used only for scoring
5. **Compare with linear regression**
   per table, same variables as the selected f

Each wafer is predicted exactly once (out-of-fold). A-456: 940 wafers, B-456: 951 wafers (Train+Val only; no test labels).