

Packets, Protocols and PHP

Networking fundamentals for developers

Jessica Smith, Feb 2026

```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

About Me

- PHP user since 1998
- Originally from Gloucester, now in Reading
- Senior Principal Engineer for DigiCert
- LAN Party Gamer and Event Organiser





```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

Abstraction

Removing **unnecessary** details to allow us to focus on the problem we're trying to solve.

Examples



Eloquent ORM



Guzzle

The Law of Leaky Abstractions


“All non-trivial abstractions, to some degree, are leaky.”

Joel Spolsky



One Function, Many Layers

```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

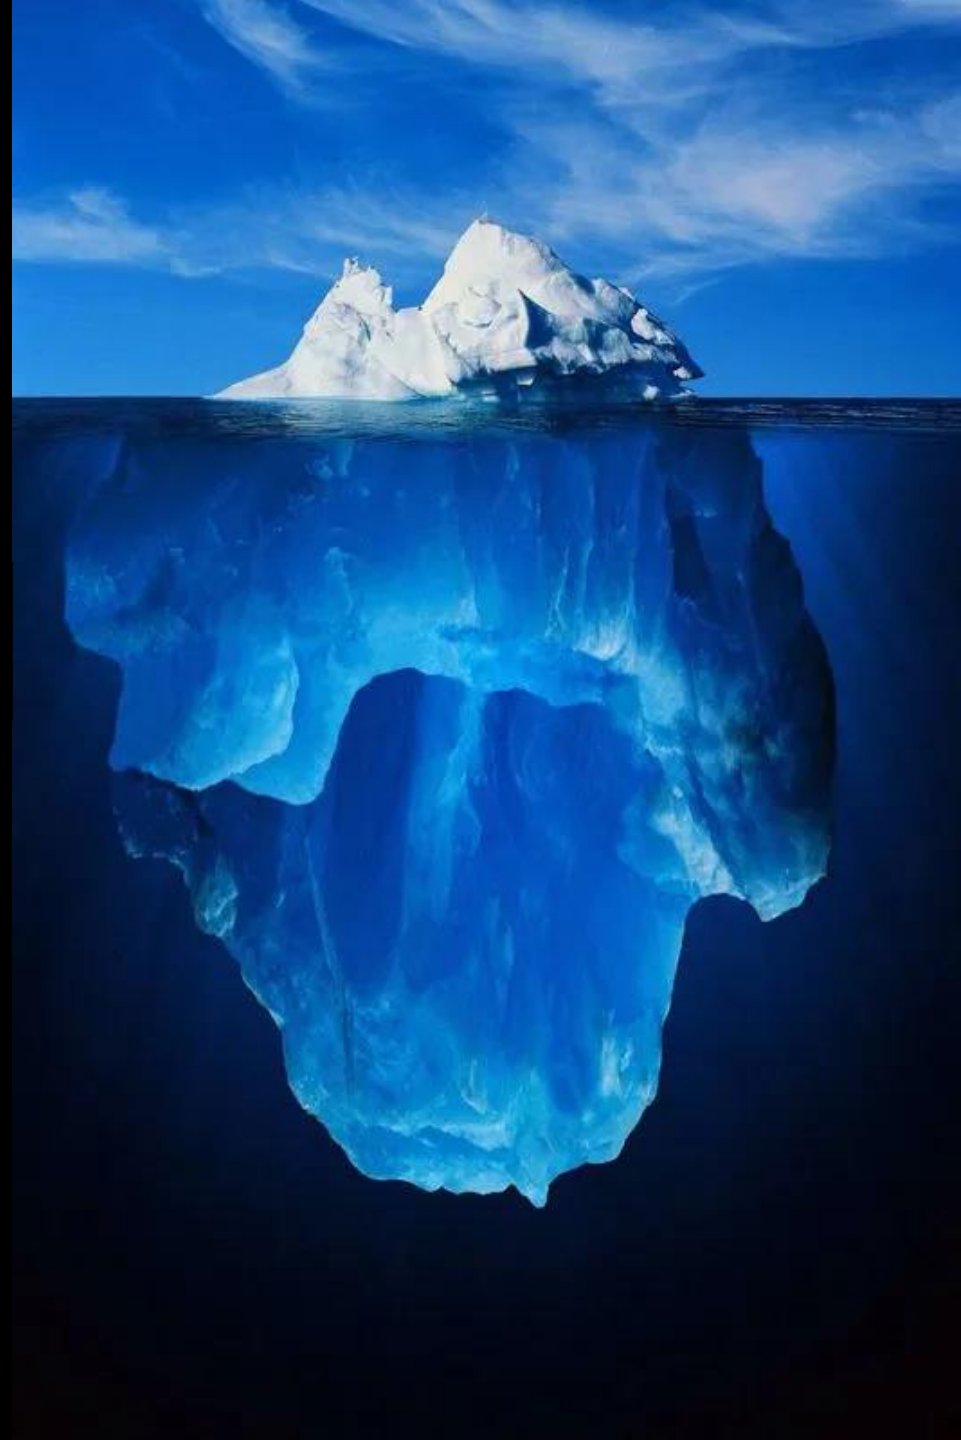

OSI Model

Application

Presentation

Session

Transport

Network

Data Link

Physical

TCP/IP Model

Application

Transport

Network

Physical

Application Layer

- Applications – PHP, Browser, Email, Games
- Protocols – HTTP, SMTP, FTP
- Compression – gzip
- Encoding – JSON, HTML
- Encryption – TLS (sort of)

Application

Transport

Network

Physical

Transport Layer

- Protocols – TCP, UDP
- Ports – 21, 22, 25, 80, 110, 443, 3497
- Error Correction
- Flow Control
- Packets – Size limited by MTU

Application

Transport

Network

Physical

TCP – Transmission Control Protocol

- Connection based
 - Established with three-way hand-shake
- Reliable
 - Packets will arrive in the correct order
 - Missing packets will be resent
- 20 byte header

HTTP

SSH

SMTP

MariaDB

UDP – User Datagram Protocol

- No Connections
- Packets may not arrive in order
- Missing packets are not resent
- 8 byte header
- No Handshake
- Quicker to establish than TCP

DNS

Gaming

VOIP

QUIC

Network Layer

- IP Addresses
 - IPv4
 - IPv6
- Routing
 - Static Routing
 - BGP

Application

Transport

Network

Physical

IPv4 and IPv6

44.30.69.1

- 32 bit
- 4.3 billion
- We have none left
- NAT and CGNAT used

2a0f:85c1:d91::1


- 128 bit
- 340 undecillion
- 45% of Internet Traffic is IPv6
- 30% of websites in 2024

DNS

- Maps names to IP addresses
- Many other uses:
 - Defining email servers
 - Specifying certificate authorities
 - Mapping IP addresses to names
- Hierarchy of domains and records.

*It's not DNS
There's no way it's DNS
It was DNS*

-SSBroski

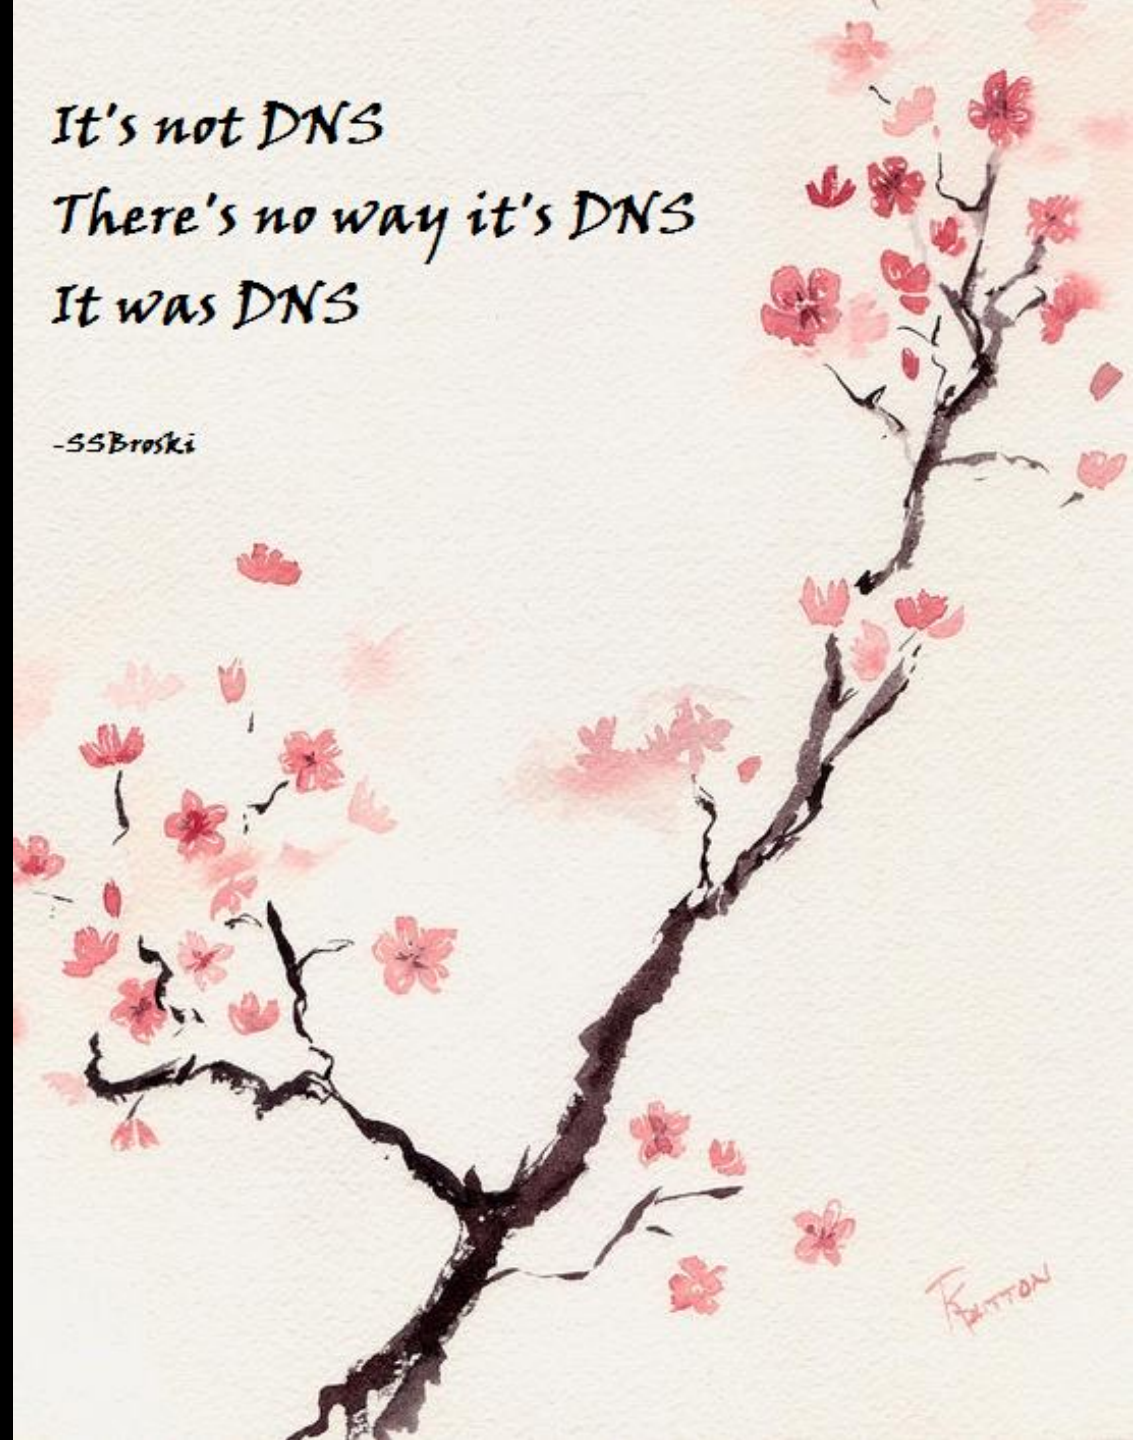

Routing

- How do we get from here to there?
- Static Routing
- Dynamic Routing
 - OSPF
 - BGP
- IP addresses are grouped together

44.30.69.0 to 44.30.69.255 is 44.30.69.0/24

44.30.69.64 to 44.30.69.127 is 44.30.69.64/26

Subnets/Networks and Prefixes

A way of representing groups of IP addresses.

Starting IP: 44.30.69.0

Ending IP: 44.30.69.127

IP Address: 44.30.69.42

Subnet Mask: 255.255.255.128

|||||||.|||||||.|||||||.0000000

25

44.30.69.42/25


Static Routing

- Literally a list of networks and the IP or network interface you can use to get there
- Usually a default route of 0.0.0.0/0 for anything not defined
- A more specific route has higher priority


Network	Gateway
192.168.0.10/24	eth0
44.30.69.0/25	tailscale0
192.168.100.0/24	192.168.0.2
0.0.0.0/0	192.168.0.1

Border Gateway Protocol

- The Internet is a collection of connected Autonomous Systems (AS)
- Each AS is represented by a number, eg. 204776
- Where they are connected they announce the networks they can provide a path for

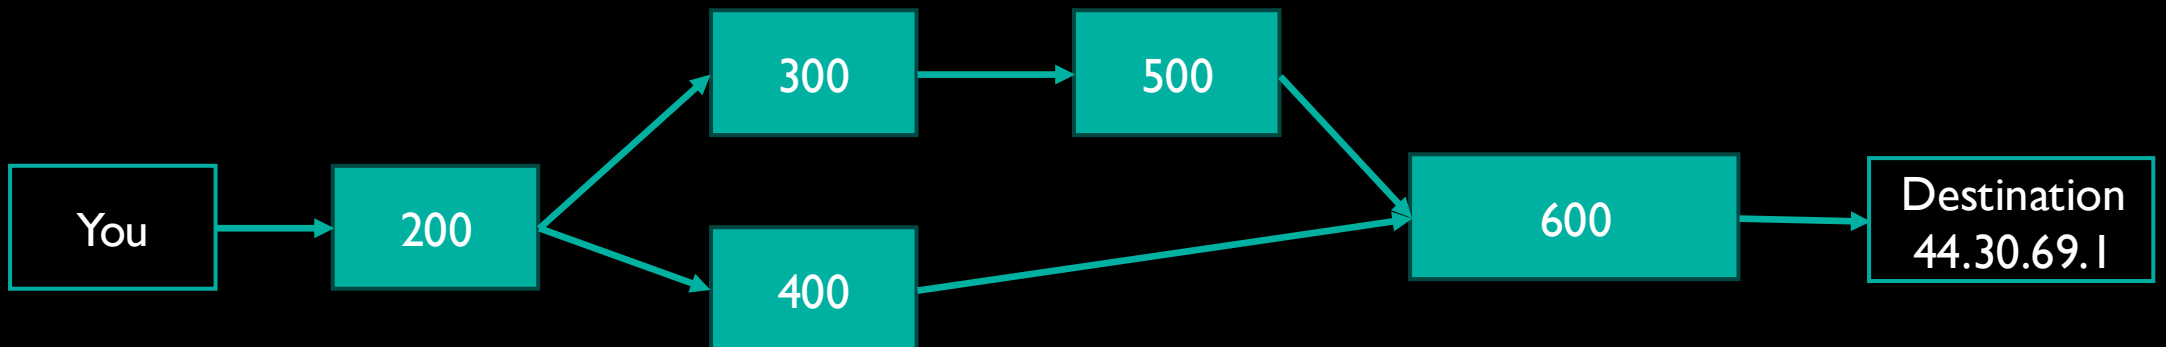

BGP Paths

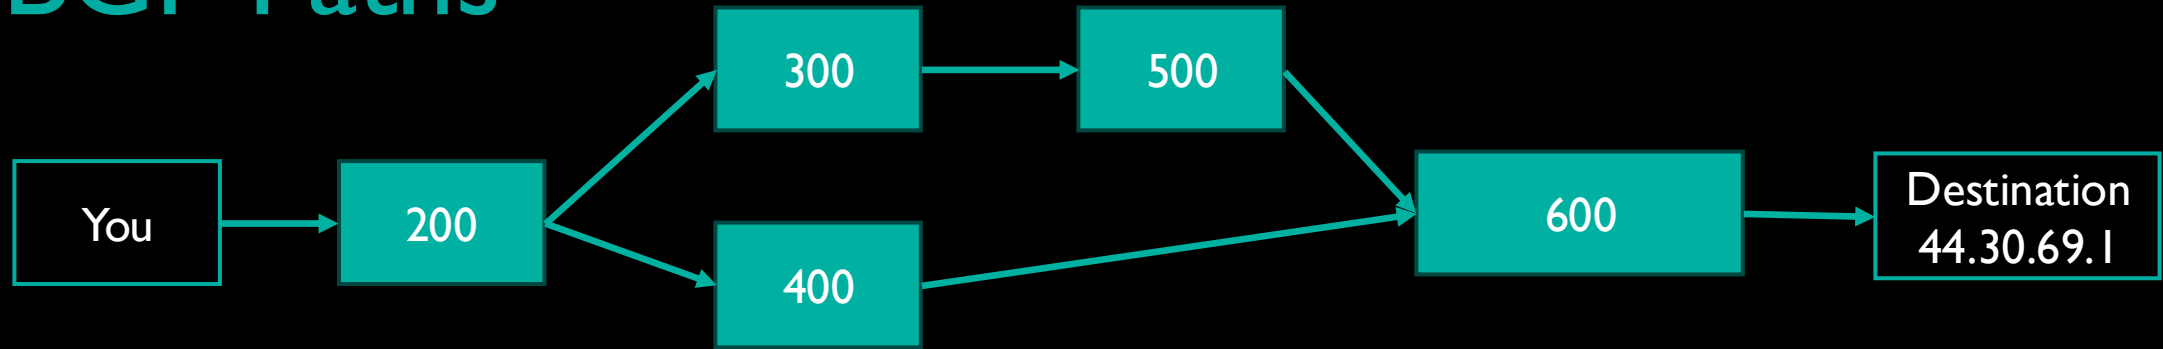

Your Paths

44.30.69.0/24

44.30.69.0/24

200 → 300 → 500 → 600

200 → 400 → 600

AS 200's Paths


44.30.69.0/24

44.30.69.0/24

300 → 500 → 600

400 → 600

BGP and Outages

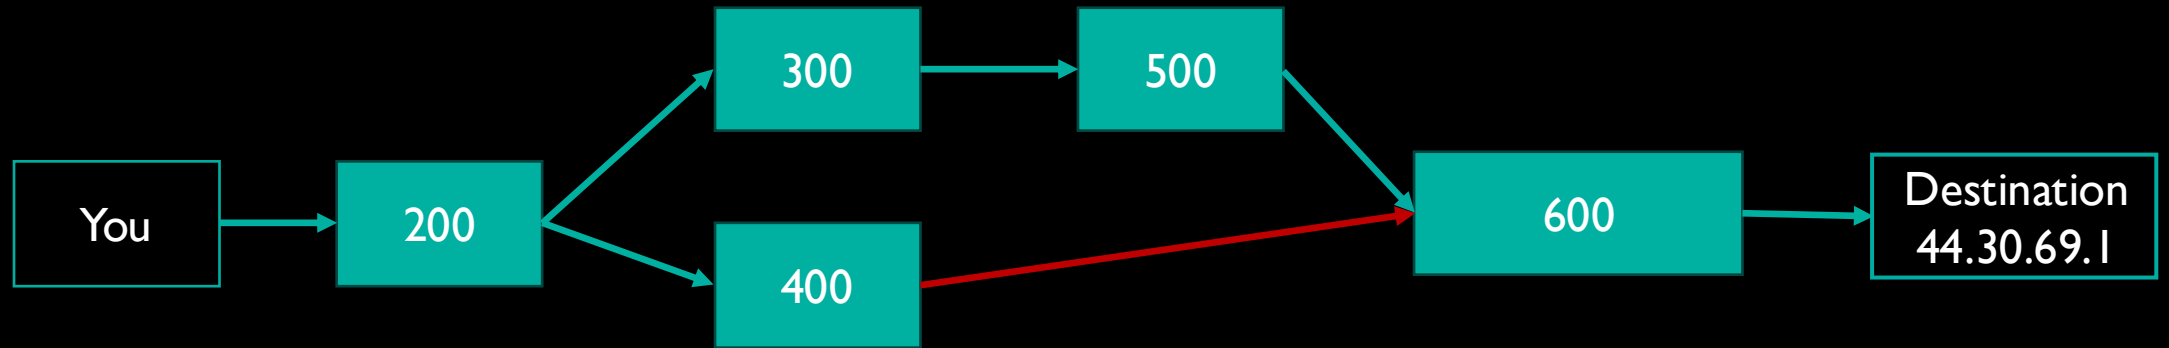

AS 200's Paths


44.30.69.0/24

~~44.30.69.0/24~~

300 → 500 → 600


~~400 → 600~~

BGP and Anycast

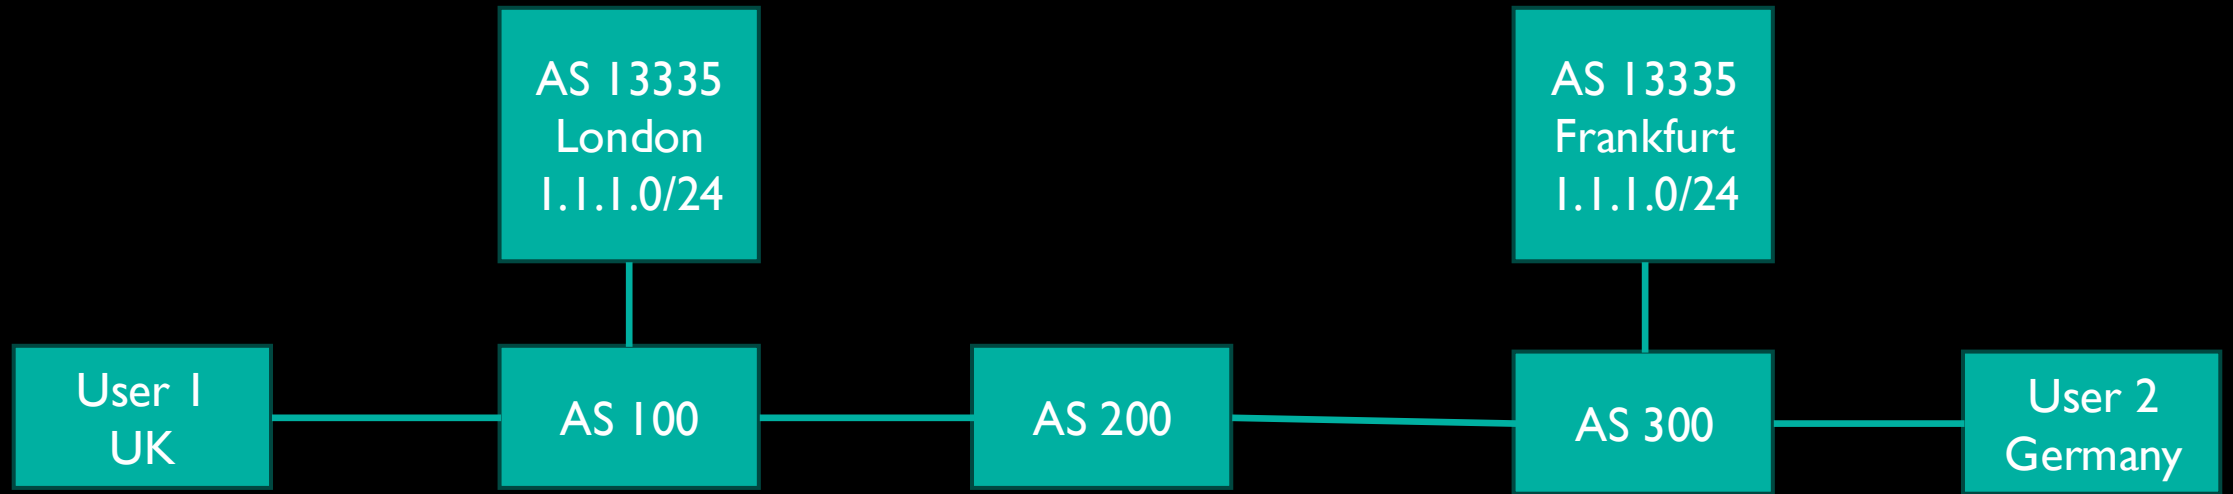

UK:	1.1.1.0/24	100 → 13335
	1.1.1.0/24	100 → 200 → 300 → 13335
Germany:	1.1.1.0/24	300 → 13335
	1.1.1.0/24	300 → 200 → 100 → 13335

BGP Mistakes

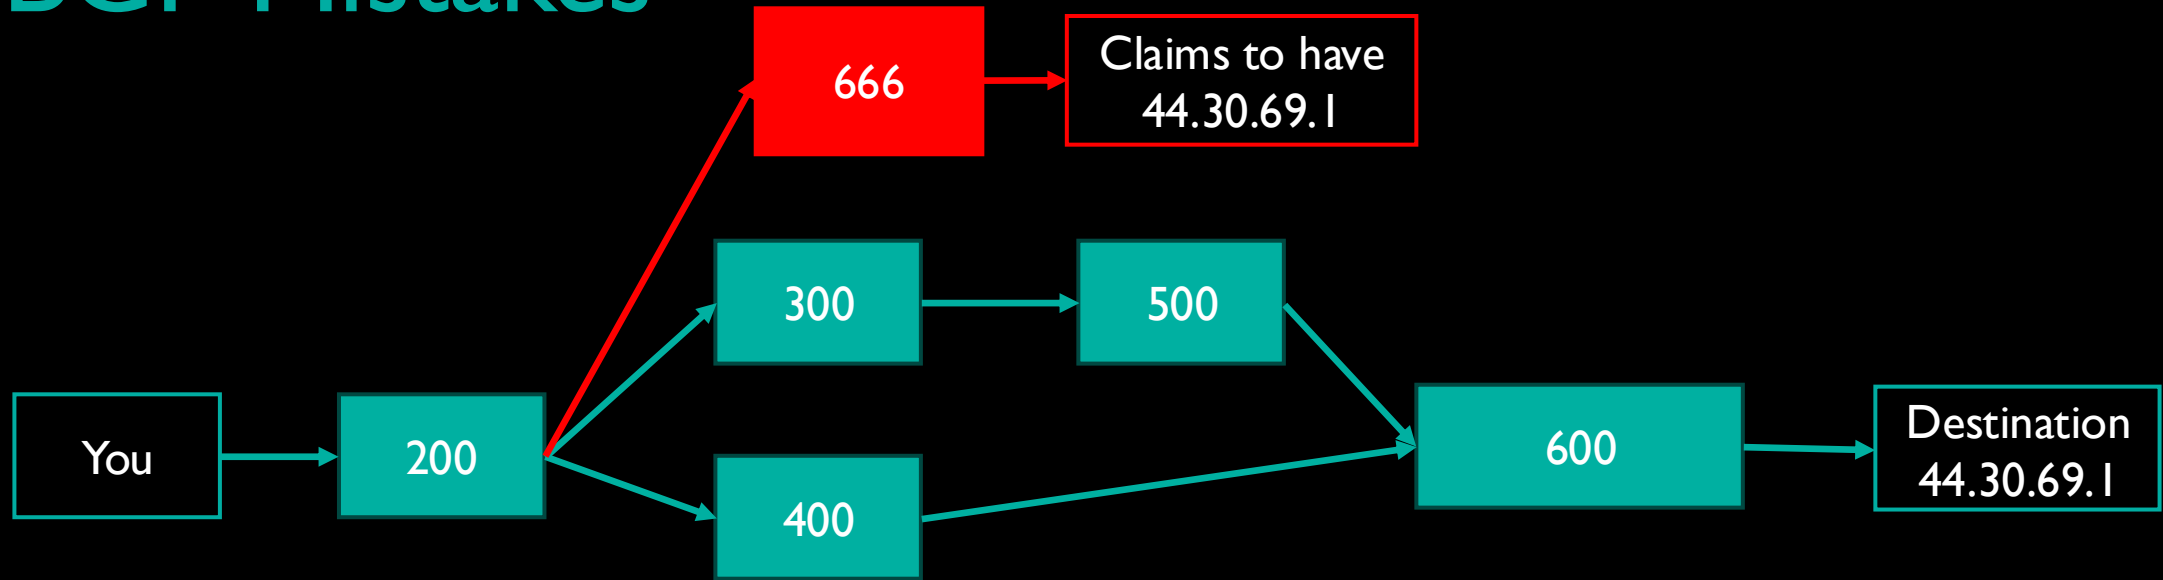

Valid Paths

44.30.69.0/24

44.30.69.0/24

200 → 300 → 500 → 600

200 → 400 → 600

Invalid Path

44.30.69.0/24

200 → 666

Physical Layer

- Network Cables
 - Fibre
 - Satellite
 - 5G
 - WiFi
-
- Latency
 - Quality

Application

Transport

Network

Physical

RFC 1149 – IP over Avian Carriers

```
vegard@gyversalen:~$ ping -i 900 10.0.3.1
```

```
PING 10.0.3.1 (10.0.3.1): 56 data bytes
```

```
64 bytes from 10.0.3.1: icmp_seq=0 ttl=255 time=6165731.1 ms
```

```
64 bytes from 10.0.3.1: icmp_seq=4 ttl=255 time=3211900.8 ms
```

```
64 bytes from 10.0.3.1: icmp_seq=2 ttl=255 time=5124922.8 ms
```

```
64 bytes from 10.0.3.1: icmp_seq=1 ttl=255 time=6388671.9 ms
```


```
--- 10.0.3.1 ping statistics ---
```

```
9 packets transmitted, 4 packets received, 55% packet loss
```

```
round-trip min/avg/max = 3211900.8/5222806.6/6388671.9 ms
```

<https://blog.linux.no/project/rfc1149/>


```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

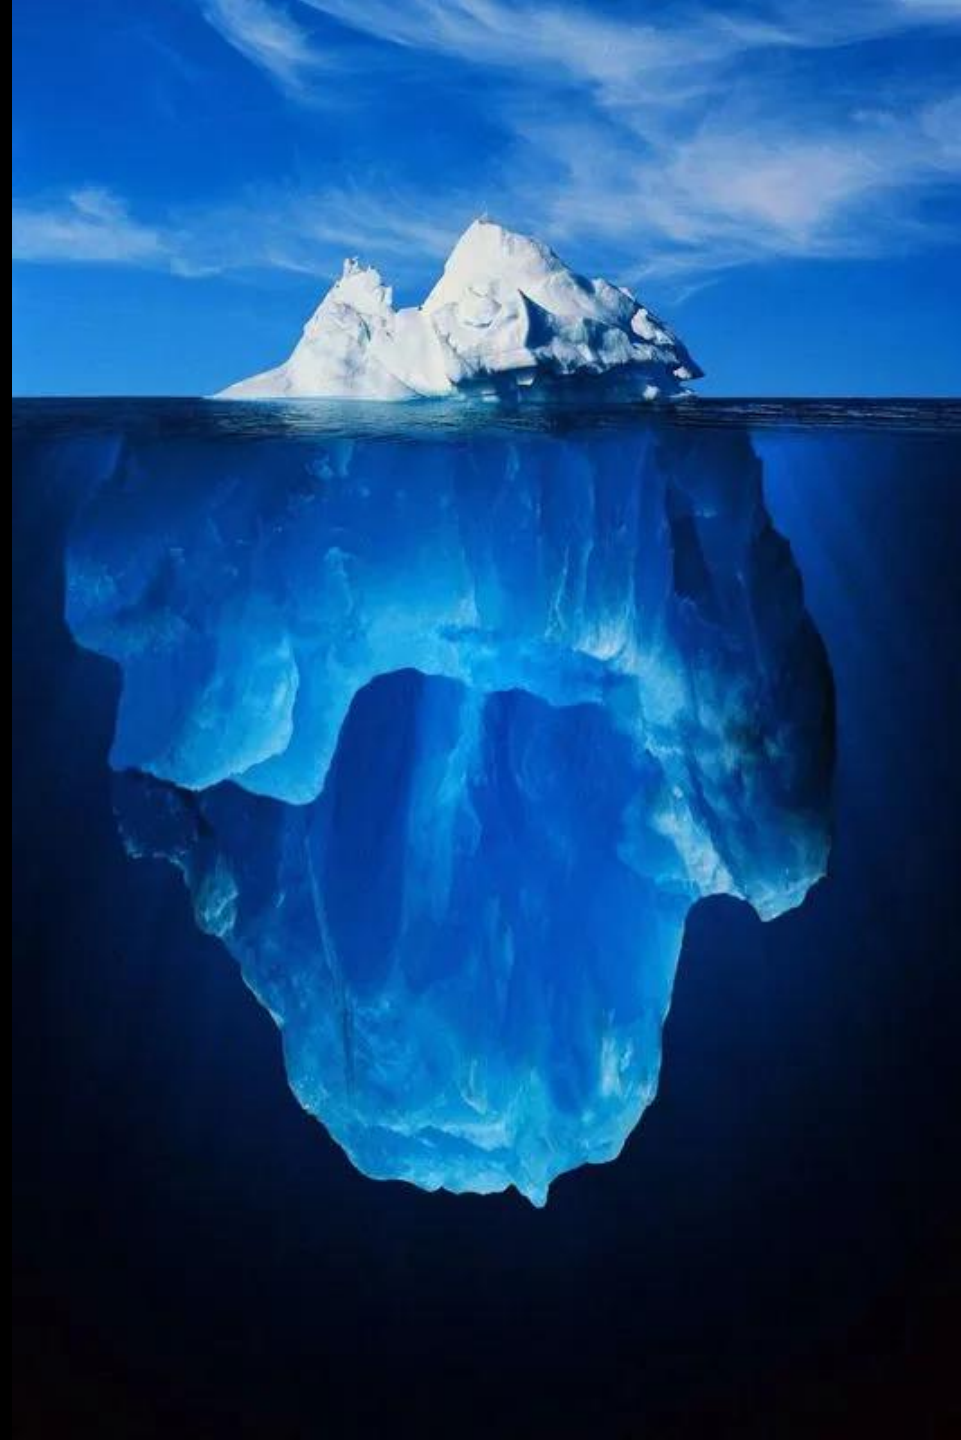

```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

DNS


- UDP
 - But can be TCP
 - or served over TLS
- Quick
- Located close to us

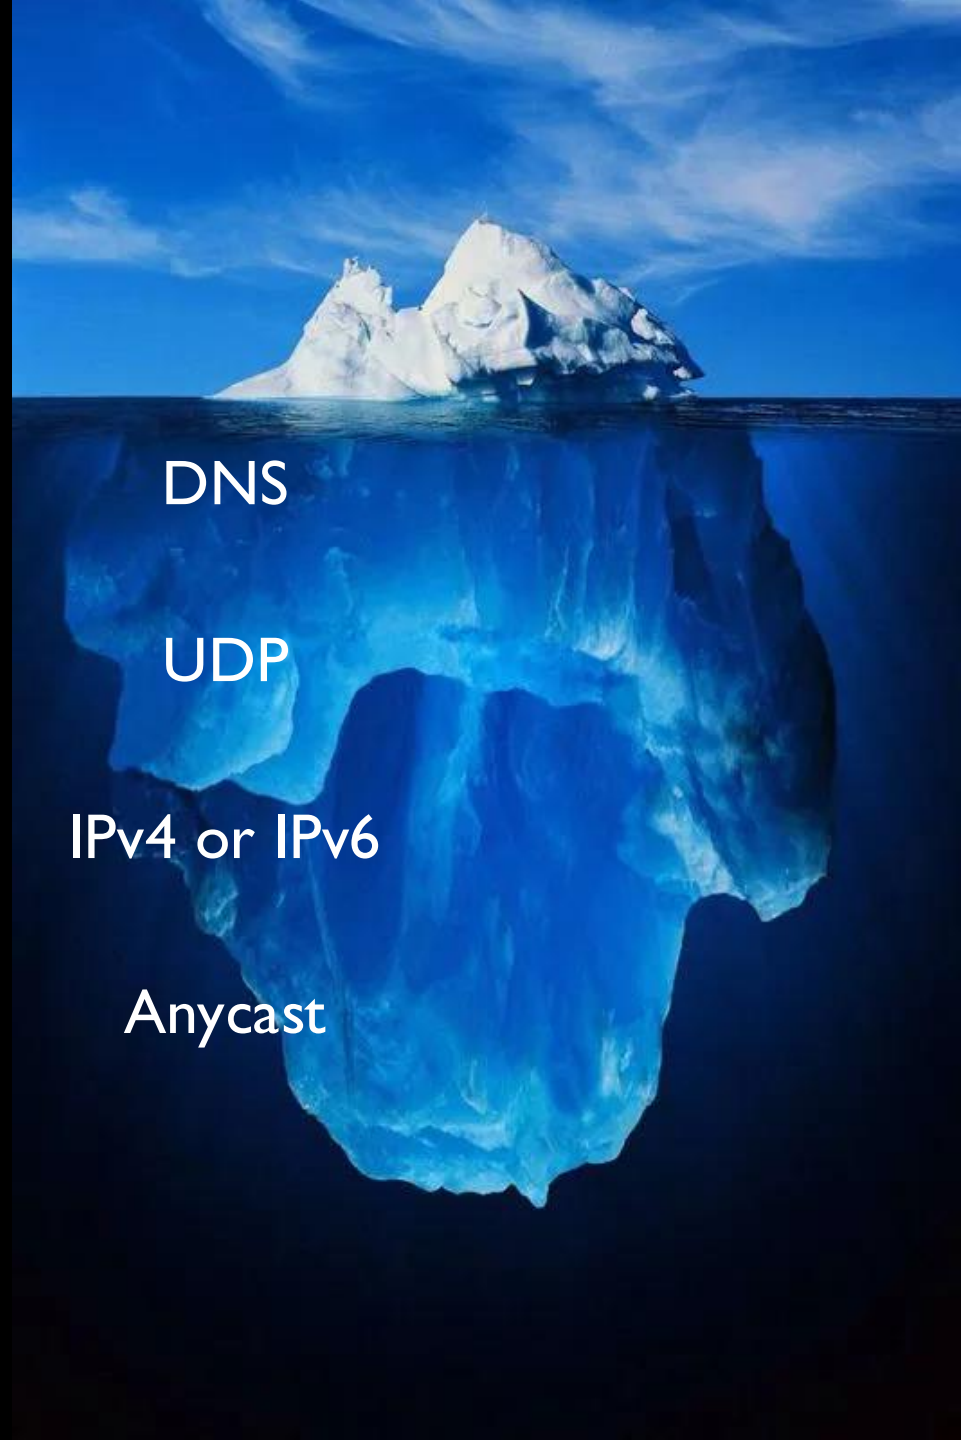

```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

Application

- What version of HTTP?
- HTTP3 is binary, not plaintext
- gzip
- TLS

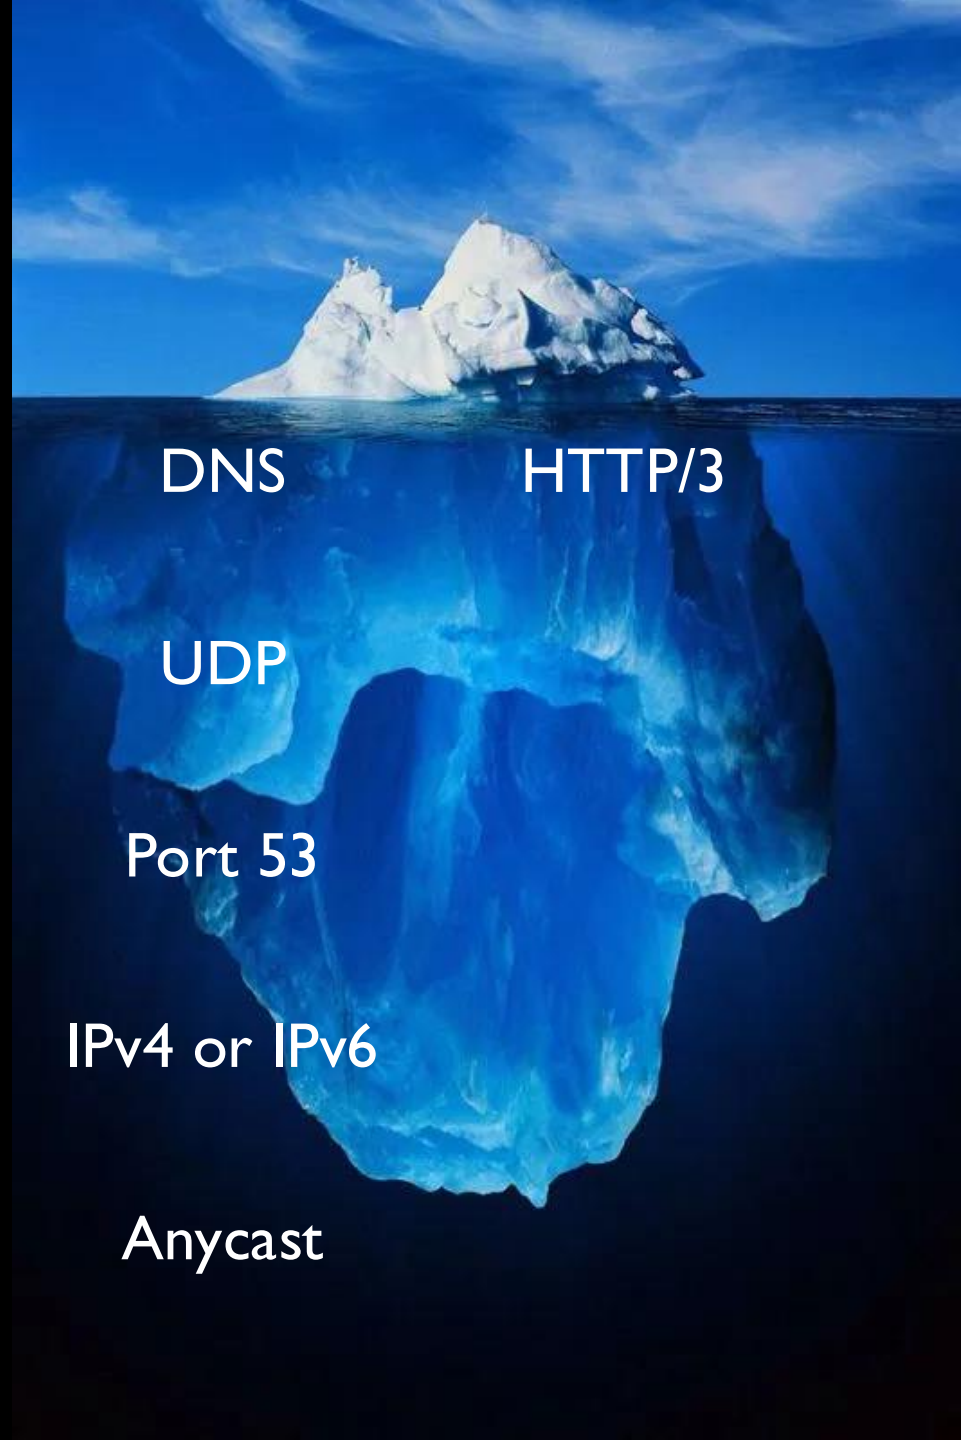


```
<?php
```

```
echo file_get_contents('https://ip.mintopia.net');
```

Transport

- HTTP/3 is QUIC which is UDP
- Multiplexing, multiple files at once
- Missing packets don't stall the connection
- Port 443

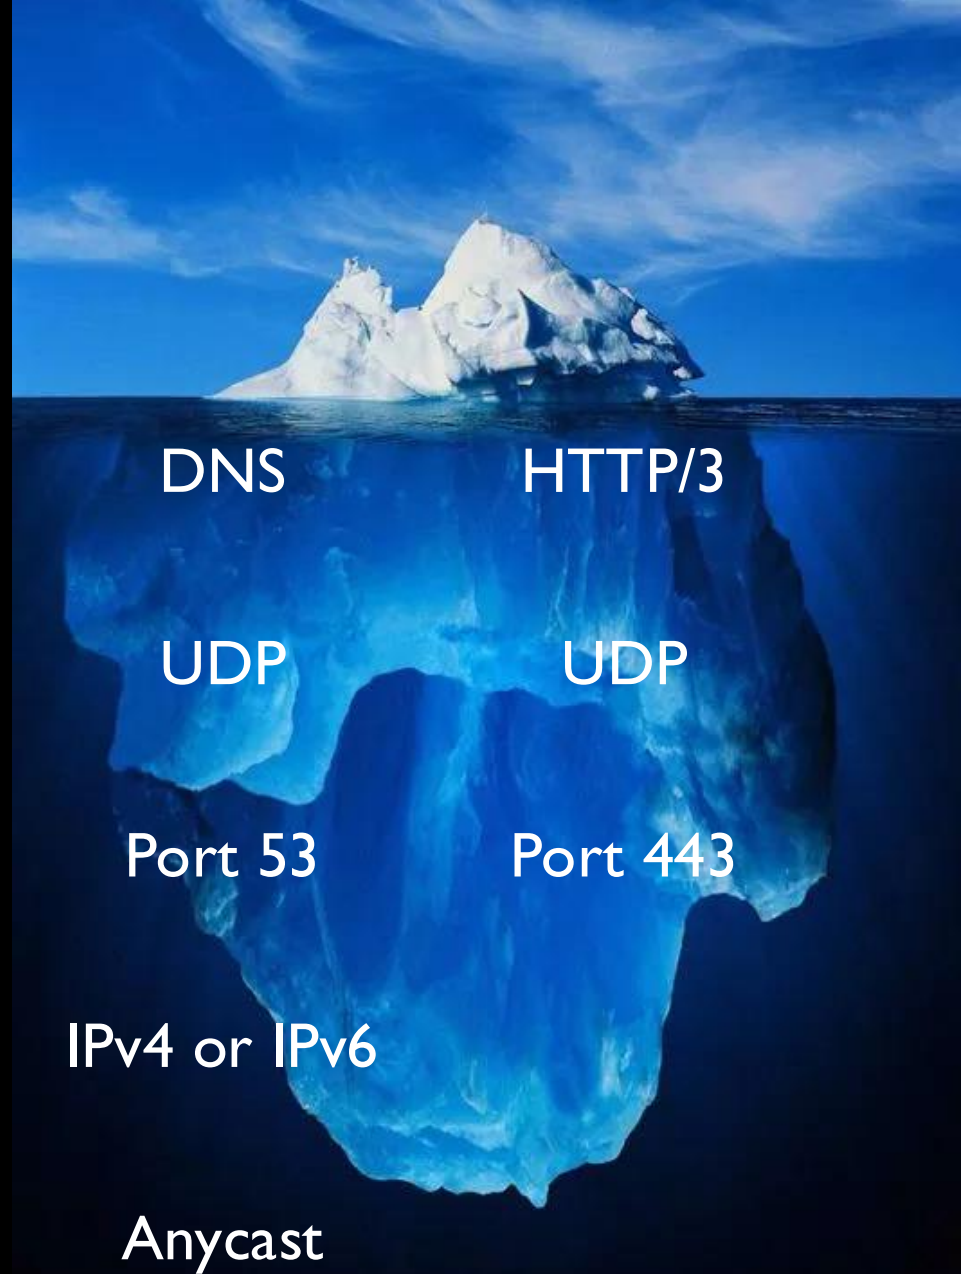


```
<?php
```

```
echo file_get_contents('https://ip.mintopia.net');
```

Network


- Either IPv4 or IPv6, we don't care
- If you're storing IP addresses – support IPv6
- Expect multiple users per IP due to NAT
- Using unicast BGP routing to a single host
- But maybe using Anycast to a CDN

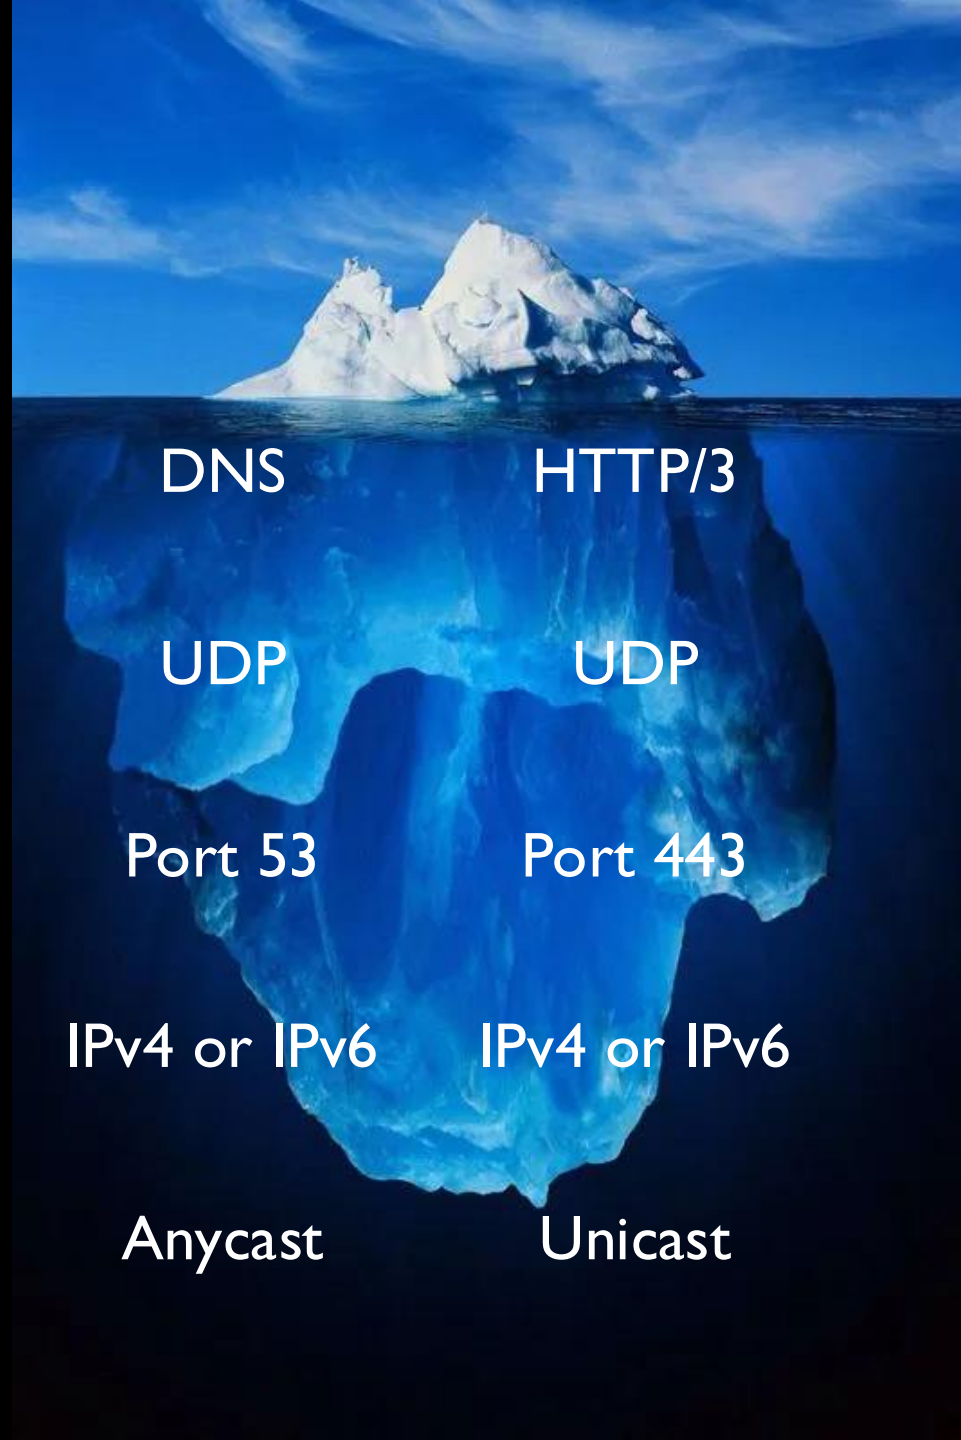

```
<?php  
echo file_get_contents('https://ip.mintopia.net');
```

Physical

- Hosted on a fast connection
- Physically close to us

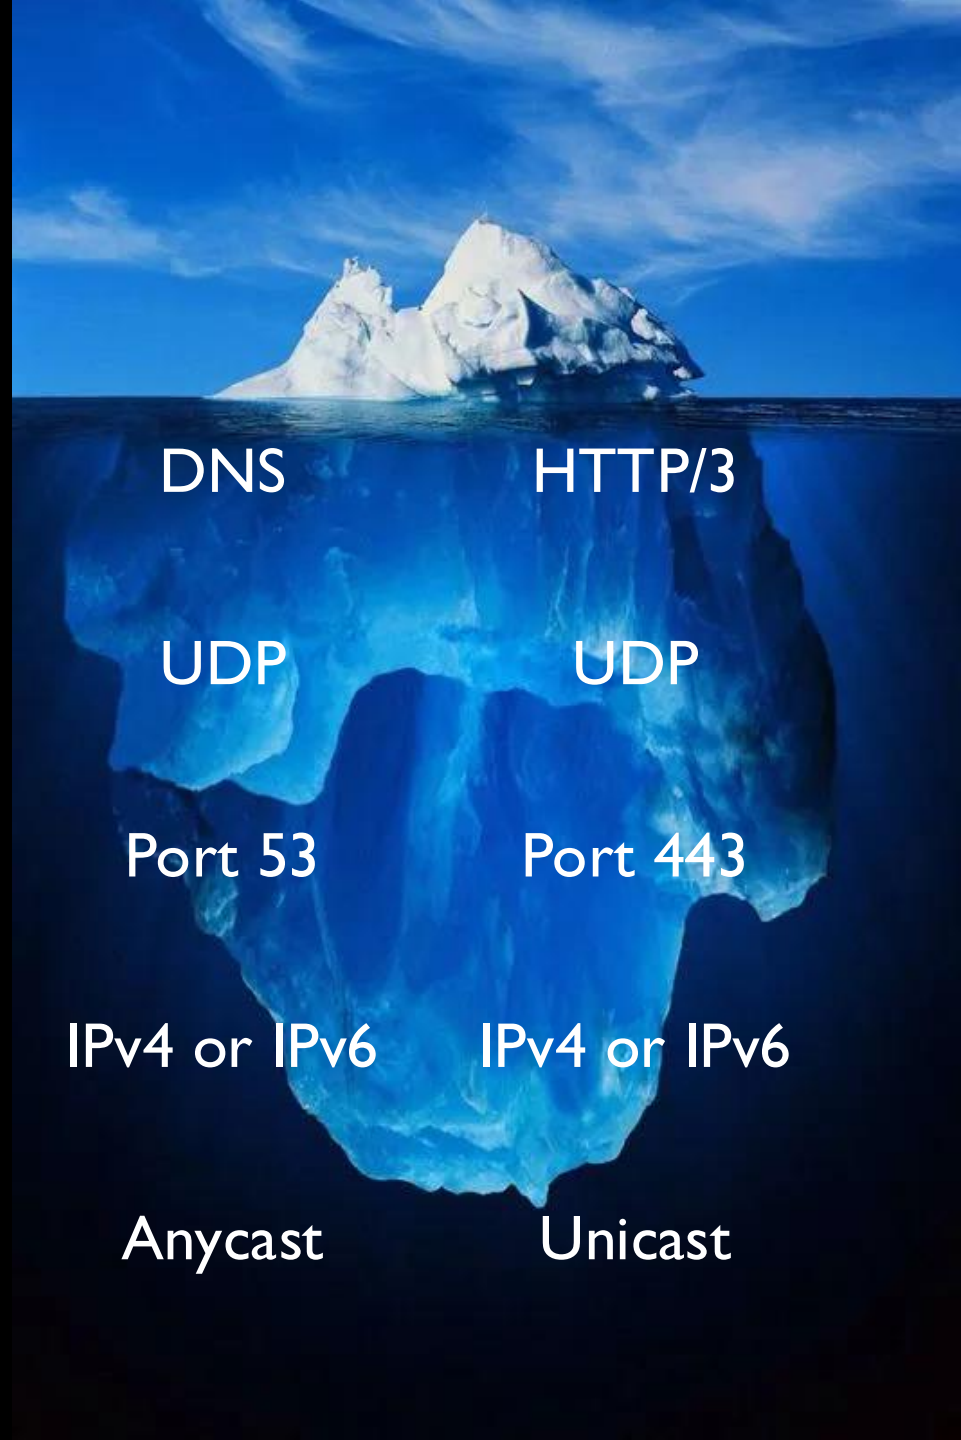

Summary

- Abstractions are leaky
- Use HTTP/3 where possible
- Use a DNS provider supporting anycast
- Locate applications as close to other services as possible

Summary

- Abstractions are leaky
- Use HTTP/3 where possible
- Use a DNS provider supporting anycast
- Locate applications as close to services and users

It's always DNS
Unless it's BGP
Sometimes it's both

Thank you

<https://phpc.social/@mintopia>

<https://github.com/mintopia/networking-fundamentals-2026>

<https://joind.in/talk/98187>



Feedback



Slides