

LuaT_EX

Reference

Manual



experimental
September 2018
Version 1.09

LuaT_EX

Reference

Manual

copyright : LuaT_EX development team
more info : www.luatex.org
version : September 25, 2018

Contents

| | |
|---|-----------|
| Introduction | 13 |
| 1 Preamble | 17 |
| 2 Basic T_EX enhancements | 19 |
| 2.1 Introduction | 19 |
| 2.1.1 Primitive behaviour | 19 |
| 2.1.2 Version information | 19 |
| 2.2 UNICODE text support | 20 |
| 2.2.1 Extended ranges | 20 |
| 2.2.2 \Uchar | 21 |
| 2.2.3 Extended tables | 21 |
| 2.3 Attributes | 21 |
| 2.3.1 Nodes | 21 |
| 2.3.2 Attribute registers | 22 |
| 2.3.3 Box attributes | 22 |
| 2.4 LUA related primitives | 24 |
| 2.4.1 \directlua | 24 |
| 2.4.2 \latelua and \lateluafunction | 25 |
| 2.4.3 \luaescapestring | 25 |
| 2.4.4 \luafunction, \luafunctioncall and \luadef | 26 |
| 2.4.5 \luabytcode and \luabytcodecall | 26 |
| 2.5 Catcode tables | 27 |
| 2.5.1 Catcodes | 27 |
| 2.5.2 \catcodetable | 27 |
| 2.5.3 \initcatcodetable | 27 |
| 2.5.4 \savecatcodetable | 28 |
| 2.6 Suppressing errors | 28 |
| 2.6.1 \suppressfontnotfounderror | 28 |
| 2.6.2 \suppresslongerror | 28 |
| 2.6.3 \suppressifcsnameerror | 28 |
| 2.6.4 \suppressoutererror | 28 |
| 2.6.5 \suppressmathparerror | 29 |
| 2.6.6 \suppressprimitiveerror | 29 |
| 2.7 Fonts | 29 |
| 2.7.1 Font syntax | 29 |
| 2.7.2 \fontid and \setfontid | 29 |
| 2.7.3 \noligs and \nokerns | 30 |
| 2.7.4 \nospaces | 30 |
| 2.8 Tokens, commands and strings | 30 |
| 2.8.1 \scantextokens | 30 |
| 2.8.2 \toksapp, \tokspre, \etoksapp and \etokspre | 30 |
| 2.8.3 \csstring, \begincsname and \lastnamedcs | 31 |
| 2.8.4 \clearmarks | 31 |



| | | |
|----------|---|-----------|
| 2.8.5 | <code>\alignmark</code> and <code>\aligntab</code> | 31 |
| 2.8.6 | <code>\latcharcode</code> | 31 |
| 2.8.7 | <code>\glet</code> | 32 |
| 2.9 | Boxes, rules and leaders | 34 |
| 2.9.1 | <code>\outputbox</code> | 34 |
| 2.9.2 | <code>\vpack</code> , <code>\hpack</code> and <code>\tpack</code> | 34 |
| 2.9.3 | <code>\vsplit</code> | 34 |
| 2.9.4 | Images and reused box objects | 34 |
| 2.9.5 | <code>\nohrule</code> and <code>\novrule</code> | 35 |
| 2.9.6 | <code>\gleaders</code> | 35 |
| 2.10 | Languages | 35 |
| 2.10.1 | <code>\hyphenationmin</code> | 35 |
| 2.10.2 | <code>\boundary</code> , <code>\noboundary</code> , <code>\protrusionboundary</code> and <code>\wordboundary</code> | 36 |
| 2.11 | Control and debugging | 36 |
| 2.11.1 | Tracing | 36 |
| 2.11.2 | <code>\outputmode</code> | 36 |
| 2.11.3 | <code>\draftmode</code> | 36 |
| 2.12 | Files | 36 |
| 2.12.1 | File syntax | 36 |
| 2.12.2 | Writing to file | 37 |
| 2.13 | Math | 37 |
| 3 | Modifications | 39 |
| 3.1 | The merged engines | 39 |
| 3.1.1 | The need for change | 39 |
| 3.1.2 | Changes from T _E X 3.1415926 | 39 |
| 3.1.3 | Changes from ε -T _E X 2.2 | 40 |
| 3.1.4 | Changes from PDFT _E X 1.40 | 40 |
| 3.1.5 | Changes from ALEPH RC4 | 42 |
| 3.1.6 | Changes from standard WEB2C | 43 |
| 3.2 | The backend primitives | 44 |
| 3.2.1 | Less primitives | 44 |
| 3.2.2 | <code>\pdfextension</code> , <code>\pdfvariable</code> and <code>\pdffeedback</code> | 44 |
| 3.2.3 | Defaults | 49 |
| 3.2.4 | Backward compatibility | 50 |
| 3.3 | Directions | 51 |
| 3.3.1 | Four directions | 51 |
| 3.3.2 | How it works | 51 |
| 3.3.3 | Controlling glue with <code>\breakafterdirmode</code> | 53 |
| 3.3.4 | Controlling parshapes with <code>\shapemode</code> | 53 |
| 3.3.5 | Symbols or numbers | 54 |
| 3.4 | Implementation notes | 55 |
| 3.4.1 | Memory allocation | 55 |
| 3.4.2 | Sparse arrays | 55 |
| 3.4.3 | Simple single-character csnames | 55 |
| 3.4.4 | The compressed format file | 56 |
| 3.4.5 | Binary file reading | 56 |



| | | |
|----------|--|-----------|
| 3.4.6 | Tabs and spaces | 56 |
| 4 | Using L^AT_EX | 57 |
| 4.1 | Initialization | 57 |
| 4.1.1 | L ^A T _E X as a LUA interpreter | 57 |
| 4.1.2 | L ^A T _E X as a LUA byte compiler | 57 |
| 4.1.3 | Other commandline processing | 57 |
| 4.2 | | 60 |
| 4.2.1 | The LUA version | 60 |
| 4.2.2 | Integration in the TDS ecosystem | 60 |
| 4.2.3 | Loading libraries | 60 |
| 4.2.4 | Executing programs | 61 |
| 4.2.5 | Multibyte string functions | 61 |
| 4.2.6 | Extra os library functions | 62 |
| 4.2.7 | Binary input from files with fio | 64 |
| 4.2.8 | Binary input from strings with sio | 64 |
| 4.2.9 | Hashes conform sha2 | 64 |
| 4.2.10 | Locales | 64 |
| 4.3 | LUA modules | 65 |
| 4.4 | Testing | 65 |
| 5 | Languages, characters, fonts and glyphs | 67 |
| 5.1 | Introduction | 67 |
| 5.2 | Characters, glyphs and discretionaries | 67 |
| 5.3 | The main control loop | 73 |
| 5.4 | Loading patterns and exceptions | 75 |
| 5.5 | Applying hyphenation | 77 |
| 5.6 | Applying ligatures and kerning | 79 |
| 5.7 | Breaking paragraphs into lines | 81 |
| 5.8 | The lang library | 81 |
| 5.8.1 | new and id | 81 |
| 5.8.2 | hyphenation | 82 |
| 5.8.3 | clear_hyphenation and clean | 82 |
| 5.8.4 | patterns and clear_patterns | 82 |
| 5.8.5 | hyphenationmin | 82 |
| 5.8.6 | [pre post][ex]hyphenchar | 82 |
| 5.8.7 | hyphenate | 83 |
| 5.8.8 | [set get]hjcode | 83 |
| 6 | Font structure | 85 |
| 6.1 | The font tables | 85 |
| 6.2 | Real fonts | 90 |
| 6.3 | Virtual fonts | 92 |
| 6.3.1 | The structure | 92 |
| 6.3.2 | Artificial fonts | 94 |
| 6.3.3 | Example virtual font | 94 |



| | | |
|----------|--|-----------|
| 6.4 | The vf library | 95 |
| 6.5 | The font library | 95 |
| 6.5.1 | Loading a TFM file | 95 |
| 6.5.2 | Loading a VF file | 96 |
| 6.5.3 | The fonts array | 96 |
| 6.5.4 | Checking a font's status | 96 |
| 6.5.5 | Defining a font directly | 97 |
| 6.5.6 | Extending a font | 97 |
| 6.5.7 | Projected next font id | 97 |
| 6.5.8 | Font ids | 97 |
| 6.5.9 | Iterating over all fonts | 98 |
| 7 | Math | 99 |
| 7.1 | Traditional alongside OPENTYPE | 99 |
| 7.2 | Unicode math characters | 99 |
| 7.3 | Math styles | 100 |
| 7.3.1 | <code>\mathstyle</code> | 100 |
| 7.3.2 | <code>\Ustack</code> | 102 |
| 7.3.3 | Cramped math styles | 102 |
| 7.4 | Math parameter settings | 103 |
| 7.4.1 | Many new <code>\Umath*</code> primitives | 103 |
| 7.4.2 | Font-based math parameters | 105 |
| 7.5 | Math spacing | 109 |
| 7.5.1 | Inline surrounding space | 109 |
| 7.5.2 | Pairwise spacing | 110 |
| 7.5.3 | Skips around display math | 111 |
| 7.5.4 | Nolimit correction | 111 |
| 7.5.5 | Math italic mess | 112 |
| 7.5.6 | Script and kerning | 112 |
| 7.5.7 | Fixed scripts | 113 |
| 7.5.8 | Penalties: <code>\mathpenaltiesmode</code> | 113 |
| 7.5.9 | Equation spacing: <code>\matheqnogapstep</code> | 114 |
| 7.6 | Math constructs | 114 |
| 7.6.1 | Unscaled fences | 114 |
| 7.6.2 | Accent handling | 115 |
| 7.6.3 | Radical extensions | 115 |
| 7.6.4 | Super- and subscripts | 116 |
| 7.6.5 | Scripts on extensibles | 116 |
| 7.6.6 | Fractions | 117 |
| 7.6.7 | Delimiters: <code>\Uleft</code> , <code>\Umiddle</code> and <code>\Uright</code> | 118 |
| 7.7 | Extracting values | 118 |
| 7.7.1 | Codes | 118 |
| 7.7.2 | Last lines | 119 |



| | | |
|----------|---|------------|
| 7.8 | Math mode | 119 |
| 7.8.1 | Verbose versions of single-character math commands | 119 |
| 7.8.2 | Script commands <code>\Unosuperscript</code> and <code>\Unosubscript</code> | 120 |
| 7.8.3 | Allowed math commands in non-math modes | 120 |
| 7.9 | Goodies | 120 |
| 7.9.1 | Flattening: <code>\mathflattenmode</code> | 120 |
| 7.9.2 | Less Tracing | 121 |
| 7.9.3 | Math options with <code>\mathoption</code> | 121 |
| 8 | Nodes | 123 |
| 8.1 | LUA node representation | 123 |
| 8.2 | Main text nodes | 123 |
| 8.2.1 | <code>hlist</code> nodes | 124 |
| 8.2.2 | <code>vlist</code> nodes | 124 |
| 8.2.3 | <code>rule</code> nodes | 124 |
| 8.2.4 | <code>ins</code> nodes | 125 |
| 8.2.5 | <code>mark</code> nodes | 125 |
| 8.2.6 | <code>adjust</code> nodes | 126 |
| 8.2.7 | <code>disc</code> nodes | 126 |
| 8.2.8 | <code>math</code> nodes | 126 |
| 8.2.9 | <code>glue</code> nodes | 127 |
| 8.2.10 | <code>kern</code> nodes | 128 |
| 8.2.11 | <code>penalty</code> nodes | 128 |
| 8.2.12 | <code>glyph</code> nodes | 128 |
| 8.2.13 | <code>boundary</code> nodes | 130 |
| 8.2.14 | <code>local_par</code> nodes | 130 |
| 8.2.15 | <code>dir</code> nodes | 130 |
| 8.2.16 | <code>marginkern</code> nodes | 131 |
| 8.3 | Math noads | 131 |
| 8.3.1 | Math kernel subnodes | 131 |
| 8.3.2 | <code>math_char</code> and <code>math_text_char</code> subnodes | 131 |
| 8.3.3 | <code>sub_box</code> and <code>sub_mlist</code> subnodes | 131 |
| 8.3.4 | <code>delim</code> subnodes | 132 |
| 8.3.5 | Math core nodes | 132 |
| 8.3.6 | simple noad nodes | 133 |
| 8.3.7 | accent nodes | 133 |
| 8.3.8 | style nodes | 133 |
| 8.3.9 | choice nodes | 133 |
| 8.3.10 | radical nodes | 134 |
| 8.3.11 | fraction nodes | 134 |
| 8.3.12 | fence nodes | 134 |
| 8.4 | Front-end whatsits | 135 |
| 8.4.1 | <code>open</code> | 135 |
| 8.4.2 | <code>write</code> | 135 |
| 8.4.3 | <code>close</code> | 135 |
| 8.4.4 | <code>user_defined</code> | 135 |
| 8.4.5 | <code>save_pos</code> | 136 |



| | | |
|--------|----------------------------------|-----|
| 8.4.6 | late_lua | 136 |
| 8.5 | DVI backend whatsits | 136 |
| 8.5.1 | special | 136 |
| 8.6 | PDF backend whatsits | 137 |
| 8.6.1 | pdf_literal | 137 |
| 8.6.2 | pdf_refobj | 137 |
| 8.6.3 | pdf_annot | 137 |
| 8.6.4 | pdf_start_link | 137 |
| 8.6.5 | pdf_end_link | 138 |
| 8.6.6 | pdf_dest | 138 |
| 8.6.7 | pdf_action | 138 |
| 8.6.8 | pdf_thread | 139 |
| 8.6.9 | pdf_start_thread | 139 |
| 8.6.10 | pdf_end_thread | 139 |
| 8.6.11 | pdf_colorstack | 139 |
| 8.6.12 | pdf_setmatrix | 140 |
| 8.6.13 | pdf_save | 140 |
| 8.6.14 | pdf_restore | 140 |
| 8.7 | The node library | 140 |
| 8.7.1 | Introduction | 140 |
| 8.7.2 | is_node | 141 |
| 8.7.3 | types and whatsits | 141 |
| 8.7.4 | id | 141 |
| 8.7.5 | type and subtype | 141 |
| 8.7.6 | fields | 142 |
| 8.7.7 | has_field | 142 |
| 8.7.8 | new | 142 |
| 8.7.9 | free, flush_node and flush_list | 142 |
| 8.7.10 | copy and copy_list | 143 |
| 8.7.11 | prev and next | 143 |
| 8.7.12 | current_attr | 143 |
| 8.7.13 | hpack | 144 |
| 8.7.14 | vpack | 144 |
| 8.7.15 | prepend_prevdepth | 145 |
| 8.7.16 | dimensions and rangedimensions | 145 |
| 8.7.17 | mlist_to_hlist | 146 |
| 8.7.18 | slide | 146 |
| 8.7.19 | tail | 146 |
| 8.7.20 | length and type count | 147 |
| 8.7.21 | is_char and is_glyph | 147 |
| 8.7.22 | traverse | 147 |
| 8.7.23 | traverse_id | 148 |
| 8.7.24 | traverse_char and traverse_glyph | 148 |
| 8.7.25 | traverse_list | 149 |
| 8.7.26 | has_glyph | 149 |
| 8.7.27 | end_of_math | 149 |



| | | |
|----------|--|------------|
| 8.7.28 | remove | 149 |
| 8.7.29 | insert_before | 149 |
| 8.7.30 | insert_after | 150 |
| 8.7.31 | first_glyph | 150 |
| 8.7.32 | ligaturing | 150 |
| 8.7.33 | kerning | 150 |
| 8.7.34 | unprotect_glyph[s] | 151 |
| 8.7.35 | protect_glyph[s] | 151 |
| 8.7.36 | last_node | 151 |
| 8.7.37 | write | 151 |
| 8.7.38 | protrusion_skippable | 151 |
| 8.8 | Glue handling | 151 |
| 8.8.1 | setglue | 151 |
| 8.8.2 | getglue | 152 |
| 8.8.3 | is_zero_glue | 152 |
| 8.9 | Attribute handling | 152 |
| 8.9.1 | Attributes | 152 |
| 8.9.2 | attribute_list nodes | 152 |
| 8.9.3 | attr nodes | 153 |
| 8.9.4 | has_attribute | 153 |
| 8.9.5 | get_attribute | 153 |
| 8.9.6 | find_attribute | 153 |
| 8.9.7 | set_attribute | 153 |
| 8.9.8 | unset_attribute | 154 |
| 8.9.9 | slide | 154 |
| 8.9.10 | check_discretionary, check_discretionaries | 154 |
| 8.9.11 | flatten_discretionaries | 154 |
| 8.9.12 | family_font | 154 |
| 8.10 | Two access models | 155 |
| 8.11 | Properties | 160 |
| 9 | LUA callbacks | 165 |
| 9.1 | Registering callbacks | 165 |
| 9.2 | File discovery callbacks | 165 |
| 9.2.1 | find_read_file and find_write_file | 166 |
| 9.2.2 | find_font_file | 166 |
| 9.2.3 | find_output_file | 166 |
| 9.2.4 | find_format_file | 166 |
| 9.2.5 | find_vf_file | 167 |
| 9.2.6 | find_map_file | 167 |
| 9.2.7 | find_enc_file | 167 |
| 9.2.8 | find_pk_file | 167 |
| 9.2.9 | find_data_file | 167 |
| 9.2.10 | find_opentype_file | 167 |
| 9.2.11 | find_truetype_file and find_type1_file | 167 |
| 9.2.12 | find_image_file | 168 |
| 9.2.13 | File reading callbacks | 168 |



| | | |
|--------|---------------------------------|-----|
| 9.2.14 | open_read_file | 168 |
| 9.2.15 | General file readers | 169 |
| 9.3 | Data processing callbacks | 170 |
| 9.3.1 | process_input_buffer | 170 |
| 9.3.2 | process_output_buffer | 170 |
| 9.3.3 | process_jobname | 170 |
| 9.4 | Node list processing callbacks | 170 |
| 9.4.1 | contribute_filter | 170 |
| 9.4.2 | buildpage_filter | 171 |
| 9.4.3 | build_page_insert | 171 |
| 9.4.4 | pre_linebreak_filter | 172 |
| 9.4.5 | linebreak_filter | 173 |
| 9.4.6 | append_to_vlist_filter | 173 |
| 9.4.7 | post_linebreak_filter | 173 |
| 9.4.8 | hpack_filter | 173 |
| 9.4.9 | vpack_filter | 174 |
| 9.4.10 | hpack_quality | 174 |
| 9.4.11 | vpack_quality | 174 |
| 9.4.12 | process_rule | 175 |
| 9.4.13 | pre_output_filter | 175 |
| 9.4.14 | hyphenate | 175 |
| 9.4.15 | ligaturing | 175 |
| 9.4.16 | kerning | 176 |
| 9.4.17 | insert_local_par | 176 |
| 9.4.18 | mlist_to_hlist | 176 |
| 9.5 | Information reporting callbacks | 176 |
| 9.5.1 | pre_dump | 176 |
| 9.5.2 | start_run | 177 |
| 9.5.3 | stop_run | 177 |
| 9.5.4 | start_page_number | 177 |
| 9.5.5 | stop_page_number | 177 |
| 9.5.6 | show_error_hook | 177 |
| 9.5.7 | show_error_message | 178 |
| 9.5.8 | show_lua_error_hook | 178 |
| 9.5.9 | start_file | 178 |
| 9.5.10 | stop_file | 178 |
| 9.5.11 | call_edit | 178 |
| 9.5.12 | finish_synctex | 179 |
| 9.5.13 | wrapup_run | 179 |
| 9.6 | PDF related callbacks | 179 |
| 9.6.1 | finish_pdffile | 179 |
| 9.6.2 | finish_pdfpage | 179 |
| 9.6.3 | page_objnum_provider | 179 |



| | | |
|-----------|---|------------|
| 9.7 | Font-related callbacks | 180 |
| 9.7.1 | define_font | 180 |
| 9.7.2 | glyph_not_found | 180 |
| 10 | The T_EX related libraries | 181 |
| 10.1 | The lua library | 181 |
| 10.1.1 | Version information | 181 |
| 10.1.2 | Bytecode registers | 181 |
| 10.1.3 | Chunk name registers | 181 |
| 10.1.4 | Introspection | 182 |
| 10.2 | The status library | 182 |
| 10.3 | The tex library | 184 |
| 10.3.1 | Internal parameter values, set and get | 184 |
| 10.3.2 | Convert commands | 187 |
| 10.3.3 | Last item commands | 188 |
| 10.3.4 | Accessing registers: set*, get* and is* | 188 |
| 10.3.5 | Character code registers: [get set]*code[s] | 189 |
| 10.3.6 | Box registers: get set]box | 191 |
| 10.3.7 | Reusing boxes: [use save]boxresource and getboxresourcedimensions | 191 |
| 10.3.8 | triggerbuildpage | 192 |
| 10.3.9 | splitbox | 192 |
| 10.3.10 | Accessing math parameters: [get set]math | 192 |
| 10.3.11 | Special list heads: [get set]list | 193 |
| 10.3.12 | Semantic nest levels: getnest and ptr | 194 |
| 10.3.13 | Print functions | 195 |
| 10.3.14 | Helper functions | 197 |
| 10.3.15 | Functions for dealing with primitives | 200 |
| 10.3.16 | Core functionality interfaces | 204 |
| 10.3.17 | Randomizers | 206 |
| 10.3.18 | Functions related to syntex | 206 |
| 10.4 | The texconfig table | 206 |
| 10.5 | The texio library | 207 |
| 10.5.1 | write | 207 |
| 10.5.2 | write_nl | 208 |
| 10.5.3 | setescape | 208 |
| 10.5.4 | closeinput | 208 |
| 10.6 | The token library | 208 |
| 10.6.1 | The scanner | 208 |
| 10.6.2 | Picking up one token | 211 |
| 10.6.3 | Creating tokens | 211 |
| 10.6.4 | Macros | 212 |
| 10.6.5 | Pushing back | 213 |
| 10.6.6 | Nota bene | 213 |



| | | |
|-----------|---|------------|
| 10.7 | The kpse library | 214 |
| 10.7.1 | set_program_name and new | 215 |
| 10.7.2 | find_file | 215 |
| 10.7.3 | lookup | 216 |
| 10.7.4 | init_prog | 216 |
| 10.7.5 | readable_file | 216 |
| 10.7.6 | expand_path | 217 |
| 10.7.7 | expand_var | 217 |
| 10.7.8 | expand_braces | 217 |
| 10.7.9 | show_path | 217 |
| 10.7.10 | var_value | 217 |
| 10.7.11 | version | 217 |
| 11 | The graphic libraries | 219 |
| 11.1 | The img library | 219 |
| 11.1.1 | new | 219 |
| 11.1.2 | fields | 220 |
| 11.1.3 | scan | 221 |
| 11.1.4 | copy | 221 |
| 11.1.5 | write, immediatewrite, immediatewriteobject | 222 |
| 11.1.6 | node | 222 |
| 11.1.7 | types | 223 |
| 11.1.8 | boxes | 223 |
| 11.2 | The mplib library | 223 |
| 11.2.1 | new | 223 |
| 11.2.2 | statistics | 225 |
| 11.2.3 | execute | 225 |
| 11.2.4 | finish | 225 |
| 11.2.5 | Result table | 225 |
| 11.2.6 | Subsidiary table formats | 228 |
| 11.2.7 | Pens and pen_info | 229 |
| 11.2.8 | Character size information | 229 |
| 12 | The fontloader | 231 |
| 12.1 | Getting quick information on a font | 231 |
| 12.2 | Loading an OPENTYPE or TRUETYPE file | 231 |
| 12.3 | Applying a 'feature file' | 233 |
| 12.4 | Applying an 'AFM file' | 233 |
| 12.5 | Fontloader font tables | 233 |
| 12.6 | Table types | 234 |
| 12.6.1 | The main table | 234 |
| 12.6.2 | glyphs | 236 |
| 12.6.3 | map | 239 |
| 12.6.4 | private | 240 |
| 12.6.5 | cidinfo | 240 |
| 12.6.6 | pfminfo | 240 |
| 12.6.7 | names | 241 |



| | | |
|-----------|---|------------|
| 12.6.8 | anchor_classes | 242 |
| 12.6.9 | gpos | 242 |
| 12.6.10 | gsub | 243 |
| 12.6.11 | ttf_tables and ttf_tab_saved | 243 |
| 12.6.12 | mm | 243 |
| 12.6.13 | mark_classes | 244 |
| 12.6.14 | math | 244 |
| 12.6.15 | validation_state | 245 |
| 12.6.16 | horiz_base and vert_base | 245 |
| 12.6.17 | altuni | 245 |
| 12.6.18 | vert_variants and horiz_variants | 245 |
| 12.6.19 | mathkern | 246 |
| 12.6.20 | kerns | 246 |
| 12.6.21 | vkerns | 246 |
| 12.6.22 | texdata | 246 |
| 12.6.23 | lookups | 246 |
| 13 | The backend libraries | 249 |
| 13.1 | The pdf library | 249 |
| 13.1.1 | mapfile, mapline | 249 |
| 13.1.2 | [set get][catalog info names trailer] | 249 |
| 13.1.3 | [set get][pageattributes pageresources pagesattributes] | 249 |
| 13.1.4 | [set get][xformattributes xformresources] | 249 |
| 13.1.5 | [set get][major minor]version | 249 |
| 13.1.6 | getcreationdate | 250 |
| 13.1.7 | [set get]inclusionerrorlevel and [set get]ignoreunknownimages | 250 |
| 13.1.8 | [set get]suppressoptionalinfo, [set get]trailerid and [set get]omitcidset | 250 |
| 13.1.9 | [set get][obj]compresslevel and [set get]recompress | 250 |
| 13.1.10 | [set get]gentounicode | 250 |
| 13.1.11 | [set get]decimaldigits | 250 |
| 13.1.12 | [set get]pkresolution | 250 |
| 13.1.13 | getlast[obj link annot] and getretval | 251 |
| 13.1.14 | getmaxobjnum and getobjtype, getfontname, getfontobjnum, getfontsize, getxformname | 251 |
| 13.1.15 | [set get]origin | 251 |
| 13.1.16 | [set get]imageresolution | 251 |
| 13.1.17 | [set get][link dest thread xform]margin | 251 |
| 13.1.18 | get[pos hpos vpos] | 251 |
| 13.1.19 | [has get]matrix | 251 |
| 13.1.20 | print | 252 |
| 13.1.21 | immediateobj | 252 |
| 13.1.22 | obj | 253 |
| 13.1.23 | refobj | 254 |
| 13.1.24 | reserveobj | 254 |
| 13.1.25 | getpageref | 254 |
| 13.1.26 | registerannot | 254 |



| | | |
|-------------------|---|------------|
| 13.1.27 | newcolorstack | 254 |
| 13.1.28 | setfontattributes | 255 |
| 13.2 | The pdfc library | 255 |
| 13.2.1 | Introduction | 255 |
| 13.2.2 | open, new, status, close, unencrypt | 255 |
| 13.2.3 | size, version, nofobjects, nofpages | 256 |
| 13.2.4 | get[catalog trailer info | 256 |
| 13.2.5 | getpage, getbox | 256 |
| 13.2.6 | get[string integer number boolean name] | 257 |
| 13.2.7 | get[from][dictionary array stream] | 257 |
| 13.2.8 | [open close readfrom][whole]stream | 257 |
| 13.2.9 | getfrom[dictionary array] | 258 |
| 13.2.10 | [dictionary array]totable | 258 |
| 13.2.11 | getfromreference | 258 |
| 13.3 | Memory streams | 258 |
| 13.4 | The pdfscanner library | 259 |
| Topics | | 263 |
| Primitives | | 267 |
| Callbacks | | 275 |
| Nodes | | 277 |
| Libraries | | 279 |
| Statistics | | 287 |



Introduction

This is the reference manual of Lua_{T_EX}. We don't claim it is complete and we assume that the reader knows about T_EX as described in "The T_EX Book", the "ε-T_EX manual", the "pdfT_EX manual", etc. Additional reference material is published in journals of user groups and ConT_EXt related documentation.

It took about a decade to reach stable version 1.0, but for good reason. Successive versions brought new functionality, more control, some cleanup of internals. Experimental features evolved into stable ones or were dropped. Already quite early Lua_{T_EX} could be used for production and it was used on a daily basis by the authors. Successive versions sometimes demanded an adaption to the Lua interfacing, but the concepts were unchanged. The current version can be considered stable in functionality and there will be no fundamental changes. Of course we then can decide to move towards version 2.00 with different properties.

Don't expect Lua_{T_EX} to behave the same as pdfT_EX! Although the core functionality of that 8 bit engine was starting point, it has been combined with the directional support of Omega (Aleph). But, Lua_{T_EX} can behave different due to its wide (32 bit) characters, many registers and large memory support. The pdf code produced differs from pdfT_EX but users will normally not notice that. There is native utf input, support for large (more than 8 bit) fonts, and the math machinery is tuned for OpenType math. There is support for directional typesetting too. The log output can differ from other engines and will likely differ more as we move forward. When you run plain T_EX for sure Lua_{T_EX} runs slower than pdfT_EX but when you run for instance ConT_EXt MkIV in many cases it runs faster, especially when you have a bit more complex documents or input. Anyway, 32 bit all-over combined with more features has a price, but on a modern machine this is no real problem.

Testing is done with ConT_EXt, but Lua_{T_EX} should work fine with other macro packages too. For that purpose we provide generic font handlers that are mostly the same as used in ConT_EXt. Discussing specific implementations is beyond this manual. Even when we keep Lua_{T_EX} lean and mean, we already have enough to discuss here.

Lua_{T_EX} consists of a number of interrelated but (still) distinguishable parts. The organization of the source code is adapted so that it can glue all these components together. We continue cleaning up side effects of the accumulated code in T_EX engines (especially code that is not needed any longer).

- ▶ We started out with most of pdfT_EX version 1.40.9. The code base was converted to C and split in modules. Experimental features were removed and utility macros are not inherited because their functionality can be programmed in Lua. The number of backend interface commands has been reduced to a few. The so called extensions are separated from the core (which we try to keep close to the original T_EX core). Some mechanisms like expansion and protrusion can behave different from the original due to some cleanup and optimization. Some whatsit based functionality (image support and reusable content) is now core functionality. We don't stay in sync with pdfT_EX development.
- ▶ The direction model from Aleph RC4 (which is derived from Omega) is included. The related primitives are part of core Lua_{T_EX} but at the node level directional support is no longer based



on so called whatsits but on real nodes with relevant properties. The number of directions is limited to the useful set and the backend has been made direction aware.

- ▶ Neither Aleph's I/O translation processes, nor tcx files, nor enc \TeX are available. These encoding-related functions are superseded by a Lua-based solution (reader callbacks). In a similar fashion all file io can be intercepted.
- ▶ We currently use Lua 5.3.*. There are few Lua libraries that we consider part of the core Lua machinery, for instance `lpeg`. There are additional Lua libraries that interface to the internals of \TeX . We also keep the Lua 5.2 `bit32` library around.
- ▶ There are various \TeX extensions but only those that cannot be done using the Lua interfaces. The math machinery often has two code paths: one traditional and the other more suitable for wide OpenType fonts. Here we follow the Microsoft specifications as much as possible. Some math functionality has been opened up a bit so that users have more control.
- ▶ The fontloader uses parts of FontForge 2008.11.17 combined with additional code specific for usage in a \TeX engine. We try to minimize specific font support to what \TeX needs: character references and dimensions and delegate everything else to Lua. That way we keep \TeX open for extensions without touching the core. In order to minimize dependencies at some point we may decide to make this an optional library.
- ▶ The MetaPost library is integral part of Lua \TeX . This gives \TeX some graphical capabilities using a relative high speed graphical subsystem. Again Lua is used as glue between the frontend and backend. Further development of MetaPost is closely related to Lua \TeX .
- ▶ The virtual font technology that comes with \TeX has been integrated into the font machinery in a way that permits creating virtual fonts at runtime. Because Lua \TeX can also act as a Lua interpreter this means that a complete \TeX workflow can be built without the need for additional programs.
- ▶ The versions starting from 1.09 no longer use the poppler library for inclusion but a light-weight dedicated one. This removes a dependency but also makes the inclusion code of Lua \TeX different from pdf \TeX . In fact it was already much different due to the Lua image interfacing.

We try to keep upcoming versions compatible but intermediate releases can contain experimental features. A general rule is that versions that end up on \TeX Live and/or are released around Con \TeX t meetings are stable. Any version between the yearly \TeX Live releases are to be considered beta and in the repository end up as trunk releases. We have an experimental branch that we use for development but there is no support for any of its experimental features. Intermediate releases (from trunk) are normally available via the Con \TeX t distribution channels (the garden and so called minimal).

Future versions will probably become a bit leaner and meaner. Some libraries might become external as we don't want to bloat the binary and also don't want to add more hard coded solutions. After all, with Lua you can extend the core functionality. The less dependencies, the better.



You might find Lua helpers that are not yet documented. These are considered experimental, although when you encounter them in a ConT_EXt version that has been around for a while you can assume that they will stay. Of course it can just be that we forgot to document them yet.

A manual like this is not really meant as tutorial, for that we refer to documents that ship with ConT_EXt, articles, etc. It is also never complete enough for all readers. We try to keep up but the reader needs to realize that it's all volunteer work done in spare time. And for sure, complaining about a bad manual or crappy documentation will not really motivate us to spend more time on it. That being said, we hope that this document is useful.

Hans Hagen
Harmut Henkel
Taco Hoekwater
Luigi Scarso

Version : September 25, 2018
LuaT_EX : luatex 1.09 / 6956
ConT_EXt : MkIV 2018.08.28 11:51





1 Preamble

This is a reference manual, not a tutorial. This means that we discuss changes relative to traditional \TeX and also present new functionality. As a consequence we will refer to concepts that we assume to be known or that might be explained later.

The average user doesn't need to know much about what is in this manual. For instance fonts and languages are normally dealt with in the macro package that you use. Messing around with node lists is also often not really needed at the user level. If you do mess around, you'd better know what you're dealing with. Reading "The \TeX Book" by Donald Knuth is a good investment of time then also because it's good to know where it all started. A more summarizing overview is given by "The \TeX by Topic" by Victor Eijkhout. You might want to peek in "The $\epsilon\text{-}\text{\TeX}$ manual" and documentation about pdf \TeX .

But ... if you're here because of Lua, then all you need to know is that you can call it from within a run. The macro package that you use probably will provide a few wrapper mechanisms but the basic `\directlua` command that does the job is:

```
\directlua{tex.print("Hi there")}
```

You can put code between curly braces but if it's a lot you can also put it in a file and load that file with the usual Lua commands.

If you still decide to read on, then it's good to know what nodes are, so we do a quick introduction here. If you input this text:

Hi There

eventually we will get a linked lists of nodes, which in ascii art looks like:

```
H <=> i <=> [glue] <=> T <=> h <=> e <=> r <=> e
```

When we have a paragraph, we actually get something:

```
[localpar] <=> H <=> i <=> [glue] <=> T <=> h <=> e <=> r <=> e <=> [glue]
```

Each character becomes a so called glyph node, a record with properties like the current font, the character code and the current language. Spaces become glue nodes. There are many node types that we will discuss later. Each node points back to a previous node or next node, given that these exist.

It's also good to know beforehand that \TeX is basically centered around creating paragraphs and pages. The par builder takes a list and breaks it into lines. We turn horizontal material into vertical. Lines are so called boxes and can be separated by glue, penalties and more. The page builder accumulates lines and when feasible triggers an output routine that will take the list so far. Constructing the actual page is not part of \TeX but done using primitives that permit manipulation of boxes. The result is handled back to \TeX and flushed to a (often pdf) file.

The Lua \TeX engine provides hooks for Lua code at nearly every reasonable point in the process: collecting content, hyphenating, applying font features, breaking into lines, etc. This means



that you can overload T_EX's natural behaviour, which still is the benchmark. When we refer to 'callbacks' we means these hooks.

Where plain T_EX is basically a basic framework for writing a specific style, macro packages like ConT_EXt and L^AT_EX provide the user a whole lot of additional tools to make documents look good. They hide the dirty details of font management, language demands, turning structure into typeset results, wrapping pages, including images, and so on. You should be aware of the fact that when you hook in your own code to manipulate lists, this can interfere with the macro package that you use.

When you read about nodes in the following chapters it's good to keep in mind their commands that relate to them. Here are a few:

| COMMAND | NODE | EXPLANATION |
|-----------------------------|--------------------|--|
| <code>\hbox</code> | <code>hlist</code> | horizontal box |
| <code>\vbox</code> | <code>vlist</code> | vertical box with the baseline at the bottom |
| <code>\vtop</code> | <code>vlist</code> | vertical box with the baseline at the top |
| <code>\hskip</code> | <code>glue</code> | horizontal skip with optional stretch and shrink |
| <code>\vskip</code> | <code>glue</code> | vertical skip with optional stretch and shrink |
| <code>\kern</code> | <code>kern</code> | horizontal or vertical fixed skip |
| <code>\discretionary</code> | <code>disc</code> | hyphenation point (pre, post, replace) |
| <code>\char</code> | <code>glyph</code> | a character |
| <code>\hrule</code> | <code>rule</code> | a horizontal rule |
| <code>\vrule</code> | <code>rule</code> | a vertical rule |
| <code>\textdir</code> | <code>dir</code> | a change in text direction |

For now this should be enough to enable you to understand the next chapters.



2 Basic T_EX enhancements

2.1 Introduction

2.1.1 Primitive behaviour

From day one, LuaT_EX has offered extra features compared to the superset of pdfT_EX, which includes ϵ -T_EX, and Aleph. This has not been limited to the possibility to execute Lua code via `\directlua`, but LuaT_EX also adds functionality via new T_EX-side primitives or extensions to existing ones.

When LuaT_EX starts up in ‘iniluatex’ mode (`luatex -ini`), it defines only the primitive commands known by T_EX82 and the one extra command `\directlua`. As is fitting, a Lua function has to be called to add the extra primitives to the user environment. The simplest method to get access to all of the new primitive commands is by adding this line to the format generation file:

```
\directlua { tex.enableprimitives('',tex.extraprimitives()) }
```

But be aware that the curly braces may not have the proper `\catcode` assigned to them at this early time (giving a ‘Missing number’ error), so it may be needed to put these assignments before the above line:

```
\catcode `{\{=1  
\catcode `{\}=2
```

More fine-grained primitives control is possible and you can look up the details in section 10.3.15. For simplicity’s sake, this manual assumes that you have executed the `\directlua` command as given above.

The startup behaviour documented above is considered stable in the sense that there will not be backward-incompatible changes any more. We have promoted some rather generic pdfT_EX primitives to core LuaT_EX ones, and the few that we inherited from Aleph (Omega) are also promoted. Effectively this means that we now only have the `tex`, `etex` and `luatex` sets left.

In Chapter 3 we discuss several primitives that are derived from pdfT_EX and Aleph (Omega). Here we stick to real new ones. In the chapters on fonts and math we discuss a few more new ones.

2.1.2 Version information

2.1.2.1

`\luatexbanner`, `\luatexversion` and `\luatexrevision`

There are three new primitives to test the version of LuaT_EX:

| PRIMITIVE | VALUE | EXPLANATION |
|----------------------------|--------------------------------|---|
| <code>\luatexbanner</code> | This is LuaTeX, Version 1.09.0 | the banner reported on the command line |



| | | |
|------------------------------|-----|---|
| <code>\luatexversion</code> | 109 | a combination of major and minor number |
| <code>\luatexrevision</code> | 0 | the revision number, the current value is |

The official LuaT_EX version is defined as follows:

- ▶ The major version is the integer result of `\luatexversion` divided by 100. The primitive is an ‘internal variable’, so you may need to prefix its use with `\the` depending on the context.
- ▶ The minor version is the two-digit result of `\luatexversion` modulo 100.
- ▶ The revision is reported by `\luatexrevision`. This primitive expands to a positive integer.
- ▶ The full version number consists of the major version, minor version and revision, separated by dots.

2.1.2.2

`\formatname`

The `\formatname` syntax is identical to `\jobname`. In `iniTEX`, the expansion is empty. Otherwise, the expansion is the value that `\jobname` had during the `iniTEX` run that dumped the currently loaded format. You can use this token list to provide your own version info.

2.2 UNICODE text support

2.2.1 Extended ranges

Text input and output is now considered to be Unicode text, so input characters can use the full range of Unicode ($2^{20} + 2^{16} - 1 = 0x10FFFF$). Later chapters will talk of characters and glyphs. Although these are not interchangeable, they are closely related. During typesetting, a character is always converted to a suitable graphic representation of that character in a specific font. However, while processing a list of to-be-typeset nodes, its contents may still be seen as a character. Inside LuaT_EX there is no clear separation between the two concepts. Because the subtype of a glyph node can be changed in Lua it is up to the user. Subtypes larger than 255 indicate that font processing has happened.

A few primitives are affected by this, all in a similar fashion: each of them has to accommodate for a larger range of acceptable numbers. For instance, `\char` now accepts values between 0 and 1,114,111. This should not be a problem for well-behaved input files, but it could create incompatibilities for input that would have generated an error when processed by older T_EX-based engines. The affected commands with an altered initial (left of the equal sign) or secondary (right of the equal sign) value are: `\char`, `\lccode`, `\uccode`, `\hjcode`, `\catcode`, `\sfcode`, `\efcode`, `\lpcode`, `\rpcode`, `\chardef`.

As far as the core engine is concerned, all input and output to text files is utf-8 encoded. Input files can be pre-processed using the reader callback. This will be explained in section 9.2.13. Normalization of the Unicode input is on purpose not built-in and can be handled by a macro package during callback processing. We have made some practical choices and the user has to live with those.



Output in byte-sized chunks can be achieved by using characters just outside of the valid Unicode range, starting at the value 1,114,112 (0x110000). When the time comes to print a character $c \geq 1,114,112$, LuaT_EX will actually print the single byte corresponding to c minus 1,114,112.

Output to the terminal uses `^^` notation for the lower control range ($c < 32$), with the exception of `^^I`, `^^J` and `^^M`. These are considered ‘safe’ and therefore printed as-is. You can disable escaping with `texio.setescape(false)` in which case you get the normal characters on the console.

2.2.2 \Uchar

The expandable command `\Uchar` reads a number between 0 and 1,114,111 and expands to the associated Unicode character.

2.2.3 Extended tables

All traditional T_EX and ϵ -T_EX registers can be 16-bit numbers. The affected commands are:

| | | | |
|----------------------|-------------------------|-----------------------|----------------------|
| <code>\count</code> | <code>\countdef</code> | <code>\box</code> | <code>\wd</code> |
| <code>\dimen</code> | <code>\dimendef</code> | <code>\unhbox</code> | <code>\ht</code> |
| <code>\skip</code> | <code>\skipdef</code> | <code>\unvbox</code> | <code>\dp</code> |
| <code>\muskip</code> | <code>\muskipdef</code> | <code>\copy</code> | <code>\setbox</code> |
| <code>\marks</code> | <code>\toksdef</code> | <code>\unhcopy</code> | <code>\vsplit</code> |
| <code>\toks</code> | <code>\insert</code> | <code>\unvcopy</code> | |

Because font memory management has been rewritten, character properties in fonts are no longer shared among font instances that originate from the same metric file. Of course we share fonts in the backend when possible so that the resulting pdf file is as efficient as possible, but for instance also expansion and protrusion no longer use copies as in pdfT_EX.

2.3 Attributes

2.3.1 Nodes

When T_EX reads input it will interpret the stream according to the properties of the characters. Some signal a macro name and trigger expansion, others open and close groups, trigger math mode, etc. What’s left over becomes the typeset text. Internally we get linked list of nodes. Characters become glyph nodes that have for instance a font and char property and `\kern 10pt` becomes a kern node with a width property. Spaces are alien to T_EX as they are turned into glue nodes. So, a simple paragraph is mostly a mix of sequences of glyph nodes (words) and glue nodes (spaces).

The sequences of characters at some point are extended with disc nodes that relate to hyphenation. After that font logic can be applied and we get a list where some characters can be replaced, for instance multiple characters can become one ligature, and font kerns can be injected. This is driven by the font properties.



Boxes (like `\hbox` and `\vbox`) become `hlist` or `vlist` nodes with width, height, depth and shift properties and a pointer `list` to its actual content. Boxes can be constructed explicitly or can be the result of subprocesses. For instance, when lines are broken into paragraphs, the lines are a linked list of `hlist` nodes.

So, to summarize: all that you enter as content eventually becomes a node, often as part of a (nested) list structure. They have a relative small memory footprint and carry only the minimal amount of information needed. In traditional \TeX a character node only held the font and slot number, in \LuaTeX we also store some language related information, the expansion factor, etc. Now that we have access to these nodes from Lua it makes sense to be able to carry more information with an node and this is where attributes kick in.

2.3.2 Attribute registers

Attributes are a completely new concept in \LuaTeX . Syntactically, they behave a lot like counters: attributes obey \TeX 's nesting stack and can be used after `\the` etc. just like the normal `\count` registers.

```
\attribute <16-bit number> <optional equals> <32-bit number>
\attributedef <cname> <optional equals> <16-bit number>
```

Conceptually, an attribute is either ‘set’ or ‘unset’. Unset attributes have a special negative value to indicate that they are unset, that value is the lowest legal value: `-0x7FFFFFFF` in hexadecimal, a.k.a. `-2147483647` in decimal. It follows that the value `-0x7FFFFFFF` cannot be used as a legal attribute value, but you *can* assign `-0x7FFFFFFF` to ‘unset’ an attribute. All attributes start out in this ‘unset’ state in \iniTeX .

Attributes can be used as extra counter values, but their usefulness comes mostly from the fact that the numbers and values of all ‘set’ attributes are attached to all nodes created in their scope. These can then be queried from any Lua code that deals with node processing. Further information about how to use attributes for node list processing from Lua is given in chapter 8.

Attributes are stored in a sorted (sparse) linked list that are shared when possible. This permits efficient testing and updating. You can define many thousands of attributes but normally such a large number makes no sense and is also not that efficient because each node carries a (possibly shared) link to a list of currently set attributes. But they are a convenient extension and one of the first extensions we implemented in \LuaTeX .

2.3.3 Box attributes

Nodes typically receive the list of attributes that is in effect when they are created. This moment can be quite asynchronous. For example: in paragraph building, the individual line boxes are created after the `\par` command has been processed, so they will receive the list of attributes that is in effect then, not the attributes that were in effect in, say, the first or third line of the paragraph.

Similar situations happen in \LuaTeX regularly. A few of the more obvious problematic cases are dealt with: the attributes for nodes that are created during hyphenation, kerning and ligaturing borrow their attributes from their surrounding glyphs, and it is possible to influence box attributes directly.



When you assemble a box in a register, the attributes of the nodes contained in the box are unchanged when such a box is placed, unboxed, or copied. In this respect attributes act the same as characters that have been converted to references to glyphs in fonts. For instance, when you use attributes to implement color support, each node carries information about its eventual color. In that case, unless you implement mechanisms that deal with it, applying a color to already boxed material will have no effect. Keep in mind that this incompatibility is mostly due to the fact that separate specials and literals are a more unnatural approach to colors than attributes.

It is possible to fine-tune the list of attributes that are applied to a hbox, vbox or vtop by the use of the keyword `attr`. The `attr` keyword(s) should come before a `to` or `spread`, if that is also specified. An example is:

```
\attribute997=123
\attribute998=456
\setbox0=\hbox {Hello}
\setbox2=\hbox attr 999 = 789 attr 998 = -"7FFFFFFF{Hello}
```

Box 0 now has attributes 997 and 998 set while box 2 has attributes 997 and 999 set while the nodes inside that box will all have attributes 997 and 998 set. Assigning the maximum negative value causes an attribute to be ignored.

To give you an idea of what this means at the Lua end, take the following code:

```
for b=0,2,2 do
  for a=997, 999 do
    tex.sprint("box ", b, " : attr ",a," : ",tostring(tex.box[b]      [a]))
    tex.sprint("\quad\quad")
    tex.sprint("list ",b, " : attr ",a," : ",tostring(tex.box[b].list[a]))
    tex.sprint("\par")
  end
end
```

Later we will see that you can access properties of a node. The boxes here are so called `hlist` nodes that have a field `list` that points to the content. Because the attributes are a list themselves you can access them by indexing the node (here we do that with `[a]`). Running this snippet gives:

```
box 0 : attr 997 : 123    list 0 : attr 997 : 123
box 0 : attr 998 : 456    list 0 : attr 998 : 456
box 0 : attr 999 : nil    list 0 : attr 999 : nil
box 2 : attr 997 : 123    list 2 : attr 997 : 123
box 2 : attr 998 : nil    list 2 : attr 998 : 456
box 2 : attr 999 : 789    list 2 : attr 999 : nil
```

Because some values are not set we need to apply the `tostring` function here so that we get the word `nil`.



2.4 LUA related primitives

2.4.1 `\directlua`

In order to merge Lua code with T_EX input, a few new primitives are needed. The primitive `\directlua` is used to execute Lua code immediately. The syntax is

```
\directlua <general text>
\directlua <16-bit number> <general text>
```

The `<general text>` is expanded fully, and then fed into the Lua interpreter. After reading and expansion has been applied to the `<general text>`, the resulting token list is converted to a string as if it was displayed using `\the\toks`. On the Lua side, each `\directlua` block is treated as a separate chunk. In such a chunk you can use the `local` directive to keep your variables from interfering with those used by the macro package.

The conversion to and from a token list means that you normally can not use Lua line comments (starting with `--`) within the argument. As there typically will be only one ‘line’ the first line comment will run on until the end of the input. You will either need to use T_EX-style line comments (starting with `%`), or change the T_EX category codes locally. Another possibility is to say:

```
\begingroup
\endlinechar=10
\directlua ...
\endgroup
```

Then Lua line comments can be used, since T_EX does not replace line endings with spaces. Of course such an approach depends on the macro package that you use.

The `<16-bit number>` designates a name of a Lua chunk and is taken from the `lua.name` array (see the documentation of the `lua` table further in this manual). When a chunk name starts with a `@` it will be displayed as a file name. This is a side effect of the way Lua implements error handling.

The `\directlua` command is expandable. Since it passes Lua code to the Lua interpreter its expansion from the T_EX viewpoint is usually empty. However, there are some Lua functions that produce material to be read by T_EX, the so called print functions. The most simple use of these is `tex.print(<string> s)`. The characters of the string `s` will be placed on the T_EX input buffer, that is, ‘before T_EX’s eyes’ to be read by T_EX immediately. For example:

```
\count10=20
a\directlua{tex.print(tex.count[10]+5)}b
```

expands to

a25b

Here is another example:

```
$\pi = \directlua{tex.print(math.pi)}$
```

will result in



$\pi = 3.1415926535898$

Note that the expansion of `\directlua` is a sequence of characters, not of tokens, contrary to all \TeX commands. So formally speaking its expansion is null, but it places material on a pseudo-file to be immediately read by \TeX , as $\varepsilon\text{-}\text{\TeX}$'s `\scantokens`. For a description of print functions look at section 10.3.13.

Because the `<general text>` is a chunk, the normal Lua error handling is triggered if there is a problem in the included code. The Lua error messages should be clear enough, but the contextual information is still pretty bad. Often, you will only see the line number of the right brace at the end of the code.

While on the subject of errors: some of the things you can do inside Lua code can break up \LaTeX pretty bad. If you are not careful while working with the node list interface, you may even end up with assertion errors from within the \TeX portion of the executable.

2.4.2 `\latelua` and `\lateluafunction`

Contrary to `\directlua`, `\latelua` stores Lua code in a whatsit that will be processed at the time of shipping out. Its intended use is a cross between pdf literals (often available as `\pdfliteral`) and the traditional \TeX extension `\write`. Within the Lua code you can print pdf statements directly to the pdf file via `pdf.print`, or you can write to other output streams via `texio.write` or simply using Lua io routines.

```
\latelua <general text>
\latelua <16-bit number> <general text>
```

Expansion of macros in the final `<general text>` is delayed until just before the whatsit is executed (like in `\write`). With regard to pdf output stream `\latelua` behaves as pdf page literals. The name `<general text>` and `<16-bit number>` behave in the same way as they do for `\directlua`.

The `\lateluafunction` primitive takes a number and is similar to `\luafunction` but gets delayed to shipout time. It's just there for completeness.

2.4.3 `\luaescapestring`

This primitive converts a \TeX token sequence so that it can be safely used as the contents of a Lua string: embedded backslashes, double and single quotes, and newlines and carriage returns are escaped. This is done by prepending an extra token consisting of a backslash with category code 12, and for the line endings, converting them to `n` and `r` respectively. The token sequence is fully expanded.

```
\luaescapestring <general text>
```

Most often, this command is not actually the best way to deal with the differences between \TeX and Lua. In very short bits of Lua code it is often not needed, and for longer stretches of Lua code it is easier to keep the code in a separate file and load it using Lua's `dofile`:

```
\directlua { dofile('mysetups.lua') }
```



2.4.4 `\luafunction`, `\luafunctioncall` and `\luadef`

The `\directlua` commands involves tokenization of its argument (after picking up an optional name or number specification). The tokenlist is then converted into a string and given to Lua to turn into a function that is called. The overhead is rather small but when you have millions of calls it can have some impact. For this reason there is a variant call available: `\luafunction`. This command is used as follows:

```
\directlua {  
  local t = lua.get_functions_table()  
  t[1] = function() tex.print("!") end  
  t[2] = function() tex.print("?") end  
}
```

```
\luafunction1  
\luafunction2
```

Of course the functions can also be defined in a separate file. There is no limit on the number of functions apart from normal Lua limitations. Of course there is the limitation of no arguments but that would involve parsing and thereby give no gain. The function, when called in fact gets one argument, being the index, so in the following example the number 8 gets typeset.

```
\directlua {  
  local t = lua.get_functions_table()  
  t[8] = function(slot) tex.print(slot) end  
}
```

The `\luafunctioncall` primitive does the same but is unexpandable, for instance in an `\edef`. In addition LuaTeX provides a definer:

```
        \luadef\MyFunctionA 1  
    \global\luadef\MyFunctionB 2  
\protected\global\luadef\MyFunctionC 3
```

You should really use these commands with care. Some references get stored in tokens and assume that the function is available when that token expands. On the other hand, as we have tested this functionality in relative complex situations normal usage should not give problems.

2.4.5 `\luabytecode` and `\luabytecodecall`

Analogue to the function callers discussed in the previous section we have byte code callers. Again the call variant is unexpandable.

```
\directlua {  
  lua.bytecode[9998] = function(s)  
    tex.sprint(s*token.scan_int())  
  end  
  lua.bytecode[5555] = function(s)
```



```

        tex.sprint(s*token.scan_dimen())
    end
}

```

This works with:

```

\luabytecode    9998 5 \luabytecode    5555 5sp
\luabytecodecall9998 5 \luabytecodecall5555 5sp

```

The variable `s` in the code is the number of the byte code register that can be used for diagnostic purposes. The advantage of bytecode registers over function calls is that they are stored in the format (but without upvalues).

2.5 Catcode tables

2.5.1 Catcodes

Catcode tables are a new feature that allows you to switch to a predefined catcode regime in a single statement. You can have a practically unlimited number of different tables. This subsystem is backward compatible: if you never use the following commands, your document will not notice any difference in behaviour compared to traditional \TeX . The contents of each catcode table is independent from any other catcode table, and its contents is stored and retrieved from the format file.

2.5.2 `\catcodetable`

`\catcodetable` <15-bit number>

The primitive `\catcodetable` switches to a different catcode table. Such a table has to be previously created using one of the two primitives below, or it has to be zero. Table zero is initialized by `ini \TeX` .

2.5.3 `\initcatcodetable`

`\initcatcodetable` <15-bit number>

The primitive `\initcatcodetable` creates a new table with catcodes identical to those defined by `ini \TeX` . The new catcode table is allocated globally: it will not go away after the current group has ended. If the supplied number is identical to the currently active table, an error is raised. The initial values are:

| CATCODE | CHARACTER | EQUIVALENT | CATEGORY |
|---------|----------------------------|------------|----------|
| 0 | <code>\</code> | | escape |
| 5 | <code>^^M</code> | return | car_ret |
| 9 | <code>^^@</code> | null | ignore |
| 10 | <code><space></code> | space | spacer |
| 11 | <code>a - z</code> | | letter |



| | | |
|----|-----------------|--------------|
| 11 | A – Z | letter |
| 12 | everything else | other |
| 14 | % | comment |
| 15 | ^^? | delete |
| | | invalid_char |

2.5.4 `\savecatcodetable`

`\savecatcodetable` <15-bit number>

`\savecatcodetable` copies the current set of catcodes to a new table with the requested number. The definitions in this new table are all treated as if they were made in the outermost level.

The new table is allocated globally: it will not go away after the current group has ended. If the supplied number is the currently active table, an error is raised.

2.6 Suppressing errors

2.6.1 `\suppressfontnotfounderror`

If this integer parameter is non-zero, then LuaTeX will not complain about font metrics that are not found. Instead it will silently skip the font assignment, making the requested csname for the font `\ifx` equal to `\nullfont`, so that it can be tested against that without bothering the user.

`\suppressfontnotfounderror = 1`

2.6.2 `\suppresslongerror`

If this integer parameter is non-zero, then LuaTeX will not complain about `\par` commands encountered in contexts where that is normally prohibited (most prominently in the arguments of macros not defined as `\long`).

`\suppresslongerror = 1`

2.6.3 `\suppressifcsnameerror`

If this integer parameter is non-zero, then LuaTeX will not complain about non-expandable commands appearing in the middle of a `\ifcsname` expansion. Instead, it will keep getting expanded tokens from the input until it encounters an `\endcsname` command. If the input expansion is unbalanced with respect to `\csname ... \endcsname` pairs, the LuaTeX process may hang indefinitely.

`\suppressifcsnameerror = 1`

2.6.4 `\suppressoutererror`

If this new integer parameter is non-zero, then LuaTeX will not complain about `\outer` commands encountered in contexts where that is normally prohibited.

`\suppressoutererror = 1`



2.6.5 `\suppressmathparerror`

The following setting will permit `\par` tokens in a math formula:

```
\suppressmathparerror = 1
```

So, the next code is valid then:

```
$ x + 1 =
```

```
a $
```

2.6.6 `\suppressprimitiveerror`

When set to a non-zero value the following command will not issue an error:

```
\suppressprimitiveerror = 1  
\primitive\notapimitive
```

2.7 Fonts

2.7.1 Font syntax

Lua_T_EX will accept a braced argument as a font name:

```
\font\myfont = {cmr10}
```

This allows for embedded spaces, without the need for double quotes. Macro expansion takes place inside the argument.

2.7.2 `\fontid` and `\setfontid`

```
\fontid\font
```

This primitive expands into a number. It is not a register so there is no need to prefix with `\number` (and using `\the` gives an error). The currently used font id is 29. Here are some more:

| STYLE | COMMAND | FONT ID |
|-------------|------------------|------------------|
| normal | <code>\tf</code> | 38 |
| bold | <code>\bf</code> | 38 |
| italic | <code>\it</code> | <i>49</i> |
| bold italic | <code>\bi</code> | <i>50</i> |

These numbers depend on the macro package used because each one has its own way of dealing with fonts. They can also differ per run, as they can depend on the order of loading fonts. For instance, when in Con_T_EXt virtual math Unicode fonts are used, we can easily get over a hundred ids in use. Not all ids have to be bound to a real font, after all it's just a number.



The primitive `\setfontid` can be used to enable a font with the given id, which of course needs to be a valid one.

2.7.3 `\noligs` and `\nokerns`

These primitives prohibit ligature and kerning insertion at the time when the initial node list is built by Lua_{T_EX}'s main control loop. You can enable these primitives when you want to do node list processing of 'characters', where T_EX's normal processing would get in the way.

```
\noligs <integer>
\nokerns <integer>
```

These primitives can also be implemented by overloading the ligature building and kerning functions, i.e. by assigning dummy functions to their associated callbacks. Keep in mind that when you define a font (using Lua) you can also omit the kern and ligature tables, which has the same effect as the above.

2.7.4 `\nospaces`

This new primitive can be used to overrule the usual `\spaceskip` related heuristics when a space character is seen in a text flow. The value 1 triggers no injection while 2 results in injection of a zero skip. In figure 2.1 we see the results for four characters separated by a space.

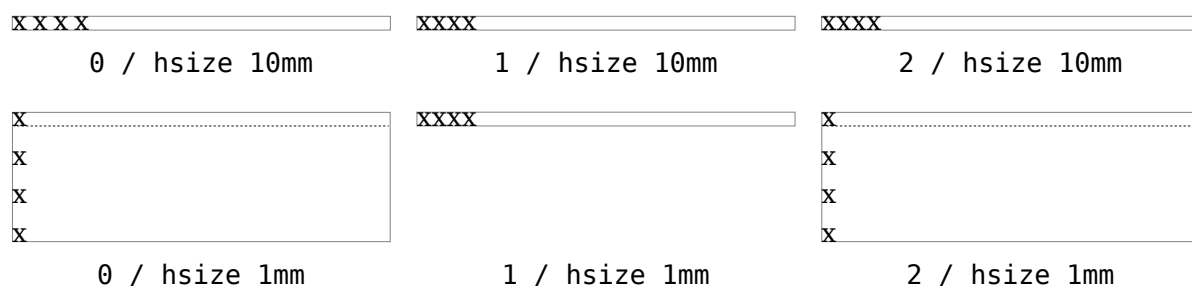


Figure 2.1 The `\nospaces` options.

2.8 Tokens, commands and strings

2.8.1 `\scantextokens`

The syntax of `\scantextokens` is identical to `\scantokens`. This primitive is a slightly adapted version of ε -T_EX's `\scantokens`. The differences are:

- ▶ The last (and usually only) line does not have a `\endlinechar` appended.
- ▶ `\scantextokens` never raises an EOF error, and it does not execute `\everyeof` tokens.
- ▶ There are no '... while end of file ...' error tests executed. This allows the expansion to end on a different grouping level or while a conditional is still incomplete.

2.8.2 `\toksapp`, `\tokspre`, `\etoksapp` and `\etokspre`

Instead of:



```
\toks0\expandafter{\the\toks0 foo}
```

you can use:

```
\etoksapp0{foo}
```

The pre variants prepend instead of append, and the e variants expand the passed general text.

2.8.3 `\csstring`, `\beginsname` and `\lastnamedcs`

These are somewhat special. The `\csstring` primitive is like `\string` but it omits the leading escape character. This can be somewhat more efficient than stripping it afterwards.

The `\beginsname` primitive is like `\csname` but doesn't create a relaxed equivalent when there is no such name. It is equivalent to

```
\ifcsname foo\endcsname
  \csname foo\endcsname
\fi
```

The advantage is that it saves a lookup (don't expect much speedup) but more important is that it avoids using the `\if` test. The `\lastnamedcs` is one that should be used with care. The above example could be written as:

```
\ifcsname foo\endcsname
  \lastnamedcs
\fi
```

This is slightly more efficient than constructing the string twice (deep down in LuaTeX this also involves some utf8 juggling), but probably more relevant is that it saves a few tokens and can make code a bit more readable.

2.8.4 `\clearmarks`

This primitive complements the ϵ -TeX mark primitives and clears a mark class completely, resetting all three connected mark texts to empty. It is an immediate command.

```
\clearmarks <16-bit number>
```

2.8.5 `\alignmark` and `\aligntab`

The primitive `\alignmark` duplicates the functionality of `#` inside alignment preambles, while `\aligntab` duplicates the functionality of `&`.

2.8.6 `\letcharcode`

This primitive can be used to assign a meaning to an active character, as in:

```
\def\foo{bar} \letcharcode123=\foo
```



This can be a bit nicer than using the uppercase tricks (using the property of `\uppercase` that it treats active characters special).

2.8.7 `\glet`

This primitive is similar to:

```
\protected\def\glet{\global\let}
```

but faster (only measurable with millions of calls) and probably more convenient (after all we also have `\gdef`).

2.8.7.1 `\expanded`, `\immediateassignment` and `\immediateassigned`

The `\expanded` primitive takes a token list and expands its content which can come in handy: it avoids a tricky mix of `\expandafter` and `\noexpand`. You can compare it with what happens inside the body of an `\edef`. But this kind of expansion still doesn't expand some primitive operations.

```
\newcount\NumberOfCalls
```

```
\def\TestMe{\advance\NumberOfCalls1 }
```

```
\edef\Tested{\TestMe foo:\the\NumberOfCalls}
```

```
\edef\Tested{\TestMe foo:\the\NumberOfCalls}
```

```
\edef\Tested{\TestMe foo:\the\NumberOfCalls}
```

```
\meaning\Tested
```

The result is a macro that has the not expanded code in its body:

```
macro:->\advance \NumberOfCalls 1 foo:0
```

Instead we can define `\TestMe` in a way that expands the assignment immediately. You need of course to be aware of preventing look ahead interference by using a space or `\relax` (often an expression works better as it doesn't leave an `\relax`).

```
\def\TestMe{\immediateassignment\advance\NumberOfCalls1 }
```

```
\edef\Tested{\TestMe foo:\the\NumberOfCalls}
```

```
\edef\Tested{\TestMe foo:\the\NumberOfCalls}
```

```
\edef\Tested{\TestMe foo:\the\NumberOfCalls}
```

```
\meaning\Tested
```

This time the counter gets updated and we don't see interference in the resulting `\Tested` macro:

```
macro:->foo:3
```

Here is a somewhat silly example of expanded comparison:



```

\def\expandeddoifelse#1#2#3#4%
  {\immediateassignment\edef\tempa{#1}%
   \immediateassignment\edef\tempb{#2}%
   \ifx\tempa\tempb
     \immediateassignment\def\next{#3}%
   \else
     \immediateassignment\def\next{#4}%
   \fi
  \next}

\edef\Tested
  {(\expandeddoifelse{abc}{def}{yes}{nop})/%
   \expandeddoifelse{abc}{abc}{yes}{nop})}

\meaning\Tested

```

It gives:

macro:->(nop/yes)

A variant is:

```

\def\expandeddoifelse#1#2#3#4%
  {\immediateassigned{
   \edef\tempa{#1}%
   \edef\tempb{#2}%
  }%
  \ifx\tempa\tempb
    \immediateassignment\def\next{#3}%
  \else
    \immediateassignment\def\next{#4}%
  \fi
  \next}

```

The possible error messages are the same as using assignments in preambles of alignments and after the `\accent` command. The supported assignments are the so called prefixed commands (except box assignments).

2.8.7.2 `\ifcondition`

This is a somewhat special one. When you write macros conditions need to be properly balanced in order to let T_EX's fast branch skipping work well. This new primitive is basically a no-op flagged as a condition so that the scanner can recognize it as an if-test. However, when a real test takes place the work is done by what follows, in the next example `\something`.

```

\unexpanded\def\something#1#2%
  {\edef\tempa{#1}%
   \edef\tempb{#2}%
   \ifx\tempa\tempb}

```



```

\ifcondition\something{a}{b}%
  \ifcondition\something{a}{a}%
    true 1
  \else
    false 1
  \fi
\else
  \ifcondition\something{a}{a}%
    true 2
  \else
    false 2
  \fi
\fi

```

If you are familiar with MetaPost, this is a bit like `vardef` where the macro has a return value. Here the return value is a test.

2.9 Boxes, rules and leaders

2.9.1 `\outputbox`

This integer parameter allows you to alter the number of the box that will be used to store the page sent to the output routine. Its default value is 255, and the acceptable range is from 0 to 65535.

```
\outputbox = 12345
```

2.9.2 `\vpack`, `\hpack` and `\tpack`

These three primitives are like `\vbox`, `\hbox` and `\vtop` but don't apply the related callbacks.

2.9.3 `\vsplit`

The `\vsplit` primitive has to be followed by a specification of the required height. As alternative for the `to` keyword you can use `upto` to get a split of the given size but result has the natural dimensions then.

2.9.4 Images and reused box objects

These two concepts are now core concepts and no longer whatsits. They are in fact now implemented as rules with special properties. Normal rules have subtype 0, saved boxes have subtype 1 and images have subtype 2. This has the positive side effect that whenever we need to take content with dimensions into account, when we look at rule nodes, we automatically also deal with these two types.



The syntax of the `\save...resource` is the same as in pdf \TeX but you should consider them to be backend specific. This means that a macro package should treat them as such and check for the current output mode if applicable.

| COMMAND | EXPLANATION |
|---|--|
| <code>\saveboxresource</code> | save the box as an object to be included later |
| <code>\saveimageresource</code> | save the image as an object to be included later |
| <code>\useboxresource</code> | include the saved box object here (by index) |
| <code>\useimageresource</code> | include the saved image object here (by index) |
| <code>\lastsavedboxresourceindex</code> | the index of the last saved box object |
| <code>\lastsavedimageresourceindex</code> | the index of the last saved image object |
| <code>\lastsavedimageresourcepages</code> | the number of pages in the last saved image object |

Lua \TeX accepts optional dimension parameters for `\use...resource` in the same format as for rules. With images, these dimensions are then used instead of the ones given to `\useimageresource` but the original dimensions are not overwritten, so that a `\useimageresource` without dimensions still provides the image with dimensions defined by `\saveimageresource`. These optional parameters are not implemented for `\saveboxresource`.

```
\useimageresource width 20mm height 10mm depth 5mm \lastsavedimageresourceindex
\useboxresource   width 20mm height 10mm depth 5mm \lastsavedboxresourceindex
```

The box resources are of course implemented in the backend and therefore we do support the `attr` and `resources` keys that accept a token list. New is the `type` key. When set to non-zero the `/Type` entry is omitted. A value of 1 or 3 still writes a `/BBox`, while 2 or 3 will write a `/Matrix`.

2.9.5 `\nohrule` and `\novrule`

Because introducing a new keyword can cause incompatibilities, two new primitives were introduced: `\nohrule` and `\novrule`. These can be used to reserve space. This is often more efficient than creating an empty box with fake dimensions.

2.9.6 `\gleaders`

This type of leaders is anchored to the origin of the box to be shipped out. So they are like normal `\leaders` in that they align nicely, except that the alignment is based on the *largest* enclosing box instead of the *smallest*. The `g` stresses this global nature.

2.10 Languages

2.10.1 `\hyphenationmin`

This primitive can be used to set the minimal word length, so setting it to a value of 5 means that only words of 6 characters and more will be hyphenated, of course within the constraints of the `\lefthyphenmin` and `\righthyphenmin` values (as stored in the glyph node). This primitive accepts a number and stores the value with the language.



2.10.2 `\boundary`, `\noboundary`, `\protrusionboundary` and `\wordboundary`

The `\noboundary` command is used to inject a whatsit node but now injects a normal node with type boundary and subtype 0. In addition you can say:

```
x\boundary 123\relax y
```

This has the same effect but the subtype is now 1 and the value 123 is stored. The traditional ligature builder still sees this as a cancel boundary directive but at the Lua end you can implement different behaviour. The added benefit of passing this value is a side effect of the generalization. The subtypes 2 and 3 are used to control protrusion and word boundaries in hyphenation and have related primitives.

2.11 Control and debugging

2.11.1 Tracing

If `\tracingonline` is larger than 2, the node list display will also print the node number of the nodes.

2.11.2 `\outputmode`

The `\outputmode` variable tells LuaTeX what it has to produce:

| VALUE | OUTPUT |
|-------|----------|
| 0 | dvi code |
| 1 | pdf code |

2.11.3 `\draftmode`

The value of the `\draftmode` counter signals the backend if it should output less. The pdf backend accepts a value of 1, while the dvi backend ignores the value. This is no critical feature so we can remove it in future versions when it can make the backend cleaner.

2.12 Files

2.12.1 File syntax

LuaTeX will accept a braced argument as a file name:

```
\input {plain}  
\openin 0 {plain}
```

This allows for embedded spaces, without the need for double quotes. Macro expansion takes place inside the argument.



The `\tracingfonts` primitive that has been inherited from pdf \TeX has been adapted to support variants in reporting the font. The reason for this extension is that a csname not always makes sense. The zero case is the default.

| VALUE | REPORTED |
|-------|---|
| 0 | <code>\foo xyz</code> |
| 1 | <code>\foo (bar)</code> |
| 2 | <code><bar> xyz</code> |
| 3 | <code><bar @ ..pt> xyz</code> |
| 4 | <code><id></code> |
| 5 | <code><id: bar></code> |
| 6 | <code><id: bar @ ..pt> xyz</code> |

2.12.2 Writing to file

You can now open upto 127 files with `\openout`. When no file is open writes will go to the console and log. As a consequence a system command is no longer possible but one can use `os.execute` to do the same.

2.13 Math

We will cover math extensions in its own chapter because not only the font subsystem and spacing model have been enhanced (thereby introducing many new primitives) but also because some more control has been added to existing functionality. Much of this relates to the different approaches of traditional \TeX fonts and OpenType math.





3 Modifications

3.1 The merged engines

3.1.1 The need for change

The first version of LuaT_EX only had a few extra primitives and it was largely the same as pdfT_EX. Then we merged substantial parts of Aleph into the code and got more primitives. When we got more stable the decision was made to clean up the rather hybrid nature of the program. This means that some primitives have been promoted to core primitives, often with a different name, and that others were removed. This made it possible to start cleaning up the code base. In chapter 2 we discussed some new primitives, here we will cover most of the adapted ones.

Besides the expected changes caused by new functionality, there are a number of not-so-expected changes. These are sometimes a side-effect of a new (conflicting) feature, or, more often than not, a change necessary to clean up the internal interfaces. These will also be mentioned.

3.1.2 Changes from T_EX 3.1415926

Of course it all starts with traditional T_EX. Even if we started with pdfT_EX, most still comes from the original. But we divert a bit.

- ▶ The current code base is written in C, not Pascal. We use cweb when possible. As a consequence instead of one large file plus change files, we now have multiple files organized in categories like tex, pdf, lang, font, lua, etc. There are some artifacts of the conversion to C, but in due time we will clean up the source code and make sure that the documentation is done right. Many files are in the cweb format, but others, like those interfacing to Lua, are C files. Of course we want to stay as close as possible to the original so that the documentation of the fundamentals behind T_EX by Don Knuth still applies.
- ▶ See chapter 5 for many small changes related to paragraph building, language handling and hyphenation. The most important change is that adding a brace group in the middle of a word (like in of{}fice) does not prevent ligature creation.
- ▶ There is no pool file, all strings are embedded during compilation.
- ▶ The specifier plus 1 filllll does not generate an error. The extra 'l' is simply typeset.
- ▶ The upper limit to \endlinechar and \newlinechar is 127.
- ▶ Magnification (\mag) is only supported in dvi output mode. You can set this parameter and it even works with true units till you switch to pdf output mode. When you use pdf output you can best not touch the \mag variable. This fuzzy behaviour is not much different from using pdf backend related functionality while eventually dvi output is required.

After the output mode has been frozen (normally that happens when the first page is shipped out) or when pdf output is enabled, the true specification is ignored. When you preload a plain format adapted to LuaT_EX it can be that the \mag parameter already has been set.



3.1.3 Changes from ε -T_EX 2.2

Being the de facto standard extension of course we provide the ε -T_EX functionality, but with a few small adaptations.

- ▶ The ε -T_EX functionality is always present and enabled so the prepended asterisk or `-etex` switch for `iniTEX` is not needed.
- ▶ The T_EX_{Xe}T extension is not present, so the primitives `\TeXXeTstate`, `\beginR`, `\beginL`, `\endR` and `\endL` are missing. Instead we used the Omega/Aleph approach to directionality as starting point.
- ▶ Some of the tracing information that is output by ε -T_EX's `\tracingassigns` and `\tracingrestores` is not there.
- ▶ Register management in LuaT_EX uses the Omega/Aleph model, so the maximum value is 65535 and the implementation uses a flat array instead of the mixed flat & sparse model from ε -T_EX.
- ▶ When `kpathsea` is used to find files, LuaT_EX uses the `ofm` file format to search for font metrics. In turn, this means that LuaT_EX looks at the `OFM FONTS` configuration variable (like Omega and Aleph) instead of `TFM FONTS` (like T_EX and pdfT_EX). Likewise for virtual fonts (LuaT_EX uses the variable `OVFFONTS` instead of `VFFONTS`).

3.1.4 Changes from PDFT_EX 1.40

Because we want to produce pdf the most natural starting point was the popular pdfT_EX program. We inherit the stable features, dropped most of the experimental code and promoted some functionality to core LuaT_EX functionality which in turn triggered renaming primitives.

For compatibility reasons we still refer to `\pdf . . .` commands but LuaT_EX has a different backend interface. Instead of these primitives there are three interfacing primitives: `\pdfextension`, `\pdfvariable` and `\pdffeedback` that take keywords and optional further arguments (below we will still use the `\pdf` prefix names as reference). This way we can extend the features when needed but don't need to adapt the core engine. The front- and backend are decoupled as much as possible.

- ▶ The (experimental) support for snap nodes has been removed, because it is much more natural to build this functionality on top of node processing and attributes. The associated primitives that are gone are: `\pdfsnaprefpoint`, `\pdfsnapy`, and `\pdfsnapycomp`.
- ▶ The (experimental) support for specialized spacing around nodes has also been removed. The associated primitives that are gone are: `\pdfadjustinterwordglue`, `\pdfprependkern`, and `\pdfappendkern`, as well as the five supporting primitives `\knbscode`, `\stbscode`, `\shbscode`, `\knbccode`, and `\knaccode`.
- ▶ A number of 'pdfT_EX primitives' have been removed as they can be implemented using Lua: `\pdfelapsedtime`, `\pdfescapehex`, `\pdfescapename`, `\pdfescapestring`, `\pdffiledump`, `\pdffilemoddate`, `\pdffilesize`, `\pdfforcepagebox`, `\pdflastmatch`, `\pdfmatch`, `\pdfmdfivesum`, `\pdfmovechars`, `\pdfoptionalalwaysusepdfpagebox`, `\pdfoptionpdfinclusionerrorlevel`, `\pdfresettimer`, `\pdfshellescape`, `\pdfstrcmp` and `\pdfunescapehex`.
- ▶ The version related primitives `\pdftexbanner`, `\pdftexversion` and `\pdftexrevision` are no longer present as there is no longer a relationship with pdfT_EX development.



- ▶ The experimental snapper mechanism has been removed and therefore also the primitives `\pdfignoreddimen`, `\pdffirstlineheight`, `\pdfeachlineheight`, `\pdfeachlinedepth` and `\pdflastlinedepth`.
- ▶ The experimental primitives `\primitive`, `\ifprimitive`, `\ifabsnum` and `\ifabsdim` are promoted to core primitives. The `\pdf*` prefixed originals are not available.
- ▶ Because LuaTeX has a different subsystem for managing images, more diversion from its ancestor happened in the meantime. We don't adapt to changes in pdfTeX.
- ▶ Two extra token lists are provided, `\pdfxformresources` and `\pdfxformattr`, as an alternative to `\pdfxform` keywords.
- ▶ Image specifications also support `visiblefilename`, `userpassword` and `ownerpassword`. The password options are only relevant for encrypted pdf files.
- ▶ The current version of LuaTeX no longer replaces and/or merges fonts in embedded pdf files with fonts of the enveloping pdf document. This regression may be temporary, depending on how the rewritten font backend will look like.
- ▶ The primitives `\pdfpagewidth` and `\pdfpageheight` have been removed because `\pagewidth` and `\pageheight` have that purpose.
- ▶ The primitives `\pdfnormaldeviate`, `\pdfuniformdeviate`, `\pdfsetrandomseed` and `\pdfrandomseed` have been promoted to core primitives without pdf prefix so the original commands are no longer recognized.
- ▶ The primitives `\ifincsname`, `\expanded` and `\quitvmode` are now core primitives.
- ▶ As the hz and protrusion mechanism are part of the core the related primitives `\lrcode`, `\rrcode`, `\efcode`, `\leftmarginkern`, `\rightmarginkern` are promoted to core primitives. The two commands `\protrudechars` and `\adjustspacing` replace their prefixed with `\pdf` originals.
- ▶ The hz optimization code has been partially redone so that we no longer need to create extra font instances. The front- and backend have been decoupled and more efficient (pdf) code is generated.
- ▶ When `\adjustspacing` has value 2, hz optimization will be applied to glyphs and kerns. When the value is 3, only glyphs will be treated. A value smaller than 2 disables this feature.
- ▶ The `\tagcode` primitive is promoted to core primitive.
- ▶ The `\letterspacefont` feature is now part of the core but will not be changed (improved). We just provide it for legacy use.
- ▶ The `\pdfnoligatures` primitive is now `\ignoreligaturesinfont`.
- ▶ The `\pdfcopyfont` primitive is now `\copyfont`.
- ▶ The `\pdffontexpand` primitive is now `\expandglyphsinfont`.
- ▶ Because position tracking is also available in dvi mode the `\savepos`, `\lastxpos` and `\lastypos` commands now replace their pdf prefixed originals.
- ▶ The introspective primitives `\pdflastximagecolordepth` and `\pdfximagebbox` have been removed. One can use external applications to determine these properties or use the built-in `img` library.
- ▶ The initializers `\pdfoutput` has been replaced by `\outputmode` and `\pdfdraftmode` is now `\draftmode`.
- ▶ The pixel multiplier dimension `\pdfpxdimen` lost its prefix and is now called `\pxdimen`.
- ▶ An extra `\pdfimageaddfilename` option has been added that can be used to block writing the filename to the pdf file.
- ▶ The primitive `\pdftracingfonts` is now `\tracingfonts` as it doesn't relate to the backend.



- ▶ The experimental primitive `\pdfinsertht` is kept as `\insertht`.
- ▶ There is some more control over what metadata goes into the pdf file.
- ▶ The promotion of primitives to core primitives as well as the separation of font- and backend means that the initialization namespace `pdftex` is gone.

One change involves the so called xforms and ximages. In pdf_T_EX these are implemented as so called whatsits. But contrary to other whatsits they have dimensions that need to be taken into account when for instance calculating optimal line breaks. In Lua_T_EX these are now promoted to a special type of rule nodes, which simplifies code that needs those dimensions.

Another reason for promotion is that these are useful concepts. Backends can provide the ability to use content that has been rendered in several places, and images are also common. As already mentioned in section 2.9.4, we now have:

| LUAT _E X | PDF _T _E X |
|---|----------------------------------|
| <code>\saveboxresource</code> | <code>\pdfxform</code> |
| <code>\saveimageresource</code> | <code>\pdfximage</code> |
| <code>\useboxresource</code> | <code>\pdfrefxform</code> |
| <code>\useimageresource</code> | <code>\pdfrefximage</code> |
| <code>\lastsavedboxresourceindex</code> | <code>\pdflastxform</code> |
| <code>\lastsavedimageresourceindex</code> | <code>\pdflastximage</code> |
| <code>\lastsavedimageresourcepages</code> | <code>\pdflastximagepages</code> |

There are a few `\pdffeedback` features that relate to this but these are typical backend specific ones. The index that gets returned is to be considered as ‘just a number’ and although it still has the same meaning (object related) as before, you should not depend on that.

The protrusion detection mechanism is enhanced a bit to enable a bit more complex situations. When protrusion characters are identified some nodes are skipped:

- | | |
|--------------------------------------|------------------------------|
| ▶ zero glue | ▶ dir nodes |
| ▶ penalties | ▶ empty horizontal lists |
| ▶ empty discretionaries | ▶ local par nodes |
| ▶ normal zero kerns | ▶ inserts, marks and adjusts |
| ▶ rules with zero dimensions | ▶ boundaries |
| ▶ math nodes with a surround of zero | ▶ whatsits |

Because this can not be enough, you can also use a protrusion boundary node to make the next node being ignored. When the value is 1 or 3, the next node will be ignored in the test when locating a left boundary condition. When the value is 2 or 3, the previous node will be ignored when locating a right boundary condition (the search goes from right to left). This permits protrusion combined with for instance content moved into the margin:

```
\protrusionboundary1\llap{!\quad}«Who needs protrusion?»
```

3.1.5 Changes from ALEPH RC4

Because we wanted proper directional typesetting the Aleph mechanisms looked most attractive. These are rather close to the ones provided by Omega, so what we say next applies to both these



programs.

- ▶ The extended 16-bit math primitives (`\omathcode` etc.) have been removed.
- ▶ The OCP processing has been removed completely and as a consequence, the following primitives have been removed: `\ocp`, `\externalocp`, `\ocplist`, `\pushocplist`, `\popocplist`, `\clearocplists`, `\addbeforeocplist`, `\addafterocplist`, `\removebeforeocplist`, `\removeafterocplist` and `\ocptracelevel`.
- ▶ LuaTeX only understands 4 of the 16 direction specifiers of Aleph: TLT (latin), TRT (arabic), RTT (cjk), LTL (mongolian). All other direction specifiers generate an error. In addition to a keyword driven model we also provide an integer driven one.
- ▶ The input translations from Aleph are not implemented, the related primitives are not available: `\DefaultInputMode`, `\noDefaultInputMode`, `\noInputMode`, `\InputMode`, `\DefaultOutputMode`, `\noDefaultOutputMode`, `\noOutputMode`, `\OutputMode`, `\DefaultInputTranslation`, `\noDefaultInputTranslation`, `\noInputTranslation`, `\InputTranslation`, `\DefaultOutputTranslation`, `\noDefaultOutputTranslation`, `\noOutputTranslation` and `\OutputTranslation`.
- ▶ Several bugs have been fixed and confusing implementation details have been sorted out.
- ▶ The scanner for direction specifications now allows an optional space after the direction is completely parsed.
- ▶ The `^^` notation has been extended: after `^^^^` four hexadecimal characters are expected and after `^^^^^^` six hexadecimal characters have to be given. The original TeX interpretation is still valid for the `^^` case but the four and six variants do no backtracking, i.e. when they are not followed by the right number of hexadecimal digits they issue an error message. Because `^^^` is a normal TeX case, we don't support the odd number of `^^^^` either.
- ▶ Glues *immediately after* direction change commands are not legal breakpoints.
- ▶ Several mechanisms that need to be right-to-left aware have been improved. For instance placement of formula numbers.
- ▶ The page dimension related primitives `\pagewidth` and `\pageheight` have been promoted to core primitives. The `\hoffset` and `\voffset` primitives have been fixed.
- ▶ The primitives `\charwd`, `\charht`, `\chardp` and `\charit` have been removed as we have the ε -TeX variants `\fontchar*`.
- ▶ The two dimension registers `\pagerightoffset` and `\pagebottomoffset` are now core primitives.
- ▶ The direction related primitives `\pagedir`, `\bodydir`, `\pardir`, `\textdir`, `\mathdir` and `\boxdir` are now core primitives.
- ▶ The promotion of primitives to core primitives as well as removing of all others means that the initialization namespace aleph that early versions of LuaTeX provided is gone.

The above let's itself summarize as: we took the 32 bit aspects and much of the directional mechanisms and merged it into the pdfTeX code base as starting point for further development. Then we simplified directionality, fixed it and opened it up.

3.1.6 Changes from standard WEB2C

The compilation framework is web2c and we keep using that but without the Pascal to C step. This framework also provides some common features that deal with reading bytes from files and locating files in tds. This is what we do different:



- There is no mltex support.
- There is no enc tex support.
- The following encoding related command line switches are silently ignored, even in non-Lua mode: -8bit, -translate-file, -mltex, -enc and -etex.
- The \openout whatsits are not written to the log file.
- Some of the so-called web2c extensions are hard to set up in non-kpse mode because texmf.cnf is not read: shell-escape is off (but that is not a problem because of Lua's os.execute), and the paranoia checks on openin and openout do not happen. However, it is easy for a Lua script to do this itself by overloading io.open and alike.
- The 'E' option does not do anything useful.

3.2 The backend primitives

3.2.1 Less primitives

In a previous section we mentioned that some pdf_T_EX primitives were removed and others promoted to core Lua_T_EX primitives. That is only part of the story. In order to separate the backend specific primitives in the code these commands are now replaced by only a few. In traditional _T_EX we only had the dvi backend but now we have two: dvi and pdf. Additional functionality is implemented as 'extensions' in _T_EX speak. By separating more strictly we are able to keep the core (frontend) clean and stable and isolate these extensions. If for some reason an extra backend option is needed, it can be implemented without touching the core. The three pdf backend related primitives are:

```
\pdfextension command [specification]
\pdfvariable name
\pdffeedback name
```

An extension triggers further parsing, depending on the command given. A variable is a (kind of) register and can be read and written, while a feedback is reporting something (as it comes from the backend it's normally a sequence of tokens).

3.2.2 \pdfextension, \pdfvariable and \pdffeedback

In order for Lua_T_EX to be more than just _T_EX you need to enable primitives. That has already been the case right from the start. If you want the traditional pdf_T_EX primitives (for as far their functionality is still around) you now can do this:

| | |
|------------------------------|-------------------------------|
| \protected\def\pdfliteral | {\pdfextension literal} |
| \protected\def\pdfcolorstack | {\pdfextension colorstack} |
| \protected\def\pdfsetmatrix | {\pdfextension setmatrix} |
| \protected\def\pdfsave | {\pdfextension save\relax} |
| \protected\def\pdfrestore | {\pdfextension restore\relax} |
| \protected\def\pdfobj | {\pdfextension obj } |
| \protected\def\pdfrefobj | {\pdfextension refobj } |
| \protected\def\pdfannot | {\pdfextension annot } |



| | |
|---|--|
| <code>\protected\def\pdfstartlink</code> | <code>{\pdfextension startlink }</code> |
| <code>\protected\def\pdfendlink</code> | <code>{\pdfextension endlink\relax}</code> |
| <code>\protected\def\pdfoutline</code> | <code>{\pdfextension outline }</code> |
| <code>\protected\def\pdfdest</code> | <code>{\pdfextension dest }</code> |
| <code>\protected\def\pdfthread</code> | <code>{\pdfextension thread }</code> |
| <code>\protected\def\pdfstartthread</code> | <code>{\pdfextension startthread }</code> |
| <code>\protected\def\pdfendthread</code> | <code>{\pdfextension endthread\relax}</code> |
| <code>\protected\def\pdfinfo</code> | <code>{\pdfextension info }</code> |
| <code>\protected\def\pdfcatalog</code> | <code>{\pdfextension catalog }</code> |
| <code>\protected\def\pdfnames</code> | <code>{\pdfextension names }</code> |
| <code>\protected\def\pdfincludechars</code> | <code>{\pdfextension includechars }</code> |
| <code>\protected\def\pdffontattr</code> | <code>{\pdfextension fontattr }</code> |
| <code>\protected\def\pdfmapfile</code> | <code>{\pdfextension mapfile }</code> |
| <code>\protected\def\pdfmapline</code> | <code>{\pdfextension mapline }</code> |
| <code>\protected\def\pdftrailer</code> | <code>{\pdfextension trailer }</code> |
| <code>\protected\def\pdfglyphtounicode</code> | <code>{\pdfextension glyphtounicode }</code> |

The introspective primitives can be defined as:

| | |
|-------------------------------------|--|
| <code>\def\pdftexversion</code> | <code>{\numexpr\pdffeedback version\relax}</code> |
| <code>\def\pdftexrevision</code> | <code>{\pdffeedback revision}</code> |
| <code>\def\pdflastlink</code> | <code>{\numexpr\pdffeedback lastlink\relax}</code> |
| <code>\def\pdfretval</code> | <code>{\numexpr\pdffeedback retval\relax}</code> |
| <code>\def\pdflastobj</code> | <code>{\numexpr\pdffeedback lastobj\relax}</code> |
| <code>\def\pdflastannot</code> | <code>{\numexpr\pdffeedback lastannot\relax}</code> |
| <code>\def\pdfxformname</code> | <code>{\numexpr\pdffeedback xformname\relax}</code> |
| <code>\def\pdfcreationdate</code> | <code>{\pdffeedback creationdate}</code> |
| <code>\def\pdffontname</code> | <code>{\numexpr\pdffeedback fontname\relax}</code> |
| <code>\def\pdffontobjnum</code> | <code>{\numexpr\pdffeedback fontobjnum\relax}</code> |
| <code>\def\pdffontsize</code> | <code>{\dimexpr\pdffeedback fontsize\relax}</code> |
| <code>\def\pdfpageref</code> | <code>{\numexpr\pdffeedback pageref\relax}</code> |
| <code>\def\pdfcolorstackinit</code> | <code>{\pdffeedback colorstackinit}</code> |

The configuration related registers have become:

| | |
|--|--|
| <code>\edef\pdfcompresslevel</code> | <code>{\pdfvariable compresslevel}</code> |
| <code>\edef\pdfobjcompresslevel</code> | <code>{\pdfvariable objcompresslevel}</code> |
| <code>\edef\pdfrecompress</code> | <code>{\pdfvariable recompress}</code> |
| <code>\edef\pdfdecimaldigits</code> | <code>{\pdfvariable decimaldigits}</code> |
| <code>\edef\pdfgamma</code> | <code>{\pdfvariable gamma}</code> |
| <code>\edef\pdfimageresolution</code> | <code>{\pdfvariable imageresolution}</code> |
| <code>\edef\pdfimageapplygamma</code> | <code>{\pdfvariable imageapplygamma}</code> |
| <code>\edef\pdfimagegamma</code> | <code>{\pdfvariable imagegamma}</code> |
| <code>\edef\pdfimagehicolor</code> | <code>{\pdfvariable imagehicolor}</code> |
| <code>\edef\pdfimageaddfilename</code> | <code>{\pdfvariable imageaddfilename}</code> |
| <code>\edef\pdfpkresolution</code> | <code>{\pdfvariable pkresolution}</code> |
| <code>\edef\pdfpkfixeddpi</code> | <code>{\pdfvariable pkfixeddpi}</code> |
| <code>\edef\pdfinclusioncopyfonts</code> | <code>{\pdfvariable inclusioncopyfonts}</code> |



| | |
|--|---|
| <code>\edef\pdfinclusionerrorlevel</code> | <code>{\pdfvariable inclusionerrorlevel}</code> |
| <code>\edef\pdfignoreunknownimages</code> | <code>{\pdfvariable ignoreunknownimages}</code> |
| <code>\edef\pdfgentounicode</code> | <code>{\pdfvariable gentounicode}</code> |
| <code>\edef\pdfomitcidset</code> | <code>{\pdfvariable omitcidset}</code> |
| <code>\edef\pdfomitcharset</code> | <code>{\pdfvariable omitcharset}</code> |
| <code>\edef\pdfpagebox</code> | <code>{\pdfvariable pagebox}</code> |
| <code>\edef\pdfminorversion</code> | <code>{\pdfvariable minorversion}</code> |
| <code>\edef\pdfuniquefilename</code> | <code>{\pdfvariable uniquefilename}</code> |
| | |
| <code>\edef\pdfhorigin</code> | <code>{\pdfvariable horigin}</code> |
| <code>\edef\pdfvorigin</code> | <code>{\pdfvariable vorigin}</code> |
| <code>\edef\pdflinkmargin</code> | <code>{\pdfvariable linkmargin}</code> |
| <code>\edef\pdfdestmargin</code> | <code>{\pdfvariable destmargin}</code> |
| <code>\edef\pdfthreadmargin</code> | <code>{\pdfvariable threadmargin}</code> |
| <code>\edef\pdfxformmargin</code> | <code>{\pdfvariable xformmargin}</code> |
| | |
| <code>\edef\pdfpagesattr</code> | <code>{\pdfvariable pagesattr}</code> |
| <code>\edef\pdfpageattr</code> | <code>{\pdfvariable pageattr}</code> |
| <code>\edef\pdfpageresources</code> | <code>{\pdfvariable pageresources}</code> |
| <code>\edef\pdfxformattr</code> | <code>{\pdfvariable xformattr}</code> |
| <code>\edef\pdfxformresources</code> | <code>{\pdfvariable xformresources}</code> |
| <code>\edef\pdfpkmode</code> | <code>{\pdfvariable pkmode}</code> |
| | |
| <code>\edef\pdfsuppressoptionalinfo</code> | <code>{\pdfvariable suppressoptionalinfo }</code> |
| <code>\edef\pdftrailerid</code> | <code>{\pdfvariable trailerid }</code> |

The variables are internal ones, so they are anonymous. When you ask for the meaning of a few previously defined ones:

```
\meaning\pdfhorigin
\meaning\pdfcompresslevel
\meaning\pdfpageattr
```

you will get:

```
macro:->[internal backend dimension]
macro:->[internal backend integer]
macro:->[internal backend tokenlist]
```

The `\edef` can also be a `\def` but it's a bit more efficient to expand the lookup related register beforehand.

The backend is derived from pdfTeX so the same syntax applies. However, the `outline` command accepts a `objnum` followed by a number. No checking takes place so when this is used it had better be a valid (flushed) object.

In order to be (more or less) compatible with pdfTeX we also support the option to suppress some info but we do so via a bitset:

```
\pdfvariable suppressoptionalinfo \numexpr
```



```

0
+ 1 % PTEX.FullBanner
+ 2 % PTEX.FileName
+ 4 % PTEX.PageNumber
+ 8 % PTEX.InfoDict
+ 16 % Creator
+ 32 % CreationDate
+ 64 % ModDate
+ 128 % Producer
+ 256 % Trapped
+ 512 % ID

```

`\relax`

In addition you can overload the trailer id, but we don't do any checking on validity, so you have to pass a valid array. The following is like the ones normally generated by the engine. You even need to include the brackets here!

```

\pdfvariable trailerid {[
  <FA052949448907805BA83C1E78896398>
  <FA052949448907805BA83C1E78896398>
]}

```

Although we started from a merge of pdf_T_EX and Aleph, by now the code base as well as functionality has diverted from those parents. Here we show the options that can be passed to the extensions.

```

\pdfextension literal
  [ direct | page | raw ] { tokens }

```

```

\pdfextension dest
  num integer | name { tokens }!crlf
  [ fitbh | fitbv | fitb | fith| fitv | fit |
    fitr <rule spec> | xyz [ zoom <integer> ]

```

```

\pdfextension annot
  reserveobjnum | useobjnum <integer>
  { tokens }

```

```

\pdfextension save

```

```

\pdfextension restore

```

```

\pdfextension setmatrix
  { tokens }

```

```

[ \immediate ] \pdfextension obj
  reserveobjnum

```

```

[ \immediate ] \pdfextension obj

```



```

[ useobjnum <integer> ]
[ uncompressed ]
[ stream [ attr { tokens } ] ]
[ file ]
{ tokens }

```

```

\pdfextension refobj
<integer>

```

```

\pdfextension colorstack
<integer>
set { tokens } | push { tokens } | pop | current

```

```

\pdfextension startlink
[ attr { tokens } ]
user { tokens } | goto | thread
[ file { tokens } ]
[ page <integer> { tokens } | name { tokens } | num integer ]
[ newwindow | nonewwindow ]

```

```

\pdfextension endlink

```

```

\pdfextension startthread
num <integer> | name { tokens }

```

```

\pdfextension endthread

```

```

\pdfextension thread
num <integer> | name { tokens }

```

```

\pdfextension outline
[ attr { tokens } ]
[ useobjnum <integer> ]
[ count <integer> ]
{ tokens }

```

```

\pdfextension glyphtounicode
{ tokens }
{ tokens }

```

```

\pdfextension catalog
{ tokens }
[ openaction
user { tokens } | goto | thread
[ file { tokens } ]
[ page <integer> { tokens } | name { tokens } | num <integer> ]
[ newwindow | nonewwindow ] ]

```

```

\pdfextension fontattr

```



```

    <integer>
    {tokens}

\pdfextension mapfile
    {tokens}

\pdfextension mapline
    {tokens}

\pdfextension includechars
    {tokens}

\pdfextension info
    {tokens}

\pdfextension names
    {tokens}

\pdfextension trailer
    {tokens}

```

3.2.3 Defaults

The engine sets the following defaults.

```

\pdfcompresslevel          9
\pdfobjcompresslevel      1 % used: (0,9)
\pdfrecompress             0 % mostly for debugging
\pdfdecimaldigits         4 % used: (3,6)
\pdfgamma                 1000
\pdfimageresolution       71
\pdfimageapplygamma       0
\pdfimagegamma            2200
\pdfimagehicolor          1
\pdfimageaddfilename      1
\pdfpkresolution          72
\pdfpkfixeddpi            0
\pdfinclusioncopyfonts     0
\pdfinclusionerrorlevel    0
\pdfignoreunknownimages  0
\pdfgentounicode          0
\pdfomitcidset            0
\pdfomitcharset           0
\pdfpagebox               0
\pdfminorversion          4
\pdfuniqueresname         0

\pdfhorigin               1in

```



| | |
|-------------------------------|------------------|
| <code>\pdfvorigin</code> | <code>1in</code> |
| <code>\pdflinkmargin</code> | <code>0pt</code> |
| <code>\pdfdestmargin</code> | <code>0pt</code> |
| <code>\pdfthreadmargin</code> | <code>0pt</code> |
| <code>\pdfxformmargin</code> | <code>0pt</code> |

3.2.4 Backward compatibility

If you also want some backward compatibility, you can add:

| | |
|--------------------------------------|---|
| <code>\let\pdfpagewidth</code> | <code>\pagewidth</code> |
| <code>\let\pdfpageheight</code> | <code>\pageheight</code> |
| <code>\let\pdfadjustspacing</code> | <code>\adjustspacing</code> |
| <code>\let\pdfprotrudechars</code> | <code>\protrudechars</code> |
| <code>\let\pdfnoligatures</code> | <code>\ignoreligaturesinfont</code> |
| <code>\let\pdffontexpand</code> | <code>\expandglyphsinfont</code> |
| <code>\let\pdfcopyfont</code> | <code>\copyfont</code> |
| <code>\let\pdfxform</code> | <code>\saveboxresource</code> |
| <code>\let\pdflastxform</code> | <code>\lastsavedboxresourceindex</code> |
| <code>\let\pdfrefxform</code> | <code>\useboxresource</code> |
| <code>\let\pdfximage</code> | <code>\saveimageresource</code> |
| <code>\let\pdflastximage</code> | <code>\lastsavedimageresourceindex</code> |
| <code>\let\pdflastximagepages</code> | <code>\lastsavedimageresourcepages</code> |
| <code>\let\pdfrefximage</code> | <code>\useimageresource</code> |
| <code>\let\pdfsavepos</code> | <code>\savepos</code> |
| <code>\let\pdflastxpos</code> | <code>\lastxpos</code> |
| <code>\let\pdflastypos</code> | <code>\lastypos</code> |
| <code>\let\pdfoutput</code> | <code>\outputmode</code> |
| <code>\let\pdfdraftmode</code> | <code>\draftmode</code> |
| <code>\let\pdfpxdimen</code> | <code>\pxdimen</code> |
| <code>\let\pdfinsertht</code> | <code>\insertht</code> |
| <code>\let\pdfnormaldeviate</code> | <code>\normaldeviate</code> |
| <code>\let\pdfuniformdeviate</code> | <code>\uniformdeviate</code> |
| <code>\let\pdfsetrandomseed</code> | <code>\setrandomseed</code> |
| <code>\let\pdfrandomseed</code> | <code>\randomseed</code> |
| <code>\let\pdfprimitive</code> | <code>\primitive</code> |
| <code>\let\ifpdfprimitive</code> | <code>\ifprimitive</code> |



```
\let\ifpdfabsnum      \ifabsnum
\let\ifpdfabsdim      \ifabsdim
```

And even:

```
\newdimen\pdfeachlineheight
\newdimen\pdfeachlinedepth
\newdimen\pdflastlinedepth
\newdimen\pdffirstlineheight
\newdimen\pdfignoreddimen
```

3.3 Directions

3.3.1 Four directions

The directional model in LuaT_EX is inherited from Omega/Aleph but we tried to improve it a bit. At some point we played with recovery of modes but that was disabled later on when we found that it interfered with nested directions. That itself had as side effect that the node list was no longer balanced with respect to directional nodes which in turn can give side effects when a series of dir changes happens without grouping.

When extending the pdf backend to support directions some inconsistencies were found and as a result we decided to support only the four models that make sense TLT (latin), TRT (arabic), RTT (cjk) and LTL (mongolian).

3.3.2 How it works

The approach is that we again make the list balanced but try to avoid some side effects. What happens is quite intuitive if we forget about spaces (turned into glue) but even there what happens makes sense if you look at it in detail. However that logic makes in-group switching kind of useless when no proper nested grouping is used: switching from right to left several times nested, results in spacing ending up after each other due to nested mirroring. Of course a sane macro package will manage this for the user but here we are discussing the low level dir injection.

This is what happens:

```
\textrdir TRT nur {\textrdir TLT run \textrdir TRT NUR} nur
```

This becomes stepwise:

```
injected: [+TRT]nur {[+TLT]run [+TRT]NUR} nur
balanced: [+TRT]nur {[+TLT]run [-TLT][+TRT]NUR[-TRT]} nur[-TRT]
result   : run {RUNrun } run
```

And this:

```
\textrdir TRT nur {nur \textrdir TLT run \textrdir TRT NUR} nur
```



becomes:

```
injected: [+TRT]nur {nur [+TLT]run [+TRT]NUR} nur
balanced: [+TRT]nur {nur [+TLT]run [-TLT][+TRT]NUR[-TRT]} nur[-TRT]
result   : run {run RUNrun } run
```

Now, in the following examples watch where we put the braces:

```
\textdir TRT nur {\textdir TLT run} {\textdir TRT NUR}} nur
```

This becomes:

```
run RUN run run
```

Compare this to:

```
\textdir TRT nur {\textdir TLT run }{\textdir TRT NUR}} nur
```

Which renders as:

```
run RUNrun run
```

So how do we deal with the next?

```
\def\ltr{\textdir TLT\relax}
\def\rtl{\textdir TRT\relax}
```

```
run {\rtl nur {\ltr run \rtl NUR \ltr run \rtl NUR} nur}
run {\ltr run {\rtl nur \ltr RUN \rtl nur \ltr RUN} run}
```

It gets typeset as:

```
run run RUNrun RUNrun run
run run runRUN runRUN run
```

We could define the two helpers to look back, pick up a skip, remove it and inject it after the dir node. But that way we loose the subtype information that for some applications can be handy to be kept as-is. This is why we now have a variant of `\textdir` which injects the balanced node before the skip. Instead of the previous definition we can use:

```
\def\ltr{\linedir TLT\relax}
\def\rtl{\linedir TRT\relax}
```

and this time:

```
run {\rtl nur {\ltr run \rtl NUR \ltr run \rtl NUR} nur}
run {\ltr run {\rtl nur \ltr RUN \rtl nur \ltr RUN} run}
```

comes out as a properly spaced:

```
run run RUN run RUN run run
run run run RUN run RUN run
```



Anything more complex than this, like combination of skips and penalties, or kerns, should be handled in the input or macro package because there is no way we can predict the expected behaviour. In fact, the `\linedir` is just a convenience extra which could also have been implemented using node list parsing.

3.3.3 Controlling glue with `\breakafterdirmode`

Glue after a dir node is ignored in the linebreak decision but you can bypass that by setting `\breakafterdirmode` to 1. The following table shows the difference. Watch your spaces.

| | 0 | 1 |
|---|--------------------|--------------------|
| <code>pre {\textdir TLT xxx} post</code> | pre xxx post | pre xxx post |
| <code>pre {\textdir TLT xxx }post</code> | pre xxx post | pre xxx post |
| <code>pre{ \textdir TLT xxx} post</code> | pre xxx post | pre xxx post |
| <code>pre{ \textdir TLT xxx }post</code> | pre xxx post | pre xxx post |
| <code>pre { \textdir TLT xxx } post</code> | pre xxx post | pre xxx post |
| <code>pre {\textdir TLT\relax \space xxx} post</code> | pre xxx post | pre xxx post |

3.3.4 Controlling parshapes with `\shapemode`

Another adaptation to the Aleph directional model is control over shapes driven by `\hangindent` and `\parshape`. This is controlled by a new parameter `\shapemode`:

| VALUE | \HANGINDENT | \PARSHAPE |
|-------|-------------|-----------|
| 0 | normal | normal |
| 1 | mirrored | normal |
| 2 | normal | mirrored |
| 3 | mirrored | mirrored |

The value is reset to zero (like `\hangindent` and `\parshape`) after the paragraph is done with. You can use negative values to prevent this. In figure 3.1 a few examples are given.



We thrive in information-thick worlds because of our marvelous and everyday capacity to select, edit, single out, structure, highlight, group, pair, merge, harmonize, synthesize, focus, organize, condense, reduce, boil down, choose, categorize, catalog, classify, list, abstract, scan, look into, idealize, isolate, discriminate, distinguish, screen, pigeonhole, pick over, sort, integrate, blend, inspect, filter, lump, skip, smooth, chunk, average, approximate, cluster, aggregate, outline, summarize, itemize, review, dip into, flip through, browse, glance into, leaf through, skim, refine, enumerate, glean, synopsise, winnow the wheat from the chaff and separate the sheep from the goats.

TLT: hangindent

ruo fo esuaceb sdlrow kciht-noitamrofni ni evirht eW
 -nis ,tide ,tceles ot yticapac yadyreve dna suolevram
 -rah ,egrem ,riap ,puorg ,thgilhgh ,erutcurts ,tuo elg
 ,nwod liob ,ecuder ,esnednoc ,ezinagro ,sucof ,ezisehtnys ,ezinom
 ,otni kool ,nacs ,tcartsba ,tsil ,yfissalc ,golatac ,ezirogetac ,esoohc
 kcip ,elohnoegip ,neercs ,hsiugnitsid ,etanimircsid ,etalosi ,ezilaedi
 ,knuhc ,htooms ,piks ,pmul ,retlfi ,tcepsni ,dnelb ,etargetni ,tros ,revo
 ,meti ,ezirammus ,eniltuo ,etagergga ,retsulc ,etamixorppa ,egareva
 ,hguorht fael ,otni ecnalg ,esworb ,hguorht pifl ,otni pid ,weiver ,ezi
 morf taehw eht wonniw ,ezisponys ,naelg ,etaremmune ,enfier ,miks
staog eht morf peehs eht etarapes dna ffahc eht.

TRT: hangindent mode 0

ruo fo esuaceb sdlrow kciht-noitamrofni ni evirht eW
 -nis ,tide ,tceles ot yticapac yadyreve dna suolevram
 -rah ,egrem ,riap ,puorg ,thgilhgh ,erutcurts ,tuo elg
 ,nwod liob ,ecuder ,esnednoc ,ezinagro ,sucof ,ezisehtnys ,ezinom
 ,otni kool ,nacs ,tcartsba ,tsil ,yfissalc ,golatac ,ezirogetac ,esoohc
 kcip ,elohnoegip ,neercs ,hsiugnitsid ,etanimircsid ,etalosi ,ezilaedi
 ,knuhc ,htooms ,piks ,pmul ,retlfi ,tcepsni ,dnelb ,etargetni ,tros ,revo
 ,meti ,ezirammus ,eniltuo ,etagergga ,retsulc ,etamixorppa ,egareva
 ,hguorht fael ,otni ecnalg ,esworb ,hguorht pifl ,otni pid ,weiver ,ezi
 morf taehw eht wonniw ,ezisponys ,naelg ,etaremmune ,enfier ,miks
staog eht morf peehs eht etarapes dna ffahc eht.

TRT: hangindent mode 1 & 3

We thrive in information-thick worlds because of our marvelous and everyday capacity to select, edit, single out, structure, highlight, group, pair, merge, harmonize, synthesize, focus, organize, condense, reduce, boil down, choose, categorize, catalog, classify, list, abstract, scan, look into, idealize, isolate, discriminate, distinguish, screen, pigeonhole, pick over, sort, integrate, blend, inspect, filter, lump, skip, smooth, chunk, average, approximate, cluster, aggregate, outline, summarize, itemize, review, dip into, flip through, browse, glance into, leaf through, skim, refine, enumerate, glean, synopsise, winnow the wheat from the chaff and separate the sheep from the goats.

TLT: parshape

-ram ruo fo esuaceb sdlrow kciht-noitamrofni ni evirht eW
 ,tuo elgnis ,tide ,tceles ot yticapac yadyreve dna suolev
 -nys ,ezinomrah ,egrem ,riap ,puorg ,thgilhgh ,erutcurts
 ,ogetac ,esoohc ,nwod liob ,ecuder ,esnednoc ,ezinagro ,sucof ,eziseht
 ,etalosi ,ezilaedi ,otni kool ,nacs ,tcartsba ,tsil ,yfissalc ,golatac ,ezir
 ,etargetni ,tros ,revo kcip ,elohnoegip ,neercs ,hsiugnitsid ,etanimircsid
 ,etamixorppa ,egareva ,knuhc ,htooms ,piks ,pmul ,retlfi ,tcepsni ,dnelb
 pifl ,otni pid ,weiver ,ezimeti ,ezirammus ,eniltuo ,etagergga ,retsulc
 ,etaremmune ,enfier ,miks ,hguorht fael ,otni ecnalg ,esworb ,hguorht
 eht etarapes dna ffahc eht morf taehw eht wonniw ,ezisponys ,naelg
staog eht morf peehs

TRT: parshape mode 0

-ram ruo fo esuaceb sdlrow kciht-noitamrofni ni evirht eW
 ,tuo elgnis ,tide ,tceles ot yticapac yadyreve dna suolev
 -nys ,ezinomrah ,egrem ,riap ,puorg ,thgilhgh ,erutcurts
 ,ogetac ,esoohc ,nwod liob ,ecuder ,esnednoc ,ezinagro ,sucof ,eziseht
 ,etalosi ,ezilaedi ,otni kool ,nacs ,tcartsba ,tsil ,yfissalc ,golatac ,ezir
 ,etargetni ,tros ,revo kcip ,elohnoegip ,neercs ,hsiugnitsid ,etanimircsid
 ,etamixorppa ,egareva ,knuhc ,htooms ,piks ,pmul ,retlfi ,tcepsni ,dnelb
 pifl ,otni pid ,weiver ,ezimeti ,ezirammus ,eniltuo ,etagergga ,retsulc
 ,etaremmune ,enfier ,miks ,hguorht fael ,otni ecnalg ,esworb ,hguorht
 eht etarapes dna ffahc eht morf taehw eht wonniw ,ezisponys ,naelg
staog eht morf peehs

TRT: parshape mode 2 & 3

Figure 3.1 The effect of shapemode.

3.3.5 Symbols or numbers

Internally the implementation is different from Aleph. First of all we use no whatsits but dedicated nodes, but also we have only 4 directions that are mapped onto 4 numbers. A text direction node can mark the start or end of a sequence of nodes, and therefore has two states. At the $\text{T}_{\text{E}}\text{X}$ end we don't see these states because $\text{T}_{\text{E}}\text{X}$ itself will add proper end state nodes if needed.

The symbolic names TLT, TRT, etc. originate in Omega. In $\text{LuaT}_{\text{E}}\text{X}$ we also have a number based model which sometimes makes more sense.

| VALUE | EQUIVALENT |
|-------|------------|
| 0 | TLT |
| 1 | TRT |
| 2 | LTL |
| 3 | RTT |

We support the Omega primitives $\backslash\text{textdir}$, $\backslash\text{pardir}$, $\backslash\text{pagedir}$, $\backslash\text{pardir}$ and $\backslash\text{mathdir}$. These accept three character keywords. The primitives that set the direction by number are: $\backslash\text{textdirection}$, $\backslash\text{pardirection}$, $\backslash\text{pagedirection}$ and $\backslash\text{bodydirection}$ and $\backslash\text{mathdirection}$. When specifying a direction for a box you can use bdir instead of dir .



3.4 Implementation notes

3.4.1 Memory allocation

The single internal memory heap that traditional \TeX used for tokens and nodes is split into two separate arrays. Each of these will grow dynamically when needed.

The `texmf.cnf` settings related to main memory are no longer used (these are: `main_memory`, `mem_bot`, `extra_mem_top` and `extra_mem_bot`). ‘Out of main memory’ errors can still occur, but the limiting factor is now the amount of RAM in your system, not a predefined limit.

Also, the memory (de)allocation routines for nodes are completely rewritten. The relevant code now lives in the C file `texnode.c`, and basically uses a dozen or so ‘avail’ lists instead of a doubly-linked model. An extra function layer is added so that the code can ask for nodes by type instead of directly requisitioning a certain amount of memory words.

Because of the split into two arrays and the resulting differences in the data structures, some of the macros have been duplicated. For instance, there are now `vlink` and `vinfo` as well as `token_link` and `token_info`. All access to the variable memory array is now hidden behind a macro called `vmem`. We mention this because using the \TeX book as reference is still quite valid but not for memory related details. Another significant detail is that we have double linked node lists and that most nodes carry more data.

The input line buffer and pool size are now also reallocated when needed, and the `texmf.cnf` settings `buf_size` and `pool_size` are silently ignored.

3.4.2 Sparse arrays

The `\mathcode`, `\delcode`, `\catcode`, `\sfcode`, `\lccode` and `\uccode` (and the new `\hjcode`) tables are now sparse arrays that are implemented in C. They are no longer part of the \TeX ‘equivalence table’ and because each had 1.1 million entries with a few memory words each, this makes a major difference in memory usage. Performance is not really hurt by this.

The `\catcode`, `\sfcode`, `\lccode`, `\uccode` and `\hjcode` assignments don’t show up when using the $\varepsilon\text{\TeX}$ tracing routines `\tracingassigns` and `\tracingrestores` but we don’t see that as a real limitation.

A side-effect of the current implementation is that `\global` is now more expensive in terms of processing than non-global assignments but not many users will notice that.

The glyph ids within a font are also managed by means of a sparse array as glyph ids can go up to index $2^{21} - 1$ but these are never accessed directly so again users will not notice this.

3.4.3 Simple single-character csnames

Single-character commands are no longer treated specially in the internals, they are stored in the hash just like the multiletter csnames.

The code that displays control sequences explicitly checks if the length is one when it has to decide whether or not to add a trailing space.



Active characters are internally implemented as a special type of multi-letter control sequences that uses a prefix that is otherwise impossible to obtain.

3.4.4 The compressed format file

The format is passed through `zlib`, allowing it to shrink to roughly half of the size it would have had in uncompressed form. This takes a bit more cpu cycles but much less disk io, so it should still be faster. We use a level 3 compression which we found to be the optimal trade-off between filesize and decompression speed.

3.4.5 Binary file reading

All of the internal code is changed in such a way that if one of the `read_xxx_file` callbacks is not set, then the file is read by a C function using basically the same convention as the callback: a single read into a buffer big enough to hold the entire file contents. While this uses more memory than the previous code (that mostly used `getc` calls), it can be quite a bit faster (depending on your io subsystem).

3.4.6 Tabs and spaces

We conform to the way other \TeX engines handle trailing tabs and spaces. For decades trailing tabs and spaces (before a newline) were removed from the input but this behaviour was changed in September 2017 to only handle spaces. We are aware that this can introduce compatibility issues in existing workflows but because we don't want too many differences with upstream \TeX Live we just follow up on that patch (which is a functional one and not really a fix). It is up to macro packages maintainers to deal with possible compatibility issues and in \LuaTeX they can do so via the callbacks that deal with reading from files.

The previous behaviour was a known side effect and (as that kind of input normally comes from generated sources) it was normally dealt with by adding a comment token to the line in case the spaces and/or tabs were intentional and to be kept. We are aware of the fact that this contradicts some of our other choices but consistency with other engines and the fact that in `kpse` mode a common file io layer is used can have a side effect of breaking compatibility. We still stick to our view that at the log level we can (and might be) more incompatible. We already expose some more details.



4 Using L^AT_EX

4.1 Initialization

4.1.1 L^AT_EX as a LUA interpreter

There are some situations that make L^AT_EX behave like a standalone Lua interpreter:

- ▶ if a `--luaonly` option is given on the commandline, or
- ▶ if the executable is named `texlua` or `luatexlua`, or
- ▶ if the only non-option argument (file) on the commandline has the extension `lua` or `luc`.

In this mode, it will set Lua's `arg[0]` to the found script name, pushing preceding options in negative values and the rest of the command line in the positive values, just like the Lua interpreter.

L^AT_EX will exit immediately after executing the specified Lua script and is, in effect, a somewhat bulky stand alone Lua interpreter with a bunch of extra preloaded libraries.

4.1.2 L^AT_EX as a LUA byte compiler

There are two situations that make L^AT_EX behave like the Lua byte compiler:

- ▶ if a `--luaonly` option is given on the command line, or
- ▶ if the executable is named `texluac`

In this mode, L^AT_EX is exactly like `luac` from the stand alone Lua distribution, except that it does not have the `-l` switch, and that it accepts (but ignores) the `--luaonly` switch. The current version of Lua can dump bytecode using `string.dump` so we might decide to drop this version of L^AT_EX.

4.1.3 Other commandline processing

When the L^AT_EX executable starts, it looks for the `--lua` command line option. If there is no `--lua` option, the command line is interpreted in a similar fashion as the other T_EX engines. Some options are accepted but have no consequence. The following command-line options are understood:

| COMMANDLINE ARGUMENT | EXPLANATION |
|---|--|
| <code>--credits</code> | display credits and exit |
| <code>--debug-format</code> | enable format debugging |
| <code>--draftmode</code> | switch on draft mode i.e. generate no output in pdf mode |
| <code>--[no-]file-line-error</code> | disable/enable file:line:error style messages |
| <code>--[no-]file-line-error-style</code> | aliases of <code>--[no-]file-line-error</code> |
| <code>--fmt=FORMAT</code> | load the format file FORMAT |



| | |
|--------------------------------------|---|
| <code>--halt-on-error</code> | stop processing at the first error |
| <code>--help</code> | display help and exit |
| <code>--ini</code> | be iniluatex, for dumping formats |
| <code>--interaction=STRING</code> | set interaction mode: batchmode, nonstopmode, scrollmode or errorstopmode |
| <code>--jobname=STRING</code> | set the job name to STRING |
| <code>--kpathsea-debug=NUMBER</code> | set path searching debugging flags according to the bits of NUMBER |
| <code>--lua=FILE</code> | load and execute a Lua initialization script |
| <code>--[no-]mktex=FMT</code> | disable/enable mktexFMT generation with FMT is tex or tfm |
| <code>--nosocket</code> | disable the Lua socket library |
| <code>--output-comment=STRING</code> | use STRING for dvi file comment instead of date (no effect for pdf) |
| <code>--output-directory=DIR</code> | use DIR as the directory to write files to |
| <code>--output-format=FORMAT</code> | use FORMAT for job output; FORMAT is dvi or pdf |
| <code>--progname=STRING</code> | set the program name to STRING |
| <code>--recorder</code> | enable filename recorder |
| <code>--safer</code> | disable easily exploitable Lua commands |
| <code>--[no-]shell-escape</code> | disable/enable system calls |
| <code>--shell-restricted</code> | restrict system calls to a list of commands given in texmf.cnf |
| <code>--synctex=NUMBER</code> | enable synctex |
| <code>--utc</code> | use utc times when applicable |
| <code>--version</code> | display version and exit |

We don't support `\write 18` because `os.execute` can do the same. It simplifies the code and makes more write targets possible.

The value to use for `\jobname` is decided as follows:

- ▶ If `--jobname` is given on the command line, its argument will be the value for `\jobname`, without any changes. The argument will not be used for actual input so it need not exist. The `--jobname` switch only controls the `\jobname` setting.
- ▶ Otherwise, `\jobname` will be the name of the first file that is read from the file system, with any path components and the last extension (the part following the last `.`) stripped off.
- ▶ There is an exception to the previous point: if the command line goes into interactive mode (by starting with a command) and there are no files input via `\everyjob` either, then the `\jobname` is set to `texput` as a last resort.

The file names for output files that are generated automatically are created by attaching the proper extension (`log`, `pdf`, etc.) to the found `\jobname`. These files are created in the directory pointed to by `--output-directory`, or in the current directory, if that switch is not present.

Without the `--lua` option, command line processing works like it does in any other web2c-based typesetting engine, except that Lua_T_EX has a few extra switches and lacks some others. Also, if the `--lua` option is present, Lua_T_EX will enter an alternative mode of command line processing in comparison to the standard web2c programs. In this mode, a small series of actions is taken in the following order:



1. First, it will parse the command line as usual, but it will only interpret a small subset of the options immediately: `--safer`, `--nosocket`, `--[no-]shell-escape`, `--enable-writel8`, `--disable-writel8`, `--shell-restricted`, `--help`, `--version`, and `--credits`.
2. Next LuaTeX searches for the requested Lua initialization script. If it cannot be found using the actual name given on the command line, a second attempt is made by prepending the value of the environment variable `LUATEXDIR`, if that variable is defined in the environment.
3. Then it checks the various safety switches. You can use those to disable some Lua commands that can easily be abused by a malicious document. At the moment, `--safer` nils the following functions:

| LIBRARY FUNCTIONS | |
|----------------------|---|
| <code>os</code> | <code>execute</code> <code>exec</code> <code>spawn</code> <code>setenv</code> <code>rename</code> <code>remove</code> <code>tmpdir</code> |
| <code>io</code> | <code>popen</code> <code>output</code> <code>tmpfile</code> |
| <code>lfs</code> | <code>rmdir</code> <code>mkdir</code> <code>chdir</code> <code>lock</code> <code>touch</code> |

Furthermore, it disables loading of compiled Lua libraries and it makes `io.open()` fail on files that are opened for anything besides reading.

4. When LuaTeX starts it sets the locale to a neutral value. If for some reason you use `os.locale`, you need to make sure you nil it afterwards because otherwise it can interfere with code that for instance generates dates. You can ignore the locale with:

```
os.setlocale(nil,nil)
```

The `--nosocket` option makes the socket library unavailable, so that Lua cannot use networking.

The switches `--[no-]shell-escape`, `--[enable|disable]-writel8`, and `--shell-restricted` have the same effects as in pdfTeX, and additionally make `io.popen()`, `os.execute`, `os.exec` and `os.spawn` adhere to the requested option.

5. Next the initialization script is loaded and executed. From within the script, the entire command line is available in the Lua table `arg`, beginning with `arg[0]`, containing the name of the executable. As consequence warnings about unrecognized options are suppressed.

Command line processing happens very early on. So early, in fact, that none of TeX's initializations have taken place yet. For that reason, the tables that deal with typesetting, like `tex`, `token`, `node` and `pdf`, are off-limits during the execution of the startup file (they are nil'd). Special care is taken that `texio.write` and `texio.write_nl` function properly, so that you can at least report your actions to the log file when (and if) it eventually becomes opened (note that TeX does not even know its `\jobname` yet at this point).

Everything you do in the Lua initialization script will remain visible during the rest of the run, with the exception of the TeX specific libraries like `tex`, `token`, `node` and `pdf` tables. These will be initialized to their documented state after the execution of the script. You should not store anything in variables or within tables with these four global names, as they will be overwritten completely.

We recommend you use the startup file only for your own TeX-independent initializations (if you need any), to parse the command line, set values in the `texconfig` table, and register the callbacks you need.



LuaTeX allows some of the command line options to be overridden by reading values from the `texconfig` table at the end of script execution (see the description of the `texconfig` table later on in this document for more details on which ones exactly).

Unless the `texconfig` table tells LuaTeX not to initialize `kpathsea` at all (set `texconfig.kpse_init` to `false` for that), LuaTeX acts on some more command line options after the initialization script is finished: in order to initialize the built-in `kpathsea` library properly, LuaTeX needs to know the correct program name to use, and for that it needs to check `--progrname`, or `--ini` and `--fmt`, if `--progrname` is missing.

4.2

Lua behaviour

4.2.1 The LUA version

We currently use Lua 5.3 and will follow developments of the language but normally with some delay. Therefore the user needs to keep an eye on (subtle) differences in successive versions of the language. Also, LuaJITTeX lags behind in the sense that LuaJIT is not in sync with regular Lua development. Here is an example of one aspect.

Lua's `tostring` function (and `string.format` may return values in scientific notation, thereby confusing the TeX end of things when it is used as the right-hand side of an assignment to a `\dimen` or `\count`. The output of these serializers also depend on the Lua version, so in Lua 5.3 you can get different output than from 5.2.

4.2.2 Integration in the TDS ecosystem

The main TeX distributions follow the TeX directory structure (`tds`). LuaTeX is able to use the `kpathsea` library to find `require()`d modules. For this purpose, `package.searchers[2]` is replaced by a different loader function, that decides at runtime whether to use `kpathsea` or the built-in core Lua function. It uses `kpathsea` when that is already initialized at that point in time, otherwise it reverts to using the normal `package.path` loader.

Initialization of `kpathsea` can happen either implicitly (when LuaTeX starts up and the startup script has not set `texconfig.kpse_init` to `false`), or explicitly by calling the Lua function `kpse.set_program_name()`.

4.2.3 Loading libraries

LuaTeX is able to use dynamically loadable Lua libraries, unless `--safer` was given as an option on the command line. For this purpose, `package.searchers[3]` is replaced by a different loader function, that decides at runtime whether to use `kpathsea` or the built-in core Lua function. It uses `kpathsea` when that is already initialized at that point in time, otherwise it reverts to using the normal `package.cpath` loader.

This functionality required an extension to `kpathsea`. There is a new `kpathsea` file format: `kpse_clua_format` that searches for files with extension `.dll` and `.so`. The `texmf.cnf` setting for this variable is `CLUAINPUTS`, and by default it has this value:




```
CLUAINPUTS=.:$SELFAUTOLOC/lib/{$$progname,$engine,}/lua//
```

This path is imperfect (it requires a tds subtree below the binaries directory), but the architecture has to be in the path somewhere, and the currently simplest way to do that is to search below the binaries directory only. Of course it no big deal to write an alternative loader and use that in a macro package. One level up (a lib directory parallel to bin) would have been nicer, but that is not doable because \TeX Live uses a bin/<arch> structure.

Loading dynamic Lua libraries will fail if there are two Lua libraries loaded at the same time (which will typically happen on win32, because there is one Lua 5.3 inside \TeX , and another will likely be linked to the dll file of the module itself).

4.2.4 Executing programs

In keeping with the other \TeX -like programs in \TeX Live, the two Lua functions `os.execute` and `io.popen`, as well as the two new functions `os.exec` and `os.spawn` that are explained below, take the value of `shell_escape` and/or `shell_escape_commands` in account. Whenever \TeX is run with the assumed intention to typeset a document (and by that we mean that it is called as `luatex`, as opposed to `texlua`, and that the command line option `--luaonly` was not given), it will only run the four functions above if the matching `texmf.cnf` variable(s) or their `texconfig` (see section 10.4) counterparts allow execution of the requested system command. In ‘script interpreter’ runs of \TeX , these settings have no effect, and all four functions have their original meaning.

Some libraries have a few more functions, either coded in C or in Lua. For instance, when we started with \TeX we added some helpers to the `luafilesystem` namespace `lfs`. The two boolean functions `lfs.isdir` and `lfs.isfile` were speedy and better variants of what could be done with `lfs.attributes`. The additional function `lfs.shortname` takes a file name and returns its short name on win32 platforms. Finally, for non-win32 platforms only, we provided `lfs.readlink` that takes an existing symbolic link as argument and returns its name. However, the library evolved so we have dropped these in favour of pure Lua variants. The `shortname` helper is obsolete and now just returns the name.

4.2.5 Multibyte string functions

`string.utfvalues` `string.utfcharacters` `string.characters` `string.characterpairs`
`string.bytes` `string.bytepairs` `string.utfvalue` `string.utfcharacter` `string.utflength`

The `string` library has a few extra functions like `string.explode(s[,m])`. This function returns an array containing the string argument `s` split into sub-strings based on the value of the string argument `m`. The second argument is a string that is either empty (this splits the string into characters), a single character (this splits on each occurrence of that character, possibly introducing empty strings), or a single character followed by the plus sign `+` (this special version does not create empty sub-strings). The default value for `m` is `' '` (multiple spaces). Note: `m` is not hidden by surrounding braces as it would be if this function was written in \TeX macros.

The `string` library also has six extra iterators that return strings piecemeal:

- ▶ `string.utfvalues(s)`: an integer value in the Unicode range
- ▶ `string.utfcharacters(s)`: a string with a single utf-8 token in it



- ▶ `string.cwharacters(s)`: a string containing one byte
- ▶ `string.characterpairs(s)`: two strings each containing one byte or an empty second string if the string length was odd
- ▶ `string.bytes(s)`: a single byte value
- ▶ `string.bytepairs(s)`: two byte values or nil instead of a number as its second return value if the string length was odd

The `string.characterpairs()` and `string.bytepairs()` iterators are useful especially in the conversion of utf16 encoded data into utf8.

There is also a two-argument form of `string.dump()`. The second argument is a boolean which, if true, strips the symbols from the dumped data. This matches an extension made in `luajit`. This is typically a function that gets adapted as Lua itself progresses.

The `string` library functions `len`, `lower`, `sub` etc. are not Unicode-aware. For strings in the utf8 encoding, i.e., strings containing characters above code point 127, the corresponding functions from the `slnunicode` library can be used, e.g., `unicode.utf8.len`, `unicode.utf8.lower` etc. The exceptions are `unicode.utf8.find`, that always returns byte positions in a string, and `unicode.utf8.match` and `unicode.utf8.gmatch`. While the latter two functions in general *are* Unicode-aware, they fall-back to non-Unicode-aware behavior when using the empty capture `()` but other captures work as expected. For the interpretation of character classes in `unicode.utf8` functions refer to the library sources at <http://luaforge.net/projects/sln>.

Version 5.3 of Lua provides some native utf8 support but we have added a few similar helpers too:

- ▶ `string.utfvalue(s)`: returns the codepoints of the characters in the given string
- ▶ `string.utfcharacter(c, ...)`: returns a string with the characters of the given code points
- ▶ `string.utflength(s)`: returns the length of the given string

These three functions are relative fast and don't do much checking. They can be used as building blocks for other helpers. So, eventually we can decide to drop the `sln` library, just that you know.

4.2.6 Extra os library functions

`os.selfdir` `os.exec` `os.spawn` `os.setenv` `os.env` `os.gettimeofday` `os.times` `os.tmpdir`
`os.type` `os.name` `os.uname`

The `os` library has a few extra functions and variables:

- ▶ `os.selfdir` is a variable that holds the directory path of the actual executable. For example: `\directlua{tex.sprint(os.selfdir)}`.
- ▶ `os.exec(commandline)` is a variation on `os.execute`. Here `commandline` can be either a single string or a single table.
 - If the argument is a table `LuaTeX` first checks if there is a value at integer index zero. If there is, this is the command to be executed. Otherwise, it will use the value at integer index one. If neither are present, nothing at all happens.
 - The set of consecutive values starting at integer 1 in the table are the arguments that are passed on to the command (the value at index 1 becomes `arg[0]`). The command is



searched for in the execution path, so there is normally no need to pass on a fully qualified path name.

- If the argument is a string, then it is automatically converted into a table by splitting on whitespace. In this case, it is impossible for the command and first argument to differ from each other.
- In the string argument format, whitespace can be protected by putting (part of) an argument inside single or double quotes. One layer of quotes is interpreted by LuaTeX, and all occurrences of `\`, `'` or `\\` within the quoted text are unescaped. In the table format, there is no string handling taking place.

This function normally does not return control back to the Lua script: the command will replace the current process. However, it will return the two values `nil` and `error` if there was a problem while attempting to execute the command.

On MS Windows, the current process is actually kept in memory until after the execution of the command has finished. This prevents crashes in situations where TeX Lua scripts are run inside integrated TeX environments.

The original reason for this command is that it cleans out the current process before starting the new one, making it especially useful for use in TeX Lua.

- ▶ `os.spawn(commandline)` is a returning version of `os.exec`, with otherwise identical calling conventions.

If the command ran ok, then the return value is the exit status of the command. Otherwise, it will return the two values `nil` and `error`.

- ▶ `os.setenv(key,value)` sets a variable in the environment. Passing `nil` instead of a value string will remove the variable.
- ▶ `os.env` is a hash table containing a dump of the variables and values in the process environment at the start of the run. It is writeable, but the actual environment is *not* updated automatically.
- ▶ `os.gettimeofday()` returns the current 'Unix time', but as a float. This function is not available on the SunOS platforms, so do not use this function for portable documents.
- ▶ `os.times()` returns the current process times according to the Unix C library function 'times'. This function is not available on the MS Windows and SunOS platforms, so do not use this function for portable documents.
- ▶ `os.tmpdir()` creates a directory in the 'current directory' with the name `luatex.XXXXXX` where the X-es are replaced by a unique string. The function also returns this string, so you can `lfs.chdir()` into it, or `nil` if it failed to create the directory. The user is responsible for cleaning up at the end of the run, it does not happen automatically.
- ▶ `os.type` is a string that gives a global indication of the class of operating system. The possible values are currently `windows`, `unix`, and `msdos` (you are unlikely to find this value 'in the wild').
- ▶ `os.name` is a string that gives a more precise indication of the operating system. These possible values are not yet fixed, and for `os.type` values `windows` and `msdos`, the `os.name` values are simply `windows` and `msdos`.

The list for the type `unix` is more precise: `linux`, `freebsd`, `kfreebsd`, `cygwin`, `openbsd`, `solaris`, `sunos` (pre-solaris), `hpux`, `irix`, `macosx`, `gnu` (`hurd`), `bsd` (unknown, but bsd-like), `sysv` (unknown, but sysv-like), `generic` (unknown).

- ▶ `os.uname` returns a table with specific operating system information acquired at runtime. The keys in the returned table are all string values, and their names are: `sysname`, `machine`, `release`, `version`, and `nodename`.



4.2.7 Binary input from files with fio

fio.readcardinal1 fio.readcardinal2 fio.readcardinal3 fio.readcardinal4 fio.readcardinaltable fio.readinteger1 fio.readinteger2 fio.readinteger3 fio.readinteger4 fio.readintegertable fio.readfixed2 fio.readfixed4 fio.read2dot14 fio.setposition fio.getposition fio.skipposition fio.readbytes fio.readbytetable

This library provides a set of functions for reading numbers from a file and in addition to the regular io library functions.

| | |
|--------------------------|-------------------------------------|
| readcardinal1(f) | a 1 byte unsigned integer |
| readcardinal2(f) | a 2 byte unsigned integer |
| readcardinal3(f) | a 3 byte unsigned integer |
| readcardinal4(f) | a 4 byte unsigned integer |
| readcardinaltable(f,n,b) | n cardinals of b bytes |
| readinteger1(f) | a 1 byte signed integer |
| readinteger2(f) | a 2 byte signed integer |
| readinteger3(f) | a 3 byte signed integer |
| readinteger4(f) | a 4 byte signed integer |
| readintegertable(f,n,b) | n integers of b bytes |
| readfixed2(f) | a 2 byte float (used in font files) |
| readfixed4(f) | a 4 byte float (used in font files) |
| read2dot14(f) | a 2 byte float (used in font files) |
| setposition(f,p) | goto position p |
| getposition(f) | get the current position |
| skipposition(f,n) | skip n positions |
| readbytes(f,n) | n bytes |
| readbytetable(f,n) | n bytes |

4.2.8 Binary input from strings with sio

sio.readcardinal1 sio.readcardinal2 sio.readcardinal3 sio.readcardinal4 sio.readcardinaltable sio.readinteger1 sio.readinteger2 sio.readinteger3 sio.readinteger4 sio.readintegertable sio.readfixed2 sio.readfixed4 sio.read2dot14 sio.setposition sio.getposition sio.skipposition sio.readbytes sio.readbytetable

A similar set of function as in the fio library is available in the sio library. Here the first argument is a string.

4.2.9 Hashes conform sha2

sha2.digest256 sha2.digest384 sha2.digest512

This library is a side effect of the pdfc library that needs such helpers. The digest256, digest384 and digest512 functions accept a string and return a string with the hash.

4.2.10 Locales

In stock Lua, many things depend on the current locale. In Lua_T_E_X, we can't do that, because it makes documents unportable. While Lua_T_E_X is running it forces the following locale settings:



```
LC_CTYPE=C
LC_COLLATE=C
LC_NUMERIC=C
```

4.3 LUA modules

Some modules that are normally external to Lua are statically linked in with Lua_T_EX, because they offer useful functionality:

- ▶ `lpeg`, by Roberto Ierusalimschy, <http://www.inf.puc-rio.br/~roberto/lpeg/lpeg.html>. This library is not Unicode-aware, but interprets strings on a byte-per-byte basis. This mainly means that `lpeg.S` cannot be used with utf8 characters encoded in more than two bytes, and thus `lpeg.S` will look for one of those two bytes when matching, not the combination of the two. The same is true for `lpeg.R`, although the latter will display an error message if used with multibyte characters. Therefore `lpeg.R('ä')` results in the message `bad argument #1 to 'R' (range must have two characters)`, since to `lpeg`, `ä` is two 'characters' (bytes), so `ä` totals three. In practice this is no real issue and with some care you can deal with Unicode just fine.
- ▶ `slnunicode`, from the `selene` libraries, <http://luaforge.net/projects/sln>. This library has been slightly extended so that the `unicode.utf8.*` functions also accept the first 256 values of plane 18. This is the range Lua_T_EX uses for raw binary output, as explained above. We have no plans to provide more like this because you can basically do all that you want in Lua.
- ▶ `luazip`, from the `kepler` project, <http://www.keplerproject.org/luazip/>.
- ▶ `luafilesystem`, also from the `kepler` project, <http://www.keplerproject.org/luafilesystem/>.
- ▶ `lzlib`, by Tiago Dionizio, <http://luaforge.net/projects/lzlib/>.
- ▶ `md5`, by Roberto Ierusalimschy <http://www.inf.puc-rio.br/~roberto/md5/md5-5/md5.html>.
- ▶ `luasocket`, by Diego Nehab <http://w3.impa.br/~diego/software/luasocket/>. The `.lua` support modules from `luasocket` are also preloaded inside the executable, there are no external file dependencies.

4.4 Testing

For development reasons you can influence the used startup date and time. This can be done in two ways.

1. By setting the environment variable `SOURCE_DATE_EPOCH`. This will influence the _T_EX parameters `time` and `date`, the random seed, the pdf timestamp and the pdf id that is derived from the time as well. This variable is consulted when the `kpse` library is enabled. Resolving is delegated to this library.
2. By setting the `start_time` variable in the `texconfig` table; as with other variables we use the internal name there. For compatibility reasons we also honour a `SOURCE_DATE_EPOCH` entry. It should be noted that there are no such variables in other engines and this method is only relevant in case the while setup happens in Lua.

When Universal Time is needed, you can pass the flag `utc` to the engine. This property also works when the date and time are set by Lua_T_EX itself. It has a complementary entry `use_utc_time` in the `texconfig` table.



There is some control possible, for instance prevent filename to be written to the pdf file. This is discussed elsewhere. In ConT_EXt we provide the command line argument `--nodates` that does a bit more disabling of dates.



5 Languages, characters, fonts and glyphs

5.1 Introduction

LuaTeX's internal handling of the characters and glyphs that eventually become typeset is quite different from the way TeX82 handles those same objects. The easiest way to explain the difference is to focus on unrestricted horizontal mode (i.e. paragraphs) and hyphenation first. Later on, it will be easy to deal with the differences that occur in horizontal and math modes.

In TeX82, the characters you type are converted into char node records when they are encountered by the main control loop. TeX attaches and processes the font information while creating those records, so that the resulting 'horizontal list' contains the final forms of ligatures and implicit kerning. This packaging is needed because we may want to get the effective width of for instance a horizontal box.

When it becomes necessary to hyphenate words in a paragraph, TeX converts (one word at time) the char node records into a string by replacing ligatures with their components and ignoring the kerning. Then it runs the hyphenation algorithm on this string, and converts the hyphenated result back into a 'horizontal list' that is consecutively spliced back into the paragraph stream. Keep in mind that the paragraph may contain unboxed horizontal material, which then already contains ligatures and kerns and the words therein are part of the hyphenation process.

Those char node records are somewhat misnamed, as they are glyph positions in specific fonts, and therefore not really 'characters' in the linguistic sense. There is no language information inside the char node records at all. Instead, language information is passed along using language whatsit nodes inside the horizontal list.

In LuaTeX, the situation is quite different. The characters you type are always converted into glyph node records with a special subtype to identify them as being intended as linguistic characters. LuaTeX stores the needed language information in those records, but does not do any font-related processing at the time of node creation. It only stores the index of the current font and a reference to a character in that font.

When it becomes necessary to typeset a paragraph, LuaTeX first inserts all hyphenation points right into the whole node list. Next, it processes all the font information in the whole list (creating ligatures and adjusting kerning), and finally it adjusts all the subtype identifiers so that the records are 'glyph nodes' from now on.

5.2 Characters, glyphs and discretionaries

TeX82 (including pdfTeX) differentiates between char nodes and lig nodes. The former are simple items that contained nothing but a 'character' and a 'font' field, and they lived in the same memory as tokens did. The latter also contained a list of components, and a subtype indicating whether this ligature was the result of a word boundary, and it was stored in the same place as other nodes like boxes and kerns and glues.



In LuaTeX, these two types are merged into one, somewhat larger structure called a glyph node. Besides having the old character, font, and component fields there are a few more, like ‘attr’ that we will see in section 8.2.12, these nodes also contain a subtype, that codes four main types and two additional ghost types. For ligatures, multiple bits can be set at the same time (in case of a single-glyph word).

- ▶ character, for characters to be hyphenated: the lowest bit (bit 0) is set to 1.
- ▶ glyph, for specific font glyphs: the lowest bit (bit 0) is not set.
- ▶ ligature, for constructed ligatures bit 1 is set.
- ▶ ghost, for so called ‘ghost objects’ bit 2 is set.
- ▶ left, for ligatures created from a left word boundary and for ghosts created from `\leftghost` bit 3 gets set.
- ▶ right, for ligatures created from a right word boundary and for ghosts created from `\rightghost` bit 4 is set.

The glyph nodes also contain language data, split into four items that were current when the node was created: the `\setlanguage` (15 bits), `\lefthyphenmin` (8 bits), `\righthyphenmin` (8 bits), and `\uchyph` (1 bit).

Incidentally, LuaTeX allows 16383 separate languages, and words can be 256 characters long. The language is stored with each character. You can set `\firstvalidlanguage` to for instance 1 and make thereby language 0 an ignored hyphenation language.

The new primitive `\hyphenationmin` can be used to signal the minimal length of a word. This value is stored with the (current) language.

Because the `\uchyph` value is saved in the actual nodes, its handling is subtly different from TeX82: changes to `\uchyph` become effective immediately, not at the end of the current partial paragraph.

Typeset boxes now always have their language information embedded in the nodes themselves, so there is no longer a possible dependency on the surrounding language settings. In TeX82, a mid-paragraph statement like `\unhbox0` would process the box using the current paragraph language unless there was a `\setlanguage` issued inside the box. In LuaTeX, all language variables are already frozen.

In traditional TeX the process of hyphenation is driven by `lccodes`. In LuaTeX we made this dependency less strong. There are several strategies possible. When you do nothing, the currently used `lccodes` are used, when loading patterns, setting exceptions or hyphenating a list.

When you set `\savingshyphcodes` to a value greater than zero the current set of `lccodes` will be saved with the language. In that case changing a `lccode` afterwards has no effect. However, you can adapt the set with:

```
\hjcode`a=`a
```

This change is global which makes sense if you keep in mind that the moment that hyphenation happens is (normally) when the paragraph or a horizontal box is constructed. When `\savingshyphcodes` was zero when the language got initialized you start out with nothing, otherwise you already have a set.

When a `\hjcode` is greater than 0 but less than 32 it indicates the to be used length. In the following example we map a character (x) onto another one in the patterns and tell the engine that æ



counts as one character. Because traditionally zero itself is reserved for inhibiting hyphenation, a value of 32 counts as zero.

Here are some examples (we assume that French patterns are used):

| | | |
|-----------------------------|---------|----------|
| | foobar | foo-bar |
| \hjcode `x=`o | fxxbars | fx-x-bar |
| \lefthyphenmin 3 | ædipus | ædi-pus |
| \lefthyphenmin 4 | ædipus | ædipus |
| \hjcode `æ=2 | ædipus | ædi-pus |
| \hjcode `i=32 \hjcode `d=32 | ædipus | ædipus |

Carrying all this information with each glyph would give too much overhead and also make the process of setting up these codes more complex. A solution with hj code sets was considered but rejected because in practice the current approach is sufficient and it would not be compatible anyway.

Beware: the values are always saved in the format, independent of the setting of \savingshyphcodes at the moment the format is dumped.

A boundary node normally would mark the end of a word which interferes with for instance discretionary injection. For this you can use the \wordboundary as a trigger. Here are a few examples of usage:

discrete---discrete

discrete—discrete

discrete\discretionary{}{}{---}discrete

discrete
discrete

discrete\wordboundary\discretionary{}{}{---}discrete

dis-
crete
discrete

discrete\wordboundary\discretionary{}{}{---}\wordboundary discrete

dis-
crete
dis-
crete

discrete\wordboundary\discretionary{---}{}{}\wordboundary discrete

dis-
crete—
dis-
crete



We only accept an explicit hyphen when there is a preceding glyph and we skip a sequence of explicit hyphens since that normally indicates a -- or --- ligature in which case we can in a worse case usage get bad node lists later on due to messed up ligature building as these dashes are ligatures in base fonts. This is a side effect of separating the hyphenation, ligaturing and kerning steps.

The start and end of a sequence of characters is signalled by a glue, penalty, kern or boundary node. But by default also a hlist, vlist, rule, dir, whatsit, ins, and adjust node indicate a start or end. You can omit the last set from the test by setting \hyphenationbounds to a non-zero value:

| VALUE | BEHAVIOUR |
|-------|-----------------------------|
| 0 | not strict |
| 1 | strict start |
| 2 | strict end |
| 3 | strict start and strict end |

The word start is determined as follows:

| NODE | BEHAVIOUR |
|------------------|---|
| boundary | yes when wordboundary |
| hlist | when hyphenationbounds 1 or 3 |
| vlist | when hyphenationbounds 1 or 3 |
| rule | when hyphenationbounds 1 or 3 |
| dir | when hyphenationbounds 1 or 3 |
| whatsit | when hyphenationbounds 1 or 3 |
| glue | yes |
| math | skipped |
| glyph | exhyphenchar (one only) : yes (so no - —) |
| otherwise | yes |

The word end is determined as follows:

| NODE | BEHAVIOUR |
|-----------------|--|
| boundary | yes |
| glyph | yes when different language |
| glue | yes |
| penalty | yes |
| kern | yes when not italic (for some historic reason) |
| hlist | when hyphenationbounds 2 or 3 |
| vlist | when hyphenationbounds 2 or 3 |
| rule | when hyphenationbounds 2 or 3 |
| dir | when hyphenationbounds 2 or 3 |
| whatsit | when hyphenationbounds 2 or 3 |
| ins | when hyphenationbounds 2 or 3 |
| adjust | when hyphenationbounds 2 or 3 |

Figures 5.1 upto 5.5 show some examples. In all cases we set the min values to 1 and make sure that the words hyphenate at each character.



| | | | |
|----|----|----|----|
| o- | o- | o- | o- |
| n- | n- | n- | n- |
| e | e | e | e |
| 0 | 1 | 2 | 3 |

Figure 5.1 one

| | | | |
|-----|------|-------|--------|
| o- | o- | onet- | onetwo |
| n- | n- | w- | |
| et- | etwo | o | |
| w- | | | |
| o | | | |
| 0 | 1 | 2 | 3 |

Figure 5.2 one\null two

| | | | |
|-----|------|-------|--------|
| o- | o- | onet- | onetwo |
| n- | n- | w- | |
| et- | etwo | o | |
| w- | | | |
| o | | | |
| 0 | 1 | 2 | 3 |

Figure 5.3 \null one\null two

| | | | |
|-----|------|--------|--------|
| o- | o- | onetwo | onetwo |
| n- | n- | | |
| et- | etwo | | |
| w- | | | |
| o | | | |
| 0 | 1 | 2 | 3 |

Figure 5.4 one\null two\null

In traditional T_EX ligature building and hyphenation are interwoven with the line break mechanism. In LuaT_EX these phases are isolated. As a consequence we deal differently with (a sequence of) explicit hyphens. We already have added some control over aspects of the hyphenation and yet another one concerns automatic hyphens (e.g. - characters in the input).

When `\automatichyphenmode` has a value of 0, a hyphen will be turned into an automatic discretionary. The snippets before and after it will not be hyphenated. A side effect is that a leading hyphen can lead to a split but one will seldom run into that situation. Setting a pre and post character makes this more prominent. A value of 1 will prevent this side effect and a value of 2 will not turn the hyphen into a discretionary. Experiments with other options, like permitting hyphenation of the words on both sides were discarded.

In figure ?? and 5.7 we show what happens with three samples:

Input A:

```
before-after \par
before--after \par
```



| | | | |
|-----|------|--------|--------|
| o- | o- | onetwo | onetwo |
| n- | n- | | |
| et- | etwo | | |
| w- | | | |
| o | | | |
| 0 | 1 | 2 | 3 |

Figure 5.5 \null one\null two\null

| | | | |
|---|---|---|---|
| before-after before--after before---after | before- after before-- after before--- after | before- after before--after before---after | before-after before--after before---after |
| A 0 6em | A 0 2pt | A 1 2pt | A 2 2pt |
| -before after- --before after-- ---before after--- | - before after- --before after-- ---before after--- | -before after- --before after-- ---before after--- | -before after- --before after-- ---before after--- |
| B 0 6em | B 0 2pt | B 1 2pt | B 2 2pt |
| before-after before--after before---after | before- after before-- after before--- after | before- after before--after before---after | before-after before--after before---after |
| C 0 6em | C 0 2pt | C 1 2pt | C 2 2pt |

Figure 5.6 The automatic modes 0 (default), 1 and 2, with a \hspace of 6em and 2pt (which triggers a linebreak).

before---after \par

Input B:

```
-before \par
after- \par
--before \par
after-- \par
---before \par
after---
```



| | | | |
|---|--|---|---|
| before-after before--after before---after | beforeB Aafter before-B Aafter before--B Aafter | beforeB Aafter before--after before---after | before-after before--after before---after |
| A 0 6em | A 0 2pt | A 1 2pt | A 2 2pt |
| -before after- --before after-- ---before after--- | B Abefore after- --before after-- ---before after--- | -before after- --before after-- ---before after--- | -before after- --before after-- ---before after--- |
| B 0 6em | B 0 2pt | B 1 2pt | B 2 2pt |
| before-after before--after before---after | beforeB Aafter before-B Aafter before--B Aafter | beforeB Aafter before--after before---after | before-after before--after before---after |
| C 0 6em | C 0 2pt | C 1 2pt | C 2 2pt |

Figure 5.7 The automatic modes 0 (default), 1 and 2, with `\preexhyphenchar` and `\postexhyphenchar` set to characters A and B.

Input C:

```
before-after \par
before--after \par
before---after \par
```

As with primitive companions of other single character commands, the `\-` command has a more verbose primitive version in `\explicitdiscretionary` and the normally intercepted in the hyphenator character `-` (or whatever is configured) is available as `\automaticdiscretionary`.

5.3 The main control loop

In Lua_T_EX's main loop, almost all input characters that are to be typeset are converted into glyph node records with subtype 'character', but there are a few exceptions.

1. The `\accent` primitive creates nodes with subtype 'glyph' instead of 'character': one for the actual accent and one for the accentee. The primary reason for this is that `\accent` in T_EX82 is explicitly dependent on the current font encoding, so it would not make much sense to



attach a new meaning to the primitive's name, as that would invalidate many old documents and macro packages. A secondary reason is that in $\text{T}_{\text{E}}\text{X}82$, `\accent` prohibits hyphenation of the current word. Since in $\text{LuaT}_{\text{E}}\text{X}$ hyphenation only takes place on 'character' nodes, it is possible to achieve the same effect. Of course, modern Unicode aware macro packages will not use the `\accent` primitive at all but try to map directly on composed characters.

This change of meaning did happen with `\char`, that now generates 'glyph' nodes with a character subtype. In traditional $\text{T}_{\text{E}}\text{X}$ there was a strong relationship between the 8-bit input encoding, hyphenation and glyphs taken from a font. In $\text{LuaT}_{\text{E}}\text{X}$ we have utf input, and in most cases this maps directly to a character in a font, apart from glyph replacement in the font engine. If you want to access arbitrary glyphs in a font directly you can always use Lua to do so, because fonts are available as Lua table.

2. All the results of processing in math mode eventually become nodes with 'glyph' subtypes. In fact, the result of processing math is just a regular list of glyphs, kerns, glue, penalties, boxes etc.
3. The Aleph-derived commands `\leftghost` and `\rightghost` create nodes of a third subtype: 'ghost'. These nodes are ignored completely by all further processing until the stage where inter-glyph kerning is added.
4. Automatic discretionaries are handled differently. $\text{T}_{\text{E}}\text{X}82$ inserts an empty discretionary after sensing an input character that matches the `\hyphenchar` in the current font. This test is wrong in our opinion: whether or not hyphenation takes place should not depend on the current font, it is a language property.¹

In $\text{LuaT}_{\text{E}}\text{X}$, it works like this: if $\text{LuaT}_{\text{E}}\text{X}$ senses a string of input characters that matches the value of the new integer parameter `\exhyphenchar`, it will insert an explicit discretionary after that series of nodes. Initially $\text{T}_{\text{E}}\text{X}$ sets the `\exhyphenchar=-1`. Incidentally, this is a global parameter instead of a language-specific one because it may be useful to change the value depending on the document structure instead of the text language.

The insertion of discretionaries after a sequence of explicit hyphens happens at the same time as the other hyphenation processing, *not* inside the main control loop.

The only use $\text{LuaT}_{\text{E}}\text{X}$ has for `\hyphenchar` is at the check whether a word should be considered for hyphenation at all. If the `\hyphenchar` of the font attached to the first character node in a word is negative, then hyphenation of that word is abandoned immediately. This behaviour is added for backward compatibility only, and the use of `\hyphenchar=-1` as a means of preventing hyphenation should not be used in new $\text{LuaT}_{\text{E}}\text{X}$ documents.

5. The `\setlanguage` command no longer creates whatsits. The meaning of `\setlanguage` is changed so that it is now an integer parameter like all others. That integer parameter is used in `\glyph_node` creation to add language information to the glyph nodes. In conjunction, the `\language` primitive is extended so that it always also updates the value of `\setlanguage`.
6. The `\noboundary` command (that prohibits word boundary processing where that would normally take place) now does create nodes. These nodes are needed because the exact place of the `\noboundary` command in the input stream has to be retained until after the ligature and font processing stages.
7. There is no longer a `main_loop` label in the code. Remember that $\text{T}_{\text{E}}\text{X}82$ did quite a lot of processing while adding `char_nodes` to the horizontal list? For speed reasons, it handled

¹ When $\text{T}_{\text{E}}\text{X}$ showed up we didn't have Unicode yet and being limited to eight bits meant that one sometimes had to compromise between supporting character input, glyph rendering, hyphenation.



that processing code outside of the ‘main control’ loop, and only the first character of any ‘word’ was handled by that ‘main control’ loop. In LuaTeX, there is no longer a need for that (all hard work is done later), and the (now very small) bits of character-handling code have been moved back inline. When `\tracingcommands` is on, this is visible because the full word is reported, instead of just the initial character.

Because we tend to make hard coded behaviour configurable a few new primitives have been added:

```
\hyphenpenaltymode
\automatichyphenpenalty
\explicithyphenpenalty
```

The first parameter has the following consequences for automatic discs (the ones resulting from an `\exhyphenchar`:

| MODE | AUTOMATIC DISC - | EXPLICIT DISC \- |
|------|--------------------------------------|-------------------------------------|
| 0 | <code>\exhyphenpenalty</code> | <code>\exhyphenpenalty</code> |
| 1 | <code>\hyphenpenalty</code> | <code>\hyphenpenalty</code> |
| 2 | <code>\exhyphenpenalty</code> | <code>\hyphenpenalty</code> |
| 3 | <code>\hyphenpenalty</code> | <code>\exhyphenpenalty</code> |
| 4 | <code>\automatichyphenpenalty</code> | <code>\explicithyphenpenalty</code> |
| 5 | <code>\exhyphenpenalty</code> | <code>\explicithyphenpenalty</code> |
| 6 | <code>\hyphenpenalty</code> | <code>\explicithyphenpenalty</code> |
| 7 | <code>\automatichyphenpenalty</code> | <code>\exhyphenpenalty</code> |
| 8 | <code>\automatichyphenpenalty</code> | <code>\hyphenpenalty</code> |

other values do what we always did in LuaTeX: insert `\exhyphenpenalty`.

5.4 Loading patterns and exceptions

Although we keep the traditional approach towards hyphenation (which is still superior) the implementation of the hyphenation algorithm in LuaTeX is quite different from the one in TeX82.

After expansion, the argument for `\patterns` has to be proper utf8 with individual patterns separated by spaces, no `\char` or `\chardef` commands are allowed. The current implementation is quite strict and will reject all non-Unicode characters. Likewise, the expanded argument for `\hyphenation` also has to be proper utf8, but here a bit of extra syntax is provided:

1. Three sets of arguments in curly braces (`{ } { } { }`) indicate a desired complex discretionary, with arguments as in `\discretionary`’s command in normal document input.
2. A `-` indicates a desired simple discretionary, cf. `\-` and `\discretionary{-}{ } { }` in normal document input.
3. Internal command names are ignored. This rule is provided especially for `\discretionary`, but it also helps to deal with `\relax` commands that may sneak in.
4. An `=` indicates a (non-discretionary) hyphen in the document input.

The expanded argument is first converted back to a space-separated string while dropping the internal command names. This string is then converted into a dictionary by a routine that creates



key-value pairs by converting the other listed items. It is important to note that the keys in an exception dictionary can always be generated from the values. Here are a few examples:

| VALUE | IMPLIED KEY (INPUT) | EFFECT |
|-----------------|---------------------|--|
| ta-ble | table | ta\-ble (= ta\discretionary{-}{-}{-}ble) |
| ba{k-}{-}{c}ken | backen | ba\discretionary{k-}{-}{c}ken |

The resultant patterns and exception dictionary will be stored under the language code that is the present value of `\language`.

In the last line of the table, you see there is no `\discretionary` command in the value: the command is optional in the \TeX -based input syntax. The underlying reason for that is that it is conceivable that a whole dictionary of words is stored as a plain text file and loaded into \LaTeX using one of the functions in the `Lua lang` library. This loading method is quite a bit faster than going through the \TeX language primitives, but some (most?) of that speed gain would be lost if it had to interpret command sequences while doing so.

It is possible to specify extra hyphenation points in compound words by using `{-}{-}{-}` for the explicit hyphen character (replace `-` by the actual explicit hyphen character if needed). For example, this matches the word ‘multi-word-boundaries’ and allows an extra break inbetween ‘boun’ and ‘daries’:

```
\hyphenation{multi{-}{-}{-}word{-}{-}{-}boun-daries}
```

The motivation behind the ε - \TeX extension `\savingsphcodes` was that hyphenation heavily depended on font encodings. This is no longer true in \LaTeX , and the corresponding primitive is basically ignored. Because we now have `\hjcode`, the case relate codes can be used exclusively for `\uppercase` and `\lowercase`.

The three curly brace pair pattern in an exception can be somewhat unexpected so we will try to explain it by example. The pattern `foo{}{}{x}bar` pattern creates a lookup `fooxbar` and the pattern `foo{}{}{}bar` creates `foobar`. Then, when a hit happens there is a replacement text (x) or none. Because we introduced penalties in discretionary nodes, the exception syntax now also can take a penalty specification. The value between square brackets is a multiplier for `\exceptionpenalty`. Here we have set it to 10000 so effectively we get 30000 in the example.

| $x\{a- \} \{-b \} \} x\{a- \} \{-b \} \} x\{a- \} \{-b \} \} x\{a- \} \{-b \} \} xx$ | | | |
|--|--|--|--|
| 10em | 3em | 0em | 6em |
| 123 xxxxxx 123 | 123 xxa- -bxa- -bxa- -bxx 123 | 123 xa- -bxa- -bxa- -bxa- -bxx 123 | 123 xxxxxx xxxxxx xxa- -bxxxx xxa- -bxxxx 123 |



| x{a-}{-b}{-}{x{a-}{-b}{-}[3]x{a-}{-b}{-}[1]x{a-}{-b}{-}}xx | | | |
|--|--------------------------------------|--------------------------------------|--|
| 10em | 3em | 0em | 6em |
| 123 xxxxxx 123 | 123 xa- -bxxxa- -bxx 123 | 123 xa- -bxxxa- -bxx 123 | 123 xxxxa- -bxx xxxxxx xxxxxx xa- -bxxxxx 123 |

| z{a-}{-b}{z}{a-}{-b}{z}{a-}{-b}{z}{a-}{-b}{z}z | | | |
|--|---|--|--|
| 10em | 3em | 0em | 6em |
| 123 zzzzzz 123 | 123 za- -bza- -bza- -b 123 | 123 za- -bza- -bza- -b a- -b23 | 123 zzzzzz zzzzzz zzza- -bzz zzzzzz 123 |

| z{a-}{-b}{z}{a-}{-b}{z}[3]{a-}{-b}{z}[1]{a-}{-b}{z}z | | | |
|--|-----------------------------|------------------------------------|--|
| 10em | 3em | 0em | 6em |
| 123 zzzzzz 123 | 123 za- -bzzzz 123 | 123 za- -bzzzz a- -b23 | 123 zzzzzz zzzzzz za- -bzzzz a- -bzzzzz 123 |

5.5 Applying hyphenation

The internal structures LuaT_EX uses for the insertion of discretionary hyphens in words is very different from the ones in T_EX82, and that means there are some noticeable differences in handling as well.

First and foremost, there is no ‘compressed trie’ involved in hyphenation. The algorithm still reads pattern files generated by patgen, but LuaT_EX uses a finite state hash to match the patterns against the word to be hyphenated. This algorithm is based on the ‘libhnj’ library used by OpenOffice, which in turn is inspired by T_EX.

There are a few differences between LuaT_EX and T_EX82 that are a direct result of the implementation:

- ▶ LuaT_EX happily hyphenates the full Unicode character range.
- ▶ Pattern and exception dictionary size is limited by the available memory only, all allocations are done dynamically. The trie-related settings in texmf.cnf are ignored.
- ▶ Because there is no ‘trie preparation’ stage, language patterns never become frozen. This means that the primitive \patterns (and its Lua counterpart lang.patterns) can be used at any time, not only in init_EX.



- ▶ Only the string representation of `\patterns` and `\hyphenation` is stored in the format file. At format load time, they are simply re-evaluated. It follows that there is no real reason to preload languages in the format file. In fact, it is usually not a good idea to do so. It is much smarter to load patterns no sooner than the first time they are actually needed.
- ▶ Lua_{TEX} uses the language-specific variables `\prehyphenchar` and `\posthyphenchar` in the creation of implicit discretionary nodes, instead of \TeX 82's `\hyphenchar`, and the values of the language-specific variables `\preexhyphenchar` and `\postexhyphenchar` for explicit discretionary nodes (instead of \TeX 82's empty discretionary).
- ▶ The value of the two counters related to hyphenation, `\hyphenpenalty` and `\exhyphenpenalty`, are now stored in the discretionary nodes. This permits a local overload for explicit `\discretionary` commands. The value current when the hyphenation pass is applied is used. When no callbacks are used this is compatible with traditional \TeX . When you apply the Lua `lang.hyphenate` function the current values are used.
- ▶ The hyphenation exception dictionary is maintained as key-value hash, and that is also dynamic, so the `hyph_size` setting is not used either.

Because we store penalties in the disc node the `\discretionary` command has been extended to accept an optional penalty specification, so you can do the following:

```
\hsizelmm
1:foo{\hyphenpenalty 10000\discretionary{}{}{}}bar\par
2:foo\discretionary penalty 10000 {}{}{}}bar\par
3:foo\discretionary{}{}{}}bar\par
```

This results in:

```
1:foobar
2:foobar
3:foo
bar
```

Inserted characters and ligatures inherit their attributes from the nearest glyph node item (usually the preceding one, but the following one for the items inserted at the left-hand side of a word).

Word boundaries are no longer implied by font switches, but by language switches. One word can have two separate fonts and still be hyphenated correctly (but it can not have two different languages, the `\setlanguage` command forces a word boundary).

All languages start out with `\prehyphenchar=-`, `\posthyphenchar=0`, `\preexhyphenchar=0` and `\postexhyphenchar=0`. When you assign the values of one of these four parameters, you are actually changing the settings for the current `\language`, this behaviour is compatible with `\patterns` and `\hyphenation`.

Lua_{TEX} also hyphenates the first word in a paragraph. Words can be up to 256 characters long (up from 64 in \TeX 82). Longer words are ignored right now, but eventually either the limitation will be removed or perhaps it will become possible to silently ignore the excess characters (this is what happens in \TeX 82, but there the behaviour cannot be controlled).



If you are using the Lua function `lang.hyphenate`, you should be aware that this function expects to receive a list of ‘character’ nodes. It will not operate properly in the presence of ‘glyph’, ‘ligature’, or ‘ghost’ nodes, nor does it know how to deal with kerning.

5.6 Applying ligatures and kerning

After all possible hyphenation points have been inserted in the list, LuaTeX will process the list to convert the ‘character’ nodes into ‘glyph’ and ‘ligature’ nodes. This is actually done in two stages: first all ligatures are processed, then all kerning information is applied to the result list. But those two stages are somewhat dependent on each other: If the used font makes it possible to do so, the ligaturing stage adds virtual ‘character’ nodes to the word boundaries in the list. While doing so, it removes and interprets `\noboundary` nodes. The kerning stage deletes those word boundary items after it is done with them, and it does the same for ‘ghost’ nodes. Finally, at the end of the kerning stage, all remaining ‘character’ nodes are converted to ‘glyph’ nodes.

This word separation is worth mentioning because, if you overrule from Lua only one of the two callbacks related to font handling, then you have to make sure you perform the tasks normally done by LuaTeX itself in order to make sure that the other, non-overruled, routine continues to function properly.

Although we could improve the situation the reality is that in modern OpenType fonts ligatures can be constructed in many ways: by replacing a sequence of characters by one glyph, or by selectively replacing individual glyphs, or by kerning, or any combination of this. Add to that contextual analysis and it will be clear that we have to let Lua do that job instead. The generic font handler that we provide (which is part of ConTeXt) distinguishes between base mode (which essentially is what we describe here and which delegates the task to TeX) and node mode (which deals with more complex fonts).

Let’s look at an example. Take the word `office`, hyphenated `of-fice`, using a ‘normal’ font with all the `f-f` and `f-i` type ligatures:

| | |
|----------------------|---|
| initial | <code>{o}{f}{f}{i}{c}{e}</code> |
| after hyphenation | <code>{o}{f}{-}, {}, {}{f}{i}{c}{e}</code> |
| first ligature stage | <code>{o}{f-}, {f}, {<ff>}{i}{c}{e}</code> |
| final result | <code>{o}{f-}, {<fi>}, {<ffi>}{c}{e}</code> |

That’s bad enough, but let us assume that there is also a hyphenation point between the `f` and the `i`, to create `of-f-ice`. Then the final result should be:

```
{o}{f-},
  {{f-},
   {i},
   {<fi>}},
  {{<ff>-},
   {i},
   {<ffi>}}}{c}{e}
```

with discretionaries in the post-break text as well as in the replacement text of the top-level discretionary that resulted from the first hyphenation point.



Here is that nested solution again, in a different representation:

| | PRE | POST | REPLACE |
|---------|-----------|-------|-----------|
| topdisc | f- (1) | sub 1 | sub 2 |
| sub 1 | f- (2) | i (3) | <fi> (4) |
| sub 2 | <ff>- (5) | i (6) | <ffi> (7) |

When line breaking is choosing its breakpoints, the following fields will eventually be selected:

| | |
|----------|-----------|
| of-f-ice | f- (1) |
| | f- (2) |
| | i (3) |
| of-fice | f- (1) |
| | <fi> (4) |
| off-ice | <ff>- (5) |
| | i (6) |
| office | <ffi> (7) |

The current solution in Lua_T_E_X is not able to handle nested discretionaries, but it is in fact smart enough to handle this fictional of-f-ice example. It does so by combining two sequential discretionary nodes as if they were a single object (where the second discretionary node is treated as an extension of the first node).

One can observe that the of-f-ice and off-ice cases both end with the same actual post replacement list (i), and that this would be the case even if i was the first item of a potential following ligature like ic. This allows Lua_T_E_X to do away with one of the fields, and thus make the whole stuff fit into just two discretionary nodes.

The mapping of the seven list fields to the six fields in this discretionary node pair is as follows:

| FIELD | DESCRIPTION |
|---------------|-------------|
| disc1.pre | f- (1) |
| disc1.post | <fi> (4) |
| disc1.replace | <ffi> (7) |
| disc2.pre | f- (2) |
| disc2.post | i (3,6) |
| disc2.replace | <ff>- (5) |

What is actually generated after ligaturing has been applied is therefore:

```
{0}{{f-},
  {<fi>},
  {<ffi>}}
{{f-},
  {i},
  {<ff>-}}{c}{e}
```

The two discretionaries have different subtypes from a discretionary appearing on its own: the first has subtype 4, and the second has subtype 5. The need for these special subtypes stems



from the fact that not all of the fields appear in their ‘normal’ location. The second discretionary especially looks odd, with things like the `<ff>`- appearing in `disc2.replace`. The fact that some of the fields have different meanings (and different processing code internally) is what makes it necessary to have different subtypes: this enables Lua_{TEX} to distinguish this sequence of two joined discretionary nodes from the case of two standalone discretions appearing in a row.

Of course there is still that relationship with fonts: ligatures can be implemented by mapping a sequence of glyphs onto one glyph, but also by selective replacement and kerning. This means that the above examples are just representing the traditional approach.

5.7 Breaking paragraphs into lines

This code is almost unchanged, but because of the above-mentioned changes with respect to discretions and ligatures, line breaking will potentially be different from traditional _{TEX}. The actual line breaking code is still based on the _{TEX}82 algorithms, and it does not expect there to be discretions inside of discretions. But, as patterns evolve and font handling can influence discretions, you need to be aware of the fact that long term consistency is not an engine matter only.

But that situation is now fairly common in Lua_{TEX}, due to the changes to the ligaturing mechanism. And also, the Lua_{TEX} discretionary nodes are implemented slightly different from the _{TEX}82 nodes: the `no_break` text is now embedded inside the `disc` node, where previously these nodes kept their place in the horizontal list. In traditional _{TEX} the discretionary node contains a counter indicating how many nodes to skip, but in Lua_{TEX} we store the pre, post and replace text in the discretionary node.

The combined effect of these two differences is that Lua_{TEX} does not always use all of the potential breakpoints in a paragraph, especially when fonts with many ligatures are used. Of course kerning also complicates matters here.

5.8 The lang library

5.8.1 new and id

This library provides the interface to Lua_{TEX}’s structure representing a language, and the associated functions.

```
<language> l = lang.new()  
<language> l = lang.new(<number> id)
```

This function creates a new userdata object. An object of type `<language>` is the first argument to most of the other functions in the `lang` library. These functions can also be used as if they were object methods, using the colon syntax. Without an argument, the next available internal id number will be assigned to this object. With argument, an object will be created that links to the internal language with that id number.

```
<number> n = lang.id(<language> l)
```



The number returned is the internal \language id number this object refers to.

5.8.2 hyphenation

You can hyphenate a string directly with:

```
<string> n = lang.hyphenation(<language> l)
lang.hyphenation(<language> l, <string> n)
```

5.8.3 clear_hyphenation and clean

This either returns the current hyphenation exceptions for this language, or adds new ones. The syntax of the string is explained in section 5.4.

```
lang.clear_hyphenation(<language> l)
```

This call clears the exception dictionary (string) for this language.

```
<string> n = lang.clean(<language> l, <string> o)
<string> n = lang.clean(<string> o)
```

This function creates a hyphenation key from the supplied hyphenation value. The syntax of the argument string is explained in section 5.4. This function is useful if you want to do something else based on the words in a dictionary file, like spell-checking.

5.8.4 patterns and clear_patterns

```
<string> n = lang.patterns(<language> l)
lang.patterns(<language> l, <string> n)
```

This adds additional patterns for this language object, or returns the current set. The syntax of this string is explained in section 5.4.

```
lang.clear_patterns(<language> l)
```

This can be used to clear the pattern dictionary for a language.

5.8.5 hyphenationmin

This function sets (or gets) the value of the T_EX parameter \hyphenationmin.

```
n = lang.hyphenationmin(<language> l)
lang.hyphenationmin(<language> l, <number> n)
```

5.8.6 [pre|post][ex|]hyphenchar

```
<number> n = lang.prehyphenchar(<language> l)
```



```
lang.prehyphenchar(<language> l, <number> n)
```

```
<number> n = lang.posthyphenchar(<language> l)
```

```
lang.posthyphenchar(<language> l, <number> n)
```

These two are used to get or set the ‘pre-break’ and ‘post-break’ hyphen characters for implicit hyphenation in this language. The initial values are decimal 45 (hyphen) and decimal 0 (indicating emptiness).

```
<number> n = lang.preexhyphenchar(<language> l)
```

```
lang.preexhyphenchar(<language> l, <number> n)
```

```
<number> n = lang.postexhyphenchar(<language> l)
```

```
lang.postexhyphenchar(<language> l, <number> n)
```

These gets or set the ‘pre-break’ and ‘post-break’ hyphen characters for explicit hyphenation in this language. Both are initially decimal 0 (indicating emptiness).

5.8.7 hyphenate

The next call inserts hyphenation points (discretionary nodes) in a node list. If `tail` is given as argument, processing stops on that node. Currently, `success` is always true if `head` (and `tail`, if specified) are proper nodes, regardless of possible other errors.

```
<boolean> success = lang.hyphenate(<node> head)
```

```
<boolean> success = lang.hyphenate(<node> head, <node> tail)
```

Hyphenation works only on ‘characters’, a special subtype of all the glyph nodes with the node subtype having the value 1. Glyph modes with different subtypes are not processed. See section 5.2 for more details.

5.8.8 [set|get]hjcode

The following two commands can be used to set or query hj codes:

```
lang.sethjcode(<language> l, <number> char, <number> usedchar)
```

```
<number> usedchar = lang.gethjcode(<language> l, <number> char)
```

When you set a hjcode the current sets get initialized unless the set was already initialized due to `\savingsphcodes` being larger than zero.





6 Font structure

6.1 The font tables

All T_EX fonts are represented to Lua code as tables, and internally as C structures. All keys in the table below are saved in the internal font structure if they are present in the table returned by the `define_font` callback, or if they result from the normal tfm/vf reading routines if there is no `define_font` callback defined.

The column ‘vf’ means that this key will be created by the `font.read_vf()` routine, ‘tfm’ means that the key will be created by the `font.read_tfm()` routine, and ‘used’ means whether or not the LuaT_EX engine itself will do something with the key. The top-level keys in the table are as follows:

| KEY | VF | TFM | USED | VALUE TYPE | DESCRIPTION |
|---------------|-----|-----|------|------------|--|
| name | yes | yes | yes | string | metric (file) name |
| area | no | yes | yes | string | (directory) location, typically empty |
| used | no | yes | yes | boolean | indicates usage (initial: false) |
| characters | yes | yes | yes | table | the defined glyphs of this font |
| checksum | yes | yes | no | number | default: 0 |
| designsize | no | yes | yes | number | expected size (default: 655360 == 10pt) |
| direction | no | yes | yes | number | default: 0 |
| encodingbytes | no | no | yes | number | default: depends on format |
| encodingname | no | no | yes | string | encoding name |
| fonts | yes | no | yes | table | locally used fonts |
| psname | no | no | yes | string | This is the PostScript fontname in the incoming font source, and it’s used as font-name identifier in the pdf output. This has to be a valid string, e.g. no spaces and such, as the backend will not do a cleanup. This gives complete control to the loader. |
| fullname | no | no | yes | string | output font name, used as a fallback in the pdf output if the psname is not set |
| header | yes | no | no | string | header comments, if any |
| hyphenchar | no | no | yes | number | default: T _E X’s \hyphenchar |
| parameters | no | yes | yes | hash | default: 7 parameters, all zero |
| size | no | yes | yes | number | the required scaling (by default the same as designsize) |
| skewchar | no | no | yes | number | default: T _E X’s \skewchar |
| type | yes | no | yes | string | basic type of this font |
| format | no | no | yes | string | disk format type |
| embedding | no | no | yes | string | pdf inclusion |
| filename | no | no | yes | string | the name of the font on disk |
| tounicode | no | yes | yes | number | When this is set to 1 LuaT _E X assumes per-glyph tounicode entries are present in the font. |



| | | | | | |
|------------------|----|----|-----|---------|--|
| stretch | no | no | yes | number | the ‘stretch’ value from <code>\expandglyphsinfont</code> |
| shrink | no | no | yes | number | the ‘shrink’ value from <code>\expandglyphsinfont</code> |
| step | no | no | yes | number | the ‘step’ value from <code>\expandglyphsinfont</code> |
| expansion_factor | no | no | no | number | the actual expansion factor of an expanded font |
| attributes | no | no | yes | string | the <code>\pdffontattr</code> |
| cache | no | no | yes | string | This key controls caching of the Lua table on the T _E X end where yes means: use a reference to the table that is passed to LuaT _E X (this is the default), and no means: don’t store the table reference, don’t cache any Lua data for this font while <code>renew</code> means: don’t store the table reference, but save a reference to the table that is created at the first access to one of its fields in the font. |
| nomath | no | no | yes | boolean | This key allows a minor speedup for text fonts. If it is present and true, then LuaT _E X will not check the character entries for math-specific keys. |
| oldmath | no | no | yes | boolean | This key flags a font as representing an old school T _E X math font and disables the OpenType code path. |
| slant | no | no | yes | number | This parameter will tilt the font and does the same as <code>SlantFont</code> in the map file for Type1 fonts. |
| extend | no | no | yes | number | This parameter will scale the font horizontally and does the same as <code>ExtendFont</code> in the map file for Type1 fonts. |
| squeeze | no | no | yes | number | This parameter will scale the font vertically and has no equivalent in the map file. |
| width | no | no | yes | number | The backend will inject pdf operators that set the penwidth. The value is (as usual in T _E X) divided by 1000. It works with the mode file. |
| mode | no | no | yes | number | The backend will inject pdf operators that relate to the drawing mode with 0 being a fill, 1 being an outline, 2 both draw and fill and 3 no painting at all. |

The saved reference in the cache option is thread-local, so be careful when you are using coroutines: an error will be thrown if the table has been cached in one thread, but you reference it from another thread.

The key name is always required. The keys `stretch`, `shrink`, `step` only have meaning when used



together: they can be used to replace a post-loading `\expandglyphsinfont` command. The `auto_expand` option is not supported in Lua_T_EX. In fact, the primitives that create expanded or protruding copies are probably only useful when used with traditional fonts because all these extra OpenType properties are kept out of the picture. The `expansion_factor` is value that can be present inside a font in `font.fonts`. It is the actual expansion factor (a value between `-shrink` and `stretch`, with step `step`) of a font that was automatically generated by the font expansion algorithm.

Because we store the actual state of expansion with each glyph and don't have special font instances, we can change some font related parameters before lines are constructed, like:

```
font.setexpansion(font.current(),100,100,20)
```

This is mostly meant for experiments (or an optimizing routing written in Lua) so there is no primitive.

The key `attributes` can be used to set font attributes in the pdf file. The key used is set by the engine when a font is actively in use, this makes sure that the font's definition is written to the output file (dvi or pdf). The tfm reader sets it to false. The `direction` is a number signalling the 'normal' direction for this font. There are sixteen possibilities:

| # | DIR | # | DIR | # | DIR | # | DIR |
|---|-----|---|-----|----|-----|----|-----|
| 0 | LT | 4 | RT | 8 | TT | 12 | BT |
| 1 | LL | 5 | RL | 9 | TL | 13 | BL |
| 2 | LB | 6 | RB | 10 | TB | 14 | BB |
| 3 | LR | 7 | RR | 11 | TR | 15 | BR |

These are Omega-style direction abbreviations: the first character indicates the 'first' edge of the character glyphs (the edge that is seen first in the writing direction), the second the 'top' side. Keep in mind that Lua_T_EX has a bit different directional model so these values are not used for anything.

The `parameters` is a hash with mixed key types. There are seven possible string keys, as well as a number of integer indices (these start from 8 up). The seven strings are actually used instead of the bottom seven indices, because that gives a nicer user interface.

The names and their internal remapping are:

| NAME | REMAPPING |
|----------------------------|-----------|
| <code>slant</code> | 1 |
| <code>space</code> | 2 |
| <code>space_stretch</code> | 3 |
| <code>space_shrink</code> | 4 |
| <code>x_height</code> | 5 |
| <code>quad</code> | 6 |
| <code>extra_space</code> | 7 |

The keys `type`, `format`, `embedding`, `fullname` and `filename` are used to embed OpenType fonts in the result pdf.



The characters table is a list of character hashes indexed by an integer number. The number is the ‘internal code’ T_EX knows this character by.

Two very special string indexes can be used also: `left_boundary` is a virtual character whose ligatures and kerns are used to handle word boundary processing. `right_boundary` is similar but not actually used for anything (yet).

Each character hash itself is a hash. For example, here is the character ‘f’ (decimal 102) in the font `cmr10` at 10pt. The numbers that represent dimensions are in scaled points.

```
[102] = {
  ["width"] = 200250,
  ["height"] = 455111,
  ["depth"] = 0,
  ["italic"] = 50973,
  ["kerns"] = {
    [63] = 50973,
    [93] = 50973,
    [39] = 50973,
    [33] = 50973,
    [41] = 50973
  },
  ["ligatures"] = {
    [102] = { ["char"] = 11, ["type"] = 0 },
    [108] = { ["char"] = 13, ["type"] = 0 },
    [105] = { ["char"] = 12, ["type"] = 0 }
  }
}
```

The following top-level keys can be present inside a character hash:

| KEY | VF | TFM | USED | TYPE | DESCRIPTION |
|-------------------------------|-----|-----|-------|--------|---|
| <code>width</code> | yes | yes | yes | number | character’s width, in sp (default 0) |
| <code>height</code> | no | yes | yes | number | character’s height, in sp (default 0) |
| <code>depth</code> | no | yes | yes | number | character’s depth, in sp (default 0) |
| <code>italic</code> | no | yes | yes | number | character’s italic correction, in sp (default zero) |
| <code>top_accent</code> | no | no | maybe | number | character’s top accent alignment place, in sp (default zero) |
| <code>bot_accent</code> | no | no | maybe | number | character’s bottom accent alignment place, in sp (default zero) |
| <code>left_protruding</code> | no | no | maybe | number | character’s <code>\lpcode</code> |
| <code>right_protruding</code> | no | no | maybe | number | character’s <code>\rptide</code> |
| <code>expansion_factor</code> | no | no | maybe | number | character’s <code>\efcode</code> |
| <code>tounicode</code> | no | no | maybe | string | character’s Unicode equivalent(s), in utf-16BE hexadecimal format |
| <code>next</code> | no | yes | yes | number | the ‘next larger’ character index |
| <code>extensible</code> | no | yes | yes | table | the constituent parts of an extensible recipe |
| <code>vert_variants</code> | no | no | yes | table | constituent parts of a vertical variant set |



| | | | | | |
|----------------|-----|-----|-----|---------|---|
| horiz_variants | no | no | yes | table | constituent parts of a horizontal variant set |
| kerns | no | yes | yes | table | kerning information |
| ligatures | no | yes | yes | table | ligaturing information |
| commands | yes | no | yes | array | virtual font commands |
| name | no | no | no | string | the character (PostScript) name |
| index | no | no | yes | number | the (OpenType or TrueType) font glyph index |
| used | no | yes | yes | boolean | typeset already (default: false) |
| mathkern | no | no | yes | table | math cut-in specifications |

The values of `top_accent`, `bot_accent` and `mathkern` are used only for math accent and superscript placement, see page 99 in this manual for details. The values of `left_protruding` and `right_protruding` are used only when `\protrudechars` is non-zero. Whether or not `expansion_factor` is used depends on the font's global expansion settings, as well as on the value of `\adjustspacing`.

The usage of `tounicode` is this: if this font specifies a `tounicode=1` at the top level, then LuaTeX will construct a `/ToUnicode` entry for the pdf font (or font subset) based on the character-level `tounicode` strings, where they are available. If a character does not have a sensible Unicode equivalent, do not provide a string either (no empty strings).

If the font level `tounicode` is not set, then LuaTeX will build up `/ToUnicode` based on the TeX code points you used, and any character-level `tounicodes` will be ignored. The string format is exactly the format that is expected by Adobe CMap files (utf-16BE in hexadecimal encoding), minus the enclosing angle brackets. For instance the `tounicode` for a `fi` ligature would be `00660069`. When you pass a number the conversion will be done for you.

A math character can have a `next` field that points to a next larger shape. However, the presence of `extensible` will overrule `next`, if that is also present. The `extensible` field in turn can be overruled by `vert_variants`, the OpenType version. The `extensible` table is very simple:

| KEY | TYPE | DESCRIPTION |
|-----|--------|----------------------------|
| top | number | top character index |
| mid | number | middle character index |
| bot | number | bottom character index |
| rep | number | repeatable character index |

The `horiz_variants` and `vert_variants` are arrays of components. Each of those components is itself a hash of up to five keys:

| KEY | TYPE | EXPLANATION |
|----------|--------|--|
| glyph | number | The character index. Note that this is an encoding number, not a name. |
| extender | number | One (1) if this part is repeatable, zero (0) otherwise. |
| start | number | The maximum overlap at the starting side (in scaled points). |
| end | number | The maximum overlap at the ending side (in scaled points). |
| advance | number | The total advance width of this item. It can be zero or missing, then the natural size of the glyph for character component is used. |

The `kerns` table is a hash indexed by character index (and 'character index' is defined as either a non-negative integer or the string value `right_boundary`), with the values of the kerning to be applied, in scaled points.



The `ligatures` table is a hash indexed by character index (and ‘character index’ is defined as either a non-negative integer or the string value `right_boundary`), with the values being yet another small hash, with two fields:

| KEY | TYPE | DESCRIPTION |
|-------------------|--------|---|
| <code>type</code> | number | the type of this ligature command, default 0 |
| <code>char</code> | number | the character index of the resultant ligature |

The `char` field in a ligature is required. The `type` field inside a ligature is the numerical or string value of one of the eight possible ligature types supported by $\text{T}_{\text{E}}\text{X}$. When $\text{T}_{\text{E}}\text{X}$ inserts a new ligature, it puts the new glyph in the middle of the left and right glyphs. The original left and right glyphs can optionally be retained, and when at least one of them is kept, it is also possible to move the new ‘insertion point’ forward one or two places. The glyph that ends up to the right of the insertion point will become the next ‘left’.

| TEXTUAL (KNUTH) | NUMBER | STRING | RESULT |
|------------------------------------|--------|----------------------------|-------------------|
| <code>l + r =: n</code> | 0 | <code>=:</code> | <code> n</code> |
| <code>l + r =: n</code> | 1 | <code>=: </code> | <code> nr</code> |
| <code>l + r =: n</code> | 2 | <code> =:</code> | <code> ln</code> |
| <code>l + r =: n</code> | 3 | <code> =: </code> | <code> lnr</code> |
| <code>l + r =: > n</code> | 5 | <code>=: ></code> | <code>n r</code> |
| <code>l + r =: > n</code> | 6 | <code> =: ></code> | <code>l n</code> |
| <code>l + r =: > n</code> | 7 | <code> =: ></code> | <code>l nr</code> |
| <code>l + r =: >> n</code> | 11 | <code> =: >></code> | <code>ln r</code> |

The default value is 0, and can be left out. That signifies a ‘normal’ ligature where the ligature replaces both original glyphs. In this table the `|` indicates the final insertion point.

The commands array is explained below.

6.2 Real fonts

Whether or not a $\text{T}_{\text{E}}\text{X}$ font is a ‘real’ font that should be written to the pdf document is decided by the `type` value in the top-level font structure. If the value is `real`, then this is a proper font, and the inclusion mechanism will attempt to add the needed font object definitions to the pdf. Values for `type` are:

| VALUE | DESCRIPTION |
|----------------------|------------------------|
| <code>real</code> | this is a base font |
| <code>virtual</code> | this is a virtual font |

The actions to be taken depend on a number of different variables:

- ▶ Whether the used font fits in an 8-bit encoding scheme or not. This is true for traditional $\text{T}_{\text{E}}\text{X}$ fonts that communicate via `tfm` files.
- ▶ The type of the disk font file, for instance a bitmap file or an outline Type1, TrueType or OpenType font.
- ▶ The level of embedding requested, although in most cases a subset of characters is embedded. The times when nothing got embedded are (in our opinion at least) basically gone.



A font that uses anything other than an 8-bit encoding vector has to be written to the pdf in a different way. When the font table has `encodingbytes` set to 2, then it is a wide font, in all other cases it isn't. The value 2 is the default for OpenType and TrueType fonts loaded via Lua. For Type1 fonts, you have to set `encodingbytes` to 2 explicitly. For pk bitmap fonts, wide font encoding is not supported at all.

If no special care is needed, Lua_T_EX falls back to the mapfile-based solution used by pdf_T_EX and dvips, so that legacy fonts are supported transparently. If a 'wide' font is used, the new subsystem kicks in, and some extra fields have to be present in the font structure. In this case, Lua_T_EX does not use a map file at all. These extra fields are: `format`, `embedding`, `fullname`, `cidinfo` (as explained above), `filename`, and the `index` key in the separate characters.

The `format` variable can have the following values. `type3` fonts are provided for backward compatibility only, and do not support the new wide encoding options.

| VALUE | DESCRIPTION |
|-----------------------|--|
| <code>type1</code> | this is a PostScript Type1 font |
| <code>type3</code> | this is a bitmapped (pk) font |
| <code>truetype</code> | this is a TrueType or TrueType-based OpenType font |
| <code>opentype</code> | this is a PostScript-based OpenType font |

Valid values for the `embedding` variable are:

| VALUE | DESCRIPTION |
|---------------------|--|
| <code>no</code> | don't embed the font at all |
| <code>subset</code> | include and attempt to subset the font |
| <code>full</code> | include this font in its entirety |

The other fields are used as follows. The `fullname` will be the PostScript/pdf font name. The `cidinfo` will be used as the character set: the `CID /Ordering` and `/Registry` keys. The `filename` points to the actual font file. If you include the full path in the `filename` or if the file is in the local directory, Lua_T_EX will run a little bit more efficient because it will not have to re-run the `find_*_file` callback in that case.

Be careful: when mixing old and new fonts in one document, it is possible to create PostScript name clashes that can result in printing errors. When this happens, you have to change the `fullname` of the font to a more unique one.

Typeset strings are written out in a wide format using 2 bytes per glyph, using the `index` key in the character information as value. The overall effect is like having an encoding based on numbers instead of traditional (PostScript) name-based reencoding. One way to get the correct index numbers for Type1 fonts is by loading the font via `fontloader.open` and use the table indices as `index` fields.

In order to make sure that cut and paste of the final document works okay you can best make sure that there is a `tounicode` vector enforced. Not all pdf viewers handle this right so take Acrobat as reference.



6.3 Virtual fonts

6.3.1 The structure

You have to take the following steps if you want Lua_T_EX to treat the returned table from `define_font` as a virtual font:

- ▶ Set the top-level key `type` to `virtual`. In most cases it's optional because we look at the `commands` entry anyway.
- ▶ Make sure there is at least one valid entry in `fonts` (see below), although recent versions of Lua_T_EX add a default entry when this table is missing.
- ▶ Add a `commands` array to those characters that matter. A virtual character can itself point to virtual characters but be careful with nesting as you can create loops and overflow the stack (which often indicates an error anyway).

The presence of the `toplevel type` key with the specific value `virtual` will trigger handling of the rest of the special virtual font fields in the table, but the mere existence of 'type' is enough to prevent Lua_T_EX from looking for a virtual font on its own. This also works 'in reverse': if you are absolutely certain that a font is not a virtual font, assigning the value `real` to `type` will inhibit Lua_T_EX from looking for a virtual font file, thereby saving you a disk search. This only matters when we load a `tfm` file.

The `fonts` is an (indexed) Lua table. The values are one- or two-key hashes themselves, each entry indicating one of the base fonts in a virtual font. In case your font is referring to itself, you can use the `font.nextid()` function which returns the index of the next to be defined font which is probably the currently defined one. So, a table looks like this:

```
fonts = {  
  { name = "ptmr8a", size = 655360 },  
  { name = "psyr", size = 600000 },  
  { id = 38 }  
}
```

The first referenced font (at index 1) in this virtual font is `ptmr8a` loaded at 10pt, and the second is `psyr` loaded at a little over 9pt. The third one is a previously defined font that is known to Lua_T_EX as font id 38. The array index numbers are used by the character command definitions that are part of each character.

The `commands` array is a hash where each item is another small array, with the first entry representing a command and the extra items being the parameters to that command. The allowed commands and their arguments are:

| COMMAND | ARGUMENTS | TYPE | DESCRIPTION |
|---------|-----------|--------|--|
| font | 1 | number | select a new font from the local fonts table |
| char | 1 | number | typeset this character number from the current font, and move right by the character's width |
| node | 1 | node | output this node (list), and move right by the width of this list |



| | | | |
|---------|-----|------------------|---|
| slot | 2 | 2 numbers | a shortcut for the combination of a font and char command |
| push | 0 | | save current position |
| nop | 0 | | do nothing |
| pop | 0 | | pop position |
| rule | 2 | 2 numbers | output a rule $ht * wd$, and move right. |
| down | 1 | number | move down on the page |
| right | 1 | number | move right on the page |
| special | 1 | string | output a \special command |
| pdf | 2 | 2 strings | output a pdf literal, the first string is one of origin, page, text, font, direct or raw; if you have one string only origin is assumed |
| lua | 1 | string, function | execute a Lua script when the glyph is embedded; in case of a function it gets the font id and character code passed |
| image | 1 | image | output an image (the argument can be either an <image> variable or an image_spec table) |
| comment | any | any | the arguments of this command are ignored |

When a font id is set to 0 then it will be replaced by the currently assigned font id. This prevents the need for hackery with future id's. Normally one could use `font.nextid` but when more complex fonts are built in the meantime other instances could have been loaded.

The pdf option also accepts a mode keyword in which case the third argument sets the mode. That option will change the mode in an efficient way (passing an empty string would result in an extra empty lines in the pdf file. This option only makes sense for virtual fonts. The font mode only makes sense in virtual fonts. Modes are somewhat fuzzy and partially inherited from pdfTeX.

| MODE | DESCRIPTION |
|--------|--|
| origin | enter page mode and set the position |
| page | enter page mode |
| text | enter text mode |
| font | enter font mode (kind of text mode, only in virtual fonts) |
| always | finish the current string and force a transform if needed |
| raw | finish the current string |

You always need to check what pdf code is generated because there can be all kind of interferences with optimization in the backend and fonts are complicated anyway. Here is a rather elaborate glyph commands example using such keys:

```
...
commands = {
  { "push" },                -- remember where we are
  { "right", 5000 },         -- move right about 0.08pt
  { "font", 3 },             -- select the fonts[3] entry
  { "char", 97 },            -- place character 97 (ASCII 'a')
  -- { "slot", 2, 97 },      -- an alternative for the previous two
}
```



```

    { "pop" },                -- go all the way back
    { "down", -200000 },      -- move upwards by about 3pt
    { "special", "pdf: 1 0 0 rg" } -- switch to red color
-- { "pdf", "origin", "1 0 0 rg" } -- switch to red color (alternative)
    { "rule", 500000, 20000 } -- draw a bar
    { "special", "pdf: 0 g" }   -- back to black
-- { "pdf", "origin", "0 g" }   -- back to black (alternative)
}
...

```

The default value for `font` is always 1 at the start of the `commands` array. Therefore, if the virtual font is essentially only a re-encoding, then you do usually not have created an explicit ‘font’ command in the array.

Rules inside of `commands` arrays are built up using only two dimensions: they do not have depth. For correct vertical placement, an extra `down` command may be needed.

Regardless of the amount of movement you create within the `commands`, the output pointer will always move by exactly the width that was given in the `width` key of the character hash. Any movements that take place inside the `commands` array are ignored on the upper level.

The `special` can have a `pdf:`, `pdf:origin:`, `pdf:page:`, `pdf:direct:` or `pdf:raw:` prefix. When you have to concatenate strings using the `pdf` command might be more efficient.

6.3.2 Artificial fonts

Even in a ‘real’ font, there can be virtual characters. When Lua_T_EX encounters a `commands` field inside a character when it becomes time to typeset the character, it will interpret the `commands`, just like for a true virtual character. In this case, if you have created no ‘`fonts`’ array, then the default (and only) ‘base’ font is taken to be the current font itself. In practice, this means that you can create virtual duplicates of existing characters which is useful if you want to create composite characters.

Note: this feature does *not* work the other way around. There can not be ‘real’ characters in a virtual font! You cannot use this technique for font re-encoding either; you need a truly virtual font for that (because characters that are already present cannot be altered).

6.3.3 Example virtual font

Finally, here is a plain T_EX input file with a virtual font demonstration:

```

\directlua {
  callback.register('define_font',
    function (name,size)
      if name == 'cmr10-red' then
        local f = font.read_tfm('cmr10',size)
        f.name   = 'cmr10-red'
        f.type   = 'virtual'
        f.fonts = {

```



```

        { name = 'cmr10', size = size }
    }
    for i,v in pairs(f.characters) do
        if string.char(i):find('[tacohanshartmut]') then
            v.commands = {
                { "special", "pdf: 1 0 0 rg" },
                { "char", i },
                { "special", "pdf: 0 g" },
            }
        end
    end
    return f
else
    return font.read_tfm(name,size)
end
end
)
}

```

```

\font\myfont = cmr10-red at 10pt \myfont This is a line of text \par
\font\myfontx = cmr10      at 10pt \myfontx Here is another line of text \par

```

6.4 The vf library

The vf library can be used when Lua code, as defined in the commands of the font, is executed. The functions provided are similar as the commands: char, down, fontid, image, node, nop, pop, push, right, rule, special and pdf. This library has been present for a while but not been advertised and tested much, if only because it's easy to define an invalid font (or mess up the pdf stream). Keep in mind that the Lua snippets are executed each time when a character is output.

6.5 The font library

The font library provides the interface into the internals of the font system, and it also contains helper functions to load traditional T_EX font metrics formats. Other font loading functionality is provided by the fontloader library that will be discussed in the next section.

6.5.1 Loading a TFM file

The behaviour documented in this subsection is considered stable in the sense that there will not be backward-incompatible changes any more.

```

<table> fnt =
    font.read_tfm(<string> name, <number> s)

```

The number is a bit special:



- ▶ If it is positive, it specifies an ‘at size’ in scaled points.
- ▶ If it is negative, its absolute value represents a ‘scaled’ setting relative to the designsizes of the font.

6.5.2 Loading a VF file

The behavior documented in this subsection is considered stable in the sense that there will not be backward-incompatible changes any more.

```
<table> vf_fnt =
    font.read_vf(<string> name, <number> s)
```

The meaning of the number `s` and the format of the returned table are similar to the ones in the `read_tfm` function.

6.5.3 The fonts array

The whole table of $\text{T}_{\text{E}}\text{X}$ fonts is accessible from Lua using a virtual array.

```
font.fonts[n] = { ... }
<table> f = font.fonts[n]
```

Because this is a virtual array, you cannot call `pairs` on it, but see below for the `font.each` iterator.

The two metatable functions implementing the virtual array are:

```
<table> f = font.getfont(<number> n)
font.setfont(<number> n, <table> f)
```

Note that at the moment, each access to the `font.fonts` or call to `font.getfont` creates a Lua table for the whole font. This process can be quite slow. In a later version of $\text{LuaT}_{\text{E}}\text{X}$, this interface will change (it will start using userdata objects instead of actual tables).

Also note the following: assignments can only be made to fonts that have already been defined in $\text{T}_{\text{E}}\text{X}$, but have not been accessed *at all* since that definition. This limits the usability of the write access to `font.fonts` quite a lot, a less stringent ruleset will likely be implemented later.

6.5.4 Checking a font’s status

You can test for the status of a font by calling this function:

```
<boolean> f =
    font.frozen(<number> n)
```

The return value is one of `true` (unassignable), `false` (can be changed) or `nil` (not a valid font at all).



6.5.5 Defining a font directly

You can define your own font into `font.fonts` by calling this function:

```
<number> i =  
    font.define(<table> f)
```

The return value is the internal id number of the defined font (the index into `font.fonts`). If the font creation fails, an error is raised. The table is a font structure. An alternative call is:

```
<number> i =  
    font.define(<number> n, <table> f)
```

Where the first argument is a reserved font id (see below).

6.5.6 Extending a font

Within reasonable bounds you can extend a font after it has been defined. Because some properties are best left unchanged this is limited to adding characters.

```
font.addcharacters(<number n>, <table> f)
```

The table passed can have the fields `characters` which is a (sub)table like the one used in `define`, and for virtual fonts a `fonts` table can be added. The characters defined in the `characters` table are added (when not yet present) or replace an existing entry. Keep in mind that replacing can have side effects because a character already can have been used. Instead of posing restrictions we expect the user to be careful. (The `setfont` helper is a more drastic replacer.)

6.5.7 Projected next font id

```
<number> i =  
    font.nextid()
```

This returns the font id number that would be returned by a `font.define` call if it was executed at this spot in the code flow. This is useful for virtual fonts that need to reference themselves. If you pass `true` as argument, the id gets reserved and you can pass to `font.define` as first argument. This can be handy when you create complex virtual fonts.

```
<number> i =  
    font.nextid(true)
```

6.5.8 Font ids

```
<number> i =  
    font.id(<string> csname)
```

This returns the font id associated with `csname`, or `-1` if `csname` is not defined.



```
<number> i =  
    font.max()
```

This is the largest used index in `font.fonts`.

```
<number> i = font.current()  
font.current(<number> i)
```

This gets or sets the currently used font number.

6.5.9 Iterating over all fonts

```
for i,v in font.each() do  
    ...  
end
```

This is an iterator over each of the defined $\text{T}_{\text{E}}\text{X}$ fonts. The first returned value is the index in `font.fonts`, the second the font itself, as a Lua table. The indices are listed incrementally, but they do not always form an array of consecutive numbers: in some cases there can be holes in the sequence.



7 Math

7.1 Traditional alongside OPENTYPE

The handling of mathematics in LuaT_EX differs quite a bit from how T_EX82 (and therefore pdfT_EX) handles math. First, LuaT_EX adds primitives and extends some others so that Unicode input can be used easily. Second, all of T_EX82's internal special values (for example for operator spacing) have been made accessible and changeable via control sequences. Third, there are extensions that make it easier to use OpenType math fonts. And finally, there are some extensions that have been proposed or considered in the past that are now added to the engine.

7.2 Unicode math characters

Character handling is now extended up to the full Unicode range (the \U prefix), which is compatible with X_YT_EX.

The math primitives from T_EX are kept as they are, except for the ones that convert from input to math commands: `mathcode`, and `delcode`. These two now allow for a 21-bit character argument on the left hand side of the equals sign.

Some of the new LuaT_EX primitives read more than one separate value. This is shown in the tables below by a plus sign.

The input for such primitives would look like this:

```
\def\overbrace{\Umathaccent 0 1 "23DE }
```

The altered T_EX82 primitives are:

| PRIMITIVE | MIN | MAX | | MIN | MAX |
|-----------|-----|--------|---|-----|--------|
| \mathcode | 0 | 10FFFF | = | 0 | 8000 |
| \delcode | 0 | 10FFFF | = | 0 | FFFFFF |

The unaltered ones are:

| PRIMITIVE | MIN | MAX |
|--------------|-----|----------|
| \mathchardef | 0 | 8000 |
| \mathchar | 0 | 7FFF |
| \mathaccent | 0 | 7FFF |
| \delimiter | 0 | 7FFFFFFF |
| \radical | 0 | 7FFFFFFF |

For practical reasons `\mathchardef` will silently accept values larger than 0x8000 and interpret it as `\Umathcharnumdef`. This is needed to satisfy older macro packages.

The following new primitives are compatible with X_YT_EX:

| PRIMITIVE | MIN | MAX | MIN | MAX |
|---------------|-------|-------------|-----|-----|
| \Umathchardef | 0+0+0 | 7+FF+10FFFF | | |



| | | | | | |
|-------------------------------|-------|-------------|----------|-----------|-------------|
| <code>\Umathcharnumdef</code> | 5 | -80000000 | 7FFFFFFF | | |
| <code>\Umathcode</code> | 0 | 10FFFF | = | 0+0+0 | 7+FF+10FFFF |
| <code>\Udelcode</code> | 0 | 10FFFF | = | 0+0 | FF+10FFFF |
| <code>\Umathchar</code> | 0+0+0 | 7+FF+10FFFF | | | |
| <code>\Umathaccent</code> | 0+0+0 | 7+FF+10FFFF | | | |
| <code>\Udelimiter</code> | 0+0+0 | 7+FF+10FFFF | | | |
| <code>\Uradical</code> | 0+0 | FF+10FFFF | | | |
| <code>\Umathcharnum</code> | | -80000000 | 7FFFFFFF | | |
| <code>\Umathcodenum</code> | 0 | 10FFFF | = | -80000000 | 7FFFFFFF |
| <code>\Udelcodenum</code> | 0 | 10FFFF | = | -80000000 | 7FFFFFFF |

Specifications typically look like:

```
\Umathchardef\xx="1"0"456
\Umathcode 123="1"0"789
```

The new primitives that deal with delimiter-style objects do not set up a ‘large family’. Selecting a suitable size for display purposes is expected to be dealt with by the font via the `\Umathoperator-size` parameter.

For some of these primitives, all information is packed into a single signed integer. For the first two (`\Umathcharnum` and `\Umathcodenum`), the lowest 21 bits are the character code, the 3 bits above that represent the math class, and the family data is kept in the topmost bits. This means that the values for math families 128–255 are actually negative. For `\Udelcodenum` there is no math class. The math family information is stored in the bits directly on top of the character code. Using these three commands is not as natural as using the two- and three-value commands, so unless you know exactly what you are doing and absolutely require the speedup resulting from the faster input scanning, it is better to use the verbose commands instead.

The `\Umathaccent` command accepts optional keywords to control various details regarding math accents. See section 7.6.2 below for details.

There are more new primitives and all of these will be explained in following sections:

| PRIMITIVE | VALUE RANGE (IN HEX) |
|-------------------------------|----------------------|
| <code>\Uroot</code> | 0 + 0-FF + 10FFFF |
| <code>\Uoverdelimiter</code> | 0 + 0-FF + 10FFFF |
| <code>\Underdelimiter</code> | 0 + 0-FF + 10FFFF |
| <code>\Udelimiterover</code> | 0 + 0-FF + 10FFFF |
| <code>\Udelimiterunder</code> | 0 + 0-FF + 10FFFF |

7.3 Math styles

7.3.1 `\mathstyle`

It is possible to discover the math style that will be used for a formula in an expandable fashion (while the math list is still being read). To make this possible, Lua_T_EX adds the new primitive:



`\mathstyle`. This is a ‘convert command’ like e.g. `\romannumeral`: its value can only be read, not set.

The returned value is between 0 and 7 (in math mode), or -1 (all other modes). For easy testing, the eight math style commands have been altered so that they can be used as numeric values, so you can write code like this:

```
\ifnum\mathstyle=\textstyle
  \message{normal text style}
\else \ifnum\mathstyle=\crampedtextstyle
  \message{cramped text style}
\fi \fi
```

Sometimes you won’t get what you expect so a bit of explanation might help to understand what happens. When math is parsed and expanded it gets turned into a linked list. In a second pass the formula will be build. This has to do with the fact that in order to determine the automatically chosen sizes (in for instance fractions) following content can influence preceding sizes. A side effect of this is for instance that one cannot change the definition of a font family (and thereby reusing numbers) because the number that got used is stored and used in the second pass (so changing `\fam 12` mid-formula spoils over to preceding use of that family).

The style switching primitives like `\textstyle` are turned into nodes so the styles set there are frozen. The `\mathchoice` primitive results in four lists being constructed of which one is used in the second pass. The fact that some automatic styles are not yet known also means that the `\mathstyle` primitive expands to the current style which can of course be different from the one really used. It’s a snapshot of the first pass state. As a consequence in the following example you get a style number (first pass) typeset that can actually differ from the used style (second pass). In the case of a math choice used ungrouped, the chosen style is used after the choice too, unless you group.

```
[a:\mathstyle]\quad
\bgroup
\mathchoice
  {\bf \scriptstyle      (x:d :\mathstyle)}
  {\bf \scriptscriptstyle (x:t :\mathstyle)}
  {\bf \scriptscriptstyle (x:s :\mathstyle)}
  {\bf \scriptscriptstyle (x:ss:\mathstyle)}
\egroup
\quad[b:\mathstyle]\quad
\mathchoice
  {\bf \scriptstyle      (y:d :\mathstyle)}
  {\bf \scriptscriptstyle (y:t :\mathstyle)}
  {\bf \scriptscriptstyle (y:s :\mathstyle)}
  {\bf \scriptscriptstyle (y:ss:\mathstyle)}
\quad[c:\mathstyle]\quad
\bgroup
\mathchoice
  {\bf \scriptstyle      (z:d :\mathstyle)}
  {\bf \scriptscriptstyle (z:t :\mathstyle)}
```



```

{\bf \scriptscriptstyle (z:s:\mathstyle)}
{\bf \scriptscriptstyle (z:ss:\mathstyle)}
\egroup
\quad[d:\mathstyle]

```

This gives:

```
[a : 0] (x:d:4) [b : 0] (y:d:4) [c:0] (z:s:6) [d:0]
```

```
[a : 2] (x:t:6) [b : 2] (y:t:6) [c:2] (z:ss:6) [d:2]
```

Using `\begingroup ... \endgroup` instead gives:

```
[a : 0] (x:d:4) [b:0] (y:s:6) [c:0] (z:ss:6) [d:0]
```

```
[a : 2] (x:t:6) [b:2] (y:ss:6) [c:2] (z:ss:6) [d:2]
```

This might look wrong but it's just a side effect of `\mathstyle` expanding to the current (first pass) style and the number being injected in the list that gets converted in the second pass. It all makes sense and it illustrates the importance of grouping. In fact, the math choice style being effective afterwards has advantages. It would be hard to get it otherwise.

7.3.2 `\Ustack`

There are a few math commands in \TeX where the style that will be used is not known straight from the start. These commands (`\over`, `\atop`, `\overwithdelims`, `\atopwithdelims`) would therefore normally return wrong values for `\mathstyle`. To fix this, Lua \TeX introduces a special prefix command: `\Ustack`:

```
\Ustack {a \over b}
```

The `\Ustack` command will scan the next brace and start a new math group with the correct (numerator) math style.

7.3.3 Cramped math styles

Lua \TeX has four new primitives to set the cramped math styles directly:

```

\crampeddisplaystyle
\crampedtextstyle
\crampedscriptstyle
\crampedscriptscriptstyle

```

These additional commands are not all that valuable on their own, but they come in handy as arguments to the math parameter settings that will be added shortly.

In Eijkhouts “ \TeX by Topic” the rules for handling styles in scripts are described as follows:

- ▶ In any style superscripts and subscripts are taken from the next smaller style. Exception: in display style they are in script style.
- ▶ Subscripts are always in the cramped variant of the style; superscripts are only cramped if the original style was cramped.



- ▶ In an `.. \over ..` formula in any style the numerator and denominator are taken from the next smaller style.
- ▶ The denominator is always in cramped style; the numerator is only in cramped style if the original style was cramped.
- ▶ Formulas under a `\sqrt` or `\overline` are in cramped style.

In LuaT_EX one can set the styles in more detail which means that you sometimes have to set both normal and cramped styles to get the effect you want. (Even) if we force styles in the script using `\scriptstyle` and `\crampedscriptstyle` we get this:

| STYLE | EXAMPLE |
|---------------|----------------------|
| default | $b^{x=xx}$ $x=xx$ |
| script | $b^{x=xx}$ $x=xx$ |
| crampedscript | $b^{x=xx}$ $x=xx$ |

Now we set the following parameters

```
\Umathordrelspacing\scriptstyle=30mu
\Umathordordspacing\scriptstyle=30mu
```

This gives a different result:

| STYLE | EXAMPLE |
|---------------|------------------------------|
| default | $b^x = x$ x $x=xx$ |
| script | $b^x = x$ x $x = x$ x |
| crampedscript | $b^{x=xx}$ $x=xx$ |

But, as this is not what is expected (visually) we should say:

```
\Umathordrelspacing\scriptstyle=30mu
\Umathordordspacing\scriptstyle=30mu
\Umathordrelspacing\crampedscriptstyle=30mu
\Umathordordspacing\crampedscriptstyle=30mu
```

Now we get:

| STYLE | EXAMPLE |
|---------------|------------------------------|
| default | $b^x = x$ x $x = x$ x |
| script | $b^x = x$ x $x = x$ x |
| crampedscript | $b^x = x$ x $x = x$ x |

7.4 Math parameter settings

7.4.1 Many new `\Umath*` primitives

In LuaT_EX, the font dimension parameters that T_EX used in math typesetting are now accessible via primitive commands. In fact, refactoring of the math engine has resulted in many more parameters than were not accessible before.



| PRIMITIVE NAME | DESCRIPTION |
|--|---|
| <code>\Umathquad</code> | the width of 18 mu's |
| <code>\Umathaxis</code> | height of the vertical center axis of the math formula above the baseline |
| <code>\Umathoperatorsize</code> | minimum size of large operators in display mode |
| <code>\Umathoverbarkern</code> | vertical clearance above the rule |
| <code>\Umathoverbarrule</code> | the width of the rule |
| <code>\Umathoverbarvgap</code> | vertical clearance below the rule |
| <code>\Umathunderbarkern</code> | vertical clearance below the rule |
| <code>\Umathunderbarrule</code> | the width of the rule |
| <code>\Umathunderbarvgap</code> | vertical clearance above the rule |
| <code>\Umathradicalkern</code> | vertical clearance above the rule |
| <code>\Umathradicalrule</code> | the width of the rule |
| <code>\Umathradicalvgap</code> | vertical clearance below the rule |
| <code>\Umathradicaldegreebefore</code> | the forward kern that takes place before placement of the radical degree |
| <code>\Umathradicaldegreeafter</code> | the backward kern that takes place after placement of the radical degree |
| <code>\Umathradicaldegreeraise</code> | this is the percentage of the total height and depth of the radical sign that the degree is raised by; it is expressed in percents, so 60% is expressed as the integer 60 |
| <code>\Umathstackvgap</code> | vertical clearance between the two elements in a <code>\atop</code> stack |
| <code>\Umathstacknumup</code> | numerator shift upward in <code>\atop</code> stack |
| <code>\Umathstackdenomdown</code> | denominator shift downward in <code>\atop</code> stack |
| <code>\Umathfractionrule</code> | the width of the rule in a <code>\over</code> |
| <code>\Umathfractionnumvgap</code> | vertical clearance between the numerator and the rule |
| <code>\Umathfractionnumup</code> | numerator shift upward in <code>\over</code> |
| <code>\Umathfractiondenomvgap</code> | vertical clearance between the denominator and the rule |
| <code>\Umathfractiondenomdown</code> | denominator shift downward in <code>\over</code> |
| <code>\Umathfractiondelsize</code> | minimum delimiter size for <code>\dots</code> withdelims |
| <code>\Umathlimitabovevgap</code> | vertical clearance for limits above operators |
| <code>\Umathlimitabovebgap</code> | vertical baseline clearance for limits above operators |
| <code>\Umathlimitabovekern</code> | space reserved at the top of the limit |
| <code>\Umathlimitbelowvgap</code> | vertical clearance for limits below operators |
| <code>\Umathlimitbelowbgap</code> | vertical baseline clearance for limits below operators |
| <code>\Umathlimitbelowkern</code> | space reserved at the bottom of the limit |
| <code>\Umathoverdelimitervgap</code> | vertical clearance for limits above delimiters |
| <code>\Umathoverdelimiterbgap</code> | vertical baseline clearance for limits above delimiters |
| <code>\Umathunderdelimitervgap</code> | vertical clearance for limits below delimiters |
| <code>\Umathunderdelimiterbgap</code> | vertical baseline clearance for limits below delimiters |
| <code>\Umathsubshiftdrop</code> | subscript drop for boxes and subformulas |
| <code>\Umathsubshiftdown</code> | subscript drop for characters |
| <code>\Umathsupshiftdrop</code> | superscript drop (raise, actually) for boxes and subformulas |
| <code>\Umathsupshiftup</code> | superscript raise for characters |
| <code>\Umathsubsupshiftdown</code> | subscript drop in the presence of a superscript |



| | |
|--|---|
| <code>\Umathsubtopmax</code> | the top of standalone subscripts cannot be higher than this above the baseline |
| <code>\Umathsupbottommin</code> | the bottom of standalone superscripts cannot be less than this above the baseline |
| <code>\Umathsupsubbottommax</code> | the bottom of the superscript of a combined super- and subscript be at least as high as this above the baseline |
| <code>\Umathsubsupvgap</code> | vertical clearance between super- and subscript |
| <code>\Umathspaceafterscript</code> | additional space added after a super- or subscript |
| <code>\Umathconnectoroverlapmin</code> | minimum overlap between parts in an extensible recipe |

Each of the parameters in this section can be set by a command like this:

```
\Umathquad\displaystyle=1em
```

they obey grouping, and you can use `\the\Umathquad\displaystyle` if needed.

7.4.2 Font-based math parameters

While it is nice to have these math parameters available for tweaking, it would be tedious to have to set each of them by hand. For this reason, Lua \TeX initializes a bunch of these parameters whenever you assign a font identifier to a math family based on either the traditional math font dimensions in the font (for assignments to math family 2 and 3 using tfm-based fonts like `cmsy` and `cmex`), or based on the named values in a potential `MathConstants` table when the font is loaded via Lua. If there is a `MathConstants` table, this takes precedence over font dimensions, and in that case no attention is paid to which family is being assigned to: the `MathConstants` tables in the last assigned family sets all parameters.

In the table below, the one-letter style abbreviations and symbolic tfm font dimension names match those used in the \TeX book. Assignments to `\textfont` set the values for the cramped and uncramped display and text styles, `\scriptfont` sets the script styles, and `\scriptscriptfont` sets the scriptscript styles, so we have eight parameters for three font sizes. In the tfm case, assignments only happen in family 2 and family 3 (and of course only for the parameters for which there are font dimensions).

Besides the parameters below, Lua \TeX also looks at the ‘space’ font dimension parameter. For math fonts, this should be set to zero.

| VARIABLE / STYLE | TFM / OPENTYPE |
|---|---|
| <code>\Umathaxis</code> | <code>axis_height</code> <code>AxisHeight</code> |
| ⁶ <code>\Umathoperatorsiz</code> <code>D, D'</code> | — <code>DisplayOperatorMinHeight</code> |
| ⁹ <code>\Umathfractiondelsize</code> <code>D, D'</code> | <code>delim1</code> <code>FractionDelimiterDisplayStyleSize</code> |
| ⁹ <code>\Umathfractiondelsize</code> <code>T, T', S, S', SS, SS'</code> | <code>delim2</code> <code>FractionDelimiterSize</code> |
| <code>\Umathfractiondenomdown</code> | <code>denom1</code> |



| | |
|--|--|
| D, D' | FractionDenominatorDisplayStyleShiftDown |
| \Umathfractiondenomdown | denom2 |
| T, T', S, S', SS, SS' | FractionDenominatorShiftDown |
| \Umathfractiondenomvgap | 3*default_rule_thickness |
| D, D' | FractionDenominatorDisplayStyleGapMin |
| \Umathfractiondenomvgap | default_rule_thickness |
| T, T', S, S', SS, SS' | FractionDenominatorGapMin |
| \Umathfractionnumup | num1 |
| D, D' | FractionNumeratorDisplayStyleShiftUp |
| \Umathfractionnumup | num2 |
| T, T', S, S', SS, SS' | FractionNumeratorShiftUp |
| \Umathfractionnumvgap | 3*default_rule_thickness |
| D, D' | FractionNumeratorDisplayStyleGapMin |
| \Umathfractionnumvgap | default_rule_thickness |
| T, T', S, S', SS, SS' | FractionNumeratorGapMin |
| \Umathfractionrule | default_rule_thickness |
| | FractionRuleThickness |
| \Umathskewedfractionhgap | math_quad/2 |
| | SkewedFractionHorizontalGap |
| \Umathskewedfractionvgap | math_x_height |
| | SkewedFractionVerticalGap |
| \Umathlimitabovebgap | big_op_spacing3 |
| | UpperLimitBaselineRiseMin |
| ¹ \Umathlimitabovekern | big_op_spacing5 |
| | 0 |
| \Umathlimitabovevgap | big_op_spacing1 |
| | UpperLimitGapMin |
| \Umathlimitbelowbgap | big_op_spacing4 |
| | LowerLimitBaselineDropMin |
| ¹ \Umathlimitbelowkern | big_op_spacing5 |
| | 0 |
| \Umathlimitbelowvgap | big_op_spacing2 |
| | LowerLimitGapMin |
| \Umathoverdelimitervgap | big_op_spacing1 |
| | StretchStackGapBelowMin |
| \Umathoverdelimiterbgap | big_op_spacing3 |
| | StretchStackTopShiftUp |
| \Umathunderdelimitervgap | big_op_spacing2 |
| | StretchStackGapAboveMin |
| \Umathunderdelimiterbgap | big_op_spacing4 |
| | StretchStackBottomShiftDown |
| \Umathoverbarkern | default_rule_thickness |



| | |
|--|---|
| | OverbarExtraAscender |
| \Umathoverbarrule | default_rule_thickness OverbarRuleThickness |
| \Umathoverbarvgap | 3*default_rule_thickness OverbarVerticalGap |
| ¹ \Umathquad | math_quad <font_size(f)> |
| \Umathradicalkern | default_rule_thickness RadicalExtraAscender |
| ² \Umathradicalrule | <not set> RadicalRuleThickness |
| ³ \Umathradicalvgap D, D' | default_rule_thickness+abs(math_x_height)/4 RadicalDisplayStyleVerticalGap |
| ³ \Umathradicalvgap T, T', S, S', SS, SS' | default_rule_thickness+abs(default_rule_thickness)/4 RadicalVerticalGap |
| ² \Umathradicaldegreebefore | <not set> RadicalKernBeforeDegree |
| ² \Umathradicaldegreeafter | <not set> RadicalKernAfterDegree |
| ^{2,7} \Umathradicaldegreeraise | <not set> RadicalDegreeBottomRaisePercent |
| ⁴ \Umathspaceafterscript | script_space SpaceAfterScript |
| \Umathstackdenomdown D, D' | denom1 StackBottomDisplayStyleShiftDown |
| \Umathstackdenomdown T, T', S, S', SS, SS' | denom2 StackBottomShiftDown |
| \Umathstacknumup D, D' | num1 StackTopDisplayStyleShiftUp |
| \Umathstacknumup T, T', S, S', SS, SS' | num3 StackTopShiftUp |
| \Umathstackvgap D, D' | 7*default_rule_thickness StackDisplayStyleGapMin |
| \Umathstackvgap T, T', S, S', SS, SS' | 3*default_rule_thickness StackGapMin |
| \Umathsubshiftdown | sub1 SubscriptShiftDown |
| \Umathsubshiftdrop | sub_drop SubscriptBaselineDropMin |
| ⁸ \Umathsubsupshiftdown | — SubscriptShiftDownWithSuperscript |
| \Umathsubtopmax | abs(math_x_height*4)/5 |



| | |
|---|---|
| | SubscriptTopMax |
| \Umathsubsupvgap | 4*default_rule_thickness SubSuperscriptGapMin |
| \Umathsupbottommin | abs(math_x_height/4) SuperscriptBottomMin |
| \Umathsupshiftdrop | sup_drop SuperscriptBaselineDropMax |
| \Umathsupshiftup D | sup1 SuperscriptShiftUp |
| \Umathsupshiftup T, S, SS, | sup2 SuperscriptShiftUp |
| \Umathsupshiftup D', T', S', SS' | sup3 SuperscriptShiftUpCramped |
| \Umathsupsubbottommax | abs(math_x_height*4)/5 SuperscriptBottomMaxWithSubscript |
| \Umathunderbarkern | default_rule_thickness UnderbarExtraDescender |
| \Umathunderbarrule | default_rule_thickness UnderbarRuleThickness |
| \Umathunderbarvgap | 3*default_rule_thickness UnderbarVerticalGap |
| ⁵ \Umathconnectoroverlapmin | 0 MinConnectorOverlap |

Note 1: OpenType fonts set `\Umathlimitabovekern` and `\Umathlimitbelowkern` to zero and set `\Umathquad` to the font size of the used font, because these are not supported in the MATH table,

Note 2: Traditional tfm fonts do not set `\Umathradicalrule` because T_EX82 uses the height of the radical instead. When this parameter is indeed not set when LuaT_EX has to typeset a radical, a backward compatibility mode will kick in that assumes that an oldstyle T_EX font is used. Also, they do not set `\Umathradicaldegreebefore`, `\Umathradicaldegreeafter`, and `\Umathradicaldegreerise`. These are then automatically initialized to 5/18quad, −10/18quad, and 60.

Note 3: If tfm fonts are used, then the `\Umathradicalvgap` is not set until the first time LuaT_EX has to typeset a formula because this needs parameters from both family 2 and family 3. This provides a partial backward compatibility with T_EX82, but that compatibility is only partial: once the `\Umathradicalvgap` is set, it will not be recalculated any more.

Note 4: When tfm fonts are used a similar situation arises with respect to `\Umathspaceafterscript`: it is not set until the first time LuaT_EX has to typeset a formula. This provides some backward compatibility with T_EX82. But once the `\Umathspaceafterscript` is set, `\scriptspace` will never be looked at again.

Note 5: Traditional tfm fonts set `\Umathconnectoroverlapmin` to zero because T_EX82 always stacks extensibles without any overlap.



Note 6: The `\Umathoperator size` is only used in `\displaystyle`, and is only set in OpenType fonts. In tfm font mode, it is artificially set to one scaled point more than the initial attempt's size, so that always the 'first next' will be tried, just like in T_EX82.

Note 7: The `\Umathradicaldegree raise` is a special case because it is the only parameter that is expressed in a percentage instead of a number of scaled points.

Note 8: `SubscriptShiftDownWithSuperscript` does not actually exist in the 'standard' OpenType math font Cambria, but it is useful enough to be added.

Note 9: `FractionDelimiterDisplayStyleSize` and `FractionDelimiterSize` do not actually exist in the 'standard' OpenType math font Cambria, but were useful enough to be added.

7.5 Math spacing

7.5.1 Inline surrounding space

Inline math is surrounded by (optional) `\mathsurround` spacing but that is a fixed dimension. There is now an additional parameter `\mathsurroundskip`. When set to a non-zero value (or zero with some stretch or shrink) this parameter will replace `\mathsurround`. By using an additional parameter instead of changing the nature of `\mathsurround`, we can remain compatible. In the meantime a bit more control has been added via `\mathsurroundmode`. This directive can take 6 values with zero being the default behaviour.

```
\mathsurround    10pt
\mathsurroundskip20pt
```

| MODE | X\$X\$X | X \$X\$ X | EFFECT |
|------|---------|-----------|--|
| 0 | xxx | x x x | obey <code>\mathsurround</code> when <code>\mathsurroundskip</code> is 0pt |
| 1 | xxx | x x x | only add skip to the left |
| 2 | xxx | x x x | only add skip to the right |
| 3 | xxx | x x x | add skip to the left and right |
| 4 | xxx | x x x | ignore the skip setting, obey <code>\mathsurround</code> |
| 5 | xxx | x x x | disable all spacing around math |
| 6 | xxx | x x x | only apply <code>\mathsurroundskip</code> when also spacing |
| 7 | xxx | x x x | only apply <code>\mathsurroundskip</code> when no spacing |

Method six omits the surround glue when there is (x)spacing glue present while method seven does the opposite, the glue is only applied when there is (x)space glue present too. Anything more fancy, like checking the beginning or end of a paragraph (or edges of a box) would not be robust anyway. If you want that you can write a callback that runs over a list and analyzes a paragraph. Actually, in that case you could also inject glue (or set the properties of a math node) explicitly. So, these modes are in practice mostly useful for special purposes and experiments (they originate in a tracker item). Keep in mind that this glue is part of the math node and not always treated as normal glue: it travels with the begin and end math nodes. Also, method 6 and 7 will zero the skip related fields in a node when applicable in the first occasion that checks them (linebreaking or packaging).



7.5.2 Pairwise spacing

Besides the parameters mentioned in the previous sections, there are also 64 new primitives to control the math spacing table (as explained in Chapter 18 of the $\mathrm{T}_{\mathrm{E}}\mathrm{X}$ book). The primitive names are a simple matter of combining two math atom types, but for completeness' sake, here is the whole list:

| | |
|------------------------------------|--------------------------------------|
| <code>\Umathordordspacing</code> | <code>\Umathopenordspacing</code> |
| <code>\Umathordopspacing</code> | <code>\Umathopenopspacing</code> |
| <code>\Umathordbinspacing</code> | <code>\Umathopenbinspacing</code> |
| <code>\Umathordrelspacing</code> | <code>\Umathopenrelspacing</code> |
| <code>\Umathordopenspacing</code> | <code>\Umathopenopenspacing</code> |
| <code>\Umathordclosespacing</code> | <code>\Umathopenclosespacing</code> |
| <code>\Umathordpunctspacing</code> | <code>\Umathopenpunctspacing</code> |
| <code>\Umathordinnerspacing</code> | <code>\Umathopeninnerspacing</code> |
| <code>\Umathopordspacing</code> | <code>\Umathcloseordspacing</code> |
| <code>\Umathopopspacing</code> | <code>\Umathcloseopspacing</code> |
| <code>\Umathopbinspacing</code> | <code>\Umathclosebinspacing</code> |
| <code>\Umathoprelspacing</code> | <code>\Umathcloserelspacing</code> |
| <code>\Umathopopenspacing</code> | <code>\Umathcloseopenspacing</code> |
| <code>\Umathopclosespacing</code> | <code>\Umathcloseclosespacing</code> |
| <code>\Umathoppunctspacing</code> | <code>\Umathclosepunctspacing</code> |
| <code>\Umathopinnerspacing</code> | <code>\Umathcloseinnerspacing</code> |
| <code>\Umathbinordspacing</code> | <code>\Umathpunctordspacing</code> |
| <code>\Umathbinopspacing</code> | <code>\Umathpunctopspacing</code> |
| <code>\Umathbinbinspacing</code> | <code>\Umathpunctbinspacing</code> |
| <code>\Umathbinrelspacing</code> | <code>\Umathpunctrelspacing</code> |
| <code>\Umathbinopenspacing</code> | <code>\Umathpunctopenspacing</code> |
| <code>\Umathbinclosespacing</code> | <code>\Umathpunctclosespacing</code> |
| <code>\Umathbinpunctspacing</code> | <code>\Umathpunctpunctspacing</code> |
| <code>\Umathbininnerspacing</code> | <code>\Umathpunctinnerspacing</code> |
| <code>\Umathrelordspacing</code> | <code>\Umathinnerordspacing</code> |
| <code>\Umathrelopspacing</code> | <code>\Umathinneropspacing</code> |
| <code>\Umathrelbinspacing</code> | <code>\Umathinnerbinspacing</code> |
| <code>\Umathrelrelspacing</code> | <code>\Umathinnerrelspacing</code> |
| <code>\Umathrelopenspacing</code> | <code>\Umathinneropenspacing</code> |
| <code>\Umathrelclosespacing</code> | <code>\Umathinnerclosespacing</code> |
| <code>\Umathrelpunctspacing</code> | <code>\Umathinnerpunctspacing</code> |
| <code>\Umathrelinnerspacing</code> | <code>\Umathinnerinnerspacing</code> |

These parameters are of type `\muskip`, so setting a parameter can be done like this:

```
\Umathopordspacing\displaystyle=4mu plus 2mu
```

They are all initialized by `initex` to the values mentioned in the table in Chapter 18 of the $\mathrm{T}_{\mathrm{E}}\mathrm{X}$ book.



Note 1: for ease of use as well as for backward compatibility, `\thinmuskip`, `\medmuskip` and `\thickmuskip` are treated specially. In their case a pointer to the corresponding internal parameter is saved, not the actual `\muskip` value. This means that any later changes to one of these three parameters will be taken into account.

Note 2: Careful readers will realise that there are also primitives for the items marked * in the `TEXbook`. These will not actually be used as those combinations of atoms cannot actually happen, but it seemed better not to break orthogonality. They are initialized to zero.

7.5.3 Skips around display math

The injection of `\abovedisplayskip` and `\belowdisplayskip` is not symmetrical. An above one is always inserted, also when zero, but the below is only inserted when larger than zero. Especially the latter makes it sometimes hard to fully control spacing. Therefore `LuaTEX` comes with a new directive: `\mathdisplayskipmode`. The following values apply:

| VALUE | MEANING |
|-------|-----------------------------------|
| 0 | normal T _E X behaviour |
| 1 | always (same as 0) |
| 2 | only when not zero |
| 3 | never, not even when not zero |

7.5.4 Nolimit correction

There are two extra math parameters `\Umathnolimitsupfactor` and `\Umathnolimitssubfactor` that were added to provide some control over how limits are spaced (for example the position of super and subscripts after integral operators). They relate to an extra parameter `\mathnolimitsmode`. The half corrections are what happens when scripts are placed above and below. The problem with italic corrections is that officially that correction italic is used for above/below placement while advanced kerns are used for placement at the right end. The question is: how often is this implemented, and if so, do the kerns assume correction too. Anyway, with this parameter one can control it.

| | \int_1^0 | \int_1^0 | \int_1^0 | \int_1^0 | \int_1^0 | ${}_1\int^0$ |
|--------------------|------------|------------|------------|------------|------------|--------------|
| mode | 0 | 1 | 2 | 3 | 4 | 8000 |
| superscript | 0 | font | 0 | 0 | +ic/2 | 0 |
| subscript | -ic | font | 0 | -ic/2 | -ic/2 | 8000ic/1000 |

When the mode is set to one, the math parameters are used. This way a macro package writer can decide what looks best. Given the current state of fonts in `ConTEXt` we currently use mode 1 with factor 0 for the superscript and 750 for the subscripts. Positive values are used for both parameters but the subscript shifts to the left. A `\mathnolimitsmode` larger than 15 is considered to be a factor for the subscript correction. This feature can be handy when experimenting.

7.5.5 Math italic mess

The `\mathitalicsmode` parameter can be set to 1 to force italic correction before noads that represent some more complex structure (read: everything that is not an ord, bin, rel, open, close, punct or inner). We show a Cambria example.

```
\mathitalicsmode = 0  $T^1$   $T$   $T+1$   $T_{\frac{1}{2}}$   $T\sqrt{1}$ 
\mathitalicsmode = 1  $T^1$   $T$   $T+1$   $T_{\frac{1}{2}}$   $T\sqrt{1}$ 
```

This kind of parameters relate to the fact that italic correction in OpenType math is bound to fuzzy rules. So, control is the solution.

7.5.6 Script and kerning

If you want to typeset text in math macro packages often provide something `\text` which obeys the script sizes. As the definition can be anything there is a good chance that the kerning doesn't come out well when used in a script. Given that the first glyph ends up in a `\hbox` we have some control over this. And, as a bonus we also added control over the normal sublist kerning. The `\mathscriptboxmode` parameter defaults to 1.

| VALUE | MEANING |
|-------|---|
| 0 | forget about kerning |
| 1 | kern math sub lists with a valid glyph |
| 2 | also kern math sub boxes that have a valid glyph |
| 2 | only kern math sub boxes with a boundary node present |

Here we show some examples. Of course this doesn't solve all our problems, if only because some fonts have characters with bounding boxes that compensate for italics, while other fonts can lack kerns.

| | <code>\$T_{\text{tf fluff}}\$</code> | <code>\$T_{\text{tf fluff}}\$</code> | <code>\$T_{\text{tf fluff}}\$</code> | <code>\$T_{\text{tf fluff}}\$</code> | <code>\$T_{\text{tf fluff}}\$</code> |
|----------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | mode 0 | mode 1 | mode 1 | mode 2 | mode 3 |
| modern | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} |
| lucidaot | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} |
| pagella | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} |
| cambria | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} |
| dejavu | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} | T_{fluff} |

Kerning between a character subscript is controlled by `\mathscriptcharmode` which also defaults to 1.

Here is another example. Internally we tag kerns as italic kerns or font kerns where font kerns result from the staircase kern tables. In 2018 fonts like Latin Modern and Pagella rely on cheats with the boundingbox, Cambria uses staircase kerns and Lucida a mixture. Depending on how fonts evolve we might add some more control over what one can turn on and off.

| | normal | modern | T_f | γ_e | γ_{ee} | T_{fluff} |
|--|--------|---------|-------|------------|---------------|--------------------|
| | | pagella | T_f | γ_e | γ_{ee} | T_{fluff} |



| | | | | | |
|------|----------|-------|------------|---------------|-------------|
| | cambrica | T_f | γ_e | γ_{ee} | T_{fluff} |
| | lucidaot | T_f | γ_e | γ_{ee} | T_{fluff} |
| bold | modern | T_f | γ_e | γ_{ee} | T_{fluff} |
| | pagella | T_f | γ_e | γ_{ee} | T_{fluff} |
| | cambrica | T_f | γ_e | γ_{ee} | T_{fluff} |
| | lucidaot | T_f | γ_e | γ_{ee} | T_{fluff} |

7.5.7 Fixed scripts

We have three parameters that are used for this fixed anchoring:

| PARAMETER | REGISTER |
|-----------|------------------------------------|
| d | <code>\Umathsubshiftdown</code> |
| u | <code>\Umathsupshiftup</code> |
| s | <code>\Umathsubsupshiftdown</code> |

When we set `\mathscriptsmode` to a value other than zero these are used for calculating fixed positions. This is something that is needed for instance for chemistry. You can manipulate the mentioned variables to achieve different effects.

| MODE | DOWN | UP | EXAMPLE |
|------|-----------------|-----------------|---|
| 0 | dynamic | dynamic | $\text{CH}_2 + \text{CH}_2^+ + \text{CH}_2^2$ |
| 1 | d | u | $\text{CH}_2 + \text{CH}_2^+ + \text{CH}_2^2$ |
| 2 | s | u | $\text{CH}_2 + \text{CH}_2^+ + \text{CH}_2^2$ |
| 3 | s | $u + s - d$ | $\text{CH}_2 + \text{CH}_2^+ + \text{CH}_2^2$ |
| 4 | $d + (s - d)/2$ | $u + (s - d)/2$ | $\text{CH}_2 + \text{CH}_2^+ + \text{CH}_2^2$ |
| 5 | d | $u + s - d$ | $\text{CH}_2 + \text{CH}_2^+ + \text{CH}_2^2$ |

The value of this parameter obeys grouping but applies to the whole current formula.

7.5.8 Penalties: `\mathpenaltiesmode`

Only in inline math penalties will be added in a math list. You can force penalties (also in display math) by setting:

```
\mathpenaltiesmode = 1
```

This primitive is not really needed in LuaTeX because you can use the callback `mlist_to_hlist` to force penalties by just calling the regular routine with forced penalties. However, as part of opening up and control this primitive makes sense. As a bonus we also provide two extra penalties:

```
\prebinoppenalty = -100 % example value
\prerelpenalty   = 900 % example value
```



They default to infinite which signals that they don't need to be inserted. When set they are injected before a binop or rel noad. This is an experimental feature.

7.5.9 Equation spacing: `\matheqnogapstep`

By default \TeX will add one quad between the equation and the number. This is hard coded. A new primitive can control this:

```
\matheqnogapstep = 1000
```

Because a math quad from the math text font is used instead of a dimension, we use a step to control the size. A value of zero will suppress the gap. The step is divided by 1000 which is the usual way to mimick floating point factors in \TeX .

7.6 Math constructs

7.6.1 Unscaled fences

The `\mathdelimitersmode` primitive is experimental and deals with the following (potential) problems. Three bits can be set. The first bit prevents an unwanted shift when the fence symbol is not scaled (a cambria side effect). The second bit forces italic correction between a preceding character ordinal and the fenced subformula, while the third bit turns that subformula into an ordinary so that the same spacing applies as with unfenced variants. Here we show Cambria (with `\mathitalicsmode` enabled).

| | | |
|--------------------------------------|--------|--------|
| <code>\mathdelimitersmode = 0</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 1</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 2</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 3</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 4</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 5</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 6</code> | $f(x)$ | $f(x)$ |
| <code>\mathdelimitersmode = 7</code> | $f(x)$ | $f(x)$ |

So, when set to 7 fenced subformulas with unscaled delimiters come out the same as unfenced ones. This can be handy for cases where one is forced to use `\left` and `\right` always because of unpredictable content. As said, it's an experimental feature (which somehow fits in the exceptional way fences are dealt with in the engine). The full list of flags is given in the next table:

| VALUE | MEANING |
|-------|---------------------------------------|
| "01 | don't apply the usual shift |
| "02 | apply italic correction when possible |
| "04 | force an ordinary subformula |
| "08 | no shift when a base character |
| "10 | only shift when an extensible |

The effect can depend on the font (and for Cambria one can use for instance "16).



7.6.2 Accent handling

LuaT_EX supports both top accents and bottom accents in math mode, and math accents stretch automatically (if this is supported by the font the accent comes from, of course). Bottom and combined accents as well as fixed-width math accents are controlled by optional keywords following `\Umathaccent`.

The keyword `bottom` after `\Umathaccent` signals that a bottom accent is needed, and the keyword `both` signals that both a top and a bottom accent are needed (in this case two accents need to be specified, of course).

Then the set of three integers defining the accent is read. This set of integers can be prefixed by the fixed keyword to indicate that a non-stretching variant is requested (in case of both accents, this step is repeated).

A simple example:

```
\Umathaccent both fixed 0 0 "20D7 fixed 0 0 "20D7 {example}
```

If a math top accent has to be placed and the accentee is a character and has a non-zero `top_accent` value, then this value will be used to place the accent instead of the `\skewchar` kern used by T_EX82.

The `top_accent` value represents a vertical line somewhere in the accentee. The accent will be shifted horizontally such that its own `top_accent` line coincides with the one from the accentee. If the `top_accent` value of the accent is zero, then half the width of the accent followed by its italic correction is used instead.

The vertical placement of a top accent depends on the `x_height` of the font of the accentee (as explained in the T_EXbook), but if a value turns out to be zero and the font had a `MathConstants` table, then `AccentBaseHeight` is used instead.

The vertical placement of a bottom accent is straight below the accentee, no correction takes place.

Possible locations are `top`, `bottom`, `both` and `center`. When no location is given `top` is assumed. An additional parameter `fraction` can be specified followed by a number; a value of for instance 1200 means that the criterium is 1.2 times the width of the nucleus. The fraction only applies to the stepwise selected shapes and is mostly meant for the `overlay` location. It also works for the other locations but then it concerns the width.

7.6.3 Radical extensions

The new primitive `\Uroot` allows the construction of a radical noad including a degree field. Its syntax is an extension of `\Uradical`:

```
\Uradical <fam integer> <char integer> <radicand>  
\Uroot    <fam integer> <char integer> <degree> <radicand>
```

The placement of the degree is controlled by the math parameters `\Umathradicaldegreebefore`, `\Umathradicaldegreeafter`, and `\Umathradicaldegreeraise`. The degree will be typeset in `\scriptscriptstyle`.



7.6.4 Super- and subscripts

The character fields in a Lua-loaded OpenType math font can have a ‘mathkern’ table. The format of this table is the same as the ‘mathkern’ table that is returned by the fontloader library, except that all height and kern values have to be specified in actual scaled points.

When a super- or subscript has to be placed next to a math item, LuaT_EX checks whether the super- or subscript and the nucleus are both simple character items. If they are, and if the fonts of both character items are OpenType fonts (as opposed to legacy T_EX fonts), then LuaT_EX will use the OpenType math algorithm for deciding on the horizontal placement of the super- or subscript.

This works as follows:

- ▶ The vertical position of the script is calculated.
- ▶ The default horizontal position is flat next to the base character.
- ▶ For superscripts, the italic correction of the base character is added.
- ▶ For a superscript, two vertical values are calculated: the bottom of the script (after shifting up), and the top of the base. For a subscript, the two values are the top of the (shifted down) script, and the bottom of the base.
- ▶ For each of these two locations:
 - find the math kern value at this height for the base (for a subscript placement, this is the `bottom_right` corner, for a superscript placement the `top_right` corner)
 - find the math kern value at this height for the script (for a subscript placement, this is the `top_left` corner, for a superscript placement the `bottom_left` corner)
 - add the found values together to get a preliminary result.
- ▶ The horizontal kern to be applied is the smallest of the two results from previous step.


The math kern value at a specific height is the kern value that is specified by the next higher height and kern pair, or the highest one in the character (if there is no value high enough in the character), or simply zero (if the character has no math kern pairs at all).

7.6.5 Scripts on extensibles

The primitives `\Uunderdelimiter` and `\Uoverdelimiter` allow the placement of a subscript or superscript on an automatically extensible item and `\Udelimiterunder` and `\Udelimiterover` allow the placement of an automatically extensible item as a subscript or superscript on a nucleus. The input:

| | | | |
|--|---|-------|----------------------------------|
| $\overline{\hspace{1cm}}$ | 0 | "2194 | {\hbox{\strut overdelimiter}}\$ |
| $\underline{\hspace{1cm}}$ | 0 | "2194 | {\hbox{\strut underdelimiter}}\$ |
| $\overline{\hspace{1cm}}\hspace{0.5cm}$ | 0 | "2194 | {\hbox{\strut delimiterover}}\$ |
| $\underline{\hspace{1cm}}\hspace{0.5cm}$ | 0 | "2194 | {\hbox{\strut delimiterunder}}\$ |

will render this:



The vertical placements are controlled by `\Umathunderdelimterbgap`, `\Umathunderdelimtervgap`, `\Umathoverdelimterbgap`, and `\Umathoverdelimtervgap` in a similar way as limit placements on large operators. The superscript in `\Uoverdelimter` is typeset in a suitable scripted style, the subscript in `\Underdelimter` is cramped as well.

These primitives accept an option width specification. When used the also optional keywords `left`, `middle` and `right` will determine what happens when a requested size can't be met (which can happen when we step to successive larger variants).

An extra primitive `\Uhexensible` is available that can be used like this:

```
$\Uhexensible width 10cm 0 "2194$
```

This will render this:



Here you can also pass options, like:

```
$\Uhexensible width 1pt middle 0 "2194$
```

This gives:



LuaTeX internally uses a structure that supports OpenType ‘MathVariants’ as well as tfm ‘extensible recipes’. In most cases where font metrics are involved we have a different code path for traditional fonts and OpenType fonts.

7.6.6 Fractions

The `\abovewithdelims` command accepts a keyword `exact`. When issued the extra space relative to the rule thickness is not added. One can of course use the `\Umathfraction..gap` commands to influence the spacing. Also the rule is still positioned around the math axis.

```
$$ { {a} \abovewithdelims() exact 4pt {b} }$$
```

The math parameter table contains some parameters that specify a horizontal and vertical gap for skewed fractions. Of course some guessing is needed in order to implement something that uses them. And so we now provide a primitive similar to the other fraction related ones but with a few options so that one can influence the rendering. Of course a user can also mess around a bit with the parameters `\Umathskewedfractionhgap` and `\Umathskewedfractionvgap`.

The syntax used here is:

```
{ {1} \Uskewed / <options> {2} }
{ {1} \Uskewedwithdelims / () <options> {2} }
```

where the options can be `noaxis` and `exact`. By default we add half the axis to the shifts and by default we zero the width of the middle character. For Latin Modern the result looks as follows:

| | | | | |
|-------|-----------------------|-----------------------|-------------------------|-------------------------|
| | $x + \frac{a}{b} + x$ | $x + \frac{1}{2} + x$ | $x + (\frac{a}{b}) + x$ | $x + (\frac{1}{2}) + x$ |
| exact | $x + \frac{a}{b} + x$ | $x + \frac{1}{2} + x$ | $x + (\frac{a}{b}) + x$ | $x + (\frac{1}{2}) + x$ |



| | | | | |
|--------------|-----------------------|-----------------------|------------------------------------|------------------------------------|
| noaxis | $x + \frac{a}{b} + x$ | $x + \frac{1}{2} + x$ | $x + \left(\frac{a}{b}\right) + x$ | $x + \left(\frac{1}{2}\right) + x$ |
| exact noaxis | $x + \frac{a}{b} + x$ | $x + \frac{1}{2} + x$ | $x + \left(\frac{a}{b}\right) + x$ | $x + \left(\frac{1}{2}\right) + x$ |


7.6.7 Delimiters: `\Uleft`, `\Umiddle` and `\Uright`

Normally you will force delimiters to certain sizes by putting an empty box or rule next to it. The resulting delimiter will either be a character from the stepwise size range or an extensible. The latter can be quite differently positioned than the characters as it depends on the fit as well as the fact if the used characters in the font have depth or height. Commands like (plain $\text{T}_{\text{E}}\text{X}$ s) `\big` need use this feature. In $\text{LuaT}_{\text{E}}\text{X}$ we provide a bit more control by three variants that support optional parameters height, depth and axis. The following example uses this:

```

\Uleft   height 30pt depth 10pt      \Udelimiter "0 "0 "000028
\quad x\quad
\Umiddle height 40pt depth 15pt      \Udelimiter "0 "0 "002016
\quad x\quad
\Uright  height 30pt depth 10pt      \Udelimiter "0 "0 "000029
\quad \quad \quad
\Uleft   height 30pt depth 10pt axis \Udelimiter "0 "0 "000028
\quad x\quad
\Umiddle height 40pt depth 15pt axis \Udelimiter "0 "0 "002016
\quad x\quad
\Uright  height 30pt depth 10pt axis \Udelimiter "0 "0 "000029

```

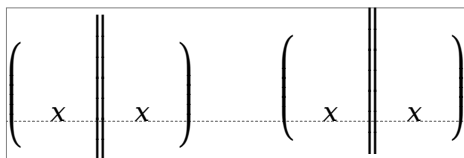

The keyword `exact` can be used as directive that the real dimensions should be applied when the criteria can't be met which can happen when we're still stepping through the successively larger variants. When no dimensions are given the `noaxis` command can be used to prevent shifting over the axis.

You can influence the final class with the keyword `class` which will influence the spacing. The numbers are the same as for character classes.

7.7 Extracting values

7.7.1 Codes

You can extract the components of a math character. Say that we have defined:

```
\Umathcode 1 2 3 4
```

then

```
[\Umathcharclass1] [\Umathcharfam1] [\Umathcharslot1]
```



will return:

[2] [3] [4]

These commands are provided as convenience. Before they come available you could do the following:

```
\def\Umathcharclass{\directlua{tex.print(tex.getmathcode(token.scan_int())[1])}}
\def\Umathcharfam {\directlua{tex.print(tex.getmathcode(token.scan_int())[2])}}
\def\Umathcharslot {\directlua{tex.print(tex.getmathcode(token.scan_int())[3])}}
```

7.7.2 Last lines

There is a new primitive to control the overshoot in the calculation of the previous line in mid-paragraph display math. The default value is 2 times the em width of the current font:

```
\predisplaygapfactor=2000
```

If you want to have the length of the last line independent of math i.e. you don't want to revert to a hack where you insert a fake display math formula in order to get the length of the last line, the following will often work too:

```
\def\lastlinelength{\dimexpr
  \directlua {tex.sprint (
    (nodes.dimensions(node.tail(tex.lists.page_head).list))
  )}sp
\relax}
```

7.8 Math mode

7.8.1 Verbose versions of single-character math commands

LuaTeX defines six new primitives that have the same function as \wedge , $_$, $\$$, and $\mathbb{}$:

| PRIMITIVE | EXPLANATION |
|---------------------------------|---|
| <code>\Usuperscript</code> | duplicates the functionality of \wedge |
| <code>\Usubscript</code> | duplicates the functionality of $_$ |
| <code>\Ustartmath</code> | duplicates the functionality of $\$$, when used in non-math mode. |
| <code>\Ustopmath</code> | duplicates the functionality of $\$$, when used in inline math mode. |
| <code>\Ustartdisplaymath</code> | duplicates the functionality of $\mathbb{}$, when used in non-math mode. |
| <code>\Ustopdisplaymath</code> | duplicates the functionality of $\mathbb{}$, when used in display math mode. |

The `\Ustopmath` and `\Ustopdisplaymath` primitives check if the current math mode is the correct one (inline vs. displayed), but you can freely intermix the four `mathon/mathoff` commands with explicit dollar sign(s).



7.8.2 Script commands `\Unosuperscript` and `\Unosubscript`

These two commands result in super- and subscripts but with the current style (at the time of rendering). So,

```
\Uleft height 30pt depth 10pt \Udelimiter "0 "0 "000028
\quad x\quad
\Umiddle height 40pt depth 15pt \Udelimiter "0 "0 "002016
\quad x\quad
\Uright height 30pt depth 10pt \Udelimiter "0 "0 "000029
\quad \quad \quad
\Uleft height 30pt depth 10pt axis \Udelimiter "0 "0 "000028
\quad x\quad
\Umiddle height 40pt depth 15pt axis \Udelimiter "0 "0 "002016
\quad x\quad
\Uright height 30pt depth 10pt axis \Udelimiter "0 "0 "000029
```

results in $x_2^1 = x_2^1 = x_2^1 = x_2^1$.

7.8.3 Allowed math commands in non-math modes

The commands `\mathchar`, and `\Umathchar` and control sequences that are the result of `\mathchardef` or `\Umathchardef` are also acceptable in the horizontal and vertical modes. In those cases, the `\textfont` from the requested math family is used.

7.9 Goodies

7.9.1 Flattening: `\mathflattenmode`

The $\text{T}_{\text{E}}\text{X}$ math engine collapses ord noads without sub- and superscripts and a character as nucleus. and which has the side effect that in OpenType mode italic corrections are applied (given that they are enabled).

```
\switchtobodyfont[modern]
$V \mathbin{\mathbin{v}} V$\par
$V \mathord{\mathord{v}} V$\par
```

This renders as:

VvV
 VvV

When we set `\mathflattenmode` to 31 we get:

$V\,v\,V$
 VvV



When you see no difference, then the font probably has the proper character dimensions and no italic correction is needed. For Latin Modern (at least till 2018) there was a visual difference. In that respect this parameter is not always needed unless of course you want efficient math lists anyway.

You can influence flattening by adding the appropriate number to the value of the mode parameter. The default value is 1.

| MODE | CLASS |
|------|-------|
| 1 | ord |
| 2 | bin |
| 4 | rel |
| 8 | punct |
| 16 | inner |

7.9.2 Less Tracing

Because there are quite some math related parameters and values, it is possible to limit tracing. Only when `tracingassigns` and/or `tracingrestores` are set to 2 or more they will be traced.

7.9.3 Math options with `\mathoption`

The logic in the math engine is rather complex and there are often no universal solutions (read: what works out well for one font, fails for another). Therefore some variations in the implementation are driven by parameters (modes). In addition there is a new primitive `\mathoption` which will be used for testing. Don't rely on any option to be there in a production version as they are meant for development.

This option was introduced for testing purposes when the math engine got split code paths and it forces the engine to treat new fonts as old ones with respect to italic correction etc. There are no guarantees given with respect to the final result and unexpected side effects are not seen as bugs as they relate to font properties. There is currently only one option:

The `oldmath` boolean flag in the Lua font table is the official way to force old treatment as it's bound to fonts. Like with all options we may temporarily introduce with this command this feature is not meant for production.





8 Nodes

8.1 LUA node representation

\TeX 's nodes are represented in Lua as userdata objects with a variable set of fields. In the following syntax tables, such as the type of such a userdata object is represented as `<node>`.

The current return value of `node.types()` is: `hlist` (0), `vlist` (1), `rule` (2), `ins` (3), `mark` (4), `adjust` (5), `boundary` (6), `disc` (7), `whatsit` (8), `local_par` (9), `dir` (10), `math` (11), `glue` (12), `kern` (13), `penalty` (14), `unset` (15), `style` (16), `choice` (17), `noad` (18), `radical` (19), `fraction` (20), `accent` (21), `fence` (22), `math_char` (23), `sub_box` (24), `sub_mlist` (25), `math_text_char` (26), `delim` (27), `margin_kern` (28), `glyph` (29), `align_record` (30), `pseudo_file` (31), `pseudo_line` (32), `page_insert` (33), `split_insert` (34), `expr_stack` (35), `nested_list` (36), `span` (37), `attribute` (38), `glue_spec` (39), `attribute_list` (40), `temp` (41), `align_stack` (42), `movement_stack` (43), `if_stack` (44), `unhyphenated` (45), `hyphenated` (46), `delta` (47), `passive` (48), `shape` (49).

The `\lastnodetype` primitive is ε - \TeX compliant. The valid range is still $[-1, 15]$ and `glyph` nodes (formerly known as `char` nodes) have number 0 while ligature nodes are mapped to 7. That way macro packages can use the same symbolic names as in traditional ε - \TeX . Keep in mind that these ε - \TeX node numbers are different from the real internal ones and that there are more ε - \TeX node types than 15.

You can ask for a list of fields with `node.fields` and for valid subtypes with `node.subtypes`. The `node.values` function reports some used values. Valid arguments are `dir`, `direction`, `glue`, `pdf_literal`, `pdf_action`, `pdf_window` and `color_stack`. Keep in mind that the setters normally expect a number, but this helper gives you a list of what numbers matter. For practical reason the `pagestate` values are also reported with this helper.

8.2 Main text nodes

These are the nodes that comprise actual typesetting commands. A few fields are present in all nodes regardless of their type, these are:

| FIELD | TYPE | EXPLANATION |
|----------------------|---------------------|--|
| <code>next</code> | <code>node</code> | the next node in a list, or <code>nil</code> |
| <code>id</code> | <code>number</code> | the node's type (<code>id</code>) number |
| <code>subtype</code> | <code>number</code> | the node subtype identifier |

The `subtype` is sometimes just a dummy entry because not all nodes actually use the `subtype`, but this way you can be sure that all nodes accept it as a valid field name, and that is often handy in node list traversal. In the following tables `next` and `id` are not explicitly mentioned.

Besides these three fields, almost all nodes also have an `attr` field, and there is also a field called `prev`. That last field is always present, but only initialized on explicit request: when the function `node.slide()` is called, it will set up the `prev` fields to be a backwards pointer in the argument node list. By now most of \TeX 's node processing makes sure that the `prev` nodes are



valid but there can be exceptions, especially when the internal magic uses a leading temp nodes to temporarily store a state.

8.2.1 hlist nodes

| FIELD | TYPE | EXPLANATION |
|------------|--------|--|
| subtype | number | 0 = unknown, 1 = line, 2 = box, 3 = indent, 4 = alignment, 5 = cell, 6 = equation, 7 = equationnumber, 8 = math, 9 = mathchar, 10 = hex-tensible, 11 = vextensible, 12 = hdelimiter, 13 = vdelimiter, 14 = overdelimiter, 15 = underdelimiter, 16 = numerator, 17 = denominator, 18 = limits, 19 = fraction, 20 = nucleus, 21 = sup, 22 = sub, 23 = degree, 24 = scripts, 25 = over, 26 = under, 27 = accent, 28 = radical |
| attr | node | list of attributes |
| width | number | the width of the box |
| height | number | the height of the box |
| depth | number | the depth of the box |
| shift | number | a displacement perpendicular to the character progression direction |
| glue_order | number | a number in the range [0, 4], indicating the glue order |
| glue_set | number | the calculated glue ratio |
| glue_sign | number | 0 = normal, 1 = stretching, 2 = shrinking |
| head/list | node | the first node of the body of this list |
| dir | string | the direction of this box, see 8.2.15 |

A warning: never assign a node list to the head field unless you are sure its internal link structure is correct, otherwise an error may result.

Note: the field name head and list are both valid. Sometimes it makes more sense to refer to a list by head, sometimes list makes more sense.

8.2.2 vlist nodes

This node is similar to hlist, except that ‘shift’ is a displacement perpendicular to the line progression direction, and ‘subtype’ only has the values 0, 4, and 5.

8.2.3 rule nodes

Contrary to traditional T_EX, LuaT_EX has more \rule subtypes because we also use rules to store reuseable objects and images. User nodes are invisible and can be intercepted by a callback.

| FIELD | TYPE | EXPLANATION |
|---------|--------|--|
| subtype | number | 0 = normal, 1 = box, 2 = image, 3 = empty, 4 = user, 5 = over, 6 = under, 7 = fraction, 8 = radical, 9 = outline |
| attr | node | list of attributes |
| width | number | the width of the rule where the special value -1073741824 is used for ‘running’ glue dimensions |



| | | |
|-----------|--------|--|
| height | number | the height of the rule (can be negative) |
| depth | number | the depth of the rule (can be negative) |
| left | number | shift at the left end (also subtracted from width) |
| right | number | (subtracted from width) |
| dir | string | the direction of this rule, see 8.2.15 |
| index | number | an optional index that can be referred to |
| transform | number | an private variable (also used to specify outline width) |

The `left` and `right` keys are somewhat special (and experimental). When rules are auto adapting to the surrounding box width you can enforce a shift to the right by setting `left`. The value is also subtracted from the width which can be a value set by the engine itself and is not entirely under user control. The `right` is also subtracted from the width. It all happens in the backend so these are not affecting the calculations in the frontend (actually the auto settings also happen in the backend). For a vertical rule `left` affects the height and `right` affects the depth. There is no matching interface at the \TeX end (although we can have more keywords for rules it would complicate matters and introduce a speed penalty.) However, you can just construct a rule node with Lua and write it to the \TeX input. The outline subtype is just a convenient variant and the `transform` field specifies the width of the outline.

8.2.4 ins nodes

This node relates to the `\insert` primitive.

| FIELD | TYPE | EXPLANATION |
|-----------|--------|---|
| subtype | number | the insertion class |
| attr | node | list of attributes |
| cost | number | the penalty associated with this insert |
| height | number | height of the insert |
| depth | number | depth of the insert |
| head/list | node | the first node of the body of this insert |

There is a set of extra fields that concern the associated glue: `width`, `stretch`, `stretch_order`, `shrink` and `shrink_order`. These are all numbers.

A warning: never assign a node list to the `head` field unless you are sure its internal link structure is correct, otherwise an error may result. You can use `list` instead (often in functions you want to use local variable with similar names and both names are equally sensible).

8.2.5 mark nodes

This one relates to the `\mark` primitive.

| FIELD | TYPE | EXPLANATION |
|---------|--------|-----------------------------------|
| subtype | number | unused |
| attr | node | list of attributes |
| class | number | the mark class |
| mark | table | a table representing a token list |



8.2.6 adjust nodes

This node comes from `\vadjust` primitive.

| FIELD | TYPE | EXPLANATION |
|-----------|--------|---------------------|
| subtype | number | 0 = normal, 1 = pre |
| attr | node | list of attributes |
| head/list | node | adjusted material |

A warning: never assign a node list to the head field unless you are sure its internal link structure is correct, otherwise an error may be the result.

8.2.7 disc nodes

The `\discretionary` and `\-`, the - character but also the hyphenation mechanism produces these nodes.

| FIELD | TYPE | EXPLANATION |
|---------|--------|--|
| subtype | number | 0 = discretionary, 1 = explicit, 2 = automatic, 3 = regular, 4 = first, 5 = second |
| attr | node | list of attributes |
| pre | node | pointer to the pre-break text |
| post | node | pointer to the post-break text |
| replace | node | pointer to the no-break text |
| penalty | number | the penalty associated with the break, normally <code>\hyphenpenalty</code> or <code>\exhyphenpenalty</code> |

The subtype numbers 4 and 5 belong to the ‘of-f-ice’ explanation given elsewhere. These disc nodes are kind of special as at some point they also keep information about breakpoints and nested ligatures.

The pre, post and replace fields at the Lua end are in fact indirectly accessed and have a prev pointer that is not nil. This means that when you mess around with the head of these (three) lists, you also need to reassign them because that will restore the proper prev pointer, so:

```
pre = d.pre
-- change the list starting with pre
d.pre = pre
```

Otherwise you can end up with an invalid internal perception of reality and LuaTeX might even decide to crash on you. It also means that running forward over for instance pre is ok but backward you need to stop at pre. And you definitely must not mess with the node that prev points to, if only because it is not really a node but part of the disc data structure (so freeing it again might crash LuaTeX).

8.2.8 math nodes

Math nodes represent the boundaries of a math formula, normally wrapped into \$ signs.



| FIELD | TYPE | EXPLANATION |
|----------|--------|--|
| subtype | number | 0 = beginmath, 1 = endmath |
| attr | node | list of attributes |
| surround | number | width of the <code>\mathsurround</code> kern |

There is a set of extra fields that concern the associated glue: `width`, `stretch`, `stretch_order`, `shrink` and `shrink_order`. These are all numbers.

8.2.9 glue nodes

Skips are about the only type of data objects in traditional \TeX that are not a simple value. They are inserted when \TeX sees a space in the text flow but also by `\hskip` and `\vskip`. The structure that represents the glue components of a skip is called a `glue_spec`, and it has the following accessible fields:

| FIELD | TYPE | EXPLANATION |
|---------------|--------|---|
| width | number | the horizontal or vertical displacement |
| stretch | number | extra (positive) displacement or stretch amount |
| stretch_order | number | factor applied to stretch amount |
| shrink | number | extra (negative) displacement or shrink amount |
| shrink_order | number | factor applied to shrink amount |

The effective width of some glue subtypes depends on the stretch or shrink needed to make the encapsulating box fit its dimensions. For instance, in a paragraph lines normally have glue representing spaces and these stretch or shrink to make the content fit in the available space. The `effective_glue` function that takes a glue node and a parent (hlist or vlist) returns the effective width of that glue item. When you pass `true` as third argument the value will be rounded.

A `glue_spec` node is a special kind of node that is used for storing a set of glue values in registers. Originally they were also used to store properties of glue nodes (using a system of reference counts) but we now keep these properties in the glue nodes themselves, which gives a cleaner interface to Lua.

The indirect spec approach was in fact an optimization in the original \TeX code. First of all it can save quite some memory because all these spaces that become glue now share the same specification (only the reference count is incremented), and zero testing is also a bit faster because only the pointer has to be checked (this is no longer true for engines that implement for instance protrusion where we really need to ensure that zero is zero when we test for bounds). Another side effect is that glue specifications are read-only, so in the end copies need to be made when they are used from Lua (each assignment to a field can result in a new copy). So in the end the advantages of sharing are not that high (and nowadays memory is less an issue, also given that a glue node is only a few memory words larger than a spec).

| FIELD | TYPE | EXPLANATION |
|---------|--------|--|
| subtype | number | 0 = userskip, 1 = lineskip, 2 = baselineskip, 3 = parskip, 4 = abovedisplayskip, 5 = belowdisplayskip, 6 = abovedisplayshortskip, 7 = belowdisplayshortskip, 8 = leftskip, 9 = rightskip, 10 = topskip, 11 |



| | | |
|--------|------|---|
| | | = splittopskip, 12 = tabskip, 13 = spaceskip, 14 = xspaceskip, 15 = parfillskip, 16 = mathskip, 17 = thinmuskip, 18 = medmuskip, 19 = thickmuskip, 98 = conditionalmathskip, 99 = muglue, 100 = leaders, 101 = cleaders, 102 = xleaders, 103 = gleaders |
| attr | node | list of attributes |
| leader | node | pointer to a box or rule for leaders |

In addition there are the width, stretch stretch_order, shrink, and shrink_order fields. Note that we use the key width in both horizontal and vertical glue. This suits the T_EX internals well so we decided to stick to that naming.

A regular word space also results in a spaceskip subtype (this used to be a userskip with subtype zero).

8.2.10 kern nodes

The \kern command creates such nodes but for instance the font and math machinery can also add them.

| FIELD | TYPE | EXPLANATION |
|---------|--------|--|
| subtype | number | 0 = fontkern, 1 = userkern, 2 = accentkern, 3 = italiccorrection |
| attr | node | list of attributes |
| kern | number | fixed horizontal or vertical advance |

8.2.11 penalty nodes

The \penalty command is one that generates these nodes.

| FIELD | TYPE | EXPLANATION |
|---------|--------|--|
| subtype | number | 0 = userpenalty, 1 = linebreakpenalty, 2 = linepenalty, 3 = wordpenalty, 4 = finalpenalty, 5 = noadpenalty, 6 = beforedisplaypenalty, 7 = afterdisplaypenalty, 8 = equationnumberpenalty |
| attr | node | list of attributes |
| penalty | number | the penalty value |

The subtypes are just informative and T_EX itself doesn't use them. When you run into an linebreakpenalty you need to keep in mind that it's a accumulation of club, widow and other relevant penalties.

8.2.12 glyph nodes

These are probably the mostly used nodes and although you can push them in the current list with for instance \char T_EX will normally do it for you when it considers some input to be text.

| FIELD | TYPE | EXPLANATION |
|---------|--------|-------------|
| subtype | number | bit field |



| | | |
|-------------------------------|---------|--|
| <code>attr</code> | node | list of attributes |
| <code>char</code> | number | the character index in the font |
| <code>font</code> | number | the font identifier |
| <code>lang</code> | number | the language identifier |
| <code>left</code> | number | the frozen <code>\lefthyphenmn</code> value |
| <code>right</code> | number | the frozen <code>\righthyphenmn</code> value |
| <code>uchyph</code> | boolean | the frozen <code>\uchyph</code> value |
| <code>components</code> | node | pointer to ligature components |
| <code>xoffset</code> | number | a virtual displacement in horizontal direction |
| <code>yoffset</code> | number | a virtual displacement in vertical direction |
| <code>width</code> | number | the (original) width of the character |
| <code>height</code> | number | the (original) height of the character |
| <code>depth</code> | number | the (original) depth of the character |
| <code>expansion_factor</code> | number | the to be applied <code>expansion_factor</code> |
| <code>data</code> | number | a general purpose field for users (we had room for it) |

The width, height and depth values are read-only. The `expansion_factor` is assigned in the par builder and used in the backend.

A warning: never assign a node list to the components field unless you are sure its internal link structure is correct, otherwise an error may be result. Valid bits for the subtype field are:

| BIT | MEANING |
|-----|-----------|
| 0 | character |
| 1 | ligature |
| 2 | ghost |
| 3 | left |
| 4 | right |

See section 5.2 for a detailed description of the subtype field.

The `expansion_factor` has been introduced as part of the separation between font- and backend. It is the result of extensive experiments with a more efficient implementation of expansion. Early versions of LuaTeX already replaced multiple instances of fonts in the backend by scaling but contrary to pdfTeX in LuaTeX we now also got rid of font copies in the frontend and replaced them by expansion factors that travel with glyph nodes. Apart from a cleaner approach this is also a step towards a better separation between front- and backend.

The `is_char` function checks if a node is a glyph node with a subtype still less than 256. This function can be used to determine if applying font logic to a glyph node makes sense. The value `nil` gets returned when the node is not a glyph, a character number is returned if the node is still tagged as character and `false` gets returned otherwise. When `nil` is returned, the id is also returned. The `is_glyph` variant doesn't check for a subtype being less than 256, so it returns either the character value or `nil` plus the id. These helpers are not always faster than separate calls but they sometimes permit making more readable tests. The `uses_font` helpers takes a node and font id and returns true when a glyph or disc node references that font.



8.2.13 boundary nodes

This node relates to the `\noboundary`, `\boundary`, `\protrusionboundary` and `\wordboundary` primitives.

| FIELD | TYPE | EXPLANATION |
|---------|--------|--|
| subtype | number | 0 = cancel, 1 = user, 2 = protrusion, 3 = word |
| attr | node | list of attributes |
| value | number | values 0-255 are reserved |

8.2.14 local_par nodes

This node is inserted at the start of a paragraph. You should not mess too much with this one.

| FIELD | TYPE | EXPLANATION |
|-----------------|--------|---|
| attr | node | list of attributes |
| pen_inter | number | local interline penalty (from <code>\localinterlinepenalty</code>) |
| pen_broken | number | local broken penalty (from <code>\localbrokenpenalty</code>) |
| dir | string | the direction of this par. see 8.2.15 |
| box_left | node | the <code>\localleftbox</code> |
| box_left_width | number | width of the <code>\localleftbox</code> |
| box_right | node | the <code>\localrightbox</code> |
| box_right_width | number | width of the <code>\localrightbox</code> |

A warning: never assign a node list to the `box_left` or `box_right` field unless you are sure its internal link structure is correct, otherwise an error may result.

8.2.15 dir nodes

Direction nodes mark parts of the running text that need a change of direction and the `\textdir` command generates them.

| FIELD | TYPE | EXPLANATION |
|-------|--------|---|
| attr | node | list of attributes |
| dir | string | the direction (but see below) |
| level | number | nesting level of this direction whatsit |

Direction specifiers are three-letter combinations of T, B, R, and L. These are built up out of three separate items:

- the first is the direction of the ‘top’ of paragraphs
- the second is the direction of the ‘start’ of lines
- the third is the direction of the ‘top’ of glyphs

However, only four combinations are accepted: TL, TR, RT, and LT. Inside actual `dir` nodes, the representation of `dir` is not a three-letter but a combination of numbers. When printed the



direction is indicated by a + or -, indicating whether the value is pushed or popped from the direction stack.

8.2.16 marginkern nodes

Margin kerns result from protrusion.

| FIELD | TYPE | EXPLANATION |
|---------|--------|-------------------------|
| subtype | number | 0 = left, 1 = right |
| attr | node | list of attributes |
| width | number | the advance of the kern |
| glyph | node | the glyph to be used |

8.3 Math noads

These are the so-called ‘noad’s and the nodes that are specifically associated with math processing. Most of these nodes contain subnodes so that the list of possible fields is actually quite small. First, the subnodes:

8.3.1 Math kernel subnodes

Many object fields in math mode are either simple characters in a specific family or math lists or node lists. There are four associated subnodes that represent these cases (in the following node descriptions these are indicated by the word <kernel>).

The next and prev fields for these subnodes are unused.

8.3.2 math_char and math_text_char subnodes

| FIELD | TYPE | EXPLANATION |
|-------|--------|---------------------|
| attr | node | list of attributes |
| char | number | the character index |
| fam | number | the family number |

The math_char is the simplest subnode field, it contains the character and family for a single glyph object. The math_text_char is a special case that you will not normally encounter, it arises temporarily during math list conversion (its sole function is to suppress a following italic correction).

8.3.3 sub_box and sub_mlist subnodes

| FIELD | TYPE | EXPLANATION |
|-----------|------|--------------------|
| attr | node | list of attributes |
| head/list | node | list of nodes |



These two subnode types are used for subsidiary list items. For `sub_box`, the head points to a ‘normal’ vbox or hbox. For `sub_mlist`, the head points to a math list that is yet to be converted.

A warning: never assign a node list to the head field unless you are sure its internal link structure is correct, otherwise an error is triggered.

8.3.4 delim subnodes

There is a fifth subnode type that is used exclusively for delimiter fields. As before, the next and prev fields are unused.

| FIELD | TYPE | EXPLANATION |
|------------|--------|--|
| attr | node | list of attributes |
| small_char | number | character index of base character |
| small_fam | number | family number of base character |
| large_char | number | character index of next larger character |
| large_fam | number | family number of next larger character |

The fields `large_char` and `large_fam` can be zero, in that case the font that is set for the `small_fam` is expected to provide the large version as an extension to the `small_char`.

8.3.5 Math core nodes

First, there are the objects (the T_EXbook calls them ‘atoms’) that are associated with the simple math objects: `ord`, `op`, `bin`, `rel`, `open`, `close`, `punct`, `inner`, `over`, `under`, `vcent`. These all have the same fields, and they are combined into a single node type with separate subtypes for differentiation.

Some noads have an option field. The values in this bitset are common:

| MEANING | BITS |
|-----------------|-------------|
| set | 0x08 |
| internal | 0x00 + 0x08 |
| internal | 0x01 + 0x08 |
| axis | 0x02 + 0x08 |
| no axis | 0x04 + 0x08 |
| exact | 0x10 + 0x08 |
| left | 0x11 + 0x08 |
| middle | 0x12 + 0x08 |
| right | 0x14 + 0x08 |
| no sub script | 0x21 + 0x08 |
| no super script | 0x22 + 0x08 |
| no script | 0x23 + 0x08 |



8.3.6 simple noad nodes

| FIELD | TYPE | EXPLANATION |
|---------|-------------|--|
| subtype | number | 0 = ord, 1 = opdisplaylimits, 2 = oplimits, 3 = opnolimits, 4 = bin, 5 = rel, 6 = open, 7 = close, 8 = punct, 9 = inner, 10 = under, 11 = over, 12 = vcenter |
| attr | node | list of attributes |
| nucleus | kernel node | base |
| sub | kernel node | subscript |
| sup | kernel node | superscript |
| options | number | bitset of rendering options |

8.3.7 accent nodes

| FIELD | TYPE | EXPLANATION |
|------------|-------------|--|
| subtype | number | 0 = bothflexible, 1 = fixedtop, 2 = fixedbottom, 3 = fixedboth |
| nucleus | kernel node | base |
| sub | kernel node | subscript |
| sup | kernel node | superscript |
| accent | kernel node | top accent |
| bot_accent | kernel node | bottom accent |
| fraction | number | larger step criterium (divided by 1000) |

8.3.8 style nodes

| FIELD | TYPE | EXPLANATION |
|-------|--------|--------------------|
| style | string | contains the style |

There are eight possibilities for the string value: one of display, text, script, or scriptscript. Each of these can have be prefixed by cramped.

8.3.9 choice nodes

| FIELD | TYPE | EXPLANATION |
|--------------|------|---------------------------------------|
| attr | node | list of attributes |
| display | node | list of display size alternatives |
| text | node | list of text size alternatives |
| script | node | list of scriptsize alternatives |
| scriptscript | node | list of scriptscriptsize alternatives |

Warning: never assign a node list to the display, text, script, or scriptscript field unless you are sure its internal link structure is correct, otherwise an error can occur.



8.3.10 radical nodes

| FIELD | TYPE | EXPLANATION |
|---------|----------------|--|
| subtype | number | 0 = radical, 1 = uradical, 2 = uroot, 3 = uunderdelimater, 4 = uoverdelimater, 5 = udelimaterunder, 6 = udelimaterover |
| attr | node | list of attributes |
| nucleus | kernel node | base |
| sub | kernel node | subscript |
| sup | kernel node | superscript |
| left | delimiter node | |
| degree | kernel node | only set by \Uroot |
| width | number | required width |
| options | number | bitset of rendering options |

Warning: never assign a node list to the nucleus, sub, sup, left, or degree field unless you are sure its internal link structure is correct, otherwise an error can be triggered.

8.3.11 fraction nodes

| FIELD | TYPE | EXPLANATION |
|---------|----------------|----------------------------------|
| attr | node | list of attributes |
| width | number | (optional) width of the fraction |
| num | kernel node | numerator |
| denom | kernel node | denominator |
| left | delimiter node | left side symbol |
| right | delimiter node | right side symbol |
| middle | delimiter node | middle symbol |
| options | number | bitset of rendering options |

Warning: never assign a node list to the num, or denom field unless you are sure its internal link structure is correct, otherwise an error can result.

8.3.12 fence nodes

| FIELD | TYPE | EXPLANATION |
|---------|----------------|--|
| subtype | number | 0 = unset, 1 = left, 2 = middle, 3 = right, 4 = no |
| attr | node | list of attributes |
| delim | delimiter node | delimiter specification |
| italic | number | italic correction |
| height | number | required height |
| depth | number | required depth |
| options | number | bitset of rendering options |
| class | number | spacing related class |

Warning: some of these fields are used by the renderer and might get adapted in the process.



8.4 Front-end whatsits

Whatsit nodes come in many subtypes that you can ask for them by running `node.whatsits:` `open` (0), `write` (1), `close` (2), `special` (3), `save_pos` (6), `late_lua` (7), `user_defined` (8), `pdf_literal` (16), `pdf_refobj` (17), `pdf_annot` (18), `pdf_start_link` (19), `pdf_end_link` (20), `pdf_dest` (21), `pdf_action` (22), `pdf_thread` (23), `pdf_start_thread` (24), `pdf_end_thread` (25), `pdf_thread_data` (26), `pdf_link_data` (27), `pdf_colorstack` (28), `pdf_setmatrix` (29), `pdf_save` (30), `pdf_restore` (31).

Some of them are generic and independent of the output mode and others are specific to the chosen backend: `dvi` or `pdf`. Here we discuss the generic font-end nodes nodes.

8.4.1 open

| FIELD | TYPE | EXPLANATION |
|---------------------|--------|--------------------------------------|
| <code>attr</code> | node | list of attributes |
| <code>stream</code> | number | \TeX 's stream id number |
| <code>name</code> | string | file name |
| <code>ext</code> | string | file extension |
| <code>area</code> | string | file area (this may become obsolete) |

8.4.2 write

| FIELD | TYPE | EXPLANATION |
|---------------------|--------|---|
| <code>attr</code> | node | list of attributes |
| <code>stream</code> | number | \TeX 's stream id number |
| <code>data</code> | table | a table representing the token list to be written |

8.4.3 close

| FIELD | TYPE | EXPLANATION |
|---------------------|--------|-----------------------------------|
| <code>attr</code> | node | list of attributes |
| <code>stream</code> | number | \TeX 's stream id number |

8.4.4 user_defined

User-defined whatsit nodes can only be created and handled from Lua code. In effect, they are an extension to the extension mechanism. The \LaTeX engine will simply step over such whatsits without ever looking at the contents.

| FIELD | TYPE | EXPLANATION |
|----------------------|--------|--------------------|
| <code>attr</code> | node | list of attributes |
| <code>user_id</code> | number | id number |
| <code>type</code> | number | type of the value |



| | | |
|-------|--------|--------------|
| value | number | a Lua number |
| | node | a node list |
| | string | a Lua string |
| | table | a Lua table |

The type can have one of six distinct values. The number is the ascii value if the first character of the type name (so you can use `string.byte("l")` instead of 108).

| VALUE | MEANING | EXPLANATION |
|-------|---------|---|
| 97 | a | list of attributes (a node list) |
| 100 | d | a Lua number |
| 108 | l | a Lua value (table, number, boolean, etc) |
| 110 | n | a node list |
| 115 | s | a Lua string |
| 116 | t | a Lua token list in Lua table form (a list of triplets) |

8.4.5 save_pos

| FIELD | TYPE | EXPLANATION |
|-------|------|--------------------|
| attr | node | list of attributes |

8.4.6 late_lua

| FIELD | TYPE | EXPLANATION |
|-------|--------------------|--|
| attr | node | list of attributes |
| data | string or function | the to be written information stored as Lua value |
| token | string | the to be written information stored as token list |
| name | string | the name to use for Lua error reporting |

The difference between data and string is that on assignment, the data field is converted to a token list, cf. use as `\latelua`. The string version is treated as a literal string.

8.5 DVI backend whatsits

8.5.1 special

There is only one dvi backend whatsit, and it just flushes its content to the output file.

| FIELD | TYPE | EXPLANATION |
|-------|--------|---------------------------------------|
| attr | node | list of attributes |
| data | string | the <code>\special</code> information |



8.6 PDF backend whatsits

8.6.1 pdf_literal

| FIELD | TYPE | EXPLANATION |
|-------|--------|--|
| attr | node | list of attributes |
| mode | number | the 'mode' setting of this literal |
| data | string | the to be written information stored as Lua string |
| token | string | the to be written information stored as token list |

Possible mode values are:

| VALUE | KEYWORD |
|-------|---------|
| 0 | origin |
| 1 | page |
| 2 | direct |
| 3 | raw |
| 4 | text |

The higher the number, the less checking and the more you can run into trouble. Especially the raw variant can produce bad pdf so you can best check what you generate.

8.6.2 pdf_refobj

| FIELD | TYPE | EXPLANATION |
|--------|--------|----------------------------------|
| attr | node | list of attributes |
| objnum | number | the referenced pdf object number |

8.6.3 pdf_annot

| FIELD | TYPE | EXPLANATION |
|--------|--------|---------------------------------------|
| attr | node | list of attributes |
| width | number | the width (not used in calculations) |
| height | number | the height (not used in calculations) |
| depth | number | the depth (not used in calculations) |
| objnum | number | the referenced pdf object number |
| data | string | the annotation data |

8.6.4 pdf_start_link

| FIELD | TYPE | EXPLANATION |
|-------|--------|--------------------------------------|
| attr | node | list of attributes |
| width | number | the width (not used in calculations) |



| | | |
|-----------|--------|---------------------------------------|
| height | number | the height (not used in calculations) |
| depth | number | the depth (not used in calculations) |
| objnum | number | the referenced pdf object number |
| link_attr | table | the link attribute token list |
| action | node | the action to perform |

8.6.5 pdf_end_link

| FIELD | TYPE | EXPLANATION |
|-------|------|-------------|
| attr | node | |

8.6.6 pdf_dest

| FIELD | TYPE | EXPLANATION |
|-----------|--------|---------------------------------------|
| attr | node | list of attributes |
| width | number | the width (not used in calculations) |
| height | number | the height (not used in calculations) |
| depth | number | the depth (not used in calculations) |
| named_id | number | is the dest_id a string value? |
| dest_id | number | the destination id |
| | string | the destination name |
| dest_type | number | type of destination |
| xyz_zoom | number | the zoom factor (times 1000) |
| objnum | number | the pdf object number |

8.6.7 pdf_action

These are a special kind of items that only appear inside pdf start link objects.

| FIELD | TYPE | EXPLANATION |
|-------------|------------------|--------------------------------|
| action_type | number | the kind of action involved |
| action_id | number or string | token list reference or string |
| named_id | number | the index of the destination |
| file | string | the target filename |
| new_window | number | the window state of the target |
| data | string | the name of the destination |

Valid action types are:

| VALUE | MEANING |
|-------|---------|
| 0 | page |
| 1 | goto |
| 2 | thread |
| 3 | user |



Valid window types are:

| VALUE | MEANING |
|-------|---------|
| 0 | notset |
| 1 | new |
| 2 | nonew |

8.6.8 pdf_thread

| FIELD | TYPE | EXPLANATION |
|-------------|--------|---------------------------------------|
| attr | node | list of attributes |
| width | number | the width (not used in calculations) |
| height | number | the height (not used in calculations) |
| depth | number | the depth (not used in calculations) |
| named_id | number | is tread_id a string value? |
| tread_id | number | the thread id |
| | string | the thread name |
| thread_attr | number | extra thread information |

8.6.9 pdf_start_thread

| FIELD | TYPE | EXPLANATION |
|-------------|--------|---------------------------------------|
| attr | node | list of attributes |
| width | number | the width (not used in calculations) |
| height | number | the height (not used in calculations) |
| depth | number | the depth (not used in calculations) |
| named_id | number | is tread_id a string value? |
| tread_id | number | the thread id |
| | string | the thread name |
| thread_attr | number | extra thread information |

8.6.10 pdf_end_thread

| FIELD | TYPE | EXPLANATION |
|-------|------|-------------|
| attr | node | |

8.6.11 pdf_colorstack

| FIELD | TYPE | EXPLANATION |
|---------|--------|----------------------|
| attr | node | list of attributes |
| stack | number | colorstack id number |
| command | number | command to execute |
| data | string | data |



8.6.12 pdf_setmatrix

| FIELD | TYPE | EXPLANATION |
|-------|--------|--------------------|
| attr | node | list of attributes |
| data | string | data |

8.6.13 pdf_save

| FIELD | TYPE | EXPLANATION |
|-------|------|--------------------|
| attr | node | list of attributes |

8.6.14 pdf_restore

| FIELD | TYPE | EXPLANATION |
|-------|------|--------------------|
| attr | node | list of attributes |

8.7 The node library

8.7.1 Introduction

The node library contains functions that facilitate dealing with (lists of) nodes and their values. They allow you to create, alter, copy, delete, and insert LuaTeX node objects, the core objects within the typesetter.

LuaTeX nodes are represented in Lua as userdata with the metadata type `luatex.node`. The various parts within a node can be accessed using named fields.

Each node has at least the three fields `next`, `id`, and `subtype`:

- ▶ The `next` field returns the userdata object for the next node in a linked list of nodes, or `nil`, if there is no next node.
- ▶ The `id` indicates TeX's 'node type'. The field `id` has a numeric value for efficiency reasons, but some of the library functions also accept a string value instead of `id`.
- ▶ The `subtype` is another number. It often gives further information about a node of a particular `id`, but it is most important when dealing with 'whatsits', because they are differentiated solely based on their `subtype`.

The other available fields depend on the `id` (and for 'whatsits', the `subtype`) of the node.

Support for unset (alignment) nodes is partial: they can be queried and modified from Lua code, but not created.

Nodes can be compared to each other, but: you are actually comparing indices into the node memory. This means that equality tests can only be trusted under very limited conditions. It will not work correctly in any situation where one of the two nodes has been freed and/or reallocated: in that case, there will be false positives.



At the moment, memory management of nodes should still be done explicitly by the user. Nodes are not ‘seen’ by the Lua garbage collector, so you have to call the node freeing functions yourself when you are no longer in need of a node (list). Nodes form linked lists without reference counting, so you have to be careful that when control returns back to LuaTeX itself, you have not deleted nodes that are still referenced from a next pointer elsewhere, and that you did not create nodes that are referenced more than once. Normally the setters and getters handle this for you.

There are statistics available with regards to the allocated node memory, which can be handy for tracing.

8.7.2 `is_node`

```
<boolean|integer> t =  
    node.is_node(<any> item)
```

This function returns a number (the internal index of the node) if the argument is a userdata object of type `<node>` and false when no node is passed.

8.7.3 `types and whatsits`

This function returns an array that maps node id numbers to node type strings, providing an overview of the possible top-level id types.

```
<table> t =  
    node.types()
```

TeX’s ‘whatsits’ all have the same id. The various subtypes are defined by their subtype fields. The function is much like `types`, except that it provides an array of subtype mappings.

```
<table> t =  
    node.whatsits()
```

8.7.4 `id`

This converts a single type name to its internal numeric representation.

```
<number> id =  
    node.id(<string> type)
```

8.7.5 `type and subtype`

In the argument is a number, then the next function converts an internal numeric representation to an external string representation. Otherwise, it will return the string node if the object represents a node, and nil otherwise.

```
<string> type =
```



```
node.type(<any> n)
```

This next one converts a single whatsit name to its internal numeric representation (subtype).

```
<number> subtype =  
    node.subtype(<string> type)
```

8.7.6 fields

This function returns an array of valid field names for a particular type of node. If you want to get the valid fields for a ‘whatsit’, you have to supply the second argument also. In other cases, any given second argument will be silently ignored.

```
<table> t =  
    node.fields(<number> id)  
<table> t =  
    node.fields(<number> id, <number> subtype)
```

The function accepts string id and subtype values as well.

8.7.7 has_field

This function returns a boolean that is only true if n is actually a node, and it has the field.

```
<boolean> t =  
    node.has_field(<node> n, <string> field)
```

8.7.8 new

The new function creates a new node. All its fields are initialized to either zero or nil except for id and subtype. Instead of numbers you can also use strings (names). If you create a new whatsit node the second argument is required. As with all node functions, this function creates a node at the T_EX level.

```
<node> n =  
    node.new(<number> id)  
<node> n =  
    node.new(<number> id, <number> subtype)
```

8.7.9 free, flush_node and flush_list

The next one the node n from T_EX’s memory. Be careful: no checks are done on whether this node is still pointed to from a register or some next field: it is up to you to make sure that the internal data structures remain correct.

```
<node> next =  
    node.free(<node> n)
```



```
flush_node(<node> n)
```

The `free` function returns the next field of the freed node, while the `flush_node` alternative returns nothing.

A list starting with node `n` can be flushed from T_EX's memory too. Be careful: no checks are done on whether any of these nodes is still pointed to from a register or some next field: it is up to you to make sure that the internal data structures remain correct.

```
node.flush_list(<node> n)
```

8.7.10 copy and copy_list

This creates a deep copy of node `n`, including all nested lists as in the case of a `hlist` or `vlist` node. Only the next field is not copied.

```
<node> m =  
    node.copy(<node> n)
```

A deep copy of the node list that starts at `n` can be created too. If `m` is also given, the copy stops just before node `m`.

```
<node> m =  
    node.copy_list(<node> n)  
<node> m =  
    node.copy_list(<node> n, <node> m)
```

Note that you cannot copy attribute lists this way. However, there is normally no need to copy attribute lists as when you do assignments to the `attr` field or make changes to specific attributes, the needed copying and freeing takes place automatically.

8.7.11 prev and next

These returns the node preceding or following the given node, or `nil` if there is no such node.

```
<node> m =  
    node.next(<node> n)  
<node> m =  
    node.prev(<node> n)
```

8.7.12 current_attr

This returns the currently active list of attributes, if there is one.

```
<node> m =  
    node.current_attr()
```

The intended usage of `current_attr` is as follows:



```

local x1 = node.new("glyph")
x1.attr = node.current_attr()
local x2 = node.new("glyph")
x2.attr = node.current_attr()

```

or:

```

local x1 = node.new("glyph")
local x2 = node.new("glyph")
local ca = node.current_attr()
x1.attr = ca
x2.attr = ca

```

The attribute lists are ref counted and the assignment takes care of incrementing the refcount. You cannot expect the value `ca` to be valid any more when you assign attributes (using `tex.setattribute`) or when control has been passed back to `TEX`.

Note: this function is somewhat experimental, and it returns the *actual* attribute list, not a copy thereof. Therefore, changing any of the attributes in the list will change these values for all nodes that have the current attribute list assigned to them.

8.7.13 hpack

This function creates a new hlist by packaging the list that begins at node `n` into a horizontal box. With only a single argument, this box is created using the natural width of its components. In the three argument form, `info` must be either `additional` or `exactly`, and `w` is the additional (`\hbox spread`) or exact (`\hbox to`) width to be used. The second return value is the badness of the generated box.

```

<node> h, <number> b =
    node.hpack(<node> n)
<node> h, <number> b =
    node.hpack(<node> n, <number> w, <string> info)
<node> h, <number> b =
    node.hpack(<node> n, <number> w, <string> info, <string> dir)

```

Caveat: there can be unexpected side-effects to this function, like updating some of the `\marks` and `\inserts`. Also note that the content of `h` is the original node list `n`: if you call `node.free(h)` you will also free the node list itself, unless you explicitly set the `list` field to `nil` beforehand. And in a similar way, calling `node.free(n)` will invalidate `h` as well!

8.7.14 vpack

This function creates a new vlist by packaging the list that begins at node `n` into a vertical box. With only a single argument, this box is created using the natural height of its components. In the three argument form, `info` must be either `additional` or `exactly`, and `w` is the additional (`\vbox spread`) or exact (`\vbox to`) height to be used.

```

<node> h, <number> b =

```



```

    node.vpack(<node> n)
<node> h, <number> b =
    node.vpack(<node> n, <number> w, <string> info)
<node> h, <number> b =
    node.vpack(<node> n, <number> w, <string> info, <string> dir)

```

The second return value is the badness of the generated box. See the description of `hpack` for a few memory allocation caveats.

8.7.15 `prepend_prevdepth`

This function is somewhat special in the sense that it is an experimental helper that adds the interlinespace to a line keeping the `baselineskip` and `lineskip` into account.

```

<node> n, <number> delta =
    node.prepend_prevdepth(<node> n, <number> prevdepth)

```

8.7.16 `dimensions` and `rangedimensions`

```

<number> w, <number> h, <number> d =
    node.dimensions(<node> n)
<number> w, <number> h, <number> d =
    node.dimensions(<node> n, <string> dir)
<number> w, <number> h, <number> d =
    node.dimensions(<node> n, <node> t)
<number> w, <number> h, <number> d =
    node.dimensions(<node> n, <node> t, <string> dir)

```

This function calculates the natural in-line dimensions of the node list starting at node `n` and terminating just before node `t` (or the end of the list, if there is no second argument). The return values are scaled points. An alternative format that starts with glue parameters as the first three arguments is also possible:

```

<number> w, <number> h, <number> d =
    node.dimensions(<number> glue_set, <number> glue_sign, <number> glue_order,
        <node> n)
<number> w, <number> h, <number> d =
    node.dimensions(<number> glue_set, <number> glue_sign, <number> glue_order,
        <node> n, <string> dir)
<number> w, <number> h, <number> d =
    node.dimensions(<number> glue_set, <number> glue_sign, <number> glue_order,
        <node> n, <node> t)
<number> w, <number> h, <number> d =
    node.dimensions(<number> glue_set, <number> glue_sign, <number> glue_order,
        <node> n, <node> t, <string> dir)

```



This calling method takes glue settings into account and is especially useful for finding the actual width of a sublist of nodes that are already boxed, for example in code like this, which prints the width of the space in between the a and b as it would be if `\box0` was used as-is:

```
\setbox0 = \hbox to 20pt {a b}

\directlua{print (node.dimensions(
    tex.box[0].glue_set,
    tex.box[0].glue_sign,
    tex.box[0].glue_order,
    tex.box[0].head.next,
    node.tail(tex.box[0].head)
)) }
```

You need to keep in mind that this is one of the few places in \TeX where floats are used, which means that you can get small differences in rounding when you compare the width reported by `hpack` with `dimensions`.

The second alternative saves a few lookups and can be more convenient in some cases:

```
<number> w, <number> h, <number> d =
    node.rangedimensions(<node> parent, <node> first)
<number> w, <number> h, <number> d =
    node.rangedimensions(<node> parent, <node> first, <node> last)
```

8.7.17 `mlist_to_hlist`

```
<node> h =
    node.mlist_to_hlist(<node> n, <string> display_type, <boolean> penalties)
```

This runs the internal `mlist` to `hlist` conversion, converting the math list in `n` into the horizontal list `h`. The interface is exactly the same as for the callback `mlist_to_hlist`.

8.7.18 `slide`

```
<node> m =
    node.slide(<node> n)
```

Returns the last node of the node list that starts at `n`. As a side-effect, it also creates a reverse chain of `prev` pointers between nodes.

8.7.19 `tail`

```
<node> m =
    node.tail(<node> n)
```

Returns the last node of the node list that starts at `n`.



8.7.20 length and type count

```
<number> i =  
    node.length(<node> n)  
<number> i =  
    node.length(<node> n, <node> m)
```

Returns the number of nodes contained in the node list that starts at *n*. If *m* is also supplied it stops at *m* instead of at the end of the list. The node *m* is not counted.

```
<number> i =  
    node.count(<number> id, <node> n)  
<number> i =  
    node.count(<number> id, <node> n, <node> m)
```

Returns the number of nodes contained in the node list that starts at *n* that have a matching *id* field. If *m* is also supplied, counting stops at *m* instead of at the end of the list. The node *m* is not counted. This function also accept string *id*'s.

8.7.21 is_char and is_glyph

The subtype of a glyph node signals if the glyph is already turned into a character reference or not.

```
<boolean> b =  
    node.is_char(<node> n)  
<boolean> b =  
    node.is_glyph(<node> n)
```

8.7.22 traverse

```
<node> t, id, subtype =  
    node.traverse(<node> n)
```

This is a Lua iterator that loops over the node list that starts at *n*. Typically code looks like this:

```
for n in node.traverse(head) do  
    ...  
end
```

is functionally equivalent to:

```
do  
    local n  
    local function f (head,var)  
        local t  
        if var == nil then  
            t = head
```



```

    else
        t = var.next
    end
    return t
end
while true do
    n = f (head, n)
    if n == nil then break end
    ...
end
end
end

```

It should be clear from the definition of the function `f` that even though it is possible to add or remove nodes from the node list while traversing, you have to take great care to make sure all the next (and prev) pointers remain valid.

If the above is unclear to you, see the section ‘For Statement’ in the Lua Reference Manual.

8.7.23 `traverse_id`

```

<node> t, subtype =
    node.traverse_id(<number> id, <node> n)

```

This is an iterator that loops over all the nodes in the list that starts at `n` that have a matching `id` field.

See the previous section for details. The change is in the local function `f`, which now does an extra while loop checking against the upvalue `id`:

```

local function f(head,var)
    local t
    if var == nil then
        t = head
    else
        t = var.next
    end
    while not t.id == id do
        t = t.next
    end
    return t
end

```

8.7.24 `traverse_char` and `traverse_glyph`

The `traverse_char` iterator loops over the glyph nodes in a list. Only nodes with a subtype less than 256 are seen.

```

<node> n, font, char =

```




```
node.traverse_char(<node> n)
```

The `traverse_glyph` iterator loops over a list and returns the list and filters all glyphs:

```
<node> n, font, char =  
    node.traverse_glyph(<node> n)
```

8.7.25 `traverse_list`

This iterator loops over the `hlist` and `vlist` nodes in a list.

```
<node> n, id, subtype, list =  
    node.traverse_list(<node> n)
```

The four return values can save some time compared to fetching these fields but in practice you seldom need them all. So consider it a (side effect of experimental) convenience.

8.7.26 `has_glyph`

This function returns the first glyph or disc node in the given list:

```
<node> n =  
    node.has_glyph(<node> n)
```

8.7.27 `end_of_math`

```
<node> t =  
    node.end_of_math(<node> start)
```

Looks for and returns the next `math_node` following the `start`. If the given node is a math end node this helper returns that node, else it follows the list and returns the next math endnote. If no such node is found `nil` is returned.

8.7.28 `remove`

```
<node> head, current =  
    node.remove(<node> head, <node> current)
```

This function removes the node `current` from the list following `head`. It is your responsibility to make sure it is really part of that list. The return values are the new head and current nodes. The returned current is the node following the current in the calling argument, and is only passed back as a convenience (or `nil`, if there is no such node). The returned head is more important, because if the function is called with `current` equal to `head`, it will be changed.

8.7.29 `insert_before`

```
<node> head, new =
```



```
node.insert_before(<node> head, <node> current, <node> new)
```

This function inserts the node `new` before `current` into the list following `head`. It is your responsibility to make sure that `current` is really part of that list. The return values are the (potentially mutated) `head` and the node `new`, set up to be part of the list (with correct next field). If `head` is initially `nil`, it will become `new`.

8.7.30 insert_after

```
<node> head, new =  
  node.insert_after(<node> head, <node> current, <node> new)
```

This function inserts the node `new` after `current` into the list following `head`. It is your responsibility to make sure that `current` is really part of that list. The return values are the `head` and the node `new`, set up to be part of the list (with correct next field). If `head` is initially `nil`, it will become `new`.

8.7.31 first_glyph

```
<node> n =  
  node.first_glyph(<node> n)  
<node> n =  
  node.first_glyph(<node> n, <node> m)
```

Returns the first node in the list starting at `n` that is a glyph node with a subtype indicating it is a glyph, or `nil`. If `m` is given, processing stops at (but including) that node, otherwise processing stops at the end of the list.

8.7.32 ligaturing

```
<node> h, <node> t, <boolean> success =  
  node.ligaturing(<node> n)  
<node> h, <node> t, <boolean> success =  
  node.ligaturing(<node> n, <node> m)
```

Apply T_EX-style ligaturing to the specified nodelist. The tail node `m` is optional. The two returned nodes `h` and `t` are the new head and tail (both `n` and `m` can change into a new ligature).

8.7.33 kerning

```
<node> h, <node> t, <boolean> success =  
  node.kerning(<node> n)  
<node> h, <node> t, <boolean> success =  
  node.kerning(<node> n, <node> m)
```

Apply T_EX-style kerning to the specified node list. The tail node `m` is optional. The two returned nodes `h` and `t` are the head and tail (either one of these can be an inserted kern node, because special kernings with word boundaries are possible).



8.7.34 unprotect_glyph[s]

```
node.unprotect_glyph(<node> n)
node.unprotect_glyphs(<node> n, [<node> n])
```

Subtracts 256 from all glyph node subtypes. This and the next function are helpers to convert from characters to glyphs during node processing. The second argument is optional and indicates the end of a range.

8.7.35 protect_glyph[s]

```
node.protect_glyph(<node> n)
node.protect_glyphs(<node> n, [<node> n])
```

Adds 256 to all glyph node subtypes in the node list starting at *n*, except that if the value is 1, it adds only 255. The special handling of 1 means that characters will become glyphs after subtraction of 256. A single character can be marked by the singular call. The second argument is optional and indicates the end of a range.

8.7.36 last_node

```
<node> n =
  node.last_node()
```

This function pops the last node from T_EX's 'current list'. It returns that node, or nil if the current list is empty.

8.7.37 write

```
node.write(<node> n)
```

This function that will append a node list to T_EX's 'current list'. The node list is not deep-copied! There is no error checking either! You might need to enforce horizontal mode in order for this to work as expected.

8.7.38 protrusion_skippable

```
<boolean> skippable =
  node.protrusion_skippable(<node> n)
```

Returns true if, for the purpose of line boundary discovery when character protrusion is active, this node can be skipped.

8.8 Glue handling

8.8.1 setglue

You can set the properties of a glue in one go. If you pass no values, the glue will become a zero glue.



```
node.setglue(<node> n)
node.setglue(<node> n,width,stretch,shrink,stretch_order,shrink_order)
```

When you pass values, only arguments that are numbers are assigned so

```
node.setglue(n,655360,false,65536)
```

will only adapt the width and shrink.

When a list node is passed, you set the glue, order and sign instead.

8.8.2 getglue

The next call will return 5 values or nothing when no glue is passed.

```
<integer> width, <integer> stretch, <integer> shrink, <integer> stretch_order,
<integer> shrink_order = node.getglue(<node> n)
```

When the second argument is false, only the width is returned (this is consistent with `tex.get`).

When a list node is passed, you get back the glue that is set, the order of that glue and the sign.

8.8.3 is_zero_glue

This function returns true when the width, stretch and shrink properties are zero.

```
<boolean> isglue =
node.is_zero_glue(<node> n)
```

8.9 Attribute handling

8.9.1 Attributes

The newly introduced attribute registers are non-trivial, because the value that is attached to a node is essentially a sparse array of key-value pairs. It is generally easiest to deal with attribute lists and attributes by using the dedicated functions in the node library, but for completeness, here is the low-level interface.

Attributes appear as linked list of userdata objects in the `attr` field of individual nodes. They can be handled individually, but it is much safer and more efficient to use the dedicated functions associated with them.

8.9.2 attribute_list nodes

An `attribute_list` item is used as a head pointer for a list of attribute items. It has only one user-visible field:

| FIELD | TYPE | EXPLANATION |
|-------|------|--------------------------------|
| next | node | pointer to the first attribute |



8.9.3 attr nodes

A normal node's attribute field will point to an item of type `attribute_list`, and the next field in that item will point to the first defined 'attribute' item, whose next will point to the second 'attribute' item, etc.

| FIELD | TYPE | EXPLANATION |
|--------|--------|-------------------------------|
| next | node | pointer to the next attribute |
| number | number | the attribute type id |
| value | number | the attribute value |

As mentioned it's better to use the official helpers rather than edit these fields directly. For instance the `prev` field is used for other purposes and there is no double linked list.

8.9.4 has_attribute

```
<number> v =  
    node.has_attribute(<node> n, <number> id)  
<number> v =  
    node.has_attribute(<node> n, <number> id, <number> val)
```

Tests if a node has the attribute with number `id` set. If `val` is also supplied, also tests if the value matches `val`. It returns the value, or, if no match is found, `nil`.

8.9.5 get_attribute

```
<number> v =  
    node.get_attribute(<node> n, <number> id)
```

Tests if a node has an attribute with number `id` set. It returns the value, or, if no match is found, `nil`. If no `id` is given then the zero attributes is assumed.

8.9.6 find_attribute

```
<number> v, <node> n =  
    node.find_attribute(<node> n, <number> id)
```

Finds the first node that has attribute with number `id` set. It returns the value and the node if there is a match and otherwise nothing.

8.9.7 set_attribute

```
node.set_attribute(<node> n, <number> id, <number> val)
```

Sets the attribute with number `id` to the value `val`. Duplicate assignments are ignored.



8.9.8 unset_attribute

```
<number> v =  
    node.unset_attribute(<node> n, <number> id)  
<number> v =  
    node.unset_attribute(<node> n, <number> id, <number> val)
```

Unsets the attribute with number `id`. If `val` is also supplied, it will only perform this operation if the value matches `val`. Missing attributes or attribute-value pairs are ignored.

If the attribute was actually deleted, returns its old value. Otherwise, returns `nil`.

8.9.9 slide

This helper makes sure that the node lists is double linked and returns the found tail node.

```
<node> tail =  
    node.slide(<node> n)
```

After some callbacks automatic sliding takes place. This feature can be turned off with `node.fix_node_lists(false)` but you better make sure then that you don't mess up lists. In most cases \TeX itself only uses next pointers but your other callbacks might expect proper prev pointers too. Future versions of Lua \TeX can add more checking but this will not influence usage.

8.9.10 check_discretionary, check_discretionaries

When you fool around with disc nodes you need to be aware of the fact that they have a special internal data structure. As long as you reassign the fields when you have extended the lists it's ok because then the tail pointers get updated, but when you add to list without reassigning you might end up in trouble when the linebreak routine kicks in. You can call this function to check the list for issues with disc nodes.

```
node.check_discretionary(<node> n)  
node.check_discretionaries(<node> head)
```

The plural variant runs over all disc nodes in a list, the singular variant checks one node only (it also checks if the node is a disc node).

8.9.11 flatten_discretionaries

This function will remove the discretionaries in the list and inject the replace field when set.

```
<node> head, count = node.flatten_discretionaries(<node> n)
```

8.9.12 family_font

When you pass a proper family identifier the next helper will return the font currently associated with it. You can normally also access the font with the normal font field or getter because it will resolve the family automatically for noads.



```
<integer> id =
    node.family_font(<integer> fam)
```

8.10 Two access models

Deep down in $\text{T}_{\text{E}}\text{X}$ a node has a number which is a numeric entry in a memory table. In fact, this model, where $\text{T}_{\text{E}}\text{X}$ manages memory is real fast and one of the reasons why plugging in callbacks that operate on nodes is quite fast too. Each node gets a number that is in fact an index in the memory table and that number often is reported when you print node related information. You go from userdata nodes and there numeric references and back with:

```
<integer> d = node.todirect(<node> n)
<node> n = node.tonode(<integer> d)
```

The userdata model is rather robust as it is a virtual interface with some additional checking while the more direct access which uses the node numbers directly. However, even with userdata you can get into troubles when you free nodes that are no longer allocated or mess up lists. if you apply `tostring` to a node you see its internal (direct) number and id.

The first model provides key based access while the second always accesses fields via functions:

```
nodeobject.char
getfield(nodenum, "char")
```

If you use the direct model, even if you know that you deal with numbers, you should not depend on that property but treat it as an abstraction just like traditional nodes. In fact, the fact that we use a simple basic datatype has the penalty that less checking can be done, but less checking is also the reason why it's somewhat faster. An important aspect is that one cannot mix both methods, but you can cast both models. So, multiplying a node number makes no sense.

So our advice is: use the indexed (table) approach when possible and investigate the direct one when speed might be a real issue. For that reason $\text{LuaT}_{\text{E}}\text{X}$ also provide the `get*` and `set*` functions in the top level node namespace. There is a limited set of getters. When implementing this direct approach the regular index by key variant was also optimized, so direct access only makes sense when nodes are accessed millions of times (which happens in some font processing for instance).

We're talking mostly of getters because setters are less important. Documents have not that many content related nodes and setting many thousands of properties is hardly a burden contrary to millions of consultations.

Normally you will access nodes like this:

```
local next = current.next
if next then
    -- do something
end
```

Here `next` is not a real field, but a virtual one. Accessing it results in a metatable method being called. In practice it boils down to looking up the node type and based on the node type checking



for the field name. In a worst case you have a node type that sits at the end of the lookup list and a field that is last in the lookup chain. However, in successive versions of LuaTeX these lookups have been optimized and the most frequently accessed nodes and fields have a higher priority.

Because in practice the next accessor results in a function call, there is some overhead involved. The next code does the same and performs a tiny bit faster (but not that much because it is still a function call but one that knows what to look up).

```
local next = node.next(current)
if next then
    -- do something
end
```

Some accessors are used frequently and for these we provide more efficient helpers:

| FUNCTION | EXPLANATION |
|------------|--|
| getnext | parsing nodelist always involves this one |
| getprev | used less but a logical companion to getnext |
| getboth | returns the next and prev pointer of a node |
| getid | consulted a lot |
| getsubtype | consulted less but also a topper |
| getfont | used a lot in OpenType handling (glyph nodes are consulted a lot) |
| getchar | idem and also in other places |
| getwhd | returns the width, height and depth of a list, rule or (unexpanded) glyph as well as glue (its spec is looked at) and unset nodes |
| getdisc | returns the pre, post and replace fields and optionally when true is passed also the tail fields |
| getlist | we often parse nested lists so this is a convenient one too |
| getleader | comparable to list, seldom used in T _E X (but needs frequent consulting like lists; leaders could have been made a dedicated node type) |
| getfield | generic getter, sufficient for the rest (other field names are often shared so a specific getter makes no sense then) |
| getbox | gets the given box (a list node) |

In the direct namespace there are more such helpers and most of them are accompanied by setters. The getters and setters are clever enough to see what node is meant. We don't deal with whatsit nodes: their fields are always accessed by name. It doesn't make sense to add getters for all fields, we just identifier the most likely candidates. In complex documents, many node and fields types never get seen, or seen only a few times, but for instance glyphs are candidates for such optimization. The `node.direct` interface has some more helpers.²

The `setdisc` helper takes three (optional) arguments plus an optional fourth indicating the subtype. Its `getdisc` takes an optional boolean; when its value is `true` the tail nodes will also be returned. The `setfont` helper takes an optional second argument, it being the character. The `directmode` setter `setlink` takes a list of nodes and will link them, thereby ignoring `nil` entries. The first valid node is returned (beware: for good reason it assumes single nodes). For rarely

² We can define the helpers in the node namespace with `getfield` which is about as efficient, so at some point we might provide that as module.



used fields no helpers are provided and there are a few that probably are used seldom too but were added for consistency. You can of course always define additional accessors using `getfield` and `setfield` with little overhead. When the second argument of `setattributelist` is `true` the current attribute list is assumed.

| FUNCTION | NODE | DIRECT |
|--------------------------------------|--|---|
| <code>check_discretionaries</code> | <code>node.check_discretionaries+</code> | <code>node.direct.check_discretionaries+</code> |
| <code>check_discretionary</code> | <code>node.check_discretionary+</code> | <code>node.direct.check_discretionary+</code> |
| <code>copy_list</code> | <code>node.copy_list+</code> | <code>node.direct.copy_list+</code> |
| <code>copy</code> | <code>node.copy+</code> | <code>node.direct.copy+</code> |
| <code>count</code> | <code>node.count+</code> | <code>node.direct.count+</code> |
| <code>current_attr</code> | <code>node.current_attr+</code> | <code>node.direct.current_attr+</code> |
| <code>dimensions</code> | <code>node.dimensions+</code> | <code>node.direct.dimensions+</code> |
| <code>effective_glue</code> | <code>node.effective_glue+</code> | <code>node.direct.effective_glue+</code> |
| <code>end_of_math</code> | <code>node.end_of_math+</code> | <code>node.direct.end_of_math+</code> |
| <code>family_font</code> | <code>node.family_font+</code> | — |
| <code>fields</code> | <code>node.fields+</code> | — |
| <code>find_attribute</code> | <code>node.find_attribute+</code> | <code>node.direct.find_attribute+</code> |
| <code>first_glyph</code> | <code>node.first_glyph+</code> | <code>node.direct.first_glyph+</code> |
| <code>flatten_discretionaries</code> | <code>node.flatten_discretionaries+</code> | <code>node.direct.flatten_discretionaries+</code> |
| <code>flush_list</code> | <code>node.flush_list+</code> | <code>node.direct.flush_list+</code> |
| <code>flush_node</code> | <code>node.flush_node+</code> | <code>node.direct.flush_node+</code> |
| <code>free</code> | <code>node.free+</code> | <code>node.direct.free+</code> |
| <code>get_attribute</code> | <code>node.get_attribute+</code> | <code>node.direct.get_attribute+</code> |
| <code>get_synctex_fields</code> | — | <code>node.direct.get_synctex_fields+</code> |
| <code>getattributelist</code> | — | <code>node.direct.getattributelist+</code> |
| <code>getboth</code> | <code>node.getboth+</code> | <code>node.direct.getboth+</code> |
| <code>getbox</code> | — | <code>node.direct.getbox+</code> |
| <code>getchar</code> | <code>node.getchar+</code> | <code>node.direct.getchar+</code> |
| <code>getcomponents</code> | — | <code>node.direct.getcomponents+</code> |
| <code>getdepth</code> | — | <code>node.direct.getdepth+</code> |
| <code>getdirection</code> | — | <code>node.direct.getdirection+</code> |
| <code>getdir</code> | — | <code>node.direct.getdir+</code> |
| <code>getdisc</code> | <code>node.getdisc+</code> | <code>node.direct.getdisc+</code> |
| <code>getfam</code> | — | <code>node.direct.getfam+</code> |
| <code>getfield</code> | <code>node.getfield+</code> | <code>node.direct.getfield+</code> |
| <code>getfont</code> | <code>node.getfont+</code> | <code>node.direct.getfont+</code> |
| <code>getglue</code> | <code>node.getglue+</code> | <code>node.direct.getglue+</code> |
| <code>getheight</code> | — | <code>node.direct.getheight+</code> |
| <code>getid</code> | <code>node.getid+</code> | <code>node.direct.getid+</code> |
| <code>getkern</code> | — | <code>node.direct.getkern+</code> |
| <code>getlang</code> | — | <code>node.direct.getlang+</code> |
| <code>getleader</code> | <code>node.getleader+</code> | <code>node.direct.getleader+</code> |
| <code>getlist</code> | <code>node.getlist+</code> | <code>node.direct.getlist+</code> |
| <code>getnext</code> | <code>node.getnext+</code> | <code>node.direct.getnext+</code> |
| <code>getnucleus</code> | — | <code>node.direct.getnucleus+</code> |



| | | |
|----------------------|----------------------------|-----------------------------------|
| getoffsets | — | node.direct.getoffsets+ |
| getpenalty | — | node.direct.getpenalty+ |
| getprev | node.getprev+ | node.direct.getprev+ |
| getproperty | node.getproperty+ | node.direct.getproperty+ |
| getshift | — | node.direct.getshift+ |
| getsubtype | node.getsubtype+ | node.direct.getsubtype+ |
| getsub | — | node.direct.getsub+ |
| getsup | — | node.direct.getsup+ |
| getdata | — | node.direct.getdata+ |
| getwhd | node.getwhd+ | node.direct.getwhd+ |
| getwidth | — | node.direct.getwidth+ |
| has_attribute | node.has_attribute+ | node.direct.has_attribute+ |
| has_field | node.has_field+ | node.direct.has_field+ |
| has_glyph | node.has_glyph+ | node.direct.has_glyph+ |
| hpack | node.hpack+ | node.direct.hpack+ |
| id | node.id+ | — |
| insert_after | node.insert_after+ | node.direct.insert_after+ |
| insert_before | node.insert_before+ | node.direct.insert_before+ |
| is_char | node.is_char+ | node.direct.is_char+ |
| is_direct | — | node.direct.is_direct+ |
| is_glyph | node.is_glyph+ | node.direct.is_glyph+ |
| is_node | node.is_node+ | node.direct.is_node+ |
| is_zero_glue | node.is_zero_glue+ | node.direct.is_zero_glue+ |
| kerning | node.kerning+ | node.direct.kerning+ |
| last_node | node.last_node+ | node.direct.last_node+ |
| length | node.length+ | node.direct.length+ |
| ligaturing | node.ligaturing+ | node.direct.ligaturing+ |
| mlist_to_hlist | node.mlist_to_hlist+ | — |
| new | node.new+ | node.direct.new+ |
| next | node.next+ | — |
| prepend_prevdepth | — | node.direct.prepend_prevdepth+ |
| prev | node.prev+ | — |
| protect_glyphs | node.protect_glyphs+ | node.direct.protect_glyphs+ |
| protect_glyph | node.protect_glyph+ | node.direct.protect_glyph+ |
| protrusion_skippable | node.protrusion_skippable+ | node.direct.protrusion_skippable+ |
| rangedimensions | node.rangedimensions+ | node.direct.rangedimensions+ |
| remove | node.remove+ | node.direct.remove+ |
| set_attribute | node.set_attribute+ | node.direct.set_attribute+ |
| set_synctex_fields | — | node.direct.set_synctex_fields+ |
| setattributelist | — | node.direct.setattributelist+ |
| setboth | — | node.direct.setboth+ |
| setbox | — | node.direct.setbox+ |
| setchar | — | node.direct.setchar+ |
| setcomponents | — | node.direct.setcomponents+ |
| setdepth | — | node.direct.setdepth+ |
| setdirection | — | node.direct.setdirection+ |



| | | |
|------------------|------------------------|-------------------------------|
| setdir | — | node.direct.setdir+ |
| setdisc | — | node.direct.setdisc+ |
| setfam | — | node.direct.setfam+ |
| setfield | node.setfield+ | node.direct.setfield+ |
| setfont | — | node.direct.setfont+ |
| setexpansion | — | node.direct.setexpansion+ |
| setglue | node.setglue+ | node.direct.setglue+ |
| setheight | — | node.direct.setheight+ |
| setkern | — | node.direct.setkern+ |
| setlang | — | node.direct.setlang+ |
| setleader | — | node.direct.setleader+ |
| setlink | — | node.direct.setlink+ |
| setlist | — | node.direct.setlist+ |
| setnext | — | node.direct.setnext+ |
| setnucleus | — | node.direct.setnucleus+ |
| setoffsets | — | node.direct.setoffsets+ |
| setpenalty | — | node.direct.setpenalty+ |
| setprev | — | node.direct.setprev+ |
| setproperty | node.setproperty+ | node.direct.setproperty+ |
| setshift | — | node.direct.setshift+ |
| setsplit | — | node.direct.setsplit+ |
| setsubtype | — | node.direct.setsubtype+ |
| setsub | — | node.direct.setsub+ |
| setup | — | node.direct.setup+ |
| setwhd | — | node.direct.setwhd+ |
| setwidth | — | node.direct.setwidth+ |
| slide | node.slide+ | node.direct.slide+ |
| subtypes | node.subtypes+ | — |
| subtype | node.subtype+ | — |
| tail | node.tail+ | node.direct.tail+ |
| todirect | node.todirect+ | node.direct.todirect+ |
| tonode | node.tonode+ | node.direct.tonode+ |
| tostring | node.tostring+ | node.direct.tostring+ |
| traverse_char | node.traverse_char+ | node.direct.traverse_char+ |
| traverse_glyph | node.traverse_glyph+ | node.direct.traverse_glyph+ |
| traverse_id | node.traverse_id+ | node.direct.traverse_id+ |
| traverse | node.traverse+ | node.direct.traverse+ |
| types | node.types+ | — |
| type | node.type+ | — |
| unprotect_glyphs | node.unprotect_glyphs+ | node.direct.unprotect_glyphs+ |
| unprotect_glyph | node.unprotect_glyph+ | node.direct.unprotect_glyph+ |
| unset_attribute | node.unset_attribute+ | node.direct.unset_attribute+ |
| usedlist | node.usedlist+ | node.direct.usedlist+ |
| uses_font | node.uses_font+ | node.direct.uses_font+ |
| vpack | node.vpack+ | node.direct.vpack+ |



whatsits
write

node.whatsits+
node.write+

—
node.direct.write+

The `node.next` and `node.prev` functions will stay but for consistency there are variants called `getnext` and `getprev`. We had to use `get` because `node.id` and `node.subtype` are already taken for providing meta information about nodes. Note: The getters do only basic checking for valid keys. You should just stick to the keys mentioned in the sections that describe node properties.

Some of the getters and setters handle multiple node types, given that the field is relevant. In that case, some field names are considered similar (like `kern` and `width`, or `data` and `value`. In retrospect we could have normalized field names better but we decided to stick to the original (internal) names as much as possible. After all, at the Lua end one can easily create synonyms.

Some nodes have indirect references. For instance a math character refers to a family instead of a font. In that case we provide a virtual font field as accessor. So, `getfont` and `.font` can be used on them. The same is true for the `width`, `height` and `depth` of glue nodes. These actually access the `spec` node properties, and here we can set as well as get the values.

In some places LuaTeX can do a bit of extra checking for valid node lists and you can enable that with:

```
node.fix_node_lists(<boolean> b)
```

You can set and query the SyncTeX fields, a file number aka tag and a line number, for a glue, kern, hlist, vlist, rule and math nodes as well as glyph nodes (although this last one is not used in native SyncTeX).

```
node.set_synctex_fields(<integer> f, <integer> l)
<integer> f, <integer> l =
    node.get_synctex_fields(<node> n)
```

Of course you need to know what you're doing as no checking on sane values takes place. Also, the `synctex` interpreter used in editors is rather peculiar and has some assumptions (heuristics).

8.11 Properties

Attributes are a convenient way to relate extra information to a node. You can assign them at the TeX end as well as at the Lua end and consult them at the Lua end. One big advantage is that they obey grouping. They are linked lists and normally checking for them is pretty efficient, even if you use a lot of them. A macro package has to provide some way to manage these attributes at the TeX end because otherwise clashes in their usage can occur.

Each node also can have a properties table and you can assign values to this table using the `setproperty` function and get properties using the `getproperty` function. Managing properties is way more demanding than managing attributes.

Take the following example:

```
\directlua {
    local n = node.new("glyph")
```



```

node.setProperty(n, "foo")
print(node.getProperty(n))

node.setProperty(n, "bar")
print(node.getProperty(n))

node.free(n)
}

```

This will print foo and bar which in itself is not that useful when multiple mechanisms want to use this feature. A variant is:

```

\directlua {
    local n = node.new("glyph")

    node.setProperty(n, { one = "foo", two = "bar" })
    print(node.getProperty(n).one)
    print(node.getProperty(n).two)

    node.free(n)
}

```

This time we store two properties with the node. It really makes sense to have a table as property because that way we can store more. But in order for that to work well you need to do it this way:

```

\directlua {
    local n = node.new("glyph")

    local t = node.getProperty(n)

    if not t then
        t = { }
        node.setProperty(n, t)
    end
    t.one = "foo"
    t.two = "bar"

    print(node.getProperty(n).one)
    print(node.getProperty(n).two)

    node.free(n)
}

```

Here our own properties will not overwrite other users properties unless of course they use the same keys. So, eventually you will end up with something:

```

\directlua {

```



```

local n = node.new("glyph")

local t = node.getproperty(n)

if not t then
    t = { }
    node.setproperty(n,t)
end
t.myself = { one = "foo", two = "bar" }

print(node.getproperty(n).myself.one)
print(node.getproperty(n).myself.two)

node.free(n)
}

```

This assumes that only you use `myself` as subtable. The possibilities are endless but care is needed. For instance, the generic font handler that ships with ConT_EXt uses the injections subtable and you should not mess with that one!

There are a few helper functions that you normally should not touch as user: `flush_properties_table` will wipe the table (normally a bad idea), `get_properties_table` and will give the table that stores properties (using direct entries) and you can best not mess too much with that one either because LuaT_EX itself will make sure that entries related to nodes will get wiped when nodes get freed, so that the Lua garbage collector can do its job. In fact, the main reason why we have this mechanism is that it saves the user (or macro package) some work. One can easily write a property mechanism in Lua where after a shipout properties gets cleaned up but it's not entirely trivial to make sure that with each freed node also its properties get freed, due to the fact that there can be nodes left over for a next page. And having a callback bound to the node deallocator would add way too much overhead.

Managing properties in the node (de)allocator functions is disabled by default and is enabled by:

```
node.set_properties_mode(true)
```

When we copy a node list that has a table as property, there are several possibilities: we do the same as a new node, we copy the entry to the table in properties (a reference), we do a deep copy of a table in the properties, we create a new table and give it the original one as a metatable. After some experiments (that also included timing) with these scenarios we decided that a deep copy made no sense, nor did nilling. In the end both the shallow copy and the metatable variant were both ok, although the second one is slower. The most important aspect to keep in mind is that references to other nodes in properties no longer can be valid for that copy. We could use two tables (one unique and one shared) or metatables but that only complicates matters.

When defining a new node, we could already allocate a table but it is rather easy to do that at the lua end e.g. using a metatable `__index` method. That way it is under macro package control. When deleting a node, we could keep the slot (e.g. setting it to false) but it could make memory consumption raise unneeded when we have temporary large node lists and after that only small lists. Both are not done.



So in the end this is what happens now: when a node is copied, and it has a table as property, the new node will share that table. If the second argument of `set_properties_mode` is `true` then a metatable approach is chosen: the copy gets its own table with the original table as metatable. If you use the generic font loader the mode is enabled that way.

A few more experiments were done. For instance: copy attributes to the properties so that we have fast access at the Lua end. In the end the overhead is not compensated by speed and convenience, in fact, attributes are not that slow when it comes to accessing them. So this was rejected.

Another experiment concerned a bitset in the node but again the gain compared to attributes was neglectable and given the small amount of available bits it also demands a pretty strong agreement over what bit represents what, and this is unlikely to succeed in the T_EX community. It doesn't pay off.

Just in case one wonders why properties make sense: it is not so much speed that we gain, but more convenience: storing all kind of (temporary) data in attributes is no fun and this mechanism makes sure that properties are cleaned up when a node is freed. Also, the advantage of a more or less global properties table is that we stay at the Lua end. An alternative is to store a reference in the node itself but that is complicated by the fact that the register has some limitations (no numeric keys) and we also don't want to mess with it too much.





9 LUA callbacks

9.1 Registering callbacks

This library has functions that register, find and list callbacks. Callbacks are Lua functions that are called in well defined places. There are two kind of callbacks: those that mix with existing functionality, and those that (when enabled) replace functionality. In mostly cases the second category is expected to behave similar to the built in functionality because in a next step specific data is expected. For instance, you can replace the hyphenation routine. The function gets a list that can be hyphenated (or not). The final list should be valid and is (normally) used for constructing a paragraph. Another function can replace the ligature builder and/or kerner. Doing something else is possible but in the end might not give the user the expected outcome.

The first thing you need to do is registering a callback:

```
id, error =
    callback.register(<string> callback_name, <function> func)
id, error =
    callback.register(<string> callback_name, nil)
id, error =
    callback.register(<string> callback_name, false)
```

Here the `callback_name` is a predefined callback name, see below. The function returns the internal id of the callback or `nil`, if the callback could not be registered. In the latter case, `error` contains an error message, otherwise it is `nil`.

LuaTeX internalizes the callback function in such a way that it does not matter if you redefine a function accidentally.

Callback assignments are always global. You can use the special value `nil` instead of a function for clearing the callback.

For some minor speed gain, you can assign the boolean `false` to the non-file related callbacks, doing so will prevent LuaTeX from executing whatever it would execute by default (when no callback function is registered at all). Be warned: this may cause all sorts of grief unless you know *exactly* what you are doing!

```
<table> info =
    callback.list()
```

The keys in the table are the known callback names, the value is a boolean where `true` means that the callback is currently set (active).

```
<function> f = callback.find(callback_name)
```

If the callback is not set, `find` returns `nil`.

9.2 File discovery callbacks

The behaviour documented in this subsection is considered stable in the sense that there will not be backward-incompatible changes any more.



9.2.1 find_read_file and find_write_file

Your callback function should have the following conventions:

```
<string> actual_name =  
    function (<number> id_number, <string> asked_name)
```

Arguments:

id_number

This number is zero for the log or \input files. For T_EX's \read or \write the number is incremented by one, so \read0 becomes 1.

asked_name

This is the user-supplied filename, as found by \input, \openin or \openout.

Return value:

actual_name

This is the filename used. For the very first file that is read in by T_EX, you have to make sure you return an actual_name that has an extension and that is suitable for use as jobname. If you don't, you will have to manually fix the name of the log file and output file after LuaT_EX is finished, and an eventual format filename will become mangled. That is because these file names depend on the jobname.

You have to return nil if the file cannot be found.

9.2.2 find_font_file

Your callback function should have the following conventions:

```
<string> actual_name =  
    function (<string> asked_name)
```

The asked_name is an otf or tfm font metrics file.

Return nil if the file cannot be found.

9.2.3 find_output_file

Your callback function should have the following conventions:

```
<string> actual_name =  
    function (<string> asked_name)
```

The asked_name is the pdf or dvi file for writing.

9.2.4 find_format_file

Your callback function should have the following conventions:

```
<string> actual_name =
```



```
function (<string> asked_name)
```

The asked_name is a format file for reading (the format file for writing is always opened in the current directory).

9.2.5 find_vf_file

Like find_font_file, but for virtual fonts. This applies to both Aleph's ovf files and traditional Knuthian vf files.

9.2.6 find_map_file

Like find_font_file, but for map files.

9.2.7 find_enc_file

Like find_font_file, but for enc files.

9.2.8 find_pk_file

Like find_font_file, but for pk bitmap files. This callback takes two arguments: name and dpi. In your callback you can decide to look for:

```
<base res>dpi/<fontname>.<actual res>pk
```

but other strategies are possible. It is up to you to find a 'reasonable' bitmap file to go with that specification.

9.2.9 find_data_file

Like find_font_file, but for embedded files (\pdfobj file '...').

9.2.10 find_opentype_file

Like find_font_file, but for OpenType font files.

9.2.11 find_truetype_file and find_type1_file

Your callback function should have the following conventions:

```
<string> actual_name =  
  function (<string> asked_name)
```

The asked_name is a font file. This callback is called while LuaTeX is building its internal list of needed font files, so the actual timing may surprise you. Your return value is later fed back into the matching read_file callback.



Strangely enough, `find_type1_file` is also used for OpenType (otf) fonts.

9.2.12 `find_image_file`

Your callback function should have the following conventions:

```
<string> actual_name =  
    function (<string> asked_name)
```

The `asked_name` is an image file. Your return value is used to open a file from the hard disk, so make sure you return something that is considered the name of a valid file by your operating system.

9.2.13 File reading callbacks

The behavior documented in this subsection is considered stable in the sense that there will not be backward-incompatible changes any more.

9.2.14 `open_read_file`

Your callback function should have the following conventions:

```
<table> env =  
    function (<string> file_name)
```

Argument:

`file_name`

The filename returned by a previous `find_read_file` or the return value of `kpse.find_file()` if there was no such callback defined.

Return value:

`env`

This is a table containing at least one required and one optional callback function for this file. The required field is `reader` and the associated function will be called once for each new line to be read, the optional one is `close` that will be called once when LuaTeX is done with the file.

LuaTeX never looks at the rest of the table, so you can use it to store your private per-file data. Both the callback functions will receive the table as their only argument.

9.2.14.1 `reader`

LuaTeX will run this function whenever it needs a new input line from the file.

```
function(<table> env)  
    return <string> line  
end
```



Your function should return either a string or `nil`. The value `nil` signals that the end of file has occurred, and will make `TeX` call the optional `close` function next.

9.2.14.2 `close`

Lua \TeX will run this optional function when it decides to close the file.

```
function(<table> env)
end
```

Your function should not return any value.

9.2.15 General file readers

There is a set of callbacks for the loading of binary data files. These all use the same interface:

```
function(<string> name)
    return <boolean> success, <string> data, <number> data_size
end
```

The name will normally be a full path name as it is returned by either one of the file discovery callbacks or the internal version of `kpse.find_file()`.

`success`

Return `false` when a fatal error occurred (e.g. when the file cannot be found, after all).

`data`

The bytes comprising the file.

`data_size`

The length of the data, in bytes.

Return an empty string and zero if the file was found but there was a reading problem.

The list of functions is:

| FUNCTION | USAGE |
|---------------------------------|--|
| <code>read_font_file</code> | ofm or tfm files |
| <code>read_vf_file</code> | virtual fonts |
| <code>read_map_file</code> | map files |
| <code>read_enc_file</code> | encoding files |
| <code>read_pk_file</code> | pk bitmap files |
| <code>read_data_file</code> | embedded files (as is possible with pdf objects) |
| <code>read_truetype_file</code> | TrueType font files |
| <code>read_type1_file</code> | Type1 font files |
| <code>read_opentype_file</code> | OpenType font files |



9.3 Data processing callbacks

9.3.1 process_input_buffer

This callback allows you to change the contents of the line input buffer just before LuaTeX actually starts looking at it.

```
function(<string> buffer)
    return <string> adjusted_buffer
end
```

If you return `nil`, LuaTeX will pretend like your callback never happened. You can gain a small amount of processing time from that. This callback does not replace any internal code.

9.3.2 process_output_buffer

This callback allows you to change the contents of the line output buffer just before LuaTeX actually starts writing it to a file as the result of a `\write` command. It is only called for output to an actual file (that is, excluding the log, the terminal, and so called `\write 18` calls).

```
function(<string> buffer)
    return <string> adjusted_buffer
end
```

If you return `nil`, LuaTeX will pretend like your callback never happened. You can gain a small amount of processing time from that. This callback does not replace any internal code.

9.3.3 process_jobname

This callback allows you to change the jobname given by `\jobname` in T_EX and `tex.jobname` in Lua. It does not affect the internal job name or the name of the output or log files.

```
function(<string> jobname)
    return <string> adjusted_jobname
end
```

The only argument is the actual job name; you should not use `tex.jobname` inside this function or infinite recursion may occur. If you return `nil`, LuaTeX will pretend your callback never happened. This callback does not replace any internal code.

9.4 Node list processing callbacks

The description of nodes and node lists is in chapter 8.

9.4.1 contribute_filter

This callback is called when LuaTeX adds contents to list:



```
function(<string> extrainfo)
end
```

The string reports the group code. From this you can deduce from what list you can give a treat.

| VALUE | EXPLANATION |
|------------|--|
| pre_box | interline material is being added |
| pre_adjust | \vadjust material is being added |
| box | a typeset box is being added (always called) |
| adjust | \vadjust material is being added |

9.4.2 buildpage_filter

This callback is called whenever Lua_T_EX is ready to move stuff to the main vertical list. You can use this callback to do specialized manipulation of the page building stage like imposition or column balancing.

```
function(<string> extrainfo)
end
```

The string extrainfo gives some additional information about what T_EX's state is with respect to the 'current page'. The possible values for the buildpage_filter callback are:

| VALUE | EXPLANATION |
|----------------|--|
| alignment | a (partial) alignment is being added |
| after_output | an output routine has just finished |
| new_graf | the beginning of a new paragraph |
| vmode_par | \par was found in vertical mode |
| hmode_par | \par was found in horizontal mode |
| insert | an insert is added |
| penalty | a penalty (in vertical mode) |
| before_display | immediately before a display starts |
| after_display | a display is finished |
| end | Lua _T _E X is terminating (it's all over) |

9.4.3 build_page_insert

This callback is called when the pagebuilder adds an insert. There is not much control over this mechanism but this callback permits some last minute manipulations of the spacing before an insert, something that might be handy when for instance multiple inserts (types) are appended in a row.

```
function(<number> n, <number> i)
    return <number> register
end
```

with



| VALUE | EXPLANATION |
|-------|-------------------------|
| n | the insert class |
| i | the order of the insert |

The return value is a number indicating the skip register to use for the prepended spacing. This permits for instance a different top space (when `i` equals one) and intermediate space (when `i` is larger than one). Of course you can mess with the insert box but you need to make sure that Lua_T_EX is happy afterwards.

9.4.4 `pre_linebreak_filter`

This callback is called just before Lua_T_EX starts converting a list of nodes into a stack of `\hboxes`, after the addition of `\parfillskip`.

```
function(<node> head, <string> groupcode)
    return true | false | <node> newhead
end
```

The string called `groupcode` identifies the nodelist's context within T_EX's processing. The range of possibilities is given in the table below, but not all of those can actually appear in `pre_linebreak_filter`, some are for the `hpack_filter` and `vpack_filter` callbacks that will be explained in the next two paragraphs.

| VALUE | EXPLANATION |
|---------------|---|
| <empty> | main vertical list |
| hbox | <code>\hbox</code> in horizontal mode |
| adjusted_hbox | <code>\hbox</code> in vertical mode |
| vbox | <code>\vbox</code> |
| vtop | <code>\vtop</code> |
| align | <code>\halign</code> or <code>\valign</code> |
| disc | discretionaries |
| insert | packaging an insert |
| vcenter | <code>\vcenter</code> |
| local_box | <code>\localleftbox</code> or <code>\localrightbox</code> |
| split_off | top of a <code>\vsplit</code> |
| split_keep | remainder of a <code>\vsplit</code> |
| align_set | alignment cell |
| fin_row | alignment row |

As for all the callbacks that deal with nodes, the return value can be one of three things:

- ▶ boolean `true` signals successful processing
- ▶ `<node>` signals that the 'head' node should be replaced by the returned node
- ▶ boolean `false` signals that the 'head' node list should be ignored and flushed from memory

This callback does not replace any internal code.



9.4.5 linebreak_filter

This callback replaces LuaT_EX's line breaking algorithm.

```
function(<node> head, <boolean> is_display)
    return <node> newhead
end
```

The returned node is the head of the list that will be added to the main vertical list, the boolean argument is true if this paragraph is interrupted by a following math display.

If you return something that is not a <node>, LuaT_EX will apply the internal linebreak algorithm on the list that starts at <head>. Otherwise, the <node> you return is supposed to be the head of a list of nodes that are all allowed in vertical mode, and at least one of those has to represent a hbox. Failure to do so will result in a fatal error.

Setting this callback to false is possible, but dangerous, because it is possible you will end up in an unfixable 'deadcycles loop'.

9.4.6 append_to_vlist_filter

This callback is called whenever LuaT_EX adds a box to a vertical list:

```
function(<node> box, <string> locationcode, <number> prevdepth,
    <boolean> mirrored)
    return list, prevdepth
end
```

It is ok to return nothing in which case you also need to flush the box or deal with it yourself. The prevdepth is also optional. Locations are box, alignment, equation, equation_number and post_linebreak.

9.4.7 post_linebreak_filter

This callback is called just after LuaT_EX has converted a list of nodes into a stack of \hboxes.

```
function(<node> head, <string> groupcode)
    return true | false | <node> newhead
end
```

This callback does not replace any internal code.

9.4.8 hpack_filter

This callback is called when T_EX is ready to start boxing some horizontal mode material. Math items and line boxes are ignored at the moment.

```
function(<node> head, <string> groupcode, <number> size,
    <string> packtype [, <string> direction] [, <node> attributelist])
```



```

    return true | false | <node> newhead
end

```

The packtype is either additional or exactly. If additional, then the size is a `\hbox spread ...` argument. If exactly, then the size is a `\hbox to` In both cases, the number is in scaled points.

The direction is either one of the three-letter direction specifier strings, or nil.

This callback does not replace any internal code.

9.4.9 vpack_filter

This callback is called when \TeX is ready to start boxing some vertical mode material. Math displays are ignored at the moment.

This function is very similar to the `hpack_filter`. Besides the fact that it is called at different moments, there is an extra variable that matches \TeX 's `\maxdepth` setting.

```

function(<node> head, <string> groupcode, <number> size, <string> packtype,
        <number> maxdepth [, <string> direction] [, <node> attributelist]))
    return true | false | <node> newhead
end

```

This callback does not replace any internal code.

9.4.10 hpack_quality

This callback can be used to intercept the overfull messages that can result from packing a horizontal list (as happens in the par builder). The function takes a few arguments:

```

function(<string> incident, <number> detail, <node> head, <number> first,
        <number> last)
    return <node> whatever
end

```

The incident is one of `overfull`, `underfull`, `loose` or `tight`. The detail is either the amount of overflow in case of `overfull`, or the badness otherwise. The head is the list that is constructed (when protrusion or expansion is enabled, this is an intermediate list). Optionally you can return a node, for instance an overfull rule indicator. That node will be appended to the list (just like \TeX 's own rule would).

9.4.11 vpack_quality

This callback can be used to intercept the overfull messages that can result from packing a vertical list (as happens in the page builder). The function takes a few arguments:

```

function(<string> incident, <number> detail, <node> head, <number> first,
        <number> last)

```



end

The incident is one of `overflow`, `underfull`, `loose` or `tight`. The detail is either the amount of overflow in case of `overflow`, or the badness otherwise. The head is the list that is constructed.

9.4.12 `process_rule`

This is an experimental callback. It can be used with rules of subtype 4 (user). The callback gets three arguments: the node, the width and the height. The callback can use `pdf.print` to write code to the pdf file but beware of not messing up the final result. No checking is done.

9.4.13 `pre_output_filter`

This callback is called when \TeX is ready to start boxing the box 255 for `\output`.

```
function(<node> head, <string> groupcode, <number> size, <string> packtype,
        <number> maxdepth [, <string> direction])
    return true | false | <node> newhead
end
```

This callback does not replace any internal code.

9.4.14 `hyphenate`

```
function(<node> head, <node> tail)
end
```

No return values. This callback has to insert discretionary nodes in the node list it receives. Setting this callback to `false` will prevent the internal discretionary insertion pass.

9.4.15 `ligaturing`

```
function(<node> head, <node> tail)
end
```

No return values. This callback has to apply ligaturing to the node list it receives.

You don't have to worry about return values because the head node that is passed on to the callback is guaranteed not to be a `glyph_node` (if need be, a temporary node will be prepended), and therefore it cannot be affected by the mutations that take place. After the callback, the internal value of the 'tail of the list' will be recalculated.

The next of head is guaranteed to be non-nil.

The next of tail is guaranteed to be nil, and therefore the second callback argument can often be ignored. It is provided for orthogonality, and because it can sometimes be handy when special processing has to take place.

Setting this callback to `false` will prevent the internal ligature creation pass.



You must not ruin the node list. For instance, the head normally is a local par node, and the tail a glue. Messing too much can push LuaTeX into panic mode.

9.4.16 kerning

```
function(<node> head, <node> tail)
end
```

No return values. This callback has to apply kerning between the nodes in the node list it receives. See `ligaturing` for calling conventions.

Setting this callback to `false` will prevent the internal kern insertion pass.

You must not ruin the node list. For instance, the head normally is a local par node, and the tail a glue. Messing too much can push LuaTeX into panic mode.

9.4.17 insert_local_par

Each paragraph starts with a local par node that keeps track of for instance the direction. You can hook a callback into the creator:

```
function(<node> local_par, <string> location)
end
```

There is no return value and you should make sure that the node stays valid as otherwise TeX can get confused.

9.4.18 mlist_to_hlist

This callback replaces LuaTeX's math list to node list conversion algorithm.

```
function(<node> head, <string> display_type, <boolean> need_penalties)
    return <node> newhead
end
```

The returned node is the head of the list that will be added to the vertical or horizontal list, the string argument is either 'text' or 'display' depending on the current math mode, the boolean argument is true if penalties have to be inserted in this list, false otherwise.

Setting this callback to `false` is bad, it will almost certainly result in an endless loop.

9.5 Information reporting callbacks

9.5.1 pre_dump

```
function()
end
```



This function is called just before dumping to a format file starts. It does not replace any code and there are neither arguments nor return values.

9.5.2 start_run

```
function()  
end
```

This callback replaces the code that prints Lua_T_EX's banner. Note that for successful use, this callback has to be set in the Lua initialization script, otherwise it will be seen only after the run has already started.

9.5.3 stop_run

```
function()  
end
```

This callback replaces the code that prints Lua_T_EX's statistics and 'output written to' messages. The engine can still do housekeeping and therefore you should not rely on this hook for postprocessing the pdf or log file.

9.5.4 start_page_number

```
function()  
end
```

Replaces the code that prints the [and the page number at the begin of \shipout. This callback will also override the printing of box information that normally takes place when \tracingoutput is positive.

9.5.5 stop_page_number

```
function()  
end
```

Replaces the code that prints the] at the end of \shipout.

9.5.6 show_error_hook

```
function()  
end
```

This callback is run from inside the _T_EX error function, and the idea is to allow you to do some extra reporting on top of what _T_EX already does (none of the normal actions are removed). You may find some of the values in the status table useful. This callback does not replace any internal code.



9.5.7 show_error_message

```
function()  
end
```

This callback replaces the code that prints the error message. The usual interaction after the message is not affected.

9.5.8 show_lua_error_hook

```
function()  
end
```

This callback replaces the code that prints the extra Lua error message.

9.5.9 start_file

```
function(category,filename)  
end
```

This callback replaces the code that prints LuaTeX's when a file is opened like (filename for regular files. The category is a number:

| VALUE | MEANING |
|-------|--|
| 1 | a normal data file, like a T _E X source |
| 2 | a font map coupling font names to resources |
| 3 | an image file (png, pdf, etc) |
| 4 | an embedded font subset |
| 5 | a fully embedded font |

9.5.10 stop_file

```
function(category)  
end
```

This callback replaces the code that prints LuaTeX's when a file is closed like the) for regular files.

9.5.11 call_edit

```
function(filename,linenumber)  
end
```

This callback replaces the call to an external editor when 'E' is pressed in reply to an error message. Processing will end immediately after the callback returns control to the main program.



9.5.12 finish_synctex

This callback can be used to wrap up alternative synctex methods. It kicks in after the normal synctex finalizer (that happens to remove the synctex files after a run when native synctex is not enabled).

9.5.13 wrapup_run

This callback is called after the pdf and log files are closed. Use it at your own risk.

9.6 PDF related callbacks

9.6.1 finish_pdffile

```
function()  
end
```

This callback is called when all document pages are already written to the pdf file and LuaTeX is about to finalize the output document structure. Its intended use is final update of pdf dictionaries such as /Catalog or /Info. The callback does not replace any code. There are neither arguments nor return values.

9.6.2 finish_pdfpage

```
function(shippingout)  
end
```

This callback is called after the pdf page stream has been assembled and before the page object gets finalized.

9.6.3 page_objnum_provider

This is one that experts can use to juggle the page tree, a data structure that determines the order in a pdf file:

```
function(objnum)  
    return objnum  
end
```

We can for instance swap the first and last page:

```
local n = 0  
callback.register("page_objnum_provider",function(objnum)  
    n = n + 1  
    if n == 1 then  
        return pdf.getpageref(tex.count[0])
```



```

elseif n == tex.count[0] then
    return pdf.getpageref(1)
else
    return objnum
end
end)

```

When you mess things up ... don't complain.

9.7 Font-related callbacks

9.7.1 `define_font`

```

function(<string> name, <number> size, <number> id)
    return <table> font | <number> id
end

```

The string `name` is the filename part of the font specification, as given by the user.

The number `size` is a bit special:

- ▶ If it is positive, it specifies an 'at size' in scaled points.
- ▶ If it is negative, its absolute value represents a 'scaled' setting relative to the designsize of the font.

The `id` is the internal number assigned to the font.

The internal structure of the font table that is to be returned is explained in chapter 6. That table is saved internally, so you can put extra fields in the table for your later Lua code to use. In alternative, `retval` can be a previously defined fontid. This is useful if a previous definition can be reused instead of creating a whole new font structure.

Setting this callback to `false` is pointless as it will prevent font loading completely but will nevertheless generate errors.

9.7.2 `glyph_not_found`

This callback kicks in when the backend cannot insert a glyph. When no callback is defined a message is written to the log.

```

function(<number> id, <number> char)
    -- do something with font id and char code
end

```



10 The T_EX related libraries

10.1 The lua library

10.1.1 Version information

This library contains one read-only item:

```
<string> s = lua.version
```

This returns the Lua version identifier string. The value is currently Lua 5.3.

10.1.2 Bytecode registers

Lua registers can be used to store Lua code chunks. The accepted values for assignments are functions and nil. Likewise, the retrieved value is either a function or nil.

```
lua.bytecode[<number> n] = <function> f  
lua.bytecode[<number> n]()
```

The contents of the `lua.bytecode` array is stored inside the format file as actual Lua bytecode, so it can also be used to preload Lua code. The function must not contain any upvalues. The associated function calls are:

```
<function> f = lua.getbytecode(<number> n)  
lua.setbytecode(<number> n, <function> f)
```

Note: Since a Lua file loaded using `loadfile(filename)` is essentially an anonymous function, a complete file can be stored in a bytecode register like this:

```
lua.bytecode[n] = loadfile(filename)
```

Now all definitions (functions, variables) contained in the file can be created by executing this bytecode register:

```
lua.bytecode[n]()
```

Note that the path of the file is stored in the Lua bytecode to be used in stack backtraces and therefore dumped into the format file if the above code is used in `iniTEX`. If it contains private information, i.e. the user name, this information is then contained in the format file as well. This should be kept in mind when preloading files into a bytecode register in `iniTEX`.

10.1.3 Chunk name registers

There is an array of 65536 (0-65535) potential chunk names for use with the `\directlua` and `\latelua` primitives.



```
lua.name[<number> n] = <string> s
<string> s = lua.name[<number> n]
```

If you want to unset a Lua name, you can assign `nil` to it. The function accessors are:

```
lua.setluaname(<string> s,<number> n])
<string> s = lua.getluaname(<number> n)
```

10.1.4 Introspection

The `getstacktop` and `andgetcalllevel` functions return numbers indicating how much nesting is going on. They are only of use as breakpoints when checking some mechanism going haywire.

10.2 The status library

This contains a number of run-time configuration items that you may find useful in message reporting, as well as an iterator function that gets all of the names and values as a table.

```
<table> info = status.list()
```

The keys in the table are the known items, the value is the current value. Almost all of the values in `status` are fetched through a metatable at run-time whenever they are accessed, so you cannot use `pairs` on `status`, but you *can* use `pairs` on `info`, of course. If you do not need the full list, you can also ask for a single item by using its name as an index into `status`. The current list is:

| KEY | EXPLANATION |
|---------------------------------|--|
| <code>banner</code> | terminal display banner |
| <code>best_page_break</code> | the current best break (a node) |
| <code>buf_size</code> | current allocated size of the line buffer |
| <code>callbacks</code> | total number of executed callbacks so far |
| <code>cs_count</code> | number of control sequences |
| <code>dest_names_size</code> | pdf destination table size |
| <code>dvi_gone</code> | written dvi bytes |
| <code>dvi_ptr</code> | not yet written dvi bytes |
| <code>dyn_used</code> | token (multi-word) memory in use |
| <code>filename</code> | name of the current input file |
| <code>fix_mem_end</code> | maximum number of used tokens |
| <code>fix_mem_min</code> | minimum number of allocated words for tokens |
| <code>fix_mem_max</code> | maximum number of allocated words for tokens |
| <code>font_ptr</code> | number of active fonts |
| <code>hash_extra</code> | extra allowed hash |
| <code>hash_size</code> | size of hash |
| <code>indirect_callbacks</code> | number of those that were themselves a result of other callbacks (e.g. file readers) |
| <code>ini_version</code> | true if this is an iniT _E X run |
| <code>init_pool_ptr</code> | iniT _E X string pool index |



| | |
|---------------------------------|--|
| <code>init_str_ptr</code> | number of <code>iniT_EX</code> strings |
| <code>input_ptr</code> | the level of input we're at |
| <code>inputid</code> | numeric id of the current input |
| <code>largest_used_mark</code> | max referenced marks class |
| <code>lasterrorcontext</code> | last error context string (with newlines) |
| <code>lasterrorstring</code> | last T _E X error string |
| <code>lastluaerrorstring</code> | last Lua error string |
| <code>lastwarningstring</code> | last warning tag, normally an indication of in what part |
| <code>lastwarningtag</code> | last warning string |
| <code>linenumber</code> | location in the current input file |
| <code>log_name</code> | name of the log file |
| <code>luabytecode_bytes</code> | number of bytes in Lua bytecode registers |
| <code>luabytecodes</code> | number of active Lua bytecode registers |
| <code>luastate_bytes</code> | number of bytes in use by Lua interpreters |
| <code>luatex_engine</code> | the LuaT _E X engine identifier |
| <code>luatex_hashchars</code> | length to which Lua hashes strings (2 ⁿ) |
| <code>luatex_hashtype</code> | the hash method used (in LuajitT _E X) |
| <code>luatex_version</code> | the LuaT _E X version number |
| <code>luatex_revision</code> | the LuaT _E X revision string |
| <code>max_buf_stack</code> | max used buffer position |
| <code>max_in_stack</code> | max used input stack entries |
| <code>max_nest_stack</code> | max used nesting stack entries |
| <code>max_param_stack</code> | max used parameter stack entries |
| <code>max_save_stack</code> | max used save stack entries |
| <code>max_strings</code> | maximum allowed strings |
| <code>nest_size</code> | nesting stack size |
| <code>node_mem_usage</code> | a string giving insight into currently used nodes |
| <code>obj_ptr</code> | max pdf object pointer |
| <code>obj_tab_size</code> | pdf object table size |
| <code>output_active</code> | true if the <code>\output</code> routine is active |
| <code>output_file_name</code> | name of the pdf or dvi file |
| <code>param_size</code> | parameter stack size |
| <code>pdf_dest_names_ptr</code> | max pdf destination pointer |
| <code>pdf_gone</code> | written pdf bytes |
| <code>pdf_mem_ptr</code> | max pdf memory used |
| <code>pdf_mem_size</code> | pdf memory size |
| <code>pdf_os_cntr</code> | max pdf object stream pointer |
| <code>pdf_os_objidx</code> | pdf object stream index |
| <code>pdf_ptr</code> | not yet written pdf bytes |
| <code>pool_ptr</code> | string pool index |
| <code>pool_size</code> | current size allocated for string characters |
| <code>save_size</code> | save stack size |
| <code>shell_escape</code> | 0 means disabled, 1 means anything is permitted, and 2 is restricted |
| <code>safer_option</code> | 1 means safer is enforced |
| <code>kpse_used</code> | 1 means that kpse is used |
| <code>stack_size</code> | input stack size |



| | |
|--------------------------|---|
| <code>str_ptr</code> | number of strings |
| <code>total_pages</code> | number of written pages |
| <code>var_mem_max</code> | number of allocated words for nodes |
| <code>var_used</code> | variable (one-word) memory in use |
| <code>lc_collate</code> | the value of <code>LC_COLLATE</code> at startup time (becomes C at startup) |
| <code>lc_ctype</code> | the value of <code>LC_CTYPE</code> at startup time (becomes C at startup) |
| <code>lc_numeric</code> | the value of <code>LC_NUMERIC</code> at startup time |

The error and warning messages can be wiped with the `resetmessages` function. A return value can be set with `setexitcode`.

10.3 The tex library

The `tex` table contains a large list of virtual internal \TeX parameters that are partially writable.

The designation ‘virtual’ means that these items are not properly defined in Lua, but are only frontends that are handled by a metatable that operates on the actual \TeX values. As a result, most of the Lua table operators (like `pairs` and `#`) do not work on such items.

At the moment, it is possible to access almost every parameter that you can use after `\the`, is a single tokens or is sort of special in \TeX . This excludes parameters that need extra arguments, like `\the\scriptfont`. The subset comprising simple integer and dimension registers are writable as well as readable (like `\tracingcommands` and `\parindent`).

10.3.1 Internal parameter values, set and get

For all the parameters in this section, it is possible to access them directly using their names as index in the `tex` table, or by using one of the functions `tex.get` and `tex.set`.

The exact parameters and return values differ depending on the actual parameter, and so does whether `tex.set` has any effect. For the parameters that *can* be set, it is possible to use `global` as the first argument to `tex.set`; this makes the assignment global instead of local.

```
tex.set (["global",] <string> n, ...)
... = tex.get (<string> n)
```

Glue is kind of special because there are five values involved. The return value is a `glue_spec` node but when you pass `false` as last argument to `tex.get` you get the width of the glue and when you pass `true` you get all five values. Otherwise you get a node which is a copy of the internal value so you are responsible for its freeing at the Lua end. When you set a glue quantity you can either pass a `glue_spec` or upto five numbers. If you pass `true` to get you get 5 values returned for a glue and when you pass `false` you only get the width returned.

10.3.1.1 Integer parameters

The integer parameters accept and return Lua numbers. These are read-write:

`tex.adjdemerits`

`tex.binoppenalty`



| | |
|---------------------------|-------------------------|
| tex.brokenpenalty | tex.outputpenalty |
| tex.catcodetable | tex.pausing |
| tex.clubpenalty | tex.postdisplaypenalty |
| tex.day | tex.predisplaydirection |
| tex.defaultthyphenchar | tex.predisplaypenalty |
| tex.defaultskewchar | tex.pretolerance |
| tex.delimiterfactor | tex.relpenalty |
| tex.displaywidowpenalty | tex.righthyphenmin |
| tex.doublehyphendemerits | tex.savinghyphcodes |
| tex.endlinechar | tex.savingvdiscards |
| tex.errorcontextlines | tex.showboxbreadth |
| tex.escapechar | tex.showboxdepth |
| tex.exhyphenpenalty | tex.time |
| tex.fam | tex.tolerance |
| tex.finalhyphendemerits | tex.tracingassigns |
| tex.floatingpenalty | tex.tracingcommands |
| tex.globaldefs | tex.tracinggroups |
| tex.hangafter | tex.tracingifs |
| tex.hbadness | tex.tracinglostchars |
| tex.holdinginserts | tex.tracingmacros |
| tex.hyphenpenalty | tex.tracingnesting |
| tex.interlinepenalty | tex.tracingonline |
| tex.language | tex.tracingoutput |
| tex.lastlinefit | tex.tracingpages |
| tex.lefthyphenmin | tex.tracingparagraphs |
| tex.linepenalty | tex.tracingrestores |
| tex.localbrokenpenalty | tex.tracingscantokens |
| tex.localinterlinepenalty | tex.tracingstats |
| tex.looseness | tex.uchyph |
| tex.mag | tex.vbadness |
| tex.maxdeadcycles | tex.widowpenalty |
| tex.month | tex.year |
| tex.newlinechar | |

These are read-only:

| | | |
|---------------------|--------------|-----------------|
| tex.deadcycles | tex.parshape | tex.spacefactor |
| tex.insertpenalties | tex.prevgraf | |

10.3.1.2 Dimension parameters

The dimension parameters accept Lua numbers (signifying scaled points) or strings (with included dimension). The result is always a number in scaled points. These are read-write:

| | | |
|------------------------|-------------------|----------------------|
| tex.boxmaxdepth | tex.displayindent | tex.emergencystretch |
| tex.delimitershortfall | tex.displaywidth | tex.hangindent |



| | | |
|--------------------------------------|-----------------------------------|--------------------------------|
| <code>tex.hfuzz</code> | <code>tex.pagebottomoffset</code> | <code>tex.scriptsace</code> |
| <code>tex.hoffset</code> | <code>tex.pageheight</code> | <code>tex.splitmaxdepth</code> |
| <code>tex.hsize</code> | <code>tex.pageleftoffset</code> | <code>tex.vfuzz</code> |
| <code>tex.lineskiplimit</code> | <code>tex.pagerightoffset</code> | <code>tex.voffset</code> |
| <code>tex.mathsurround</code> | <code>tex.pagetopoffset</code> | <code>tex.vsize</code> |
| <code>tex.maxdepth</code> | <code>tex.pagewidth</code> | <code>tex.prevdepth</code> |
| <code>tex.nullldelimaterspace</code> | <code>tex.parindent</code> | <code>tex.prevgraf</code> |
| <code>tex.overfullrule</code> | <code>tex.predisplaysize</code> | <code>tex.spacefactor</code> |

These are read-only:

| | | |
|------------------------------------|---------------------------------|------------------------------|
| <code>tex.pagedepth</code> | <code>tex.pagefilstretch</code> | <code>tex.pagestretch</code> |
| <code>tex.pagefillllstretch</code> | <code>tex.pagegoal</code> | <code>tex.pagetotal</code> |
| <code>tex.pagefillstretch</code> | <code>tex.pageshrink</code> | |

Beware: as with all Lua tables you can add values to them. So, the following is valid:

```
tex.foo = 123
```

When you access a T_EX parameter a look up takes place. For read-only variables that means that you will get something back, but when you set them you create a new entry in the table thereby making the original invisible.

There are a few special cases that we make an exception for: `prevdepth`, `prevgraf` and `spacefactor`. These normally are accessed via the `tex.nest` table:

```
tex.nest[tex.nest.ptr].prevdepth = p
tex.nest[tex.nest.ptr].spacefactor = s
```

However, the following also works:

```
tex.prevdepth = p
tex.spacefactor = s
```

Keep in mind that when you mess with node lists directly at the Lua end you might need to update the top of the nesting stack's `prevdepth` explicitly as there is no way LuaT_EX can guess your intentions. By using the accessor in the `tex` tables, you get and set the values at the top of the nesting stack.

10.3.1.3 Direction parameters

The direction parameters are read-only and return a Lua string.

| | | |
|--------------------------|--------------------------|-------------------------|
| <code>tex.bodydir</code> | <code>tex.pagedir</code> | <code>tex.texdir</code> |
| <code>tex.mathdir</code> | <code>tex.pardir</code> | |



10.3.1.4 Glue parameters

The glue parameters accept and return a userdata object that represents a glue_spec node.

| | | |
|--|------------------------------|-------------------------------|
| <code>tex.abovedisplayshortskip</code> | <code>tex.leftskip</code> | <code>tex.spaceskip</code> |
| <code>tex.abovedisplayskip</code> | <code>tex.lineskip</code> | <code>tex.splittopskip</code> |
| <code>tex.baselineskip</code> | <code>tex.parfillskip</code> | <code>tex.tabskip</code> |
| <code>tex.belowdisplayshortskip</code> | <code>tex.parskip</code> | <code>tex.topskip</code> |
| <code>tex.belowdisplayskip</code> | <code>tex.rightskip</code> | <code>tex.xspaceskip</code> |

10.3.1.5 Muglue parameters

All muglue parameters are to be used read-only and return a Lua string.

| | | |
|----------------------------|------------------------------|-----------------------------|
| <code>tex.medmuskip</code> | <code>tex.thickmuskip</code> | <code>tex.thinmuskip</code> |
|----------------------------|------------------------------|-----------------------------|

10.3.1.6 Tokenlist parameters

The tokenlist parameters accept and return Lua strings. Lua strings are converted to and from token lists using `\the \toks` style expansion: all category codes are either space (10) or other (12). It follows that assigning to some of these, like `tex.output`, is actually useless, but it feels bad to make exceptions in view of a coming extension that will accept full-blown token strings.

| | | |
|-------------------------------|----------------------------|----------------------------|
| <code>tex.errhelp</code> | <code>tex.everyhbox</code> | <code>tex.everyvbox</code> |
| <code>tex.everycr</code> | <code>tex.everyjob</code> | <code>tex.output</code> |
| <code>tex.everydisplay</code> | <code>tex.everymath</code> | |
| <code>tex.everyeof</code> | <code>tex.verypar</code> | |

10.3.2 Convert commands

All ‘convert’ commands are read-only and return a Lua string. The supported commands at this moment are:

| | |
|---------------------------------|---|
| <code>tex.eTeXVersion</code> | <code>tex.fontname(number)</code> |
| <code>tex.eTeXrevision</code> | <code>tex.uniformdeviate(number)</code> |
| <code>tex.formatname</code> | <code>tex.number(number)</code> |
| <code>tex.jobname</code> | <code>tex.romannumeral(number)</code> |
| <code>tex.luatexbanner</code> | <code>tex.fontidentifier(number)</code> |
| <code>tex.luatexrevision</code> | |

If you are wondering why this list looks haphazard; these are all the cases of the ‘convert’ internal command that do not require an argument, as well as the ones that require only a simple numeric value. The special (Lua-only) case of `tex.fontidentifier` returns the csname string that matches a font id number (if there is one).



10.3.3 Last item commands

All ‘last item’ commands are read-only and return a number. The supported commands at this moment are:

| | | |
|-------------------------------|------------------------------------|-----------------------------------|
| <code>tex.lastpenalty</code> | <code>tex.lastypos</code> | <code>tex.currentgrouptype</code> |
| <code>tex.lastkern</code> | <code>tex.randomseed</code> | <code>tex.currentiflevel</code> |
| <code>tex.lastskip</code> | <code>tex.luatexversion</code> | <code>tex.currentifttype</code> |
| <code>tex.lastnodetype</code> | <code>tex.eTeXminorversion</code> | <code>tex.currentifbranch</code> |
| <code>tex.inputlineno</code> | <code>tex.eTeXversion</code> | |
| <code>tex.lastxpos</code> | <code>tex.currentgrouplevel</code> | |

10.3.4 Accessing registers: `set*`, `get*` and `is*`

TeX’s attributes (`\attribute`), counters (`\count`), dimensions (`\dimen`), skips (`\skip`, `\muskip`) and token (`\toks`) registers can be accessed and written to using two times five virtual sub-tables of the `tex` table:

| | | |
|----------------------------|-------------------------|-------------------------|
| <code>tex.attribute</code> | <code>tex.skip</code> | <code>tex.muglue</code> |
| <code>tex.count</code> | <code>tex.glue</code> | <code>tex.toks</code> |
| <code>tex.dimen</code> | <code>tex.muskip</code> | |

It is possible to use the names of relevant `\attributedef`, `\countdef`, `\dimendef`, `\skipdef`, or `\toksdef` control sequences as indices to these tables:

```
tex.count.scratchcounter = 0
enormous = tex.dimen['maxdimen']
```

In this case, LuaTeX looks up the value for you on the fly. You have to use a valid `\countdef` (or `\attributedef`, or `\dimendef`, or `\skipdef`, or `\toksdef`), anything else will generate an error (the intent is to eventually also allow `<chardef tokens>` and even macros that expand into a number).

- ▶ The count registers accept and return Lua numbers.
- ▶ The dimension registers accept Lua numbers (in scaled points) or strings (with an included absolute dimension; `em` and `ex` and `px` are forbidden). The result is always a number in scaled points.
- ▶ The token registers accept and return Lua strings. Lua strings are converted to and from token lists using `\the \toks` style expansion: all category codes are either space (10) or other (12).
- ▶ The skip registers accept and return `glue_spec` userdata node objects (see the description of the node interface elsewhere in this manual).
- ▶ The glue registers are just skip registers but instead of userdata are verbose.
- ▶ Like the counts, the attribute registers accept and return Lua numbers.

As an alternative to array addressing, there are also accessor functions defined for all cases, for example, here is the set of possibilities for `\skip` registers:




```

tex.setskip (["global",] <number> n, <node> s)
tex.setskip (["global",] <string> s, <node> s)
<node> s = tex.getskip (<number> n)
<node> s = tex.getskip (<string> s)

```

We have similar setters for count, dimen, muskip, and toks. Counters and dimen are represented by numbers, skips and muskips by nodes, and toks by strings.

Again the glue variants are not using the glue-spec userdata nodes. The setglue function accepts upto 5 arguments: width, stretch, shrink, stretch order and shrink order and the getglue function reports them, unless the second argument is false in which case only the width is returned.

Here is an example using a threesome:

```

local d = tex.getdimen("foo")
if tex.isdimen("bar") then
    tex.setdimen("bar",d)
end

```

There are six extra skip (glue) related helpers:

```

tex.setglue (["global"], <number> n,
    width, stretch, shrink, stretch_order, shrink_order)
tex.setglue (["global"], <string> s,
    width, stretch, shrink, stretch_order, shrink_order)
width, stretch, shrink, stretch_order, shrink_order =
    tex.getglue (<number> n)
width, stretch, shrink, stretch_order, shrink_order =
    tex.getglue (<string> s)

```

The other two are tex.setmuglue and tex.getmuglue.

There are such helpers for dimen, count, skip, muskip, box and attribute registers but the glue ones are special because they have to deal with more properties.

As with the general get and set function discussed before, for the skip registers getskip returns a node and getglue returns numbers, while setskip accepts a node and setglue expects upto 5 numbers. Again, when you pass false as second argument to getglue you only get the width returned. The same is true for the mu variants getmuskip, setmuskip, getmuskip and setmuskip.

For tokens registers we have an alternative where a catcode table is specified:

```

tex.scantoks(0,3,"$e=mc^2$")
tex.scantoks("global",0,"$\int\limits^1_2$")

```

In the function-based interface, it is possible to define values globally by using the string global as the first function argument.

10.3.5 Character code registers: [get|set]*code[s]

T_EX's character code tables (\lccode, \uccode, \sfcode, \catcode, \mathcode, \delcode) can be accessed and written to using six virtual subtables of the tex table



| | | |
|-------------------------|--------------------------|---------------------------|
| <code>tex.lccode</code> | <code>tex.sfcodes</code> | <code>tex.mathcode</code> |
| <code>tex.uccode</code> | <code>tex.catcode</code> | <code>tex.delcode</code> |

The function call interfaces are roughly as above, but there are a few twists. `sfcodes` are the simple ones:

```
tex.setsfcodes ([ "global", ] <number> n, <number> s)
<number> s = tex.getsfcodes (<number> n)
```

The function call interface for `lccode` and `uccode` additionally allows you to set the associated sibling at the same time:

```
tex.setlccode ([ "global", ] <number> n, <number> lc)
tex.setlccode ([ "global", ] <number> n, <number> lc, <number> uc)
<number> lc = tex.getlccode (<number> n)
tex.setuccode ([ "global", ] <number> n, <number> uc)
tex.setuccode ([ "global", ] <number> n, <number> uc, <number> lc)
<number> uc = tex.getuccode (<number> n)
```

The function call interface for `catcode` also allows you to specify a category table to use on assignment or on query (default in both cases is the current one):

```
tex.setcatcode ([ "global", ] <number> n, <number> c)
tex.setcatcode ([ "global", ] <number> cattable, <number> n, <number> c)
<number> lc = tex.getcatcode (<number> n)
<number> lc = tex.getcatcode (<number> cattable, <number> n)
```

The interfaces for `delcode` and `mathcode` use small array tables to set and retrieve values:

```
tex.setmathcode ([ "global", ] <number> n, <table> mval )
<table> mval = tex.getmathcode (<number> n)
tex.setdelcode ([ "global", ] <number> n, <table> dval )
<table> dval = tex.getdelcode (<number> n)
```

Where the table for `mathcode` is an array of 3 numbers, like this:

```
{
    <number> class,
    <number> family,
    <number> character
}
```

And the table for `delcode` is an array with 4 numbers, like this:

```
{
    <number> small_fam,
    <number> small_char,
    <number> large_fam,
    <number> large_char
}
```



```
}
```

You can also avoid the table:

```
tex.setmathcode (["global"], <number> n, <number> class,  
    <number> family, <number> character)  
class, family, char =  
    tex.getmathcodes (<number> n)  
tex.setdelcode (["global"], <number> n, <number> smallfam,  
    <number> smallchar, <number> largefam, <number> largechar)  
smallfam, smallchar, largefam, largechar =  
    tex.getdelcodes (<number> n)
```

Normally, the third and fourth values in a delimiter code assignment will be zero according to `\Udelcode` usage, but the returned table can have values there (if the delimiter code was set using `\delcode`, for example). Unset `delcode`'s can be recognized because `dval[1]` is `-1`.

10.3.6 Box registers: `get|set|box`

It is possible to set and query actual boxes, coming for instance from `\hbox`, `\vbox` or `\vtop`, using the node interface as defined in the node library:

```
tex.box
```

for array access, or

```
tex.setbox(["global",] <number> n, <node> s)  
tex.setbox(["global",] <string> cs, <node> s)  
<node> n = tex.getbox(<number> n)  
<node> n = tex.getbox(<string> cs)
```

for function-based access. In the function-based interface, it is possible to define values globally by using the string `global` as the first function argument.

Be warned that an assignment like

```
tex.box[0] = tex.box[2]
```

does not copy the node list, it just duplicates a node pointer. If `\box2` will be cleared by `TEX` commands later on, the contents of `\box0` becomes invalid as well. To prevent this from happening, always use `node.copy_list` unless you are assigning to a temporary variable:

```
tex.box[0] = node.copy_list(tex.box[2])
```

10.3.7 Reusing boxes: `[use|save]boxresource` and `getboxresourcedimensions`

The following function will register a box for reuse (this is modelled after so called xforms in pdf). You can (re)use the box with `\useboxresource` or by creating a rule node with subtype 2.



```
local index = tex.saveboxresource(n,attributes,resources,immediate,type,margin)
```

The optional second and third arguments are strings, the fourth is a boolean. The fifth argument is a type. When set to non-zero the `/Type` entry is omitted. A value of 1 or 3 still writes a `/BBox`, while 2 or 3 will write a `/Matrix`. The sixth argument is the (virtual) margin that extends beyond the effective boundingbox as seen by $\text{T}_{\text{E}}\text{X}$. Instead of a box number one can also pass a `[h|v]list` node.

You can generate the reference (a rule type) with:

```
local reused = tex.useboxresource(n,wd,ht,dp)
```

The dimensions are optional and the final ones are returned as extra values. The following is just a bonus (no dimensions returned means that the resource is unknown):

```
local w, h, d, m = tex.getboxresourcedimensions(n)
```

This returns the width, height, depth and margin of the resource.

10.3.8 triggerbuildpage

You should not expect too much from the `triggerbuildpage` helpers because often $\text{T}_{\text{E}}\text{X}$ doesn't do much if it thinks nothing has to be done, but it might be useful for some applications. It just does as it says it calls the internal function that build a page, given that there is something to build.

10.3.9 splitbox

You can split a box:

```
local vlist = tex.splitbox(n,height,mode)
```

The remainder is kept in the original box and a packaged vlist is returned. This operation is comparable to the `\vsplit` operation. The mode can be `additional` or `exactly` and concerns the split off box.

10.3.10 Accessing math parameters: `[get|set]math`

It is possible to set and query the internal math parameters using:

```
tex.setmath(["global",] <string> n, <string> t, <number> n)
<number> n = tex.getmath(<string> n, <string> t)
```

As before an optional first parameter `global` indicates a global assignment.

The first string is the parameter name minus the leading `'Umath'`, and the second string is the style name minus the trailing `'style'`. Just to be complete, the values for the math parameter name are:

`quad`

`axis`

`operatorsize`



| | | | |
|---------------------|---------------------|--------------------|-------------------|
| overbarkern | overbarrule | overbarvgap | |
| underbarkern | underbarrule | underbarvgap | |
| radicalkern | radicalrule | radicalvgap | |
| radicaldegreebefore | radicaldegreeafter | radicaldegreeraise | |
| stackvgap | stacknumup | stackdenomdown | |
| fractionrule | fractionnumvgap | fractionnumup | |
| fractiondenomvgap | fractiondenomdown | fractiondelsize | |
| limitabovevgap | limitabovebgap | limitabovekern | |
| limitbelowvgap | limitbelowbgap | limitbelowkern | |
| underdelimitervgap | underdelimiterbgap | | |
| overdelimitervgap | overdelimiterbgap | | |
| subshiftdrop | supshiftdrop | subshiftdown | |
| subsupshiftdown | subtopmax | supshiftdown | |
| supbottommin | supsubbottommax | subsupvgap | |
| spaceafterscript | connectoroverlapmin | | |
| ordordspacing | ordopspacing | ordbinspacing | ordrelspacing |
| ordopenspacing | ordclosespacing | ordpunctspacing | ordinnerspacing |
| opordspacing | opopspacing | opbinspacing | oprelspacing |
| opopenspacing | opclosespacing | oppunctspacing | opinnerspacing |
| binordspacing | binopspacing | binbinspacing | binrelspacing |
| binopenspacing | binclosespacing | binpunctspacing | bininnerspacing |
| relordspacing | relopspacing | relbinspacing | relrelspacing |
| relopenspacing | relclosespacing | relpunctspacing | relinnerspacing |
| openordspacing | openopspacing | openbinspacing | openrelspacing |
| openopenspacing | openclosespacing | openpunctspacing | openinnerspacing |
| closeordspacing | closeopspacing | closebinspacing | closerelspacing |
| closeopenspacing | closeclosespacing | closepunctspacing | closeinnerspacing |
| punctordspacing | punctopspacing | punctbinspacing | punctrelspacing |
| punctopenspacing | punctclosespacing | punctpunctspacing | punctinnerspacing |
| innerordspacing | inneropspacing | innerbinspacing | innerrelspacing |
| inneropenspacing | innerclosespacing | innerpunctspacing | innerinnerspacing |

The values for the style parameter are:

| | |
|--------------|---------------------|
| display | crampeddisplay |
| text | crampedtext |
| script | crampedscript |
| scriptscript | crampedscriptscript |

The value is either a number (representing a dimension or number) or a glue spec node representing a muskip for `ordordspacing` and similar spacing parameters.

10.3.11 Special list heads: `[get|set]list`

The virtual table `tex.lists` contains the set of internal registers that keep track of building page lists.



| FIELD | EXPLANATION |
|---------------------|---|
| page_ins_head | circular list of pending insertions |
| contrib_head | the recent contributions |
| page_head | the current page content |
| hold_head | used for held-over items for next page |
| adjust_head | head of the current \vadjust list |
| pre_adjust_head | head of the current \vadjust pre list |
| page_discards_head | head of the discarded items of a page break |
| split_discards_head | head of the discarded items in a vsplit |

The getter and setter functions are `getlist` and `setlist`. You have to be careful with what you set as \TeX can have expectations with regards to how a list is constructed or in what state it is.

10.3.12 Semantic nest levels: `getnest` and `ptr`

The virtual table `nest` contains the currently active semantic nesting state. It has two main parts: a zero-based array of userdata for the semantic nest itself, and the numerical value `ptr`, which gives the highest available index. Neither the array items in `nest[]` nor `ptr` can be assigned to (as this would confuse the typesetting engine beyond repair), but you can assign to the individual values inside the array items, e.g. `tex.nest[tex.nest.ptr].prevdepth`.

`tex.nest[tex.nest.ptr]` is the current nest state, `nest[0]` the outermost (main vertical list) level. The getter function is `getnest`. You can pass a number (which gives you a list), nothing or `top`, which returns the topmost list, or the string `ptr` which gives you the index of the topmost list.

The known fields are:

| KEY | TYPE | MODES | EXPLANATION |
|-------------|---------|-------|---|
| mode | number | all | a number representing the main mode at this level: 0 = no mode (this happens during <code>\write</code>), 1 = vertical, 127 = horizontal, 253 = display math, -1 = internal vertical, -127 = restricted horizontal, -253 = inline math |
| modeline | number | all | source input line where this mode was entered in, negative inside the output routine |
| head | node | all | the head of the current list |
| tail | node | all | the tail of the current list |
| prevgraf | number | vmode | number of lines in the previous paragraph |
| prevdepth | number | vmode | depth of the previous paragraph |
| spacefactor | number | hmode | the current space factor |
| dirs | node | hmode | used for temporary storage by the line break algorithm |
| noad | node | mmode | used for temporary storage of a pending fraction numerator, for <code>\over</code> etc. |
| delimptr | node | mmode | used for temporary storage of the previous math delimiter, for <code>\middle</code> |
| mathdir | boolean | mmode | true when during math processing the <code>\mathdir</code> is not the same as the surrounding <code>\texdir</code> |



10.3.13 Print functions

The `tex` table also contains the three print functions that are the major interface from Lua scripting to \TeX . The arguments to these three functions are all stored in an in-memory virtual file that is fed to the \TeX scanner as the result of the expansion of `\directlua`.

The total amount of returnable text from a `\directlua` command is only limited by available system ram. However, each separate printed string has to fit completely in \TeX 's input buffer. The result of using these functions from inside callbacks is undefined at the moment.

10.3.13.1 `print`

```
tex.print(<string> s, ...)
tex.print(<number> n, <string> s, ...)
tex.print(<table> t)
tex.print(<number> n, <table> t)
```

Each string argument is treated by \TeX as a separate input line. If there is a table argument instead of a list of strings, this has to be a consecutive array of strings to print (the first non-string value will stop the printing process).

The optional parameter can be used to print the strings using the catcode regime defined by `\catcodetable n`. If `n` is `-1`, the currently active catcode regime is used. If `n` is `-2`, the resulting catcodes are the result of `\the \toks`: all category codes are 12 (other) except for the space character, that has category code 10 (space). Otherwise, if `n` is not a valid catcode table, then it is ignored, and the currently active catcode regime is used instead.

The very last string of the very last `tex.print` command in a `\directlua` will not have the `\newlinechar` appended, all others do.

10.3.13.2 `sprint`

```
tex.sprint(<string> s, ...)
tex.sprint(<number> n, <string> s, ...)
tex.sprint(<table> t)
tex.sprint(<number> n, <table> t)
```

Each string argument is treated by \TeX as a special kind of input line that makes it suitable for use as a partial line input mechanism:

- ▶ \TeX does not switch to the 'new line' state, so that leading spaces are not ignored.
- ▶ No `\newlinechar` is inserted.
- ▶ Trailing spaces are not removed. Note that this does not prevent \TeX itself from eating spaces as result of interpreting the line. For example, in

```
before\directlua{tex.sprint("\relax")tex.sprint(" inbetween")}after
```



the space before `in` between will be gobbled as a result of the ‘normal’ scanning of `\relax`.

If there is a table argument instead of a list of strings, this has to be a consecutive array of strings to print (the first non-string value will stop the printing process).

The optional argument sets the catcode regime, as with `tex.print`. This influences the string arguments (or numbers turned into strings).

Although this needs to be used with care, you can also pass token or node userdata objects. These get injected into the stream. Tokens had best be valid tokens, while nodes need to be around when they get injected. Therefore it is important to realize the following:

- ▶ When you inject a token, you need to pass a valid token userdata object. This object will be collected by Lua when it no longer is referenced. When it gets printed to \TeX the token itself gets copied so there is no interference with the Lua garbage collection. You manage the object yourself. Because tokens are actually just numbers, there is no real extra overhead at the \TeX end.
- ▶ When you inject a node, you need to pass a valid node userdata object. The node related to the object will not be collected by Lua when it no longer is referenced. It lives on at the \TeX end in its own memory space. When it gets printed to \TeX the node reference is used assuming that node stays around. There is no Lua garbage collection involved. Again, you manage the object yourself. The node itself is freed when \TeX is done with it.

If you consider the last remark you might realize that we have a problem when a printed mix of strings, tokens and nodes is reused. Inside \TeX the sequence becomes a linked list of input buffers. So, `"123"` or `"\foo{123}"` gets read and parsed on the fly, while `<token userdata>` already is tokenized and effectively is a token list now. A `<node userdata>` is also tokenized into a token list but it has a reference to a real node. Normally this goes fine. But now assume that you store the whole lot in a macro: in that case the tokenized node can be flushed many times. But, after the first such flush the node is used and its memory freed. You can prevent this by using copies which is controlled by setting `\luacopyinputnodes` to a non-zero value. This is one of these fuzzy areas you have to live with if you really mess with these low level issues.

10.3.13.3 `tprint`

```
tex.tprint({<number> n, <string> s, ...}, {...})
```

This function is basically a shortcut for repeated calls to `tex.sprint(<number> n, <string> s, ...)`, once for each of the supplied argument tables.

10.3.13.4 `cprint`

This function takes a number indicating the to be used catcode, plus either a table of strings or an argument list of strings that will be pushed into the input stream.

```
tex.cprint( 1," 1: ${\\foo}") tex.print("\\par") -- a lot of \bgroup s
tex.cprint( 2," 2: ${\\foo}") tex.print("\\par") -- matching \egroup s
tex.cprint( 9," 9: ${\\foo}") tex.print("\\par") -- all get ignored
tex.cprint(10,"10: ${\\foo}") tex.print("\\par") -- all become spaces
```




```
tex.cprint(11,"11: ${\\foo}") tex.print("\\par") -- letters
tex.cprint(12,"12: ${\\foo}") tex.print("\\par") -- other characters
tex.cprint(14,"12: ${\\foo}") tex.print("\\par") -- comment triggers
```

10.3.13.5 write, twrite, nwrite

```
tex.write(<string> s, ...)
tex.write(<table> t)
```

Each string argument is treated by T_EX as a special kind of input line that makes it suitable for use as a quick way to dump information:

- ▶ All catcodes on that line are either ‘space’ (for ‘ ’) or ‘character’ (for all others).
- ▶ There is no `\endlinechar` appended.

If there is a table argument instead of a list of strings, this has to be a consecutive array of strings to print (the first non-string value will stop the printing process).

The functions `twrite` and `nwrite` can be used to write a token or node back to T_EX possibly intermixed with regular strings that will be tokenized. You have to make sure that you pass the right data because sometimes T_EX has expectations that need to be met.

10.3.14 Helper functions

10.3.14.1 round

```
<number> n = tex.round(<number> o)
```

Rounds Lua number `o`, and returns a number that is in the range of a valid T_EX register value. If the number starts out of range, it generates a ‘number too big’ error as well.

10.3.14.2 scale

```
<number> n = tex.scale(<number> o, <number> delta)
<table> n = tex.scale(table o, <number> delta)
```

Multiplies the Lua numbers `o` and `delta`, and returns a rounded number that is in the range of a valid T_EX register value. In the table version, it creates a copy of the table with all numeric top-level values scaled in that manner. If the multiplied number(s) are of range, it generates ‘number too big’ error(s) as well.

Note: the precision of the output of this function will depend on your computer’s architecture and operating system, so use with care! An interface to LuaT_EX’s internal, 100% portable scale function will be added at a later date.

10.3.14.3 number and romannumeral

These are the companions to the primitives `\number` and `\romannumeral`. They can be used like:



```
tex.print(tex.romannumeral(123))
```

10.3.14.4 fontidentifier and fontname

The first one returns the name only, the second one reports the size too.

```
tex.print(tex.fontname(tex.fontname))  
tex.print(tex.fontname(tex.fontidentidier))
```

10.3.14.5 sp

```
<number> n = tex.sp(<number> o)  
<number> n = tex.sp(<string> s)
```

Converts the number *o* or a string *s* that represents an explicit dimension into an integer number of scaled points.

For parsing the string, the same scanning and conversion rules are used that Lua_T_E_X would use if it was scanning a dimension specifier in its T_E_X-like input language (this includes generating errors for bad values), expect for the following:

1. only explicit values are allowed, control sequences are not handled
2. infinite dimension units (*fil...*) are forbidden
3. *mu* units do not generate an error (but may not be useful either)

10.3.14.6 tex.getlinenumber and tex.setlinenumber

You can mess with the current line number:

```
local n = tex.getlinenumber()  
tex.setlinenumber(n+10)
```

which can be shortcut to:

```
tex.setlinenumber(10,true)
```

This might be handy when you have a callback that read numbers from a file and combines them in one line (in which case an error message probably has to refer to the original line). Interference with T_E_X's internal handling of numbers is of course possible.

10.3.14.7 error and show_context

```
tex.error(<string> s)  
tex.error(<string> s, <table> help)
```

This creates an error somewhat like the combination of `\errhelp` and `\errmessage` would. During this error, deletions are disabled.

The array part of the help table has to contain strings, one for each line of error help.



In case of an error the `show_context` function will show the current context where we're at (in the expansion).

10.3.14.8 `run, runtoks, finish`

These two functions start the interpretations and force its end. A run normally boils down to T_EX entering the so called main loop. A token is fetched and depending on its current meaning some actions take place. Sometimes that action comes immediately, sometimes more scanning is needed. Quite often tokens get pushed back into the input. This all means that the T_EX scanner is constantly pushing and popping input states, but in the end after all the action is done returns to the main loop.

Because of the fact that T_EX is in a complex dance of expanding, dealing with fonts, typesetting paragraphs, messing around with boxes, building pages, and so on, you cannot easily run a nested T_EX run (read nested main loop). However, there is an option to force a local run with `runtoks`. The content of the given token list register gets expanded locally after which we return to where we triggered this expansion, at the Lua end. Instead a function can get passed that does some work. You have to make sure that at the end T_EX is in a sane state and this is not always trivial. A more complex mechanism would complicate T_EX itself (and probably also harm performance) so this simple local expansion loop has to do.

```
tex.runtoks(<token register>)  
tex.runtoks(<lua function>)
```

When the `\tracingnesting` parameter is set to a value larger than 2 some information is reported about the state of the local loop.

10.3.14.9 `run, runtoks, finish`

An example of a (possible error triggering) complication is that T_EX expects to be in some state, say horizontal mode, and you have to make sure it is when you start feeding back something from Lua into T_EX. Normally a user will not run into issues but when you start writing tokens or nodes or have a nested run there can be situations that you need to run `forcehmode`. There is no recipe for this and intercepting possible cases would weaken LuaT_EX's flexibility.

10.3.14.10 `hashtokens`

```
for i,v in pairs (tex.hashtokens()) do ... end
```

Returns a list of names. This can be useful for debugging, but note that this also reports control sequences that may be unreachable at this moment due to local redefinitions: it is strictly a dump of the hash table. You can use `token.create` to inspect properties, for instance when the command key in a created table equals 123, you have the `cmdname` value `undefined_cs`.

10.3.14.11 `definefont`

```
tex.definefont(<string> csname, <number> fontid)
```



```
tex.definefont(<boolean> global, <string> csname, <number> fontid)
```

Associates `csname` with the internal font number `fontid`. The definition is global if (and only if) `global` is specified and true (the setting of `globaldefs` is not taken into account).

10.3.15 Functions for dealing with primitives

10.3.15.1 `enableprimitives`

```
tex.enableprimitives(<string> prefix, <table> primitive names)
```

This function accepts a prefix string and an array of primitive names. For each combination of ‘prefix’ and ‘name’, the `tex.enableprimitives` first verifies that ‘name’ is an actual primitive (it must be returned by one of the `tex.extraprimtives` calls explained below, or part of `TEX82`, or `\directlua`). If it is not, `tex.enableprimitives` does nothing and skips to the next pair.

But if it is, then it will construct a `csname` variable by concatenating the ‘prefix’ and ‘name’, unless the ‘prefix’ is already the actual prefix of ‘name’. In the latter case, it will discard the ‘prefix’, and just use ‘name’.

Then it will check for the existence of the constructed `csname`. If the `csname` is currently undefined (note: that is not the same as `\relax`), it will globally define the `csname` to have the meaning: run code belonging to the primitive ‘name’. If for some reason the `csname` is already defined, it does nothing and tries the next pair.

An example:

```
tex.enableprimitives('LuaTeX', {'formatname'})
```

will define `\LuaTeXformatname` with the same intrinsic meaning as the documented primitive `\formatname`, provided that the control sequences `\LuaTeXformatname` is currently undefined.

When `LuaTEX` is run with `--ini` only the `TEX82` primitives and `\directlua` are available, so no extra primitives **at all**.

If you want to have all the new functionality available using their default names, as it is now, you will have to add

```
\ifx\directlua\undefined \else  
  \directlua {tex.enableprimitives('',tex.extraprimtives ())}  
\fi
```

near the beginning of your format generation file. Or you can choose different prefixes for different subsets, as you see fit.

Calling some form of `tex.enableprimitives` is highly important though, because if you do not, you will end up with a `TEX82`-lookalike that can run Lua code but not do much else. The defined `csnames` are (of course) saved in the format and will be available at runtime.

10.3.15.2 `extraprimtives`

```
<table> t = tex.extraprimtives(<string> s, ...)
```



This function returns a list of the primitives that originate from the engine(s) given by the requested string value(s). The possible values and their (current) return values are given in the following table. In addition the somewhat special primitives ‘\ ’, ‘\/' and ‘-’ are defined.

| NAME | VALUES |
|------|---|
| tex | vskip write vsize boundary unhcopy output unskip unvbox boxmaxdepth muskipdef string toksdef floatingpenalty righthyphenmin voffset escapechar topmark splitfirstmark vsplit everydisplay badness xleaders textfont showlists language mathchoice topskip abovedisplayshortskip underline tracinglostchars pagefillstretch unvcopy splitbotmark finalhyphendemerits atopwithdelims pretolerance fi dp setlanguage ht mathchardef nulldelimiterspace or wd pagegoal advance chardef catcode mathchar scriptscriptfont mathcode leftskip pageshrink pagefilstretch delcode fontname brokenpenalty lastkern belowdisplayshortskip tolerance mathopen exhyphenpenalty maxdepth futurelet abovewithdelims hangindent lastskip linepenalty everyjob xspaceskip globaldefs everypar scriptfont delimiter afterassignment firstmark wordboundary lineskiplimit lineskip def fam day iffalse textstyle end mag box belowdisplayskip ifx let errmessage exhyphenchar hss expandafter the displaywidth Uright mathsurround pagedepth looseness leaders vss ifhmode botmark displaystyle accent immediate ifmmode meaning abovedisplayskip medmuskip emergencystretch rightskip mathclose hangafter hoffset aftergroup cleaders romannumeral hbadness mathbin showboxbreadth ifvmode jobname vbadness patterns nonstopmode errhelp predisplayskip endlinechar mathinner lastbox showboxdepth postdisplaypenalty mathrel holdinginserts radical mathord pagetotal everycr adjdemerits halign defaultskewchar errorcontextlines splitmaxdepth Uleft ifcase noindent tracingmacros moveright predisplaysize tracingrestores message ifhbox deadcycles interlinepenalty mathpunct lccode noboundary displayindent nonscript everyhbox global penalty tracingcommands everymath nolimits noalign inputlineno pagestretch parskip indent dimendef widowpenalty ifvbox above spaceskip middle displaylimits pausing everyvbox iftrue moveleft mathop endcsname dimen ifcat clubpenalty splittopskip doublehyphendemerits ifdim limits ifeof ignorespaces insert delimitershortfall ifodd insertpenalties tracingpages hpack vadjust tracingonline count ifnum edef char begingroup tracingparagraphs hyphenation hfuzz openout leqno hyphenpenalty vcenter hfil thickmuskip maxdeadcycles mkern hbox overfullrule else hsize raise thinmuskip spacefactor input hrule left eqno parfillskip font valign dump relax prevdepth read shipout batchmode right setbox baselineskip special mskip endgroup uchyph binoppenalty endinput omit pagefilllstretch overwithdelims newlinechar vfilneg time tpack skip vfill span prevgraf over show vbox tracingstats year defaultthyphenchar nullfont muskip vpack toks outer multiply tracingoutput firstvalidlanguage parindent protrusionboundary displaywidowpenalty unhbox lefthyphenmin vtop mathaccent vfuzz overline unkern closeout showthe showbox uppercase lowercase closein openin errorstopmode scrollmode skewchar hyphenchar sfcode uccode skipdef countdef glet xdef gdef long Umiddle atop scriptscriptstyle scriptstyle discretionary unpenalty copy lower kern vfil hfilneg hfill hskip crcr cr ifvoid ifinner if number lastpenalty par vrule |



| | |
|--------|--|
| | parshape noexpand mark fontdimen divide csname scriptspace outputpenalty month delimiterfactor relpenalty tabskip |
| core | directlua |
| etex | unless botmarks currentifttype pagediscards mutoglu displaywidowpenalties fontcharic fontchardp fontcharht fontcharwd widowpenalties tracingifs if- fontchar eTeXVersion protected topmarks showgroups glueexpr splitfirstmarks predisplaydirection everyeof eTeXversion clubpenalties savingvdiscards splitbotmarks showtokens tracingassigns dimexpr parshapedimen readline trac- ingscantokens tracingnesting ifdefined currentifbranch firstmarks lastnode- type marks currentgrouplevel interlinepenalties muexpr unexpanded ifcsname parshapeindent showifs parshapelength splitdiscards gluetomu glueshrink gluestretch glueshrinkorder gluestretchorder numexpr scantokens interac- tionmode detokenize currentiflevel currentgrouptype savinghyphcodes last- linefit tracinggroups eTeXrevision eTeXminorversion |
| luatex | Umathcloseopspacing textdir Umathordpunctspacing Udelimiterunder mathsur- roundmode Uskewedwithdelims bodydirection Umathopenpunctspacing pagebotto- moffset luabytecodecall mathsurroundskip endlcalcontrol Umathordinnerspacing Umathbinclonespacing toksapp rightghost Umathlimitbelowbgap Umath- openinnerspacing textdirection tokspre Umathnolimitsubfactor Uoverdelimiter Umathpunctpunctspacing Umathclosepunctspacing mathdisplayskipmode saveim- ageresource mathrulesfam Umathrelordspacing Umathsupbottommin Umathlimit- belowkern copyfont pagedirection Umathstackdenomdown localrightbox Umath- fractionrule Umathcharfam Umathcloseinnerspacing Umathopenrelspacing Uhex- tensible Umathsupsubbottommax leftmarginkern Umathcloserelspacing linedi- rection ifincsname Umathcharnum Umathinnerordspacing syntex luabytecode formatname letterspacefont boxdirection pdfextension Umathrelinnerspacing Umathsubtopmax randomseed suppressoutererror Umathsubsupshiftdown Umath- opbinspacing Umathordbinspacing Umathrelopspacing Umathopenbinspacing sup- pressprimitiveerror Umathoverdelimiterbgap localleftbox alignmark Uunderde- limiter hyphenationmin Umathclosebinspacing Umathcodenum dvifedback out- putmode luafunction compoundhyphenmode Umathpunctopenspacing luacopyin- putnodes Umathconnectoroverlapmin crampedscriptscriptstyle csstring Umath- radicaldegreeafter uniformdeviate luatexversion Umathfractionnumup right- marginkern Umathopclonespacing mathrulesmode explicithyphenpenalty Umath- ordclonespacing Umathoverdelimitervgap etokspre expanded suppressmathpar- error Udelcode bodydir immediateassigned shapemode attribute Umathsubshift- drop Umathsubshiftdown matheqnogapstep Umathpunctrelspacing lastsavedim- ageresourceindex lastsavedimageresourcepages mathoption Umathradicalde- greeraise fixupboxesmode adjustspacing Umathsupshiftdrop Umathcharslot Umathcloseclonespacing luatexrevision insertht localinterlinepenalty use- boxresource explicitdiscretionary Umathchar Udelimiterover Ustack Umathcode mathdelimitersmode saveboxresource Udelcodenum gtoksapp suppresslongerror ignoreligaturesinfont Umathaxis Umathfractionnumvgap gtokspre mathflat- tenmode Umathskewedfractionhgap Umathrelclonespacing Umathpunctbinspacing Ustopdisplaymath quitvmode crampedscriptstyle letcharcode setrandomseed hy- phenationbounds crampedtextstyle pagedir Umathbinrelspacing Umathopordspac- |



ing dvivariable attributedef mathdirection Umathordordspacing pdffeedback
 Umathskewedfractionvgap Umathopenordspacing mathitalicsmode mathdir output-
 box Umathcloseordspacing Umathnolimitsupfactor pagewidth Ustopmath aligntab
 prehphenchar dviextension luafunctioncall Umathpunctopspacing breakafter-
 dirmode Umathsubsupvgap luaescapestring prerelpenalty begincsname Umath-
 radicalrule Umathunderbarrule postexhyphenchar Umathradicaldegreebefore
 Umathstacknumup normaldeviate Umathbinopspacing xtoksapp boxdir Ustartdis-
 playmath savecatcodetable Umathbinpunctspacing mathscriptboxmode tagcode
 Uroot lastsavedboxresourceindex Unosuperscript Umathoperatorsizex tokspre
 Uradical mathstyle Umathopopenspacing Umathordopenspacing automatichyphen-
 penalty Umathbininnerspacing Umathinnerrelspacing clearmarks Umathoverbarv-
 gap fontid Umathopenopenspacing immediateassignment Umathunderdelimiterbgap
 Umathoverbarrule setfontid crampeddisplaystyle ifabsdim Umathlimitabove-
 bgap Umathcharclass Umathstackvgap Umathinneropspacing Umathrelbinspacing
 Umathcloseopenspacing ifcondition pardir initcatcodetable nokerns pageleft-
 offset luadef tracingfonts nospaces Umathreloppspacing Umathlimitabovekern
 Udelimiter savepos nohrule mathrulethicknessmode localbrokenpenalty Umath-
 fractiondelsize exceptionpenalty automaticdiscretionary gleaders Umath-
 underdelimitertervgap Umathinnerbinspacing noligs hyphenpenaltymode draft-
 mode automatichyphenmode prebinoppenalty Usubscript Umathcharnumdef rcode
 mathpenaltiesmode mathscriptcharmode Umathaccent pagetopoffset pageheight
 catcodetable Umathspaceafterscript predisplayspacefactor primitive Umathin-
 neropopenspacing Uskewed pxdimen Umathordopspacing Umathopenopspacing ifab-
 snum scantextokens mathnolimitsmode mathscriptsmode suppressifcsnameerror
 suppressfontnotfounderror pardirection pdfvariable lateluafunction latelua
 useimageresource pagerightoffset linedir efcode lpcode hjcode preexhyphen-
 char posthyphenchar Umathinnerinnerspacing Umathinnerpunctspacing Umathin-
 nerclosespacing Umathpunctinnerspacing Umathpunctclosespacing Umathpunc-
 tordspacing Umathopennclosespacing Umathrelpunctspacing Umathrelrelspac-
 ing Umathbinopopenspacing Umathbinbinspacing Umathbinordspacing Umathopin-
 nerspacing Umathoppunctspacing Umathoprelspacing Umathopopspacing Umathor-
 dreldspacing Umathsupshiftup Umathlimitbelowvgap Umathlimitabovevgap Umath-
 fractiondenomdown Umathfractiondenomvgap Umathradicalvgap Umathradicalk-
 ern Umathunderbarvgap Umathunderbarkern Umathoverbarkern Umathquad Umath-
 chardef Uvextensible Unosubscript Usuperscript Ustartmath ifprimitive Uchar
 luatexbanner lastypos lastxpos novrule etoksapp leftghost expandglyphsinfont
 lastnamedcs protrudechars

Note that `luatex` does not contain `directlua`, as that is considered to be a core primitive, along with all the \TeX 82 primitives, so it is part of the list that is returned from 'core'.

Running `tex.extraprimitives` will give you the complete list of primitives -ini startup. It is exactly equivalent to `tex.extraprimitives("etex", "luatex")`.

10.3.15.3 primitives

```
<table> t = tex.primitives()
```



This function returns a list of all primitives that Lua_T_EX knows about.

10.3.16 Core functionality interfaces

10.3.16.1 badness

```
<number> b = tex.badness(<number> t, <number> s)
```

This helper function is useful during linebreak calculations. *t* and *s* are scaled values; the function returns the badness for when total *t* is supposed to be made from amounts that sum to *s*. The returned number is a reasonable approximation of $100(t/s)^3$;

10.3.16.2 tex.resetparagraph

This function resets the parameters that T_EX normally resets when a new paragraph is seen.

10.3.16.3 linebreak

```
local <node> nodelist, <table> info =  
    tex.linebreak(<node> listhead, <table> parameters)
```

The understood parameters are as follows:

| NAME | TYPE | EXPLANATION |
|-----------------------------------|-----------------|---|
| <code>pardir</code> | string | |
| <code>pretolerance</code> | number | |
| <code>tracingparagraphs</code> | number | |
| <code>tolerance</code> | number | |
| <code>looseness</code> | number | |
| <code>hyphenpenalty</code> | number | |
| <code>exhyphenpenalty</code> | number | |
| <code>pdfadjustspacing</code> | number | |
| <code>adjdemerits</code> | number | |
| <code>pdfprotrudechars</code> | number | |
| <code>linepenalty</code> | number | |
| <code>lastlinefit</code> | number | |
| <code>doublehyphendemerits</code> | number | |
| <code>finalhyphendemerits</code> | number | |
| <code>hangafter</code> | number | |
| <code>interlinepenalty</code> | number or table | if a table, then it is an array like <code>\interlinepenalties</code> |
| <code>clubpenalty</code> | number or table | if a table, then it is an array like <code>\clubpenalties</code> |
| <code>widowpenalty</code> | number or table | if a table, then it is an array like <code>\widowpenalties</code> |
| <code>brokenpenalty</code> | number | |
| <code>emergencystretch</code> | number | in scaled points |
| <code>hangindent</code> | number | in scaled points |



| | | |
|-----------|----------------|------------------|
| hsize | number | in scaled points |
| leftskip | glue_spec node | |
| rightskip | glue_spec node | |
| parshape | table | |

Note that there is no interface for `\displaywidowpenalties`, you have to pass the right choice for `widowpenalties` yourself.

It is your own job to make sure that `listhead` is a proper paragraph list: this function does not add any nodes to it. To be exact, if you want to replace the core line breaking, you may have to do the following (when you are not actually working in the `pre_linebreak_filter` or `linebreak_filter` callbacks, or when the original list starting at `listhead` was generated in horizontal mode):

- ▶ add an ‘indent box’ and perhaps a `local_par` node at the start (only if you need them)
- ▶ replace any found final glue by an infinite penalty (or add such a penalty, if the last node is not a glue)
- ▶ add a glue node for the `\parfillskip` after that penalty node
- ▶ make sure all the `prev` pointers are OK

The result is a node list, it still needs to be `vpacked` if you want to assign it to a `\vbox`. The returned info table contains four values that are all numbers:

| NAME | EXPLANATION |
|------------------------|--|
| <code>prevdepth</code> | depth of the last line in the broken paragraph |
| <code>prevgraf</code> | number of lines in the broken paragraph |
| <code>looseness</code> | the actual looseness value in the broken paragraph |
| <code>demerits</code> | the total demerits of the chosen solution |

Note there are a few things you cannot interface using this function: You cannot influence font expansion other than via `pdfadjustspacing`, because the settings for that take place elsewhere. The same is true for `hbadness` and `hfuzz` etc. All these are in the `hpack` routine, and that fetches its own variables via `globals`.

10.3.16.4 `shipout`

`tex.shipout(<number> n)`

Ships out box number `n` to the output file, and clears the box register.

10.3.16.5 `getpagestate`

This helper reports the current page state: `empty`, `box_there` or `inserts_only` as integer value.

10.3.16.6 `getlocallevel`

This integer reports the current level of the local loop. It’s only useful for debugging and the (relative state) numbers can change with the implementation.



10.3.17 Randomizers

For practical reasons Lua_T_E_X has its own random number generator. The original Lua random function is available as `tex.lua_math_random`. You can initialize with a new seed with `init_rand` (`lua_math_randomseed` is equivalent to this one).

There are three generators: `normal_rand` (no argument is used), `uniform_rand` (takes a number that will get rounded before being used) and `uniformdeviate` which behaves like the primitive and expects a scaled integer, so

```
tex.print(tex.uniformdeviate(65536)/65536)
```

will give a random number between zero and one.

10.3.18 Functions related to synctex

The next helpers only make sense when you implement your own synctex logic. Keep in mind that the library used in editors assumes a certain logic and is geared for plain and L^AT_E_X, so after a decade users expect a certain behaviour.

| NAME | EXPLANATION |
|-----------------------------------|--|
| <code>set_synctex_mode</code> | 0 is the default and used normal synctex logic, 1 uses the values set by the next helpers while 2 also sets these for glyph nodes; 3 sets glyphs and glue and 4 sets only glyphs |
| <code>set_synctex_tag</code> | set the current tag (file) value (obeys save stack) |
| <code>set_synctex_line</code> | set the current line value (obeys save stack) |
| <code>set_synctex_no_files</code> | disable synctex file logging |
| <code>get_synctex_mode</code> | returns the current mode (for values see above) |
| <code>get_synctex_tag</code> | get the currently set value of tag (file) |
| <code>get_synctex_line</code> | get the currently set value of line |
| <code>force_synctex_tag</code> | overload the tag (file) value (0 resets) |
| <code>force_synctex_line</code> | overload the line value (0 resets) |

The last one is somewhat special. Due to the way files are registered in Sync_T_E_X we need to explicitly disable that feature if we provide our own alternative if we want to avoid that overhead. Passing a value of 1 disables registering.

10.4 The texconfig table

This is a table that is created empty. A startup Lua script could fill this table with a number of settings that are read out by the executable after loading and executing the startup file.

| KEY | TYPE | DEFAULT | EXPLANATION |
|------------------------|---------|---------|--|
| <code>kpse_init</code> | boolean | true | false totally disables kpathsea initialisation, and enables interpretation of the following numeric key-value pairs. (only ever unset this if you implement <i>all</i> file find callbacks!) |



| | | | |
|-----------------------|---------|-------|--|
| shell_escape | string | 'f' | Use 'y' or 't' or 'l' to enable \write 18 unconditionally, 'p' to enable the commands that are listed in shell_escape_commands |
| shell_escape_commands | string | | Comma-separated list of command names that may be executed by \write 18 even if shell_escape is set to 'p'. Do <i>not</i> use spaces around commas, separate any required command arguments by using a space, and use the ascii double quote (") for any needed argument or path quoting |
| string_vacancies | number | 75000 | cf. web2c docs |
| pool_free | number | 5000 | cf. web2c docs |
| max_strings | number | 15000 | cf. web2c docs |
| strings_free | number | 100 | cf. web2c docs |
| nest_size | number | 50 | cf. web2c docs |
| max_in_open | number | 15 | cf. web2c docs |
| param_size | number | 60 | cf. web2c docs |
| save_size | number | 4000 | cf. web2c docs |
| stack_size | number | 300 | cf. web2c docs |
| dvi_buf_size | number | 16384 | cf. web2c docs |
| error_line | number | 79 | cf. web2c docs |
| half_error_line | number | 50 | cf. web2c docs |
| max_print_line | number | 79 | cf. web2c docs |
| hash_extra | number | 0 | cf. web2c docs |
| pk_dpi | number | 72 | cf. web2c docs |
| trace_file_names | boolean | true | false disables T _E X's normal file open-close feedback (the assumption is that callbacks will take care of that) |
| file_line_error | boolean | false | do file:line style error messages |
| halt_on_error | boolean | false | abort run on the first encountered error |
| formatname | string | | if no format name was given on the command line, this key will be tested first instead of simply quitting |
| jobname | string | | if no input file name was given on the command line, this key will be tested first instead of simply giving up |

Note: the numeric values that match web2c parameters are only used if kpse_init is explicitly set to false. In all other cases, the normal values from texmf.cnf are used.

10.5 The texio library

This library takes care of the low-level I/O interface: writing to the log file and/or console.

10.5.1 write

```
texio.write(<string> target, <string> s, ...)
```



```
texio.write(<string> s, ...)
```

Without the `target` argument, writes all given strings to the same location(s) \TeX writes messages to at this moment. If `\batchmode` is in effect, it writes only to the log, otherwise it writes to the log and the terminal. The optional `target` can be one of three possibilities: `term`, `log` or `term and log`.

Note: If several strings are given, and if the first of these strings is or might be one of the targets above, the `target` must be specified explicitly to prevent Lua from interpreting the first string as the target.

10.5.2 write_nl

```
texio.write_nl(<string> target, <string> s, ...)
texio.write_nl(<string> s, ...)
```

This function behaves like `texio.write`, but make sure that the given strings will appear at the beginning of a new line. You can pass a single empty string if you only want to move to the next line.

10.5.3 setescape

You can disable ^^ escaping of control characters by passing a value of zero.

10.5.4 closeinput

This function that should be used with care. It acts as `\endinput` but at the Lua end. You can use it to (sort of) force a jump back to \TeX . Normally a Lua will just collect prints and at the end bump an input level and flush these prints. This function can help you stay at the current level but you need to know what you're doing (or more precise: what \TeX is doing with input).

10.6 The token library

10.6.1 The scanner

The token library provides means to intercept the input and deal with it at the Lua level. The library provides a basic scanner infrastructure that can be used to write macros that accept a wide range of arguments. This interface is on purpose kept general and as performance is quite ok. One can build additional parsers without too much overhead. It's up to macro package writers to see how they can benefit from this as the main principle behind \LaTeX is to provide a minimal set of tools and no solutions. The scanner functions are probably the most intriguing.

| FUNCTION | ARGUMENT | RESULT |
|---------------------------|----------|--|
| <code>scan_keyword</code> | string | returns true if the given keyword is gobbled; as with the regular \TeX keyword scanner this is case insensitive (and ascii based) |



| | | |
|-----------------------------|--------------------|---|
| <code>scan_keywordcs</code> | string | returns true if the given keyword is gobbled; this variant is case sensitive and also suitable for utf8 |
| <code>scan_int</code> | | returns an integer |
| <code>scan_real</code> | | returns a number from e.g. 1, 1.1, .1 with optional collapsed signs |
| <code>scan_float</code> | | returns a number from e.g. 1, 1.1, .1, 1.1E10, , .1e-10 with optional collapsed signs |
| <code>scan_dimen</code> | infinity, mu-units | returns a number representing a dimension and or two numbers being the filler and order |
| <code>scan_glue</code> | mu-units | returns a glue spec node |
| <code>scan_toks</code> | definer, expand | returns a table of tokens tokens |
| <code>scan_code</code> | bitset | returns a character if its category is in the given bitset (representing catcodes) |
| <code>scan_string</code> | | returns a string given between {}, as \macro or as sequence of characters with catcode 11 or 12 |
| <code>scan_argument</code> | | this one is similar to <code>scanstring</code> but also accepts a \cs (which then get expanded) |
| <code>scan_word</code> | | returns a sequence of characters with catcode 11 or 12 as string |
| <code>scan_csname</code> | | returns foo after scanning \foo |
| <code>scan_list</code> | | picks up a box specification and returns a [h v]list node |

The scanners can be considered stable apart from the one scanning for a token. The `scan_code` function takes an optional number, the keyword function a normal Lua string. The `infinity` boolean signals that we also permit `fill` as dimension and the `mu-units` flags the scanner that we expect math units. When scanning tokens we can indicate that we are defining a macro, in which case the result will also provide information about what arguments are expected and in the result this is separated from the meaning by a separator token. The `expand` flag determines if the list will be expanded.

The string scanner scans for something between curly braces and expands on the way, or when it sees a control sequence it will return its meaning. Otherwise it will scan characters with catcode letter or other. So, given the following definition:

```
\def\bar{bar}
\def\foo{foo-\bar}
```

we get:

| NAME | RESULT | |
|---|----------------|--------------------|
| <code>\directlua{token.scan_string()}{foo}</code> | foo | full expansion |
| <code>\directlua{token.scan_string()}foo</code> | foo | letters and others |
| <code>\directlua{token.scan_string()}\foo</code> | foo-bar | meaning |

The `\foo` case only gives the meaning, but one can pass an already expanded definition (`\edef'd`). In the case of the braced variant one can of course use the `\detokenize` and `\unexpanded` primitives since there we do expand.

The `scan_word` scanner can be used to implement for instance a number scanner:



```
function token.scan_number(base)
    return tonumber(token.scan_word(),base)
end
```

This scanner accepts any valid Lua number so it is a way to pick up floats in the input.

You can use the Lua interface as follows:

```
\directlua {
    function mymacro(n)
        ...
    end
}

\def\mymacro#1{%
    \directlua {
        mymacro(\number\dimexpr#1)
    }%
}

\mymacro{12pt}
\mymacro{\dimen0}
```

You can also do this:

```
\directlua {
    function mymacro()
        local d = token.scan_dimen()
        ...
    end
}

\def\mymacro{%
    \directlua {
        mymacro()
    }%
}

\mymacro 12pt
\mymacro \dimen0
```

It is quite clear from looking at the code what the first method needs as argument(s). For the second method you need to look at the Lua code to see what gets picked up. Instead of passing from T_EX to Lua we let Lua fetch from the input stream.

In the first case the input is tokenized and then turned into a string, then it is passed to Lua where it gets interpreted. In the second case only a function call gets interpreted but then the input is picked up by explicitly calling the scanner functions. These return proper Lua variables so no further conversion has to be done. This is more efficient but in practice (given what T_EX



has to do) this effect should not be overestimated. For numbers and dimensions it saves a bit but for passing strings conversion to and from tokens has to be done anyway (although we can probably speed up the process in later versions if needed).

10.6.2 Picking up one token

The scanners look for a sequence. When you want to pick up one token from the input you use `get_next`. This creates a token with the (low level) properties as discussed next. This token is just the next one. If you want to enforce expansion first you can use `scan_token`. Internally tokens are characterized by a number that packs a lot of information. In order to access the bits of information a token is wrapped in a userdata object.

The `expand` function will trigger expansion of the next token in the input. This can be quite unpredictable but when you call it you probably know enough about \TeX not to be too worried about that. It basically is a call to the internal `expand` related function.

10.6.3 Creating tokens

The creator function can be used as follows:

```
local t = token.create("relax")
```

This gives back a token object that has the properties of the `\relax` primitive. The possible properties of tokens are:

| NAME | EXPLANATION |
|-------------------------|--|
| <code>command</code> | a number representing the internal command number |
| <code>cmdname</code> | the type of the command (for instance the catcode in case of a character or the classifier that determines the internal treatment) |
| <code>csname</code> | the associated control sequence (if applicable) |
| <code>id</code> | the unique id of the token |
| <code>tok</code> | the full token number as stored in \TeX |
| <code>active</code> | a boolean indicating the active state of the token |
| <code>expandable</code> | a boolean indicating if the token (macro) is expandable |
| <code>protected</code> | a boolean indicating if the token (macro) is protected |
| <code>mode</code> | a number either representing a character or another entity |
| <code>index</code> | a number running from 0x0000 upto 0xFFFF indicating a \TeX register index |

Alternatively you can use a getter `get_<fieldname>` to access a property of a token.

The numbers that represent a catcode are the same as in \TeX itself, so using this information assumes that you know a bit about \TeX 's internals. The other numbers and names are used consistently but are not frozen. So, when you use them for comparing you can best query a known primitive or character first to see the values.

You can ask for a list of commands:

```
local t = token.commands()
```



The id of a token class can be queried as follows:

```
local id = token.command_id("math_shift")
```

If you really know what you're doing you can create character tokens by not passing a string but a number:

```
local letter_x = token.create(string.byte("x"))
local other_x = token.create(string.byte("x"),12)
```

Passing weird numbers can give side effects so don't expect too much help with that. As said, you need to know what you're doing. The best way to explore the way these internals work is to just look at how primitives or macros or `\chardef`'d commands are tokenized. Just create a known one and inspect its fields. A variant that ignores the current catcode table is:

```
local whatever = token.new(123,12)
```

You can test if a control sequence is defined with `is_defined`, which accepts a string and returns a boolean:

```
local okay = token.is_defined("foo")
```

The largest character possible is returned by `biggest_char`, just in case you need to know that boundary condition.

10.6.4 Macros

The `set_macro` function can get upto 4 arguments:

```
set_macro("csname","content")
set_macro("csname","content","global")
set_macro("csname")
```

You can pass a catcodetable identifier as first argument:

```
set_macro(catcodetable,"csname","content")
set_macro(catcodetable,"csname","content","global")
set_macro(catcodetable,"csname")
```

The results are like:

```
\def\csname{content}
\gdef\csname{content}
\def\csname{}
```

The `get_macro` function can be used to get the content of a macro while the `get_meaning` function gives the meaning including the argument specification (as usual in \TeX separated by `->`).

The `set_char` function can be used to do a `\chardef` at the Lua end, where invalid assignments are silently ignored:




```
set_char("csname",number)
set_char("csname",number,"global")
```

A special one is the following:

```
set_lua("mycode",id)
set_lua("mycode",id,"global","protected")
```

This creates a token that refers to a Lua function with an entry in the table that you can access with `lua.get_functions_table`. It is the companion to `\luadef`.

10.6.5 Pushing back

There is a (for now) experimental putter:

```
local t1 = token.get_next()
local t2 = token.get_next()
local t3 = token.get_next()
local t4 = token.get_next()
-- watch out, we flush in sequence
token.put_next { t1, t2 }
-- but this one gets pushed in front
token.put_next ( t3, t4 )
```

When we scan `wxyz!` we get `yzwx!` back. The argument is either a table with tokens or a list of tokens. The `token.expand` function will trigger expansion but what happens really depends on what you're doing where.

10.6.6 Nota bene

When scanning for the next token you need to keep in mind that we're not scanning like \TeX does: expanding, changing modes and doing things as it goes. When we scan with Lua we just pick up tokens. Say that we have:

```
\bar
```

but `\bar` is undefined. Normally \TeX will then issue an error message. However, when we have:

```
\def\foo{\bar}
```

We get no error, unless we expand `\foo` while `\bar` is still undefined. What happens is that as soon as \TeX sees an undefined macro it will create a hash entry and when later it gets defined that entry will be reused. So, `\bar` really exists but can be in an undefined state.

```
bar : bar
foo : foo
myfirstbar :
```

This was entered as:



```
bar      : \directlua{tex.print(token.scan_csname())}\bar
foo      : \directlua{tex.print(token.scan_csname())}\foo
myfirstbar : \directlua{tex.print(token.scan_csname())}\myfirstbar
```

The reason that you see `bar` reported and not `myfirstbar` is that `\bar` was already used in a previous paragraph.

If we now say:

```
\def\foo{}
```

we get:

```
bar : bar
foo : foo
myfirstbar :
```

And if we say

```
\def\foo{\bar}
```

we get:

```
bar : bar
foo : foo
myfirstbar :
```

When scanning from Lua we are not in a mode that defines (undefined) macros at all. There we just get the real primitive undefined macro token.

```
1889253 536941998
1889363 536941998
1888980 536941998
```

This was generated with:

```
\directlua{local t = token.get_next() tex.print(t.id.." "..t.tok)}\myfirstbar
\directlua{local t = token.get_next() tex.print(t.id.." "..t.tok)}\mysecondbar
\directlua{local t = token.get_next() tex.print(t.id.." "..t.tok)}\mythirdbar
```

So, we do get a unique token because after all we need some kind of Lua object that can be used and garbage collected, but it is basically the same one, representing an undefined control sequence.

10.7 The `kpse` library

This library provides two separate, but nearly identical interfaces to the `kpathsea` file search functionality: there is a ‘normal’ procedural interface that shares its `kpathsea` instance with `LuaTeX` itself, and an object oriented interface that is completely on its own.



10.7.1 set_program_name and new

The way the library looks up variables is driven by the `texmf.cnf` file where the currently set program name acts as filter. You can check what file is used by with `default_texmf.cnf`.

Before the search library can be used at all, its database has to be initialized. There are three possibilities, two of which belong to the procedural interface.

First, when LuaTeX is used to typeset documents, this initialization happens automatically and the `kpathsea` executable and program names are set to `luatex` (that is, unless explicitly prohibited by the user's startup script. See section 4.1 for more details).

Second, in TeX Lua mode, the initialization has to be done explicitly via the `kpse.set_program_name` function, which sets the `kpathsea` executable (and optionally program) name.

```
kpse.set_program_name(<string> name)
kpse.set_program_name(<string> name, <string> proname)
```

The second argument controls the use of the 'dotted' values in the `texmf.cnf` configuration file, and defaults to the first argument.

Third, if you prefer the object oriented interface, you have to call a different function. It has the same arguments, but it returns a userdata variable.

```
local kpathsea = kpse.new(<string> name)
local kpathsea = kpse.new(<string> name, <string> proname)
```

Apart from these two functions, the calling conventions of the interfaces are identical. Depending on the chosen interface, you either call `kpse.find_file` or `kpathsea:find_file`, with identical arguments and return values.

10.7.2 find_file

The most often used function in the library is `find_file`:

```
<string> f = kpse.find_file(<string> filename)
<string> f = kpse.find_file(<string> filename, <string> ftype)
<string> f = kpse.find_file(<string> filename, <boolean> mustexist)
<string> f = kpse.find_file(<string> filename, <string> ftype, <boolean> mustexist)
<string> f = kpse.find_file(<string> filename, <string> ftype, <number> dpi)
```

Arguments:

filename

the name of the file you want to find, with or without extension.

ftype

maps to the `-format` argument of `kpsewhich`. The supported `ftype` values are the same as the ones supported by the standalone `kpsewhich` program: MetaPost support, PostScript header, TeX system documentation, TeX system sources, Troff fonts, `afm`, `base`, `bib`, `bitmap font`, `bst`, `cid maps`, `clua`, `cmap files`, `cnf`, `cweb`, `dvips config`,



enc files, fmt, font feature files, gf, graphic/figure, ist, lig files, ls-R, lua, map, mem, mf, mfpool, mft, misc fonts, mlbib, mlbst, mp, mppool, ocp, ofm, opentype fonts, opl, other binary files, other text files, otp, ovf, ovp, pdftex config, pk, subfont definition files, tex, texmfscripts, texpool, tfm, truetype fonts, type1 fonts, type42 fonts, vf, web, web2c files

The default type is tex. Note: this is different from kpsewhich, which tries to deduce the file type itself from looking at the supplied extension.

mustexist

is similar to kpsewhich's -must-exist, and the default is false. If you specify true (or a non-zero integer), then the kpse library will search the disk as well as the ls-R databases.

dpi

This is used for the size argument of the formats pk, gf, and bitmap font.

10.7.3 lookup

A more powerful (but slower) generic method for finding files is also available. It returns a string for each found file.

```
<string> f, ... = kpse.lookup(<string> filename, <table> options)
```

The options match commandline arguments from kpsewhich:

| KEY | TYPE | EXPLANATION |
|-----------|-----------------|--|
| debug | number | set debugging flags for this lookup |
| format | string | use specific file type (see list above) |
| dpi | number | use this resolution for this lookup; default 600 |
| path | string | search in the given path |
| all | boolean | output all matches, not just the first |
| mustexist | boolean | search the disk as well as ls-R if necessary |
| mktxpk | boolean | disable/enable mktxpk generation for this lookup |
| mktextex | boolean | disable/enable mktextex generation for this lookup |
| mktxmf | boolean | disable/enable mktxmf generation for this lookup |
| mktextfm | boolean | disable/enable mktextfm generation for this lookup |
| subdir | string or table | only output matches whose directory part ends with the given string(s) |

10.7.4 init_prog

Extra initialization for programs that need to generate bitmap fonts.

```
kpse.init_prog(<string> prefix, <number> base_dpi, <string> mfmode)
kpse.init_prog(<string> prefix, <number> base_dpi, <string> mfmode, <string>
fallback)
```

10.7.5 readable_file

Test if an (absolute) file name is a readable file.



```
<string> f = kpse.readable_file(<string> name)
```

The return value is the actual absolute filename you should use, because the disk name is not always the same as the requested name, due to aliases and system-specific handling under e.g. msdos. Returns nil if the file does not exist or is not readable.

10.7.6 expand_path

Like kpsewhich's -expand-path:

```
<string> r = kpse.expand_path(<string> s)
```

10.7.7 expand_var

Like kpsewhich's -expand-var:

```
<string> r = kpse.expand_var(<string> s)
```

10.7.8 expand_braces

Like kpsewhich's -expand-braces:

```
<string> r = kpse.expand_braces(<string> s)
```

10.7.9 show_path

Like kpsewhich's -show-path:

```
<string> r = kpse.show_path(<string> ftype)
```

10.7.10 var_value

Like kpsewhich's -var-value:

```
<string> r = kpse.var_value(<string> s)
```

10.7.11 version

Returns the kpathsea version string.

```
<string> r = kpse.version()
```





11 The graphic libraries

11.1 The `img` library

The `img` library can be used as an alternative to `\pdfximage` and `\pdfrefximage`, and the associated ‘satellite’ commands like `\pdfximagebbox`. Image objects can also be used within virtual fonts via the `image` command listed in section 6.3.

11.1.1 `new`

```
<image> var = img.new()  
<image> var = img.new(<table> image_spec)
```

This function creates a userdata object of type ‘image’. The `image_spec` argument is optional. If it is given, it must be a table, and that table must contain a `filename` key. A number of other keys can also be useful, these are explained below.

You can either say

```
a = img.new()
```

followed by

```
a.filename = "foo.png"
```

or you can put the file name (and some or all of the other keys) into a table directly, like so:

```
a = img.new({filename='foo.pdf', page=1})
```

The generated `<image>` userdata object allows access to a set of user-specified values as well as a set of values that are normally filled in and updated automatically by LuaTeX itself. Some of those are derived from the actual image file, others are updated to reflect the pdf output status of the object.

There is one required user-specified field: the file name (`filename`). It can optionally be augmented by the requested image dimensions (`width`, `depth`, `height`), user-specified image attributes (`attr`), the requested pdf page identifier (`page`), the requested boundingbox (`pagebox`) for pdf inclusion, the requested color space object (`colorspace`).

The function `img.new` does not access the actual image file, it just creates the `<image>` userdata object and initializes some memory structures. The `<image>` object and its internal structures are automatically garbage collected.

Once the image is scanned, all the values in the `<image>` except `width`, `height` and `depth`, become frozen, and you cannot change them any more.

You can use `pdf.setignoreunknownimages(1)` (or at the TeX end the `\pdfvariable ignoreunknownimages`) to get around a quit when no known image type is found (based on name or preamble). Beware: this will not catch invalid images and we cannot guarantee side effects.



A zero dimension image is still included when requested. No special flags are set. A proper workflow will not rely in such a catch but make sure that images are valid.

11.1.2 fields

```
<table> keys = img.fields()
```

This function returns a list of all the possible `image_spec` keys, both user-supplied and automatic ones.

| FIELD NAME | TYPE | DESCRIPTION |
|------------------------------|---------|---|
| <code>attr</code> | string | the image attributes for Lua _T _E X |
| <code>bbox</code> | table | table with 4 boundingbox dimensions <code>llx</code> , <code>lly</code> , <code>urx</code> and <code>ury</code> overruling the <code>pagebox</code> entry |
| <code>colordepth</code> | number | the number of bits used by the color space |
| <code>colorspace</code> | number | the color space object number |
| <code>depth</code> | number | the image depth for Lua _T _E X |
| <code>filename</code> | string | the image file name |
| <code>filepath</code> | string | the full (expanded) file name of the image |
| <code>height</code> | number | the image height for Lua _T _E X |
| <code>imagetype</code> | string | one of <code>pdf</code> , <code>png</code> , <code>jpg</code> , <code>jp2</code> or <code>jbig2</code> |
| <code>index</code> | number | the pdf image name suffix |
| <code>objnum</code> | number | the pdf image object number |
| <code>page</code> | number | the identifier for the requested image page |
| <code>pagebox</code> | string | the requested bounding box, one of <code>none</code> , <code>media</code> , <code>crop</code> , <code>bleed</code> , <code>trim</code> , <code>art</code> |
| <code>pages</code> | number | the total number of available pages |
| <code>rotation</code> | number | the image rotation from included pdf file, in multiples of 90 deg. |
| <code>stream</code> | string | the raw stream data for an <code>/XObject /Form</code> object |
| <code>transform</code> | number | the image transform, integer number 0..7 |
| <code>orientation</code> | number | the (jpeg) image orientation, integer number 1..8 (0 for unset) |
| <code>width</code> | number | the image width for Lua _T _E X |
| <code>xres</code> | number | the horizontal natural image resolution (in dpi) |
| <code>xsize</code> | number | the natural image width |
| <code>yres</code> | number | the vertical natural image resolution (in dpi) |
| <code>ysize</code> | number | the natural image height |
| <code>visiblefilename</code> | string | when set, this name will find its way in the pdf file as PTEX specification; when an empty string is assigned nothing is written to file; otherwise the natural filename is taken |
| <code>userpassword</code> | string | the userpassword needed for opening a pdf file |
| <code>ownerpassword</code> | string | the ownerpassword needed for opening a pdf file |
| <code>keepopen</code> | boolean | keep the pdf file open |
| <code>nolength</code> | boolean | don't add length key nor compress for streams |

A running (undefined) dimension in width, height, or depth is represented as `nil` in Lua, so if you want to load an image at its 'natural' size, you do not have to specify any of those three fields.



The `stream` parameter allows to fabricate an `/XObject /Form` object from a string giving the stream contents, e.g., for a filled rectangle:

```
a.stream = "0 0 20 10 re f"
```

When writing the image, an `/XObject /Form` object is created, like with embedded pdf file writing. The object is written out only once. The `stream` key requires that also the `bbox` table is given. The `stream` key conflicts with the `filename` key. The `transform` key works as usual also with `stream`.

The `bbox` key needs a table with four boundingbox values, e.g.:

```
a.bbox = { "30bp", 0, "225bp", "200bp" }
```

This replaces and overrules any given `pagebox` value; with given `bbox` the box dimensions coming with an embedded pdf file are ignored. The `xsize` and `ysize` dimensions are set accordingly, when the image is scaled. The `bbox` parameter is ignored for non-pdf images.

The `transform` allows to mirror and rotate the image in steps of 90 deg. The default value 0 gives an unmirrored, unrotated image. Values 1 – 3 give counterclockwise rotation by 90, 180, or 270 degrees, whereas with values 4 – 7 the image is first mirrored and then rotated counterclockwise by 90, 180, or 270 degrees. The `transform` operation gives the same visual result as if you would externally preprocess the image by a graphics tool and then use it by LuaTeX. If a pdf file to be embedded already contains a `/Rotate` specification, the rotation result is the combination of the `/Rotate` rotation followed by the `transform` operation.

11.1.3 scan

```
<image> var = img.scan(<image> var)
<image> var = img.scan(<table> image_spec)
```

When you say `img.scan(a)` for a new image, the file is scanned, and variables such as `xsize`, `ysize`, image type, number of pages, and the resolution are extracted. Each of the width, height, depth fields are set up according to the image dimensions, if they were not given an explicit value already. An image file will never be scanned more than once for a given image variable. With all subsequent `img.scan(a)` calls only the dimensions are again set up (if they have been changed by the user in the meantime).

For ease of use, you can do right-away a

```
<image> a = img.scan { filename = "foo.png" }
```

without a prior `img.new`.

Nothing is written yet at this point, so you can do `a=img.scan`, retrieve the available info like image width and height, and then throw away `a` again by saying `a=nil`. In that case no image object will be reserved in the PDF, and the used memory will be cleaned up automatically.

11.1.4 copy

```
<image> var = img.copy(<image> var)
```



```
<image> var = img.copy(<table> image_spec)
```

If you say `a = b`, then both variables point to the same `<image>` object. if you want to write out an image with different sizes, you can do `b = img.copy(a)`.

Afterwards, `a` and `b` still reference the same actual image dictionary, but the dimensions for `b` can now be changed from their initial values that were just copies from `a`.

11.1.5 write, immediatewrite, immediatewriteobject

```
<image> var = img.write(<image> var)
<image> var = img.write(<table> image_spec)
```

By `img.write(a)` a pdf object number is allocated, and a whatsit node of subtype `pdf_refximage` is generated and put into the output list. By this the image `a` is placed into the page stream, and the image file is written out into an image stream object after the shipping of the current page is finished.

Again you can do a terse call like

```
img.write { filename = "foo.png" }
```

The `<image>` variable is returned in case you want it for later processing. You can also write an object.

By `img.immediatewrite(a)` a pdf object number is allocated, and the image file for image `a` is written out immediately into the pdf file as an image stream object (like with `\immediate\pdfximage`). The object number of the image stream dictionary is then available by the `objnum` key. No `pdf_refximage` whatsit node is generated. You will need an `img.write(a)` or `img.node(a)` call to let the image appear on the page, or reference it by another trick; else you will have a dangling image object in the pdf file.

```
<image> var = img.immediatewrite(<image> var)
<image> var = img.immediatewrite(<table> image_spec)
<image> var = img.immediatewriteobject(<image> var)
<image> var = img.immediatewriteobject(<table> image_spec)
```

Also here you can do a terse call like

```
a = img.immediatewrite { filename = "foo.png" }
```

The `<image>` variable is returned and you will most likely need it.

11.1.6 node

```
<node> n = img.node(<image> var)
<node> n = img.node(<table> image_spec)
```

This function allocates a pdf object number and returns a whatsit node of subtype `pdf_refximage`, filled with the image parameters width, height, depth, and `objnum`. Also here you can do a terse call like:



```
n = img.node ({ filename = "foo.png" })
```

This example outputs an image:

```
node.write(img.node{filename="foo.png"})
```

11.1.7 types

```
<table> types = img.types()
```

This function returns a list with the supported image file type names, currently these are pdf, png, jpg, jp2 (JPEG 2000), and jbig2.

11.1.8 boxes

```
<table> boxes = img.boxes()
```

This function returns a list with the supported pdf page box names, currently these are media, crop, bleed, trim, and art, all in lowercase.

The pdf file is kept open after its properties are determined. After inclusion, which happens when the page that references the image is flushed, the file is closed. This means that when you have thousands of images on one page, your operating system might decide to abort the run. When you include more than one page from a pdf file you can set the keepopen flag when you allocate an image object, or pass the keepopen directive when you refer to the image with `\useimageresource`. This only makes sense when you embed many pages. An `\immediate` applied to `\saveimageresource` will also force a close after inclusion.

```
\immediate\useimageresource{foo.pdf}%  
    \saveimageresource          \lastsavedimageresourceindex % closed  
    \useimageresource{foo.pdf}%  
    \saveimageresource          \lastsavedimageresourceindex % kept open  
    \useimageresource{foo.pdf}%  
    \saveimageresource keepopen\lastsavedimageresourceindex % kept open  
  
\directlua{img.write(img.scan{ file = "foo.pdf" })} % closed  
\directlua{img.write(img.scan{ file = "foo.pdf", keepopen = true })} % kept open
```

11.2 The mplib library

The MetaPost library interface registers itself in the table `mplib`. It is based on `mplib` version 2.00.

11.2.1 new

To create a new MetaPost instance, call



```
<mpinstance> mp = mplib.new({...})
```

This creates the mp instance object. The argument hash can have a number of different fields, as follows:

| NAME | TYPE | DESCRIPTION | DEFAULT |
|-------------|----------|--|------------------|
| error_line | number | error line width | 79 |
| print_line | number | line length in ps output | 100 |
| random_seed | number | the initial random seed | variable |
| math_mode | string | the number system to use: scaled, double or decimal | scaled |
| interaction | string | the interaction mode: batch, nonstop, scroll or errorstop | errorstop |
| job_name | string | --jobname | mpout |
| find_file | function | a function to find files | only local files |

The binary mode is no longer available in the LuaTeX version of mplib. It offers no real advantage and brings a ton of extra libraries with platform specific properties that we can now avoid. We might introduce a high resolution scaled variant at some point but only when it pays of performance wise.

The find_file function should be of this form:

```
<string> found = finder (<string> name, <string> mode, <string> type)
```

with:

| NAME | THE REQUESTED FILE |
|------|--|
| mode | the file mode: r or w |
| type | the kind of file, one of: mp, tfm, map, pfb, enc |

Return either the full path name of the found file, or nil if the file cannot be found.

Note that the new version of mplib no longer uses binary mem files, so the way to preload a set of macros is simply to start off with an input command in the first execute call.

When you are processing a snippet of text starting with btex and ending with either etex or verbatimtex, the MetaPost texscriptmode parameter controls how spaces and newlines get honoured. The default value is 1. Possible values are:

| NAME | MEANING |
|------|---|
| 0 | no newlines |
| 1 | newlines in verbatimtex |
| 2 | newlines in verbatimtex and etex |
| 3 | no leading and trailing strip in verbatimtex |
| 4 | no leading and trailing strip in verbatimtex and btex |

That way the Lua handler (assigned to make_text) can do what it likes. An etex has to be followed by a space or ; or be at the end of a line and preceded by a space or at the beginning of a line.



11.2.2 statistics

You can request statistics with:

```
<table> stats = mp:statistics()
```

This function returns the vital statistics for an mplib instance. There are four fields, giving the maximum number of used items in each of four allocated object classes:

| FIELD | TYPE | EXPLANATION |
|-------------|--------|-------------------------------|
| main_memory | number | memory size |
| hash_size | number | hash size |
| param_size | number | simultaneous macro parameters |
| max_in_open | number | input file nesting levels |

Note that in the new version of mplib, this is informational only. The objects are all allocated dynamically, so there is no chance of running out of space unless the available system memory is exhausted.

11.2.3 execute

You can ask the MetaPost interpreter to run a chunk of code by calling

```
<table> rettable = execute(mp,"metapost code")
```

for various bits of MetaPost language input. Be sure to check the `rettable.status` (see below) because when a fatal MetaPost error occurs the mplib instance will become unusable thereafter.

Generally speaking, it is best to keep your chunks small, but beware that all chunks have to obey proper syntax, like each of them is a small file. For instance, you cannot split a single statement over multiple chunks.

In contrast with the normal stand alone `mpost` command, there is *no* implied ‘input’ at the start of the first chunk.

11.2.4 finish

```
<table> rettable = finish(mp)
```

If for some reason you want to stop using an mplib instance while processing is not yet actually done, you can call `inish`. Eventually, used memory will be freed and open files will be closed by the Lua garbage collector, but an explicit `inish` is the only way to capture the final part of the output streams.

11.2.5 Result table

The return value of `execute` and `finish` is a table with a few possible keys (only `status` is always guaranteed to be present).



| FIELD | TYPE | EXPLANATION |
|--------|--------|--|
| log | string | output to the 'log' stream |
| term | string | output to the 'term' stream |
| error | string | output to the 'error' stream (only used for 'out of memory') |
| status | number | the return value: 0 = good, 1 = warning, 2 = errors, 3 = fatal error |
| fig | table | an array of generated figures (if any) |

When status equals 3, you should stop using this mplib instance immediately, it is no longer capable of processing input.

If it is present, each of the entries in the `fig` array is a userdata representing a figure object, and each of those has a number of object methods you can call:

| FIELD | TYPE | EXPLANATION |
|--------------|----------|---|
| boundingbox | function | returns the bounding box, as an array of 4 values |
| postscript | function | returns a string that is the ps output of the <code>fig</code> . this function accepts two optional integer arguments for specifying the values of prologues (first argument) and procset (second argument) |
| svg | function | returns a string that is the svg output of the <code>fig</code> . This function accepts an optional integer argument for specifying the value of prologues |
| objects | function | returns the actual array of graphic objects in this <code>fig</code> |
| copy_objects | function | returns a deep copy of the array of graphic objects in this <code>fig</code> |
| filename | function | the filename this <code>fig</code> 's PostScript output would have written to in stand alone mode |
| width | function | the <code>fontcharwd</code> value |
| height | function | the <code>fontcharht</code> value |
| depth | function | the <code>fontchardp</code> value |
| italcorr | function | the <code>fontcharit</code> value |
| charcode | function | the (rounded) <code>charcode</code> value |

Note: you can call `fig:objects()` only once for any one `fig` object!

When the boundingbox represents a 'negated rectangle', i.e. when the first set of coordinates is larger than the second set, the picture is empty.

Graphical objects come in various types that each has a different list of accessible values. The types are: `fill`, `outline`, `text`, `start_clip`, `stop_clip`, `start_bounds`, `stop_bounds`, `special`.

There is a helper function (`mplib.fields(obj)`) to get the list of accessible values for a particular object, but you can just as easily use the tables given below.

All graphical objects have a field type that gives the object type as a string value; it is not explicit mentioned in the following tables. In the following, numbers are PostScript points represented as a floating point number, unless stated otherwise. Field values that are of type `table` are explained in the next section.

11.2.5.1 fill

| FIELD | TYPE | EXPLANATION |
|-------|-------|-------------------|
| path | table | the list of knots |



| | | |
|------------|--------|---|
| htap | table | the list of knots for the reversed trajectory |
| pen | table | knots of the pen |
| color | table | the object's color |
| linejoin | number | line join style (bare number) |
| miterlimit | number | miterlimit |
| prescript | string | the prescript text |
| postscript | string | the postscript text |

The entries htap and pen are optional.

11.2.5.2 outline

| FIELD | TYPE | EXPLANATION |
|------------|--------|-------------------------------|
| path | table | the list of knots |
| pen | table | knots of the pen |
| color | table | the object's color |
| linejoin | number | line join style (bare number) |
| miterlimit | number | miterlimit |
| linecap | number | line cap style (bare number) |
| dash | table | representation of a dash list |
| prescript | string | the prescript text |
| postscript | string | the postscript text |

The entry dash is optional.

11.2.5.3 text

| FIELD | TYPE | EXPLANATION |
|------------|--------|-----------------------|
| text | string | the text |
| font | string | font tfm name |
| dsize | number | font size |
| color | table | the object's color |
| width | number | |
| height | number | |
| depth | number | |
| transform | table | a text transformation |
| prescript | string | the prescript text |
| postscript | string | the postscript text |

11.2.5.4 special

| FIELD | TYPE | EXPLANATION |
|-----------|--------|--------------|
| prescript | string | special text |



11.2.5.5 start_bounds, start_clip

| FIELD | TYPE | EXPLANATION |
|-------|-------|-------------------|
| path | table | the list of knots |

11.2.5.6 stop_bounds, stop_clip

Here are no fields available.

11.2.6 Subsidiary table formats

11.2.6.1 Paths and pens

Paths and pens (that are really just a special type of paths as far as mplib is concerned) are represented by an array where each entry is a table that represents a knot.

| FIELD | TYPE | EXPLANATION |
|------------|--------|--|
| left_type | string | when present: endpoint, but usually absent |
| right_type | string | like left_type |
| x_coord | number | X coordinate of this knot |
| y_coord | number | Y coordinate of this knot |
| left_x | number | X coordinate of the precontrol point of this knot |
| left_y | number | Y coordinate of the precontrol point of this knot |
| right_x | number | X coordinate of the postcontrol point of this knot |
| right_y | number | Y coordinate of the postcontrol point of this knot |

There is one special case: pens that are (possibly transformed) ellipses have an extra stringB Avalued key type with value `elliptical` besides the array part containing the knot list.

11.2.6.2 Colors

A color is an integer array with 0, 1, 3 or 4 values:

| FIELD | TYPE | EXPLANATION |
|-------|--------------|--|
| 0 | marking only | no values |
| 1 | greyscale | one value in the range (0, 1), 'black' is 0 |
| 3 | rgb | three values in the range (0, 1), 'black' is 0, 0, 0 |
| 4 | cmyk | four values in the range (0, 1), 'black' is 0, 0, 0, 1 |

If the color model of the internal object was uninitialized, then it was initialized to the values representing 'black' in the colorspace `defaultcolormodel` that was in effect at the time of the shipout.

11.2.6.3 Transforms

Each transform is a six-item array.



| INDEX | TYPE | EXPLANATION |
|-------|--------|---------------|
| 1 | number | represents x |
| 2 | number | represents y |
| 3 | number | represents xx |
| 4 | number | represents yx |
| 5 | number | represents xy |
| 6 | number | represents yy |

Note that the translation (index 1 and 2) comes first. This differs from the ordering in PostScript, where the translation comes last.

11.2.6.4 Dashes

Each dash is two-item hash, using the same model as PostScript for the representation of the dashlist. `dashes` is an array of 'on' and 'off', values, and `offset` is the phase of the pattern.

| FIELD | TYPE | EXPLANATION |
|---------------------|--------|----------------------------|
| <code>dashes</code> | hash | an array of on-off numbers |
| <code>offset</code> | number | the starting offset value |

11.2.7 Pens and `pen_info`

There is helper function (`pen_info(obj)`) that returns a table containing a bunch of vital characteristics of the used pen (all values are floats):

| FIELD | TYPE | EXPLANATION |
|--------------------|--------|------------------|
| <code>width</code> | number | width of the pen |
| <code>sx</code> | number | x scale |
| <code>rx</code> | number | x y multiplier |
| <code>ry</code> | number | y x multiplier |
| <code>sy</code> | number | y scale |
| <code>tx</code> | number | x offset |
| <code>ty</code> | number | y offset |

11.2.8 Character size information

These functions find the size of a glyph in a defined font. The `fontname` is the same name as the argument to `infont`; the `char` is a glyph id in the range 0 to 255; the returned `w` is in AFM units.

11.2.8.1 `char_width`

```
<number> w = char_width(mp,<string> fontname, <number> char)
```

11.2.8.2 `char_height`

```
<number> w = char_height(mp,<string> fontname, <number> char)
```



11.2.8.3 char_depth

<number> w = char_depth(mp,<string> fontname, <number> char)

11.2.8.4 get[boolean|numeric|string|path]

When a script call brings you from the MetaPost run (temporarily) back to Lua you can access variables, but only if they are known (so for instance anonymous capsules like loop variables are not accessible).

<boolean> w = getboolean(mp,<string> name)

<number> n = getnumeric(mp,<string> name)

<string> s = getstring (mp,<string> name)

<table> p = getpath (mp,<string> name)

The path is returned a a table with subtables that have six numbers: the coordinates of the point, pre- and postcontrol. A cycle fields indicates if a path is cyclic.



12 The fontloader

The fontloader library is sort of independent of the rest in the sense that it can load font into a Lua table that then can be converted into a table suitable for T_EX. The library is an adapted subset of FontForge and as such gives a similar view on a font (which has advantages when you want to debug). We will not discuss OpenType in detail here as the Microsoft website offers enough information about it. The tables returned by the loader are not that far from the standard. We have no plans to extend the loader (it may even become an external module at some time).

12.1 Getting quick information on a font

When you want to locate font by name you need some basic information that is hidden in the font files. For that reason we provide an efficient helper that gets the basic information without loading all of the font. Normally this helper is used to create a font (name) database.

```
<table> info =  
    fontloader.info(<string> filename)
```

This function returns either nil, or a table, or an array of small tables (in the case of a TrueType collection). The returned table(s) will contain some fairly interesting information items from the font(s) defined by the file:

| KEY | TYPE | EXPLANATION |
|--------------|--------|--|
| fontname | string | the PostScript name of the font |
| fullname | string | the formal name of the font |
| famlyname | string | the family name this font belongs to |
| weight | string | a string indicating the color value of the font |
| version | string | the internal font version |
| italicangle | float | the slant angle |
| units_per_em | number | 1000 for PostScript-based fonts, usually 2048 for TrueType |
| pfminfo | table | (see section 12.6.6) |

Getting information through this function is (sometimes much) more efficient than loading the font properly, and is therefore handy when you want to create a dictionary of available fonts based on a directory contents.

12.2 Loading an OPENTYPE or TRUETYPE file

If you want to use an OpenType font, you have to get the metric information from somewhere. Using the fontloader library, the simplest way to get that information is thus:

```
function load_font (filename)  
    local metrics = nil  
    local font = fontloader.open(filename)  
    if font then
```



```

        metrics = fontloader.to_table(font)
        fontloader.close(font)
    end
    return metrics
end

myfont = load_font('/opt/tex/texmf/fonts/data/arial.ttf')

```

The main function call is

```

<userdata> f, <table> w = fontloader.open(<string> filename)
<userdata> f, <table> w = fontloader.open(<string> filename, <string> fontname)

```

The first return value is a userdata representation of the font. The second return value is a table containing any warnings and errors reported by fontloader while opening the font. In normal typesetting, you would probably ignore the second argument, but it can be useful for debugging purposes.

For TrueType collections (when filename ends in 'ttc') and dfont collections, you have to use a second string argument to specify which font you want from the collection. Use the fontname strings that are returned by fontloader.info for that.

To turn the font into a table, fontloader.to_table is used on the font returned by fontloader.open.

```

<table> f = fontloader.to_table(<userdata> font)

```

This table cannot be used directly by Lua_T_EX and should be turned into another one as described in chapter 6. Do not forget to store the fontname value in the psname field of the metrics table to be returned to Lua_T_EX, otherwise the font inclusion backend will not be able to find the correct font in the collection.

See section 12.5 for details on the userdata object returned by fontloader.open and the layout of the metrics table returned by fontloader.to_table.

The font file is parsed and partially interpreted by the font loading routines from FontForge. The file format can be OpenType, TrueType, TrueType Collection, cff, or Type1.

There are a few advantages to this approach compared to reading the actual font file ourselves:

- ▶ The font is automatically re-encoded, so that the metrics table for TrueType and OpenType fonts is using Unicode for the character indices.
- ▶ Many features are pre-processed into a format that is easier to handle than just the bare tables would be.
- ▶ PostScript-based OpenType fonts do not store the character height and depth in the font file, so the character boundingbox has to be calculated in some way.

A loaded font is discarded with:

```

fontloader.close(<userdata> font)

```



12.3 Applying a ‘feature file’

You can apply a ‘feature file’ to a loaded font:

```
<table> errors = fontloader.apply_featurefile(<userdata> font, <string> file-  
name)
```

A ‘feature file’ is a textual representation of the features in an OpenType font. See

http://www.adobe.com/devnet/opentype/afdko/topic_feature_file_syntax.html

and

<http://fontforge.sourceforge.net/featurefile.html>

for a more detailed description of feature files.

If the function fails, the return value is a table containing any errors reported by fontloader while applying the feature file. On success, nil is returned.

12.4 Applying an ‘AFM file’

You can apply an ‘afm file’ to a loaded font:

```
<table> errors = fontloader.apply_afmfile(<userdata> font, <string> filename)
```

An afm file is a textual representation of (some of) the meta information in a Type1 font. See

ftp://ftp.math.utah.edu/u/ma/hohn/linux/postscript/5004.AFM_Spec.pdf

for more information about afm files.

Note: If you fontloader.open a Type1 file named font.pfb, the library will automatically search for and apply font.afm if it exists in the same directory as the file font.pfb. In that case, there is no need for an explicit call to apply_afmfile().

If the function fails, the return value is a table containing any errors reported by fontloader while applying the AFM file. On success, nil is returned.

12.5 Fontloader font tables

As mentioned earlier, the return value of fontloader.open is a userdata object. One way to have access to the actual metrics is to call fontloader.to_table on this object, returning the table structure that is explained in the following sections. In the following sections we will not explain each field in detail. Most fields are self descriptive and for the more technical aspects you need to consult the relevant font references.

It turns out that the result from fontloader.to_table sometimes needs very large amounts of memory (depending on the font’s complexity and size) so it is possible to access the userdata object directly.



- ▶ All top-level keys that would be returned by `to_table()` can also be accessed directly.
- ▶ The top-level key 'glyphs' returns a *virtual* array that allows indices from `f.glyphmin` to `(f.glyphmax)`.
- ▶ The items in that virtual array (the actual glyphs) are themselves also userdata objects, and each has accessors for all of the keys explained in the section 'Glyph items' below.
- ▶ The top-level key 'subfonts' returns an *actual* array of userdata objects, one for each of the subfonts (or nil, if there are no subfonts).

A short example may be helpful. This code generates a printout of all the glyph names in the font `PunkNova.kern.otf`:

```
local f = fontloader.open('PunkNova.kern.otf')
print (f.fontname)
local i = 0
if f.glyphcnt > 0 then
    for i=f.glyphmin,f.glyphmax do
        local g = f.glyphs[i]
        if g then
            print(g.name)
        end
        i = i + 1
    end
end
fontloader.close(f)
```

In this case, the LuaTeX memory requirement stays below 100MB on the test computer, while the internal structure generated by `to_table()` needs more than 2GB of memory (the font itself is 6.9MB in disk size).

Only the top-level font, the subfont table entries, and the glyphs are virtual objects, everything else still produces normal Lua values and tables.

If you want to know the valid fields in a font or glyph structure, call the `fields` function on an object of a particular type (either glyph or font):

```
<table> fields = fontloader.fields(<userdata> font)
<table> fields = fontloader.fields(<userdata> font_glyph)
```

For instance:

```
local fields = fontloader.fields(f)
local fields = fontloader.fields(f.glyphs[0])
```

12.6 Table types

12.6.1 The main table

The top-level keys in the returned table are (the explanations in this part of the documentation are not yet finished):



| KEY | TYPE | explanation |
|------------------------------|--------|--|
| table_version | number | indicates the metrics version (currently 0.3) |
| fontname | string | PostScript font name |
| fullname | string | official (human-oriented) font name |
| familyname | string | family name |
| weight | string | weight indicator |
| copyright | string | copyright information |
| filename | string | the file name |
| version | string | font version |
| italicangle | float | slant angle |
| units_per_em | number | 1000 for PostScript-based fonts, usually 2048 for TrueType |
| ascent | number | height of ascender in units_per_em |
| descent | number | depth of descender in units_per_em |
| upos | float | |
| uwidth | float | |
| uniqueid | number | |
| glyphs | array | |
| glyphcnt | number | number of included glyphs |
| glyphmax | number | maximum used index the glyphs array |
| glyphmin | number | minimum used index the glyphs array |
| notdef_loc | number | location of the .notdef glyph or -1 when not present |
| hasvmetrics | number | |
| onlybitmaps | number | |
| serifcheck | number | |
| issarif | number | |
| issans | number | |
| encodingchanged | number | |
| strokedfont | number | |
| use_typo_metrics | number | |
| weight_width_slope_only | number | |
| head_optimized_for_cleartype | number | |
| uni_interp | enum | unset, none, adobe, greek, japanese, trad_chinese, simp_chinese, korean, ams |
| origname | string | the file name, as supplied by the user |
| map | table | |
| private | table | |
| xuid | string | |
| pfminfo | table | |
| names | table | |
| cidinfo | table | |
| subfonts | array | |
| comments | string | |
| fontlog | string | |
| cvt_names | string | |
| anchor_classes | table | |



| | |
|------------------|---------------------------------|
| ttf_tables | table |
| ttf_tab_saved | table |
| kerns | table |
| vkerns | table |
| texdata | table |
| lookups | table |
| gpos | table |
| gsub | table |
| mm | table |
| chosename | string |
| macstyle | number |
| fondname | string |
| fontstyle_id | number |
| fontstyle_name | table |
| strokewidth | float |
| mark_classes | table |
| creationtime | number |
| modificationtime | number |
| os2_version | number |
| math | table |
| validation_state | table |
| horiz_base | table |
| vert_base | table |
| extrema_bound | number |
| truetype | boolean signals a TrueType font |

12.6.2 glyphs

The glyphs is an array containing the per-character information (quite a few of these are only present if non-zero).

| KEY | TYPE | EXPLANATION |
|--------------|--------|---|
| name | string | the glyph name |
| unicode | number | unicode code point, or -1 |
| boundingbox | array | array of four numbers, see note below |
| width | number | only for horizontal fonts |
| vwidth | number | only for vertical fonts |
| tsidebearing | number | only for vertical ttf/otf fonts, and only if non-zero |
| lsidebearing | number | only if non-zero and not equal to boundingbox[1] |
| class | string | one of "none", "base", "ligature", "mark", "component" (if not present, the glyph class is 'automatic') |
| kerns | array | only for horizontal fonts, if set |
| vkerns | array | only for vertical fonts, if set |
| dependents | array | linear array of glyph name strings, only if nonempty |
| lookups | table | only if nonempty |
| ligatures | table | only if nonempty |



| | | |
|-------------------|--------|---|
| anchors | table | only if set |
| comment | string | only if set |
| tex_height | number | only if set |
| tex_depth | number | only if set |
| italic_correction | number | only if set |
| top_accent | number | only if set |
| is_extended_shape | number | only if this character is part of a math extension list |
| altuni | table | alternate Unicode items |
| vert_variants | table | |
| horiz_variants | table | |
| mathkern | table | |

On boundingbox: The boundingbox information for TrueType fonts and TrueType-based otf fonts is read directly from the font file. PostScript-based fonts do not have this information, so the boundingbox of traditional PostScript fonts is generated by interpreting the actual bezier curves to find the exact boundingbox. This can be a slow process, so the boundingboxes of PostScript-based otf fonts (and raw cff fonts) are calculated using an approximation of the glyph shape based on the actual glyph points only, instead of taking the whole curve into account. This means that glyphs that have missing points at extrema will have a too-tight boundingbox, but the processing is so much faster that in our opinion the tradeoff is worth it.

The kerns and vkerns are linear arrays of small hashes:

| KEY | TYPE | EXPLANATION |
|--------|--------|-------------|
| char | string | |
| off | number | |
| lookup | string | |

The lookups is a hash, based on lookup subtable names, with the value of each key inside that a linear array of small hashes:

| KEY | TYPE | EXPLANATION |
|---------------|-------|--|
| type | enum | position, pair, substitution, alternate, multiple, ligature, lcaret, kerning, vkerning, anchors, contextpos, contextsub, chainpos, chain-sub, reversesub, max, kernback, vkernback |
| specification | table | extra data |

For the first seven values of type, there can be additional sub-information, stored in the sub-table specification:

| VALUE | TYPE | EXPLANATION |
|--------------|-------|---|
| position | table | a table of the offset_specs type |
| pair | table | one string: paired, and an array of one or two offset_specs tables: offsets |
| substitution | table | one string: variant |
| alternate | table | one string: components |
| multiple | table | one string: components |



| | | |
|----------|-------|-------------------------------|
| ligature | table | two strings: components, char |
| lcaret | array | linear array of numbers |

Tables for `offset_specs` contain up to four number-valued fields: `x` (a horizontal offset), `y` (a vertical offset), `h` (an advance width correction) and `v` (an advance height correction).

The `ligatures` is a linear array of small hashes:

| KEY | TYPE | EXPLANATION |
|------------|--------|---|
| lig | table | uses the same substructure as a single item in the <code>lookups</code> table explained above |
| char | string | |
| components | array | linear array of named components |
| ccnt | number | |

The anchor table is indexed by a string signifying the anchor type, which is one of:

| KEY | TYPE | EXPLANATION |
|----------|-------|--|
| mark | table | placement mark |
| basechar | table | mark for attaching combining items to a base char |
| baselig | table | mark for attaching combining items to a ligature |
| basemark | table | generic mark for attaching combining items to connect to |
| centry | table | cursive entry point |
| cexit | table | cursive exit point |

The content of these is a short array of defined anchors, with the entry keys being the anchor names. For all except `baselig`, the value is a single table with this definition:

| KEY | TYPE | EXPLANATION |
|--------------|--------|-------------------------------------|
| x | number | x location |
| y | number | y location |
| ttf_pt_index | number | truetype point index, only if given |

For `baselig`, the value is a small array of such anchor sets, one for each constituent item of the ligature.

For clarification, an anchor table could for example look like this :

```
['anchor'] = {
  ['basemark'] = {
    ['Anchor-7'] = { ['x']=170, ['y']=1080 }
  },
  ['mark'] = {
    ['Anchor-1'] = { ['x']=160, ['y']=810 },
    ['Anchor-4'] = { ['x']=160, ['y']=800 }
  },
  ['baselig'] = {
    [1] = { ['Anchor-2'] = { ['x']=160, ['y']=650 } },
    [2] = { ['Anchor-2'] = { ['x']=460, ['y']=640 } }
```



```
    }
}
```

Note: The baselig table can be sparse!

12.6.3 map

The top-level map is a list of encoding mappings. Each of those is a table itself.

| KEY | TYPE | EXPLANATION |
|----------|--------|---------------------------------------|
| enccount | number | |
| encmax | number | |
| backmax | number | |
| remap | table | |
| map | array | non-linear array of mappings |
| backmap | array | non-linear array of backward mappings |
| enc | table | |

The remap table is very small:

| KEY | TYPE | EXPLANATION |
|----------|--------|-------------|
| firstenc | number | |
| lastenc | number | |
| infont | number | |

The enc table is a bit more verbose:

| KEY | TYPE | EXPLANATION |
|------------------|--------|-----------------------------|
| enc_name | string | |
| char_cnt | number | |
| char_max | number | |
| unicode | array | of Unicode position numbers |
| psnames | array | of PostScript glyph names |
| builtin | number | |
| hidden | number | |
| only_1byte | number | |
| has_1byte | number | |
| has_2byte | number | |
| is_unicodebmp | number | only if non-zero |
| is_unicodedefull | number | only if non-zero |
| is_custom | number | only if non-zero |
| is_original | number | only if non-zero |
| is_compact | number | only if non-zero |
| is_japanese | number | only if non-zero |
| is_korean | number | only if non-zero |
| is_tradchinese | number | only if non-zero [name?] |
| is_simplechinese | number | only if non-zero |



| | |
|-----------------|--------|
| low_page | number |
| high_page | number |
| iconv_name | string |
| iso_2022_escape | string |

12.6.4 private

This is the font's private PostScript dictionary, if any. Keys and values are both strings.

12.6.5 cidinfo

| KEY | TYPE | EXPLANATION |
|------------|--------|-------------|
| registry | string | |
| ordering | string | |
| supplement | number | |
| version | number | |

12.6.6 pfminfo

The pfminfo table contains most of the OS/2 information:

| KEY | TYPE | EXPLANATION |
|------------------|--------|-------------|
| pfmset | number | |
| winascent_add | number | |
| windescent_add | number | |
| hheadascent_add | number | |
| hheaddescent_add | number | |
| typoascent_add | number | |
| typodescent_add | number | |
| subsuper_set | number | |
| panose_set | number | |
| hheadset | number | |
| vheadset | number | |
| pfmfamily | number | |
| weight | number | |
| width | number | |
| avgwidth | number | |
| firstchar | number | |
| lastchar | number | |
| fstype | number | |
| linegap | number | |
| vlinegap | number | |
| hhead_ascent | number | |
| hhead_descent | number | |
| os2_typoascent | number | |



| | | |
|------------------|--------|---|
| os2_typodescent | number | |
| os2_typolinegap | number | |
| os2_winascent | number | |
| os2_windescent | number | |
| os2_subxsize | number | |
| os2_subysize | number | |
| os2_subxoff | number | |
| os2_subyoff | number | |
| os2_supxsize | number | |
| os2_supysize | number | |
| os2_supxoff | number | |
| os2_supyoff | number | |
| os2_strikeysize | number | |
| os2_strikeypos | number | |
| os2_family_class | number | |
| os2_xheight | number | |
| os2_capheight | number | |
| os2_defaultchar | number | |
| os2_breakchar | number | |
| os2_vendor | string | |
| codepages | table | A two-number array of encoded code pages |
| unicoderanges | table | A four-number array of encoded unicode ranges |
| panose | table | |

The panose subtable has exactly 10 string keys:

| KEY | TYPE | EXPLANATION |
|-----------------|--------|--|
| familytype | string | Values as in the OpenType font specification: Any, No Fit, Text and Display, Script, Decorative, Pictorial |
| serifstyle | string | See the OpenType font specification for values |
| weight | string | idem |
| proportion | string | idem |
| contrast | string | idem |
| strokevariation | string | idem |
| armstyle | string | idem |
| letterform | string | idem |
| midline | string | idem |
| xheight | string | idem |

12.6.7 names

Each item has two top-level keys:

| KEY | TYPE | EXPLANATION |
|-------|--------|-------------------------|
| lang | string | language for this entry |
| names | table | |



The names keys are the actual TrueType name strings. The possible keys are: copyright, family, subfamily, uniqueid, fullname, version, postscriptname, trademark, manufacturer, designer, descriptor, venderurl, designerurl, license, licenseurl, idontknow, preffamilyname, premodifiers, compatfull, sampletext, cidfindfontname, wwsfamily and wwssubfamily.

12.6.8 anchor_classes

The anchor_classes classes:

| KEY | TYPE | EXPLANATION |
|--------|--------|---------------------------------------|
| name | string | a descriptive id of this anchor class |
| lookup | string | |
| type | string | one of mark, mkmk, curs, mklg |

12.6.9 gpos

The gpos table has one array entry for each lookup. (The gpos_ prefix is somewhat redundant.)

| KEY | TYPE | EXPLANATION |
|-----------|--------|--|
| type | string | one of gpos_single, gpos_pair, gpos_cursive, gpos_mark2base, gpos_mark2ligature, gpos_mark2mark, gpos_context, gpos_contextchain |
| flags | table | |
| name | string | |
| features | array | |
| subtables | array | |

The flags table has a true value for each of the lookup flags that is actually set:

| KEY | TYPE | EXPLANATION |
|----------------------|---------|-------------|
| r2l | boolean | |
| ignorebaseglyphs | boolean | |
| ignoreligatures | boolean | |
| ignorecombiningmarks | boolean | |
| mark_class | string | |

The features subtable items of gpos have:

| KEY | TYPE | EXPLANATION |
|---------|--------|-------------|
| tag | string | |
| scripts | table | |

The scripts table within features has:



| KEY | TYPE | EXPLANATION |
|--------|------------------|-------------|
| script | string | |
| langs | array of strings | |

The subtables table has:

| KEY | TYPE | EXPLANATION |
|------------------|--------|----------------|
| name | string | |
| suffix | string | (only if used) |
| anchor_classes | number | (only if used) |
| vertical_kerning | number | (only if used) |
| kernclass | table | (only if used) |

The kernclass with subtables table has:

| KEY | TYPE | EXPLANATION |
|---------|------------------|----------------------|
| firsts | array of strings | |
| seconds | array of strings | |
| lookup | string or array | associated lookup(s) |
| offsets | array of numbers | |

Note: the kernclass (as far as we can see) always has one entry so it could be one level deep instead. Also the seconds start at [2] which is close to the fontforge internals so we keep that too.

12.6.10 gsub

This has identical layout to the gpos table, except for the type:

| KEY | TYPE | EXPLANATION |
|------|--------|---|
| type | string | one of gsub_single, gsub_multiple, gsub_alternate, gsub_ligature, gsub_context, gsub_contextchain, gsub_reversecontextchain |

12.6.11 ttf_tables and ttf_tab_saved

| KEY | TYPE | EXPLANATION |
|--------|--------|-------------|
| tag | string | |
| len | number | |
| maxlen | number | |
| data | number | |

12.6.12 mm

| KEY | TYPE | EXPLANATION |
|------|-------|---------------------|
| axes | table | array of axis names |



| | | |
|----------------|--------|--|
| instance_count | number | |
| positions | table | array of instance positions (#axes * instances) |
| defweights | table | array of default weights for instances |
| cdv | string | |
| ndv | string | |
| axismaps | table | |

The axismaps:

| KEY | TYPE | EXPLANATION |
|---------|--------|---------------------------|
| blends | table | an array of blend points |
| designs | table | an array of design values |
| min | number | |
| def | number | |
| max | number | |

12.6.13 mark_classes

The keys in this table are mark class names, and the values are a space-separated string of glyph names in this class.

12.6.14 math

The math table has the variables that are also discussed in the chapter about math: ScriptPercentScaleDown, ScriptScriptPercentScaleDown, DelimitedSubFormulaMinHeight, DisplayOperatorMinHeight, MathLeading, AxisHeight, AccentBaseHeight, FlattenedAccentBaseHeight, SubscriptShiftDown, SubscriptTopMax, SubscriptBaselineDropMin, SuperscriptShiftUp, SuperscriptShiftUpCramped, SuperscriptBottomMin, SuperscriptBaselineDropMax, SubSuperscriptGapMin, SuperscriptBottomMaxWithSubscript, SpaceAfterScript, UpperLimitGapMin, UpperLimitBaselineRiseMin, LowerLimitGapMin, LowerLimitBaselineDropMin, StackTopShiftUp, StackTopDisplayStyleShiftUp, StackBottomShiftDown, StackBottomDisplayStyleShiftDown, StackGapMin, StackDisplayStyleGapMin, StretchStackTopShiftUp, StretchStackBottomShiftDown, StretchStackGapAboveMin, StretchStackGapBelowMin, FractionNumeratorShiftUp, FractionNumeratorDisplayStyleShiftUp, FractionDenominatorShiftDown, FractionDenominatorDisplayStyleShiftDown, FractionNumeratorGapMin, FractionNumeratorDisplayStyleGapMin, FractionRuleThickness, FractionDenominatorGapMin, FractionDenominatorDisplayStyleGapMin, SkewedFractionHorizontalGap, SkewedFractionVerticalGap, OverbarVerticalGap, OverbarRuleThickness, OverbarExtraAscender, UnderbarVerticalGap, UnderbarRuleThickness, UnderbarExtraDescender, RadicalVerticalGap, RadicalDisplayStyleVerticalGap, RadicalRuleThickness, RadicalExtraAscender, RadicalKernBeforeDegree, RadicalKernAfterDegree, RadicalDegreeBottomRaisePercent, MinConnectorOverlap, FractionDelimiterSize and FractionDelimiterDisplayStyleSize.



12.6.15 validation_state

This is just a bonus table with keys: `bad_ps_fontname`, `bad_glyph_table`, `bad_cff_table`, `bad_metrics_table`, `bad_cmap_table`, `bad_bitmaps_table`, `bad_gx_table`, `bad_ot_table`, `bad_os2_version` and `bad_sfnt_header`.

12.6.16 horiz_base and vert_base

| KEY | TYPE | EXPLANATION |
|---------|-------|------------------------------|
| tags | table | an array of script list tags |
| scripts | table | |

The scripts subtable:

| KEY | TYPE | EXPLANATION |
|------------------|--------|-------------|
| baseline | table | |
| default_baseline | number | |
| lang | table | |

The lang subtable:

| KEY | TYPE | EXPLANATION |
|----------|--------|--------------|
| tag | string | a script tag |
| ascent | number | |
| descent | number | |
| features | table | |

The features points to an array of tables with the same layout except that in those nested tables, the tag represents a language.

12.6.17 altuni

An array of alternate Unicode values. Inside that array are hashes with:

| KEY | TYPE | EXPLANATION |
|---------|--------|--|
| unicode | number | this glyph is also used for this unicode |
| variant | number | the alternative is driven by this unicode selector |

12.6.18 vert_variants and horiz_variants

| KEY | TYPE | EXPLANATION |
|-------------------|--------|-------------|
| variants | string | |
| italic_correction | number | |
| parts | table | |

The parts table is an array of smaller tables:



| KEY | TYPE | EXPLANATION |
|-----------|--------|-------------|
| component | string | |
| extender | number | |
| start | number | |
| end | number | |
| advance | number | |

12.6.19 mathkern

| KEY | TYPE | EXPLANATION |
|--------------|-------|-------------|
| top_right | table | |
| bottom_right | table | |
| top_left | table | |
| bottom_left | table | |

Each of the subtables is an array of small hashes with two keys:

| KEY | TYPE | EXPLANATION |
|--------|--------|-------------|
| height | number | |
| kern | number | |

12.6.20 kerns

Substructure is identical to the per-glyph subtable.

12.6.21 vkerns

Substructure is identical to the per-glyph subtable.

12.6.22 texdata

| KEY | TYPE | EXPLANATION |
|--------|--------|-----------------------------|
| type | string | unset, text, math, mathtext |
| params | array | 22 font numeric parameters |

12.6.23 lookups

Top-level lookups is quite different from the ones at character level. The keys in this hash are strings, the values the actual lookups, represented as dictionary tables.

| KEY | TYPE | EXPLANATION |
|--------|--------|---|
| type | string | |
| format | enum | one of glyphs, class, coverage, reversecoverage |



| | | |
|---------------|--------|------------------------|
| tag | string | |
| current_class | array | |
| before_class | array | |
| after_class | array | |
| rules | array | an array of rule items |

Rule items have one common item and one specialized item:

| KEY | TYPE | EXPLANATION |
|-----------------|-------|--|
| lookups | array | a linear array of lookup names |
| glyphs | array | only if the parent's format is glyphs |
| class | array | only if the parent's format is class |
| coverage | array | only if the parent's format is coverage |
| reversecoverage | array | only if the parent's format is reversecoverage |

A glyph table is:

| KEY | TYPE | EXPLANATION |
|-------|--------|-------------|
| names | string | |
| back | string | |
| fore | string | |

A class table is:

| KEY | TYPE | EXPLANATION |
|---------|-------|-------------|
| current | array | of numbers |
| before | array | of numbers |
| after | array | of numbers |

for coverage:

| KEY | TYPE | EXPLANATION |
|---------|-------|-------------|
| current | array | of strings |
| before | array | of strings |
| after | array | of strings |

and for reverse coverage:

| KEY | TYPE | EXPLANATION |
|--------------|--------|-------------|
| current | array | of strings |
| before | array | of strings |
| after | array | of strings |
| replacements | string | |





13 The backend libraries

13.1 The pdf library

This library contains variables and functions that are related to the pdf backend. You can find more details about the expected values to setters in section 3.2.

13.1.1 mapfile, mapline

```
pdf.mapfile(<string> map file)
pdf.mapline(<string> map line)
```

These two functions can be used to replace primitives `\pdfmapfile` and `\pdfmapline` inherited from pdf \TeX . They expect a string as only parameter and have no return value. The first character in a map line can be -, + or = which means as much as remove, add or replace this line. They are not state setters but act immediately.

13.1.2 [set|get][catalog|info|names|trailer]

These functions complement the corresponding pdf backend token lists dealing with metadata. The value types are strings and they are written to the pdf file directly after the token registers set at the \TeX end are written.

13.1.3 [set|get][pageattributes|pageresources|pagesattributes]

These functions complement the corresponding pdf backend token lists dealing with page resources. The variables have no interaction with the corresponding pdf backend token register. They are written to the pdf file directly after the token registers set at the \TeX end are written.

13.1.4 [set|get][xformattributes|xformresources]

These functions complement the corresponding pdf backend token lists dealing with reusable boxes and images. The variables have no interaction with the corresponding pdf backend token register. They are written to the pdf file directly after the token registers set at the \TeX end are written.

13.1.5 [set|get][major|minor]version

You can set both the major and minor version of the output. The major version is normally 1 but when set to 2 some data will not be written to the file in order to comply with the standard. What minor version you set depends on what pdf features you use. This is out of control of Lua \TeX .



13.1.6 `getcreationdate`

This function returns a string with the date in the format that ends up in the pdf file, in this case it's: `D:20180925203435+02'00'`.

13.1.7 `[set|get]inclusionerrorlevel` and `[set|get]ignoreunknownimages`

These variable control how error in included image are treated. They are modeled after the pdfTeX equivalents.

13.1.8 `[set|get]suppressoptionalinfo`, `[set|get]trailerid` and `[set|get]omitcidset`

The optional info bitset (a number) determines what kind of info gets flushed. By default we flush all. See section 3.2.2 for more details.

You can set your own trailer id. This has to be string containing valid pdf array content with checksums.

The cidset and charset flags (numbers) disables inclusion of a so called CIDSet and CharSet entries, which can be handy when aiming at some of the many pdf substandards.

13.1.9 `[set|get][obj|]compresslevel` and `[set|get]recompress`

These functions set the level stream compression. When object compression is enabled multiple objects will be packed in a compressed stream which saves space. The minimum values are 0, the maxima are 9.

When recompression is to 1 compressed objects will be decompressed and when `compresslevel` is larger than zero they will then be recompressed. This is mostly a debugging feature and should not be relied upon.

13.1.10 `[set|get]gentounicode`

This flag enables tounicode generation (like in pdfTeX). Normally the values are provided by the font loader.

13.1.11 `[set|get]decimaldigits`

These two functions set the accuracy of floats written to the pdf file. You can set any value but the backend will not go below 3 and above 6.

13.1.12 `[set|get]pkresolution`

These setter takes two arguments: the resolution and an optional zero or one that indicates if this is a fixed one. The getter returns these two values.



13.1.13 `getlast[obj|link|annot]` and `getretval`

These status variables are similar to the ones traditionally used in the backend interface at the \TeX end.

13.1.14 `getmaxobjnum` and `getobjtype`, `getfontname`, `getfontobjnum`, `getfontsize`, `getxformname`

.

These introspective helpers are mostly used when you construct pdf objects yourself and need for instance information about a (to be) embedded font.

13.1.15 `[set|get]origin`

This one is used to set the horizontal and/or vertical offset, a traditional backend property.

```
pdf.setorigin() -- sets both to 0pt
pdf.setorigin(tex.sp("1in")) -- sets both to 1in
pdf.setorigin(tex.sp("1in"),tex.sp("1in"))
```

The counterpart of this function returns two values.

13.1.16 `[set|get]imageresolution`

These two functions relate to the imageresolution that is used when the image itself doesn't provide a non-zero x or y resolution.

13.1.17 `[set|get][link|dest|thread|xform]margin`

These functions can be used to set and retrieve the margins that are added to the natural bounding boxes of the respective objects.

13.1.18 `get[pos|hpos|vpos]`

These functions get current location on the output page, measured from its lower left corner. The values return scaled points as units.

```
local h, v = pdf.getpos()
```

13.1.19 `[has|get]matrix`

The current matrix transformation is available via the `getmatrix` command, which returns 6 values: `sx`, `rx`, `ry`, `sy`, `tx`, and `ty`. The `hasmatrix` function returns `true` when a matrix is applied.

```
if pdf.hasmatrix() then
```



```

    local sx, rx, ry, sy, tx, ty = pdf.getmatrix()
    -- do something useful or not
end

```

13.1.20 print

You can print a string to the pdf document from within a `\latelua` call. This function is not to be used inside `\directlua` unless you know *exactly* what you are doing.

```

pdf.print(<string> s)
pdf.print(<string> type, <string> s)

```

The optional parameter can be used to mimic the behavior of pdf literals: the `type` is `direct` or `page`.

13.1.21 immediateobj

This function creates a pdf object and immediately writes it to the pdf file. It is modelled after pdf_{TEX}'s `\immediate \pdfobj` primitives. All function variants return the object number of the newly generated object.

```

<number> n =
    pdf.immediateobj(<string> objtext)
<number> n =
    pdf.immediateobj("file", <string> filename)
<number> n =
    pdf.immediateobj("stream", <string> streamtext, <string> attrtext)
<number> n =
    pdf.immediateobj("streamfile", <string> filename, <string> attrtext)

```

The first version puts the `objtext` raw into an object. Only the object wrapper is automatically generated, but any internal structure (like `<< >>` dictionary markers) needs to be provided by the user. The second version with keyword `file` as first argument puts the contents of the file with name `filename` raw into the object. The third version with keyword `stream` creates a stream object and puts the `streamtext` raw into the stream. The stream length is automatically calculated. The optional `attrtext` goes into the dictionary of that object. The fourth version with keyword `streamfile` does the same as the third one, it just reads the stream data raw from a file.

An optional first argument can be given to make the function use a previously reserved pdf object.

```

<number> n =
    pdf.immediateobj(<integer> n, <string> objtext)
<number> n =
    pdf.immediateobj(<integer> n, "file", <string> filename)
<number> n =

```




```

pdf.immediateobj(<integer> n, "stream", <string> streamtext, <string> attr-
text)
<number> n =
pdf.immediateobj(<integer> n, "streamfile", <string> filename, <string> at-
trtext)

```

13.1.22 obj

This function creates a pdf object, which is written to the pdf file only when referenced, e.g., by `refobj()`.

All function variants return the object number of the newly generated object, and there are two separate calling modes. The first mode is modelled after pdfT_EX's `\pdfobj` primitive.

```

<number> n =
pdf.obj(<string> objtext)
<number> n =
pdf.obj("file", <string> filename)
<number> n =
pdf.obj("stream", <string> streamtext, <string> attrtext)
<number> n =
pdf.obj("streamfile", <string> filename, <string> attrtext)

```

An optional first argument can be given to make the function use a previously reserved pdf object.

```

<number> n =
pdf.obj(<integer> n, <string> objtext)
<number> n =
pdf.obj(<integer> n, "file", <string> filename)
<number> n =
pdf.obj(<integer> n, "stream", <string> streamtext, <string> attrtext)
<number> n =
pdf.obj(<integer> n, "streamfile", <string> filename, <string> attrtext)

```

The second mode accepts a single argument table with key-value pairs.

```

<number> n = pdf.obj {
  type           = <string>,
  immediate      = <boolean>,
  objnum         = <number>,
  attr           = <string>,
  compresslevel  = <number>,
  objcompression = <boolean>,
  file           = <string>,
  string         = <string>,
  nolength       = <boolean>,
}

```



The `type` field can have the values `raw` and `stream`, this field is required, the others are optional (within constraints). When `nolength` is set, there will be no `/Length` entry added to the dictionary.

Note: this mode makes `obj` look more flexible than it actually is: the constraints from the separate parameter version still apply, so for example you can't have both `string` and `file` at the same time.

13.1.23 `refobj`

This function, the Lua version of the `\pdfrefobj` primitive, references an object by its object number, so that the object will be written to the pdf file.

```
pdf.refobj(<integer> n)
```

This function works in both the `\directlua` and `\latelua` environment. Inside `\directlua` a new whatsit node `'pdf_refobj'` is created, which will be marked for flushing during page output and the object is then written directly after the page, when also the resources objects are written to the pdf file. Inside `\latelua` the object will be marked for flushing.

This function has no return values.

13.1.24 `reserveobj`

This function creates an empty pdf object and returns its number.

```
<number> n = pdf.reserveobj()  
<number> n = pdf.reserveobj("annot")
```

13.1.25 `getpageref`

The object number of a page can be fetched with this function. This can be a forward reference so when you ask for a future page, you do get a number back.

```
<number> n = pdf.getpageref(123)
```

13.1.26 `registerannot`

This function adds an object number to the `/Annots` array for the current page without doing anything else. This function can only be used from within `\latelua`.

```
pdf.registerannot (<number> objnum)
```

13.1.27 `newcolorstack`

This function allocates a new color stack and returns its id. The arguments are the same as for the similar backend extension primitive.



```
pdf.newcolorstack("0 g","page",true) -- page|direct|origin
```

13.1.28 setfontattributes

This function will force some additional code into the font resource. It can for instance be used to add a custom ToUnicode vector to a bitmap file.

```
pdf.setfontattributes(<number> font id, <string> pdf code)
```

13.2 The pdf library

13.2.1 Introduction

The pdf library replaces the epdf library and provides an interface to pdf files. It uses the same code as is used for pdf image inclusion. The pplib library by Paweł Jackowski replaces the poppler (derived from xpdf) library.

A pdf file is basically a tree of objects and one descends into the tree via dictionaries (key/value) and arrays (index/value). There are a few topmost dictionaries that start at root that are accessed more directly.

Although everything in pdf is basically an object we only wrap a few in so called userdata Lua objects.

| pdf | Lua |
|------------|---|
| null | nil |
| boolean | boolean |
| integer | integer |
| float | number |
| name | string |
| string | string |
| array | array userdata |
| dictionary | dictionary userdata |
| stream | stream userdata (with related dictionary) |
| reference | reference userdata |

The regular getters return these Lua data types but one can also get more detailed information.

13.2.2 open, new, status, close, unencrypt

A document is loaded from a file or string

```
<pdf document> = pdf.open(filename)
<pdf document> = pdf.new(somestring,somelength)
```

Such a document is closed with:

```
pdf.close(<pdf document>)
```



You can check if a document opened well by:

```
pdfe.status(<pdf document>)
```

The returned codes are:

| VALUE | EXPLANATION |
|-------|-----------------------------------|
| -2 | the document failed to open |
| -1 | the document is (still) protected |
| 0 | the document is not encrypted |
| 2 | the document has been unencrypted |

An encrypted document can be unencrypted by the next command where instead of either password you can give nil:

```
pdfe.unencrypt(<pdf document>,userpassword,ownerpassword)
```

13.2.3 size, version, nofobjects, nopages

A successfully opened document can provide some information:

```
bytes = size(<pdf document>)
major, minor = version(<pdf document>)
n = nofobjects(<pdf document>)
n = nopages(<pdf document>)
bytes, waste = nopages(<pdf document>)
```

13.2.4 get[catalog|trailer|info]

For accessing the document structure you start with the so called catalog, a dictionary:

```
<pdf dictionary> = pdfe.getcatalog(<pdf document>)
```

The other two root dictionaries are accessed with:

```
<pdf dictionary> = pdfe.gettrailer(<pdf document>)
<pdf dictionary> = pdfe.getinfo(<pdf document>)
```

13.2.5 getpage, getbox

A specific page can conveniently be reached with the next command, which returns a dictionary.

```
<pdf dictionary> = pdfe.getpage(<pdf document>,pagenumber)
```

Another convenience command gives you the (bounding) box of a (normally page) which can be inherited from the document itself. An example of a valid box name is MediaBox.

```
pages = pdfe.getbox(<pdf document>,boxname)
```



13.2.6 get[string|integer|number|boolean|name]

Common values in dictionaries and arrays are strings, integers, floats, booleans and names (which are also strings) and these are also normal Lua objects:

```
s = getstring (<pdf array|dictionary>,index|key)
i = getinteger(<pdf array|dictionary>,index|key)
n = getnumber (<pdf array|dictionary>,index|key)
b = getboolean(<pdf array|dictionary>,index|key)
n = getname   (<pdf array|dictionary>,index|key)
```

13.2.7 get[from][dictionary|array|stream]

Normally you will use an index in an array and key in a dictionary but dictionaries also accept an index. The size of an array or dictionary is available with the usual # operator.

```
<pdf dictionary> = getdictionary(<pdf array|dictionary>,index|key)
<pdf array>      = getarray      (<pdf array|dictionary>,index|key)
<pdf stream>,
<pdf dictionary> = getstream     (<pdf array|dictionary>,index|key)
```

These commands return dictionaries, arrays and streams, which are dictionaries with a blob of data attached.

Before we come to an alternative access mode, we mention that the objects provide access in a different way too, for instance this is valid:

```
print(pdf.open("foo.pdf").Catalog.Type)
```

At the topmost level there are Catalog, Info, Trailer and Pages, so this is also okay:

```
print(pdf.open("foo.pdf").Pages[1])
```

13.2.8 [open|close|readfrom][whole|]stream

Streams are sort of special. When your index or key hits a stream you get back a stream object and dictionary object. The dictionary you can access in the usual way and for the stream there are the following methods:

```
okay    = openstream(<pdf stream>,[decode])
         closestream(<pdf stream>)
str, n = readfromstream(<pdf stream>)
str, n = readwholestream(<pdf stream>,[decode])
```

You either read in chunks, or you ask for the whole. When reading in chunks, you need to open and close the stream yourself. The n value indicates the length read. The decode parameter controls if the stream data gets uncompressed.



As with dictionaries, you can access fields in a stream dictionary in the usual Lua way too. You get the content when you 'call' the stream. You can pass a boolean that indicates if the stream has to be decompressed.

13.2.9 getfrom[dictionary|array]

In addition to the interface described before, there is also a bit lower level interface available.

```
key, type, value, detail = getfromdictionary(<pdf dictionary>,index)
type, value, detail = getfromarray(<pdf array>,index)
```

| TYPE | MEANING | VALUE | DETAIL |
|------|------------|------------------|-----------------|
| 0 | none | nil | |
| 1 | null | nil | |
| 2 | boolean | boolean | |
| 3 | boolean | integer | |
| 4 | number | float | |
| 5 | name | string | |
| 6 | string | string | hex |
| 7 | array | arrayobject | size |
| 8 | dictionary | dictionaryobject | size |
| 9 | stream | streamobject | dictionary size |
| 10 | reference | integer | |

A hex string is (in the pdf file) surrounded by <> while plain strings are bounded by <>.

13.2.10 [dictionary|array]totable

All entries in a dictionary or table can be fetched with the following commands where the return values are a hashed or indexed table.

```
hash = dictionarytotable(<pdf dictionary>)
list = arraytotable(<pdf array>)
```

You can get a list of pages with:

```
{ { <pdf dictionary>, size, objnum }, ... } = pagestotable(<pdf document>)
```

13.2.11 getfromreference

Because you can have unresolved references, a reference object can be resolved with:

```
<pdf dictionary|array|stream> = getfromreference(<pdf reference>)
```

13.3 Memory streams

The pdf.new that takes three arguments:



| VALUE | EXPLANATION |
|--------|---|
| stream | this is a (in low level Lua speak) light userdata object, i.e. a pointer to a sequence of bytes |
| length | this is the length of the stream in bytes (the stream can have embedded zeros) |
| name | optional, this is a unique identifier that is used for hashing the stream, so that multiple doesn't use more memory |

The third argument is optional. When it is not given the function will return an pdf document object as with a regular file, otherwise it will return a filename that can be used elsewhere (e.g. in the image library) to reference the stream as pseudo file.

Instead of a light userdata stream (which is actually fragile but handy when you come from a library) you can also pass a Lua string, in which case the given length is (at most) the string length.

The function returns an pdf object and a string. The string can be used in the img library instead of a filename. You need to prevent garbage collection of the object when you use it as image (for instance by storing it somewhere).

Both the memory stream and it's use in the image library is experimental and can change. In case you wonder where this can be used: when you use the swiglib library for graphicmagick, it can return such a userdata object. This permits conversion in memory and passing the result directly to the backend. This might save some runtime in one-pass workflows. This feature is currently not meant for production and we might come up with a better implementation.

13.4 The pdfscanner library

The pdfscanner library allows interpretation of pdf content streams and /ToUnicode (cmap) streams. You can get those streams from the pdf document object, as explained in an earlier section. There is only a single top-level function in this library:

```
pdfscanner.scan (<pdf document>, <table> operator table, <table> info)
pdfscanner.scan (<pdf array>, <table> operator table, <table> info)
pdfscanner.scan (<string>, <table> operator table, <table> info)
```

The first argument should be a Lua string or a stream or array object coming from the pdf document object. The second argument, operator table, should be a Lua table where the keys are pdf operator name strings and the values are Lua functions (defined by you) that are used to process those operators. The functions are called whenever the scanner finds one of these pdf operators in the content stream(s). The functions are called with two arguments: the scanner object itself, and the info table that was passed as the third argument to pdfscanner.scan.

Internally, pdfscanner.scan loops over the pdf operators in the stream(s), collecting operands on an internal stack until it finds a pdf operator. If that pdf operator's name exists in operator table, then the associated function is executed. After the function has run (or when there is no function to execute) the internal operand stack is cleared in preparation for the next operator, and processing continues.

The scanner argument to the processing functions is needed because it offers various methods to get the actual operands from the internal operand stack.



A simple example of processing a pdf's document stream could look like this:

```
local operatortable = { }

operatortable.Do = function(scanner,info)
    local resources = info.resources
    if resources then
        local val      = scanner:pop()
        local name     = val[2]
        local xobject = resources.XObject
        print(info.space .. "Uses XObject " .. name)
        local resources = xobject.Resources
        if resources then
            local newinfo = {
                space      = info.space .. " ",
                resources = resources,
            }
            pdfscanner.scan(entry, operatortable, newinfo)
        end
    end
end

local function Analyze(filename)
    local doc = pdf.open(filename)
    if doc then
        local pages = doc.Pages
        for i=1,#pages do
            local page = pages[i]
            local info = {
                space      = " ",
                resources = page.Resources,
            }
            print("Page " .. i)
            -- pdfscanner.scan(page.Contents,operatortable,info)
            pdfscanner.scan(page.Contents(),operatortable,info)
        end
    end
end

Analyze("foo.pdf")
```

This example iterates over all the actual content in the pdf, and prints out the found XObject names. While the code demonstrates quite some of the pdf functions, let's focus on the type pdfscanner specific code instead.

From the bottom up, the following line runs the scanner with the pdf page's top-level content given in the first argument.



The third argument, `info`, contains two entries: `space` is used to indent the printed output, and `resources` is needed so that embedded XForms can find their own content.

The second argument, `operatortable` defines a processing function for a single pdf operator, `Do`.

The function `Do` prints the name of the current XObject, and then starts a new scanner for that object's content stream, under the condition that the XObject is in fact a `/Form`. That nested scanner is called with new `info` argument with an updated `space` value so that the indentation of the output nicely nests, and with a new `resources` field to help the next iteration down to properly process any other, embedded XObjects.

Of course, this is not a very useful example in practice, but for the purpose of demonstrating `pdfscanner`, it is just long enough. It makes use of only one scanner method: `scanner:pop()`. That function pops the top operand of the internal stack, and returns a Lua table where the object at index one is a string representing the type of the operand, and object two is its value.

The list of possible operand types and associated Lua value types is:

| TYPES | TYPE |
|----------|-----------|
| integer | <number> |
| real | <number> |
| boolean | <boolean> |
| name | <string> |
| operator | <string> |
| string | <string> |
| array | <table> |
| dict | <table> |

In case of `integer` or `real`, the value is always a Lua (floating point) number. In case of `name`, the leading slash is always stripped.

In case of `string`, please bear in mind that pdf actually supports different types of strings (with different encodings) in different parts of the pdf document, so you may need to reencode some of the results; `pdfscanner` always outputs the byte stream without reencoding anything. `pdfscanner` does not differentiate between literal strings and hexadecimal strings (the hexadecimal values are decoded), and it treats the stream data for inline images as a string that is the single operand for `EI`.

In case of `array`, the table content is a list of `pop` return values and in case of `dict`, the table keys are pdf name strings and the values are `pop` return values.

There are a few more methods defined that you can ask `scanner`:

| METHOD | EXPLANATION |
|----------------------------|--|
| <code>pop</code> | see above |
| <code>popnumber</code> | return only the value of a real or integer |
| <code>popname</code> | return only the value of a name |
| <code>popstring</code> | return only the value of a string |
| <code>poparray</code> | return only the value of a array |
| <code>popdictionary</code> | return only the value of a dict |



| | |
|------------|--|
| popboolean | return only the value of a boolean |
| done | abort further processing of this scan() call |

The pop* are convenience functions, and come in handy when you know the type of the operands beforehand (which you usually do, in pdf). For example, the Do function could have used `local name = scanner:popname()` instead, because the single operand to the Do operator is always a pdf name object.

The done function allows you to abort processing of a stream once you have learned everything you want to learn. This comes in handy while parsing /ToUnicode, because there usually is trailing garbage that you are not interested in. Without done, processing only ends at the end of the stream, possibly wasting cpu cycles.

We keep the older names popNumber, popName, popString, popArray, popDict and popBool around.



Topics

a

Aleph 42, 51
adjust 126
attributes 22, 152, 188

b

backend 36, 44, 249
banner 19
boundary 130
boxes 17, 22, 191
 reuse 191
 split 192
bytecodes 181

c

callbacks 165
 building pages 171
 closing files 169
 contributions 170, 173
 data files 167
 dump 176
 editing 178
 errors 177, 178
 files 178
 font files 166, 167
 fonts 180
 format file 166
 hyphenation 175
 image files 168
 input buffer 170
 inserts 171
 job run 177
 jobname 170
 kerning 176
 ligature building 175
 linebreaks 172, 173
 math 176
 opening files 168
 output 175
 output buffer 170
 output file 166
 pdf file 179
 packing 173, 174

pages 177
reader 168
readers 169
rules 175
synctex 179
wrapping up 179

catcodes 27
characters 67
 codes 189
command line 57
conditions 33
configuration 206
convert commands 187
csnames 55

d

direct nodes 155
directions 51, 130
discretionaries 77, 81, 126

e

ε -TEX 40
engines 39
errors 28, 29, 198
escaping 25
exceptions 75
expansion 32

f

files
 binary 56
 finding 215
 map 249
 names 36
 writing 37
fontloader
 tables 233
fonts 29, 85
 current 97
 define 97
 defining 199
 extend 97
 id 97



- information 231
- iterate 98
- library 95
- loading 231
- real 90
- tables 85
- tfm 95
- used 287
- vf 96
- virtual 90, 92, 94, 96

format 20, 56

g

- glue 127
- glyphs 67, 128
- graphics 219

h

- hash 199
- helpers 197
- history 39
- hyphenation 35, 67, 73, 75
 - discretionaries 77
 - exceptions 75
 - how it works 77
 - patterns 75

i

- io 207
- images 219
 - immediate 222
 - injection 222
 - library 219
 - MetaPost 223
 - mplib 223
 - object 222
 - types 223
- initialization 57, 200
 - bitmaps 216
- insertions 125

k

- kerning 79
- kerns 128
 - suppress 30

l

- Lua 17
 - byte code 57
 - extensions 60
 - interpreter 57
 - libraries 60, 65
 - modules 65
- languages 35, 67
 - library 81
- last items 188
- leaders 35
- libraries
 - kpse 214
 - lua 181
 - status 182
 - tex 184
 - texconfig 206
 - texio 207
 - token 208
- ligatures 79
 - suppress 30
- linebreaks 81, 204
- lists 124, 193

m

- MetaPost 223
 - mplib 223
- macros 212
- main loop 73
- map files 249
- marks 31, 125
- math 29, 37, 99
 - accents 115
 - codes 118
 - cramped 102
 - delimiters 116, 118
 - extensibles 116
 - fences 114
 - flattening 120
 - fractions 117
 - italics 112
 - kerning 112
 - last line 119
 - limits 111
 - nodes 126, 131



parameters 103, 105, 192
penalties 113
radicals 115
scripts 112, 116, 120
spacing 102, 109, 110, 111
stacks 102
styles 100, 102, 119, 120
text 120
tracing 121
Unicode 99
memory 55

n

nesting 194, 205
newline 56
nodes 17, 21, 123
 adjust 126
 attributes 152
 boundary 130
 direct 155
 direction 130
 discretionaries 126
 functions 141
 glue 127
 glyph 128
 insertions 125
 kerns 128
 lists 124
 marks 125
 math 126, 131
 paragraphs 130, 131
 penalty 128
 properties 160
 rules 124
 text 123

o

Omega 51
OpenType 231
output 34, 36

p

pdf 249
 analyze 255
 annotations 251, 254
 backend 44

catalog 249
color stack 254
compression 250
date 65, 250
fonts 255
info 249
margins 251
matrix 251
memory streams 258
objects 251, 252, 253, 254, 255
options 250
page attributes 249
page resources 249
pages 254
positioning 251
positions 251
precision 250
print to 252
resolution 250, 251
scanner 259
trailer 249, 250
pdfa 255
unicode 250
version 249
xform attributes 249
xform resources 249
pdfTeX 40
pages 192, 205
paragraphs 81, 130, 131
 reset 204
parameters
 internal 184
 math 192
patterns 75
penalty 128
primitives 29, 200
printing 195
properties 160
protrusion 131

r

registers 188, 191
 bytecodes 181
rules 35, 124



s

shipout 205
space 56
spaces
 suppress 30
splitting 34
synctex 206

t

T_EX 39
TrueType 231
Type1 233
testing 65
text
 math 120

tokens 208
 scanning 30
tracing 36

u

Unicode 20, 21
 math 99

v

version 19, 181

w

web2c 43



Primitives

This register contains the primitives that are mentioned in the manual. There are of course many more primitives. The LuaTeX primitives are typeset in bold. The primitives from pdfTeX are not supported that way but mentioned anyway.

| | | | |
|---|---------------------|--|---|
| <code>\abovedisplayskip</code> | 111 | <code>\csname</code> | 28, 31 |
| <code>\abovewithdelims</code> | 117 | <code>\csstring</code> | 31 |
| <code>\accent</code> | 33, 73, 74 | | |
| <code>\addafterocplist</code> | 43 | <code>\DefaultInputMode</code> | 43 |
| <code>\addbeforeocplist</code> | 43 | <code>\DefaultInputTranslation</code> | 43 |
| <code>\adjustspacing</code> | 41, 89 | <code>\DefaultOutputMode</code> | 43 |
| <code>\alignmark</code> | 31 | <code>\DefaultOutputTranslation</code> | 43 |
| <code>\aligntab</code> | 31 | <code>\def</code> | 46 |
| <code>\atop</code> | 102, 104 | <code>\delcode</code> | 55, 99, 189, 191 |
| <code>\atopwithdelims</code> | 102 | <code>\delimiter</code> | 99 |
| <code>\attribute</code> | 188 | <code>\detokenize</code> | 209 |
| <code>\attributedef</code> | 188 | <code>\dimen</code> | 21, 60, 188 |
| <code>\automaticdiscretionary</code> | 73 | <code>\dimendef</code> | 21, 188 |
| <code>\automatichyphenmode</code> | 71 | <code>\directlua</code> | 17 |
| <code>\automatichyphenpenalty</code> | 75 | <code>\directlua</code> | 19, 24, 25, 26, 181, 195, 200, 252, 254 |
| | | <code>\discretionary</code> | 18, 75, 76, 78, 126 |
| <code>\batchmode</code> | 208 | <code>\displaystyle</code> | 109 |
| <code>\begincsname</code> | 31 | <code>\displaywidowpenalties</code> | 205 |
| <code>\begingroup</code> | 102 | <code>\dp</code> | 21 |
| <code>\belowdisplayskip</code> | 111 | <code>\draftmode</code> | 36, 41 |
| <code>\bodydir</code> | 43 | | |
| <code>\bodydirection</code> | 54 | <code>\edef</code> | 26, 32, 46, 209 |
| <code>\boundary</code> | 36, 130 | <code>\efcode</code> | 20, 41, 88 |
| <code>\box</code> | 21 | <code>\endcsname</code> | 28 |
| <code>\boxdir</code> | 43 | <code>\endgroup</code> | 102 |
| <code>\breakafterdirmode</code> | 53 | <code>\endinput</code> | 208 |
| | | <code>\endlinechar</code> | 30, 39, 195, 197 |
| <code>\catcode</code> | 19, 20, 55, 189 | <code>\errhelp</code> | 198 |
| <code>\catcodetable</code> | 27, 195 | <code>\errmessage</code> | 198 |
| <code>\char</code> | 18, 20, 74, 75, 128 | <code>\etoksapp</code> | 30 |
| <code>\chardef</code> | 20, 75, 212 | <code>\etokspre</code> | 30 |
| <code>\clearmarks</code> | 31 | <code>\everyeof</code> | 30 |
| <code>\clearocplists</code> | 43 | <code>\everyjob</code> | 58 |
| <code>\clubpenalties</code> | 204 | <code>\exceptionpenalty</code> | 76 |
| <code>\copy</code> | 21 | <code>\exhyphenchar</code> | 74, 75 |
| <code>\copyfont</code> | 41 | <code>\exhyphenpenalty</code> | 75, 78, 126 |
| <code>\count</code> | 21, 22, 60, 188 | <code>\expandafter</code> | 32 |
| <code>\countdef</code> | 21, 188 | <code>\expanded</code> | 32, 41 |
| <code>\crampedscriptstyle</code> | 103 | | |



\expandglyphsinfont 41, 86, 87
\explicitdiscretionary 73
\explicithyphenpenalty 75
\externalocp 43

\firstvalidlanguage 68
\fontid 29
\formatname 20, 200

\gleaders 35
\glet 32
\global 55

\halign 172
\hangindent 53
\hbox 18, 22, 34, 112, 172, 173, 191
\hjcode 20, 55, 68, 76
\hoffset 43
\hpack 34
\hrule 18
\hsize 72
\hskip 18, 127
\ht 21
\hyphenation 75, 78
\hyphenationbounds 70
\hyphenationmin 35, 68
\hyphenchar 74, 78, 85
\hyphenpenalty 75, 78, 126

\InputMode 43
\InputTranslation 43
\if 31
\ifabsdim 41
\ifabsnum 41
\ifcondition 33
\ifcsname 28
\ifincsname 41
\ifprimitive 41
\ifx 28
\ignoreligaturesinfont 41
\immediate 222, 223, 252
\immediateassigned 32
\immediateassignment 32
\initcatcodetable 27
\input 166
\insert 21, 125

\insertht 42
\interlinepenalties 204

\jobname 20, 58, 59, 170

\kern 18, 128
\knaccode 40
\knbccode 40
\knbscode 40

\language 74, 76, 78, 82
\lastnamedcs 31
\lastnodetype 123
\lastsavedboxresourceindex 35, 42
\lastsavedimageresourceindex 35, 42
\lastsavedimageresourcepages 35, 42
\lastxpos 41
\lastypos 41
\latelua 25, 136, 181, 252, 254
\lateluafunction 25
\lccode 20, 55, 189
\leaders 35
\left 114
\leftghost 68, 74
\lefthyphenmin 35, 68
\leftmarginkern 41
\letcharcode 31
\letterspacefont 41
\linedir 53
\localbrokenpenalty 130
\localinterlinepenalty 130
\localleftbox 130, 172
\localrightbox 130, 172
\long 28
\lowercase 76
\lpcode 20, 41, 88
\luabytecode 26
\luabytecodecall 26
\luacopyinputnodes 196
\luaedef 26, 213
\luaescapestring 25
\luafunction 25, 26
\luafunctioncall 26
\luatexbanner 19
\luatexrevision 19, 20
\luatexversion 19, 20



| | | | |
|--|--------------------|--------------------------------------|-----------------|
| <code>\mag</code> | 39 | <code>\noOutputTranslation</code> | 43 |
| <code>\mark</code> | 125 | <code>\nospaces</code> | 30 |
| <code>\marks</code> | 21, 144 | <code>\novrule</code> | 35 |
| <code>\mathaccent</code> | 99 | <code>\nullfont</code> | 28 |
| <code>\mathchar</code> | 99, 120 | <code>\number</code> | 29, 197 |
| <code>\mathchardef</code> | 99, 120 | | |
| <code>\mathchoice</code> | 101 | <code>\OutputMode</code> | 43 |
| <code>\mathcode</code> | 55, 99, 189 | <code>\OutputTranslation</code> | 43 |
| <code>\mathdelimitersmode</code> | 114 | <code>\ocp</code> | 43 |
| <code>\mathdir</code> | 43 | <code>\ocplist</code> | 43 |
| <code>\mathdir</code> | 54 | <code>\ocptracelevel</code> | 43 |
| <code>\mathdir</code> | 194 | <code>\omathcode</code> | 43 |
| <code>\mathdirection</code> | 54 | <code>\openin</code> | 166 |
| <code>\mathdisplayskipmode</code> | 111 | <code>\openout</code> | 37, 44, 166 |
| <code>\matheqnogapstep</code> | 114 | <code>\outer</code> | 28 |
| <code>\mathflattenmode</code> | 120 | <code>\output</code> | 175, 183 |
| <code>\mathitalicsmode</code> | 112, 114 | <code>\outputbox</code> | 34 |
| <code>\mathnolimitsmode</code> | 111 | <code>\outputmode</code> | 36, 41 |
| <code>\mathoption</code> | 121 | <code>\over</code> | 102, 104, 194 |
| <code>\mathpenaltiesmode</code> | 113 | <code>\overline</code> | 103 |
| <code>\mathscriptboxmode</code> | 112 | <code>\overwithdelims</code> | 102 |
| <code>\mathscriptcharmode</code> | 112 | | |
| <code>\mathscriptsmode</code> | 113 | <code>\pagebottomoffset</code> | 43 |
| <code>\mathstyle</code> | 100, 101, 102, 195 | <code>\pagedir</code> | 43 |
| <code>\mathsurround</code> | 109, 127 | <code>\pagedir</code> | 54 |
| <code>\mathsurroundmode</code> | 109 | <code>\pagedirection</code> | 54 |
| <code>\mathsurroundskip</code> | 109 | <code>\pageheight</code> | 41, 43 |
| <code>\maxdepth</code> | 174 | <code>\pagerightoffset</code> | 43 |
| <code>\medmuskip</code> | 111 | <code>\pagewidth</code> | 41, 43 |
| <code>\middle</code> | 194 | <code>\par</code> | 22, 28, 29, 171 |
| <code>\muskip</code> | 21, 110, 111, 188 | <code>\pardir</code> | 43 |
| <code>\muskipdef</code> | 21 | <code>\pardir</code> | 54 |
| | | <code>\pardirection</code> | 54 |
| <code>\newlinechar</code> | 39 | <code>\parfillskip</code> | 172, 205 |
| <code>\noboundary</code> | 36, 74, 79, 130 | <code>\parindent</code> | 184 |
| <code>\noDefaultInputMode</code> | 43 | <code>\parshape</code> | 53 |
| <code>\noDefaultInputTranslation</code> | 43 | <code>\patterns</code> | 75, 77, 78 |
| <code>\noDefaultOutputMode</code> | 43 | <code>\pdfadjustinterwordglue</code> | 40 |
| <code>\noDefaultOutputTranslation</code> | 43 | <code>\pdfappendkern</code> | 40 |
| <code>\noexpand</code> | 32 | <code>\pdfcopyfont</code> | 41 |
| <code>\nohrule</code> | 35 | <code>\pdfdraftmode</code> | 41 |
| <code>\noInputMode</code> | 43 | <code>\pdfeachlinedepth</code> | 41 |
| <code>\noInputTranslation</code> | 43 | <code>\pdfeachlineheight</code> | 41 |
| <code>\nokerns</code> | 30 | <code>\pdfelapseddtime</code> | 40 |
| <code>\noligs</code> | 30 | <code>\pdfescapehex</code> | 40 |
| <code>\noOutputMode</code> | 43 | <code>\pdfescapehex</code> | 40 |



\pdfescapestring 40
\pdfextension 40, 44
\pdffeedback 40, 42, 44
\pdffiledump 40
\pdffilemoddate 40
\pdffilesize 40
\pdffirstlineheight 41
\pdffontattr 86
\pdffontexpand 41
\pdfforcepagebox 40
\pdfignoreddimen 41
\pdfimageaddfilename 41
\pdfinserttht 42
\pdflastlinedepth 41
\pdflastmatch 40
\pdflastxform 42
\pdflastximage 42
\pdflastximagepages 42
\pdfliteral 25
\pdfmapfile 249
\pdfmapline 249
\pdfmatch 40
\pdfmdfivesum 40
\pdfmovechars 40
\pdfnoligatures 41
\pdfnormaldeviate 41
\pdfobj 252, 253
\pdfoptionalwaysusepdfpagebox 40
\pdfoptionpdfinclusionerrorlevel 40
\pdfoutput 41
\pdfpageheight 41
\pdfpagewidth 41
\pdfprependkern 40
\pdfpxdimen 41
\pdfrandomseed 41
\pdfrefobj 254
\pdfrefxform 42
\pdfrefximage 42, 219
\pdfresettimer 40
\pdfsetrandomseed 41
\pdfshellescape 40
\pdfsnaprefpoint 40
\pdfsnapy 40
\pdfsnapycomp 40
\pdfstrcmp 40
\pdftexbanner 40
\pdftexrevision 40
\pdftexversion 40
\pdftracingfonts 41
\pdfunescapehex 40
\pdfuniformdeviate 41
\pdfvariable 40, 44, 219
\pdfxform 41, 42
\pdfxformattr 41
\pdfxformresources 41
\pdfximage 42, 219, 222
\penalty 128
\popocplist 43
\postexhyphenchar 73, 78
\posthyphenchar 78
\preexhyphenchar 73, 78
\prehyphenchar 78
\primitive 41
\protrudechars 41, 89
\protrusionboundary 36, 130
\pushocplist 43
\pxdimen 41

\quitvmode 41

\radical 99
\read 166
\relax 75, 196, 200, 211
\removeafterocplist 43
\removebeforeocplist 43
\right 114
\rightghost 68, 74
\righthyphenmin 35, 68
\rightmarginkern 41
\romannumeral 101, 197
\rptide 20, 41, 88
\rule 124

\saveboxresource 35, 42
\savecatcodetable 28
\saveimageresource 35, 42, 223
\savepos 41
\savingshyphcodes 68, 69, 76, 83
\scantextokens 30
\scantokens 25, 30
\scriptfont 105
\scriptscriptfont 105



| | |
|--|---|
| <code>\scriptscriptstyle</code> 115 | <code>\tracingrestores</code> 40, 55 |
| <code>\scriptspace</code> 108 | <code>\Uchar</code> 21 |
| <code>\scriptstyle</code> 103 | <code>\Udelcode</code> 100, 191 |
| <code>\setbox</code> 21 | <code>\Udelcodenum</code> 100 |
| <code>\setfontid</code> 29, 30 | <code>\Udelimiter</code> 100 |
| <code>\setlanguage</code> 68, 74, 78 | <code>\Udelimiterover</code> 100, 116 |
| <code>\sfcode</code> 20, 55, 189 | <code>\Udelimiterunder</code> 100, 116 |
| <code>\shapemode</code> 53 | <code>\Uhexensible</code> 117 |
| <code>\shbscode</code> 40 | <code>\Umathaccent</code> 100, 115 |
| <code>\shipout</code> 177 | <code>\Umathaxis</code> 104 |
| <code>\skewchar</code> 85, 115 | <code>\Umathbinbinspacing</code> 110 |
| <code>\skip</code> 21, 188 | <code>\Umathbinclonespacing</code> 110 |
| <code>\skipdef</code> 21, 188 | <code>\Umathbininnerspacing</code> 110 |
| <code>\spaceskip</code> 30 | <code>\Umathbinopenspacing</code> 110 |
| <code>\special</code> 93, 136 | <code>\Umathbinopspacing</code> 110 |
| <code>\stbscode</code> 40 | <code>\Umathbinordspacing</code> 110 |
| <code>\string</code> 31 | <code>\Umathbinpunctspacing</code> 110 |
| <code>\suppressfontnotfounderror</code> 28 | <code>\Umathbinrelspacing</code> 110 |
| <code>\suppressifcsnameerror</code> 28 | <code>\Umathchar</code> 100, 120 |
| <code>\suppresslongerror</code> 28 | <code>\Umathchardef</code> 99, 120 |
| <code>\suppressmathparerror</code> 29 | <code>\Umathcharnum</code> 100 |
| <code>\suppressoutererror</code> 28 | <code>\Umathcharnumdef</code> 99, 100 |
| <code>\suppressprimitiveerror</code> 29 | <code>\Umathclosebinspacing</code> 110 |
| | <code>\Umathcloseclonespacing</code> 110 |
| <code>\tagcode</code> 41 | <code>\Umathcloseinnerspacing</code> 110 |
| <code>\textdir</code> 18 | <code>\Umathcloseopenspacing</code> 110 |
| <code>\textdir</code> 43, 52 | <code>\Umathcloseopspacing</code> 110 |
| <code>\textdir</code> 54, 130 | <code>\Umathcloseordspacing</code> 110 |
| <code>\textdir</code> 194 | <code>\Umathclosepunctspacing</code> 110 |
| <code>\textdirection</code> 54 | <code>\Umathcloserelspacing</code> 110 |
| <code>\textfont</code> 105, 120 | <code>\Umathcode</code> 100 |
| <code>\textstyle</code> 101 | <code>\Umathcodenum</code> 100 |
| <code>\the</code> 20, 22, 29, 184, 187, 188, 195 | <code>\Umathconnectoroverlapmin</code> 105, 108 |
| <code>\thickmuskip</code> 111 | <code>\Umathfractiondelsize</code> 104 |
| <code>\thinmuskip</code> 111 | <code>\Umathfractiondenomdown</code> 104 |
| <code>\toks</code> 21, 187, 188, 195 | <code>\Umathfractiondenomvgap</code> 104 |
| <code>\toksapp</code> 30 | <code>\Umathfractionnumup</code> 104 |
| <code>\toksdef</code> 21, 188 | <code>\Umathfractionnumvgap</code> 104 |
| <code>\tokspre</code> 30 | <code>\Umathfractionrule</code> 104 |
| <code>\tpack</code> 34 | <code>\Umathinnerbinspacing</code> 110 |
| <code>\tracingassigns</code> 40, 55 | <code>\Umathinnerclonespacing</code> 110 |
| <code>\tracingcommands</code> 75, 184 | <code>\Umathinnerinnerspacing</code> 110 |
| <code>\tracingfonts</code> 37, 41 | <code>\Umathinneropenspacing</code> 110 |
| <code>\tracingnesting</code> 199 | <code>\Umathinneropspacing</code> 110 |
| <code>\tracingonline</code> 36 | <code>\Umathinnerordspacing</code> 110 |
| <code>\tracingoutput</code> 177 | |



| | | | |
|--------------------------------------|---------------|--|--------------------|
| <code>\Umathinnerpunctspacing</code> | 110 | <code>\Umathpunctpunctspacing</code> | 110 |
| <code>\Umathinnerrelspacing</code> | 110 | <code>\Umathpunctrelspacing</code> | 110 |
| <code>\Umathlimitabovebgap</code> | 104 | <code>\Umathquad</code> | 104, 108 |
| <code>\Umathlimitabovekern</code> | 104, 108 | <code>\Umathradicaldegreeafter</code> | 104, 108, 115 |
| <code>\Umathlimitabovevgap</code> | 104 | <code>\Umathradicaldegreebefore</code> | 104, 108, 115 |
| <code>\Umathlimitbelowbgap</code> | 104 | <code>\Umathradicaldegreeraise</code> | 104, 108, 109, 115 |
| <code>\Umathlimitbelowkern</code> | 104, 108 | <code>\Umathradicalkern</code> | 104 |
| <code>\Umathlimitbelowvgap</code> | 104 | <code>\Umathradicalrule</code> | 104, 108 |
| <code>\Umathnolimitsubfactor</code> | 111 | <code>\Umathradicalvgap</code> | 104, 108 |
| <code>\Umathnolimitsupfactor</code> | 111 | <code>\Umathrelbinspacing</code> | 110 |
| <code>\Umathopbinspacing</code> | 110 | <code>\Umathrelclosespacing</code> | 110 |
| <code>\Umathopclosespacing</code> | 110 | <code>\Umathrelinnerspacing</code> | 110 |
| <code>\Umathopenbinspacing</code> | 110 | <code>\Umathreloppenspacing</code> | 110 |
| <code>\Umathopenclosespacing</code> | 110 | <code>\Umathreloppspacing</code> | 110 |
| <code>\Umathopeninnerspacing</code> | 110 | <code>\Umathrelordspacing</code> | 110 |
| <code>\Umathopenopenspacing</code> | 110 | <code>\Umathrelpunctspacing</code> | 110 |
| <code>\Umathopenopspacing</code> | 110 | <code>\Umathrelrelspacing</code> | 110 |
| <code>\Umathopenordspacing</code> | 110 | <code>\Umathskewedfractionhgap</code> | 117 |
| <code>\Umathopenpunctspacing</code> | 110 | <code>\Umathskewedfractionvgap</code> | 117 |
| <code>\Umathopenrelspacing</code> | 110 | <code>\Umathspaceafterscript</code> | 105, 108 |
| <code>\Umathoperatorsize</code> | 100, 104, 109 | <code>\Umathstackdenomdown</code> | 104 |
| <code>\Umathopinnerspacing</code> | 110 | <code>\Umathstacknumup</code> | 104 |
| <code>\Umathopopenspacing</code> | 110 | <code>\Umathstackvgap</code> | 104 |
| <code>\Umathopopspacing</code> | 110 | <code>\Umathsubshiftdown</code> | 104, 113 |
| <code>\Umathopordspacing</code> | 110 | <code>\Umathsubshiftdrop</code> | 104 |
| <code>\Umathoppunctspacing</code> | 110 | <code>\Umathsubsupshiftdown</code> | 104, 113 |
| <code>\Umathoprelspacing</code> | 110 | <code>\Umathsubsupvgap</code> | 105 |
| <code>\Umathordbinspacing</code> | 110 | <code>\Umathsubtopmax</code> | 105 |
| <code>\Umathordclosespacing</code> | 110 | <code>\Umathsupbottommin</code> | 105 |
| <code>\Umathordinnerspacing</code> | 110 | <code>\Umathsupshiftdrop</code> | 104 |
| <code>\Umathordopenspacing</code> | 110 | <code>\Umathsupshiftup</code> | 104, 113 |
| <code>\Umathordopspacing</code> | 110 | <code>\Umathsupsubbottommax</code> | 105 |
| <code>\Umathordordspacing</code> | 110 | <code>\Umathunderbarkern</code> | 104 |
| <code>\Umathordpunctspacing</code> | 110 | <code>\Umathunderbarrule</code> | 104 |
| <code>\Umathordrelspacing</code> | 110 | <code>\Umathunderbarvgap</code> | 104 |
| <code>\Umathoverbarkern</code> | 104 | <code>\Umathunderdelimeterbgap</code> | 104, 117 |
| <code>\Umathoverbarrule</code> | 104 | <code>\Umathunderdelimitervgap</code> | 104, 117 |
| <code>\Umathoverbarvgap</code> | 104 | <code>\Umath*</code> | 103 |
| <code>\Umathoverdelimeterbgap</code> | 104, 117 | <code>\Umiddle</code> | 118 |
| <code>\Umathoverdelimitervgap</code> | 104, 117 | <code>\Unosubscript</code> | 120 |
| <code>\Umathpunctbinspacing</code> | 110 | <code>\Unosuperscript</code> | 120 |
| <code>\Umathpunctclosespacing</code> | 110 | <code>\Uoverdelimiter</code> | 100, 116, 117 |
| <code>\Umathpunctinnerspacing</code> | 110 | <code>\Uradical</code> | 100, 115 |
| <code>\Umathpunctopenspacing</code> | 110 | <code>\Uright</code> | 118 |
| <code>\Umathpunctopspacing</code> | 110 | <code>\Uroot</code> | 100, 115, 134 |
| <code>\Umathpunctordspacing</code> | 110 | | |



| | |
|--------------------------------------|--|
| \Ustack 102 | \vadjust 126, 171, 194 |
| \Ustartdisplaymath 119 | \valign 172 |
| \Ustartmath 119 | \vbox 18, 22, 34, 172, 191, 205 |
| \Ustopdisplaymath 119 | \vcenter 172 |
| \Ustopmath 119 | \voffset 43 |
| \Usubscript 119 | \vpack 34 |
| \Usuperscript 119 | \vrule 18 |
| \Uunderdelimit 100, 116, 117 | \vskip 18, 127 |
| \uccode 20, 55, 189 | \vsplit 21, 34, 172, 192 |
| \uchyph 68, 129 | \vtop 18, 34, 172, 191 |
| \unexpanded 209 | |
| \unhbox 21 | \wd 21 |
| \unhcopy 21 | \widowpenalties 204 |
| \unvbox 21 | \wordboundary 36, 69, 130 |
| \unvcopy 21 | \write 25, 58, 166, 170, 194 |
| \uppercase 32, 76 | |
| \useboxresource 35, 42, 191 | \- 73, 75, 126 |
| \useimageresource 35, 42, 223 | |





Callbacks

b

buildpage_filter 171
build_page_insert 171

c

call_edit 178
contribute_filter 170

d

define_font 85, 92, 180

f

find_data_file 167
find_enc_file 167
find_font_file 166, 167
find_format_file 166
find_image_file 168
find_map_file 167
find_opentype_file 167
find_output_file 166
find_pk_file 167
find_read_file 166, 168
find_truetype_file 167
find_typed1_file 167, 168
find_vf_file 167
find_write_file 166
finish_pdffile 179
finish_pdfpage 179
finish_synctex 179

g

glyph_not_found 180

h

hpack_filter 172, 173, 174
hyphenate 175

k

kerning 176, 237

l

ligaturing 175, 176
linebreak_filter 173, 205

m

mlist_to_hlist 113, 146, 176

o

open_read_file 168

p

page_objnum_provider 179
post_linebreak_filter 173
pre_dump 176
pre_linebreak_filter 172, 205
process_input_buffer 170
process_jobname 170
process_output_buffer 170
process_rule 175

s

show_error_hook 177
show_error_message 178
show_lua_error_hook 178
start_file 178
start_page_number 177
start_run 177
stop_file 178
stop_page_number 177
stop_run 177

v

vpack_filter 172, 174

w

wrapup_run 179





Nodes

This register contains the nodes that are known to LuaTeX. The primary nodes are in bold, whatsits that are determined by their subtype are normal. The names prefixed by pdf_ are backend specific.

a

accent 133
adjust 70, 126
attr 153
attribute_list 152, 153

b

boundary 36, 70, 130

c

choice 133
close 135
color_stack 123

d

delim 132
delta 197
dir 18, 70, 123, 130
disc 18, 21, 126

f

fence 134
fraction 115, 134

g

glue 18, 21, 70, 123, 127
glue-spec 189
glue_spec 127, 184, 187, 188
glyph 18, 21, 67, 68, 73, 128, 148

h

hlist 18, 22, 23, 70, 124, 149

i

ins 70, 125

k

kern 18, 21, 70, 128

l

late_lua 136
local_par 130, 205

m

marginkern 131
mark 125, 242
math 126, 246
math_char 131
math_text_char 131

n

noad 133

o

open 135

p

pdf_action 123, 138
pdf_annot 137
pdf_colorstack 139
pdf_dest 138
pdf_end_link 138
pdf_end_thread 139
pdf_literal 123, 137
pdf_refobj 137
pdf_restore 140
pdf_save 140
pdf_setmatrix 140
pdf_start_link 137
pdf_start_thread 139
pdf_thread 139
pdf_window 123
penalty 70, 128

r

radical 134
rule 18, 70, 95, 124



s

save_pos 136
special 136
style 133
sub_box 131, 132
sub_mlist 131, 132

t

temp 124

u

unset 140, 236, 246
user_defined 135

v

vlist 18, 22, 70, 124, 149

w

whatsit 70, 142
write 135



Libraries

This register contains the functions available in libraries. Not all functions are documented, for instance because they can be experimental or obsolete.

callback

- find 165
- list 165
- register 165

fio

- getposition 64
- readbytes 64
- readbytetable 64
- readcardinaltable 64
- readcardinal1 64
- readcardinal2 64
- readcardinal3 64
- readcardinal4 64
- readfixed2 64
- readfixed4 64
- readintegertable 64
- readinteger1 64
- readinteger2 64
- readinteger3 64
- readinteger4 64
- read2dot14 64
- setposition 64
- skipposition 64

fontloader

- apply_afmfile 233
- apply_featurefile 233
- close 231
- fields 233
- info 231
- open 231
- to_table 231

img

- boxes 223
- copy 221
- fields 220
- immediatewrite 222
- immediatewriteobject 222
- new 219
- node 222
- scan 221

- types 223

- write 222

kpse

- default_texmfcnf 215
- expand_braces 217
- expand_path 217
- expand_var 217
- find_file 215
- init_prog 216
- lookup 216
- new 215
- readable_file 216
- set_program_name 215
- show_path 217
- var_value 217
- version 217

lang

- clean 82
- clear_hyphenation 82
- clear_patterns 82
- gethjcode 83
- hyphenate 83
- hyphenation 82
- hyphenationmin 82
- id 81
- new 81
- patterns 82
- postexhyphenchar 82
- posthyphenchar 82
- preexhyphenchar 82
- prehyphenchar 82
- sethjcode 83

lua

- bytecode 181
- getbytecode 181
- getcalllevel 182
- getluaname 181
- getstacktop 182
- name 181
- setbytecode 181



setluaname 181
version 181

mplib

char_depth 230
char_height 229
char_width 229
execute 225
fields 225
finish 225
get_boolean 230
get_numeric 230
get_path 230
get_string 230
new 223
pen_info 229
statistics 225
version 223

node

check_discretionaries 154, 157
check_discretionary 154, 157
copy 143, 157
copy_list 143, 157
count 147, 157
current_attr 143, 157
dimensions 145, 157
effective_glue 157
end_of_math 149, 157
family_font 154, 157
fields 123, 142, 157
find_attribute 153, 157
first_glyph 150, 157
flatten_discretionaries 154, 157
flush_list 142, 157
flush_node 142, 157
flush_properties_table 160
free 142, 157
getboth 157
getchar 157
getdisc 157
getfield 157
getfont 157
getglue 152, 157
getid 157
getleader 157
getlist 157
getnext 157

getprev 158
getproperty 158
getsubtype 158
getwhd 158
get_attribute 153, 157
get_properties_table 160
has_attribute 153, 158
has_field 142, 158
has_glyph 149, 158
hpack 144, 158
id 141, 158
insert_after 150, 158
insert_before 149, 158
is_char 147, 158
is_glyph 147, 158
is_node 141, 158
is_zero_glue 152, 158
kerning 150, 158
last_node 151, 158
length 147, 158
ligaturing 150, 158
mlist_to_hlist 146, 158
new 142, 158
next 143, 158
prepend_prevdepth 145
prev 143, 158
protect_glyph 151, 158
protect_glyphs 151, 158
protrusion_skippable 151, 158
rangedimensions 145, 158
remove 149, 158
setfield 159
setglue 151, 159
setproperty 159
set_attribute 153, 158
set_properties_mode 160
slide 154, 159
subtype 141, 159
subtypes 123, 159
tail 146, 159
todirect 155, 159
tonode 155, 159
tostring 155, 159
traverse 147, 159
traverse_char 148, 159
traverse_glyph 148, 159



traverse_id 148, 159
traverse_list 149
type 141, 159
types 141, 159
unprotect_glyph 151, 159
unprotect_glyphs 151, 159
unset_attribute 154, 159
usedlist 159
uses_font 159
values 123
vpack 144, 159
whatsits 141, 160
write 151, 160

node.direct

check_discretionaries 157
check_discretionary 157
copy 157
copy_list 157
count 157
current_attr 157
dimensions 157
effective_glue 157
end_of_math 157
find_attribute 157
first_glyph 157
flatten_discretionaries 157
flush_list 157
flush_node 157
free 157
getattributelist 157
getboth 157
getbox 157
getchar 157
getcomponents 157
getdata 158
getdepth 157
getdir 157
getdirection 157
getdisc 157
getfam 157
getfield 157
getfont 157
getglue 157
getheight 157
getid 157
getkern 157

getlang 157
getleader 157
getlist 157
getnext 157
getnucleus 157
getoffsets 158
getpenalty 158
getprev 158
getproperty 158
getshift 158
getsub 158
getsubtype 158
getsup 158
getwhd 158
getwidth 158
get_attribute 157
get_synctex_fields 157
has_attribute 158
has_field 158
has_glyph 158
hpack 158
insert_after 158
insert_before 158
is_char 158
is_direct 158
is_glyph 158
is_node 158
is_zero_glue 158
kerning 158
last_node 158
length 158
ligaturing 158
new 158
prepend_prevdepth 158
protect_glyph 158
protect_glyphs 158
protrusion_skippable 158
rangedimensions 158
remove 158
setattributelist 158
setboth 158
setbox 158
setchar 158
setcomponents 158
setdepth 158
setdir 159



- setdirection 158
- setdisc 159
- setexpansion 159
- setfam 159
- setfield 159
- setfont 159
- setglue 159
- setheight 159
- setkern 159
- setlang 159
- setleader 159
- setlink 159
- setlist 159
- setnext 159
- setnucleus 159
- setoffsets 159
- setpenalty 159
- setprev 159
- setproperty 159
- setshift 159
- setsplit 159
- setsub 159
- setsubtype 159
- setup 159
- setwhd 159
- setwidth 159
- set_attribute 158
- set_synctex_fields 158
- slide 159
- tail 159
- todirect 159
- tonode 159
- tostring 159
- traverse 159
- traverse_char 159
- traverse_glyph 159
- traverse_id 159
- unprotect_glyph 159
- unprotect_glyphs 159
- unset_attribute 159
- usedlist 159
- uses_font 159
- vpack 159
- write 160

os

- env 62

- exec 62
- gettimeofday 62
- name 62
- selfdir 62
- setenv 62
- spawn 62
- times 62
- tmpdir 62
- type 62
- uname 62

pdf

- getcatalog 249
- getcompresslevel 250
- getcreationdate 250
- getdecimaldigits 250
- getdestmargin 251
- getfontname 251
- getfontobjnum 251
- getfontsize 251
- getgentounicode 250
- gethpos 251
- getignoreunknownimages 250
- getimageresolution 251
- getinclusionerrorlevel 250
- getinfo 249
- getlastannot 251
- getlastlink 251
- getlastobj 251
- getlinkmargin 251
- getmajorversion 249
- getmarginmargin 251
- getmatrix 251
- getmaxobjnum 251
- getminorversion 249
- getnames 249
- getobjcompresslevel 250
- getobjtype 251
- getomitcharset 250
- getomitcidset 250
- getorigin 251
- getpageattributes 249
- getpageref 254
- getpageresources 249
- getpagesattributes 249
- getpkresolution 250
- getpos 251



- getrecompress 250
- getretval 251
- getsuppressoptionalinfo 250
- getthreadmargin 251
- gettrailer 249
- gettrailerid 250
- getvpos 251
- getxformattributes 249
- getxformmargin 251
- getxformname 251
- getxformresources 249
- hasmatrix 251
- immediateobj 252
- newcolorstack 254
- obj 253
- print 252
- refobj 254
- registerannot 254
- reserveobj 254
- setcatalog 249
- setcompresslevel 250
- setdecimaldigits 250
- setdestmargin 251
- setfontattributes 255
- setgentounicode 250
- setignoreunknownimages 250
- setimageresolution 251
- setinclusionerrorlevel 250
- setinfo 249
- setlastannot 251
- setlastlink 251
- setlastobj 251
- setlinkmargin 251
- setmajorversion 249
- setmarginmargin 251
- setminorversion 249
- setnames 249
- setobjcompresslevel 250
- setomitcharset 250
- setomitcidset 250
- setorigin 251
- setpageattributes 249
- setpageresources 249
- setpagesattributes 249
- setpkresolution 250
- setrecompress 250

- setsuppressoptionalinfo 250
- setthreadmargin 251
- settrailer 249
- settrailerid 250
- setxformattributes 249
- setxformmargin 251
- setxformresources 249

pdf

- arraytotable 258
- close 255
- closestream 257
- dictionarytotable 258
- getarray 257
- getboolean 257
- getbox 256
- getcatalog 256
- getdictionary 257
- getfromarray 257, 258
- getfromdictionary 257, 258
- getfromreference 258
- getfromstream 257
- getinfo 256
- getinteger 257
- getname 257
- getnumber 257
- getpage 256
- getstream 257
- getstring 257
- gettrailer 256
- new 255, 258
- nofobjects 256
- nofpages 256
- open 255
- openstream 257
- readfromstream 257
- readfromwholestream 257
- size 256
- status 255
- unencrypt 255
- version 256

pdfscanner

- done 261
- pop 261
- poparray 261
- popboolean 261
- popdictionary 261



popname 261
 popnumber 261
 popstring 261
 scan 259
sha2
 digest256 64
 digest384 64
 digest512 64
sio
 getposition 64
 readbytes 64
 readbytetable 64
 readcardinaltable 64
 readcardinal1 64
 readcardinal2 64
 readcardinal3 64
 readcardinal4 64
 readfixed2 64
 readfixed4 64
 readintegertable 64
 readinteger1 64
 readinteger2 64
 readinteger3 64
 readinteger4 64
 read2dot14 64
 setposition 64
 skipposition 64
status
 list 182
 resetmessages 182
 setexitcode 182
string
 bytepairs 61
 bytes 61
 characterpairs 61
 characters 61
 utfcharacter 61
 utfcharacters 61
 utflength 61
 utfvalue 61
 utfvalues 61
tex
 attribute 188
 badness 204
 box 188, 191
 catcode 189
 count 188
 cprint 196
 definefont 199
 delcode 189
 dimen 188
 enableprimitives 200
 error 198
 extraprimitives 200
 finish 199
 fontidentifier 198
 fontname 198
 forcehmode 199
 force_synctex_line 206
 force_synctex_tag 206
 get 184
 getattribute 188
 getbox 188, 191
 getboxresourcedimensions 191
 getcatcode 189
 getcount 188
 getdelcode 189
 getdelcodes 189
 getdimen 188
 getglue 188
 getlccode 189
 getlinenumber 198
 getlist 193
 getlocallevel 205
 getmath 192
 getmathcode 189
 getmathcodes 189
 getmuglue 188
 getmuskip 188
 getnest 194
 getpagestate 205
 getsfcode 189
 getskip 188
 gettoks 188
 getuccode 189
 get_synctex_line 206
 get_synctex_mode 206
 get_synctex_tag 206
 glue 188
 hashtokens 199
 init_rand 206
 isattribute 188



- isbox 188
- iscount 188
- isdimen 188
- isglue 188
- ismuglue 188
- ismuskip 188
- isskip 188
- istoks 188
- lccode 189
- linebreak 204
- lists 193
- lua_math_random 206
- lua_math_randomseed 206
- mathcode 189
- muglue 188
- muskip 188
- nest 194
- normal_rand 206
- number 197
- nwrite 197
- primitives 203
- print 195
- ptr 194
- resetparagraph 204
- romannumeral 197
- round 197
- run 199
- runtoks 199
- saveboxresource 191
- scale 197
- scantoks 188
- set 184
- setattribute 188
- setbox 188, 191
- setcatcode 189
- setcount 188
- setdelcode 189
- setdelcodes 189
- setdimen 188
- setglue 188
- setlccode 189
- setlinenumber 198
- setlist 193
- setmath 192
- setmathcode 189
- setmathcodes 189
- setmuglue 188
- setmuskip 188
- setsfcode 189
- setskip 188
- settoks 188
- setuccode 189
- set_synctex_line 206
- set_synctex_mode 206
- set_synctex_no_files 206
- set_synctex_tag 206
- sfcode 189
- shipout 205
- show_context 198
- skip 188
- sp 198
- splitbox 192
- sprint 195
- toks 188
- tprint 196
- triggerbuildpage 192
- twrite 197
- uccode 189
- uniformdeviate 206
- uniform_rand 206
- useboxresource 191
- write 197
- texio**
 - closeinput 208
 - setescape 208
 - write 207
 - write_nl 208
- token**
 - biggest_char 211
 - commands 211
 - command_id 211
 - create 211
 - expand 211
 - get_active 211
 - get_cmdname 211
 - get_command 211
 - get_csname 211
 - get_expandable 211
 - get_functions_table 212
 - get_id 211
 - get_index 211
 - get_macro 212



| | | | |
|---------------|----------|----------------|-----|
| get_meaning | 212 | scan_glue | 208 |
| get_mode | 211 | scan_int | 208 |
| get_next | 211, 213 | scan_keyword | 208 |
| get_protected | 211 | scan_keywordcs | 208 |
| get_tok | 211 | scan_list | 208 |
| is_defined | 211 | scan_real | 208 |
| is_token | 211 | scan_string | 208 |
| new | 211 | scan_token | 211 |
| put_next | 213 | scan_toks | 208 |
| scan_argument | 208 | scan_word | 208 |
| scan_code | 208 | set_char | 212 |
| scan_csname | 208 | set_lua | 212 |
| scan_dimen | 208 | set_macro | 212 |
| scan_float | 208 | | |



Statistics

The following fonts are used in this document:

| used | filesize | version | filename |
|------------|------------------|---------|-----------------------------|
| 22 | 1.622.732 | 5.960 | cambria.ttc |
| 4 | 827.080 | 5.960 | cambriai.ttf |
| 11 | 163.452 | 1.802 | LucidaBrightMath0T-Demi.otf |
| 11 | 348.296 | 1.802 | LucidaBrightMath0T.otf |
| 4 | 73.284 | 1.801 | LucidaBright0T.otf |
| 22 | 733.500 | 1.958 | latinmodern-math.otf |
| 1 | 64.684 | 2.004 | lmmono10-regular.otf |
| 1 | 64.160 | 2.004 | lmmonoltcond10-regular.otf |
| 4 | 111.536 | 2.004 | lmroman10-regular.otf |
| 22 | 525.008 | 1.106 | texgyredejavu-math.otf |
| 22 | 601.220 | 1.632 | texgyrepagella-math.otf |
| 4 | 144.472 | 2.004 | texgyrepagella-regular.otf |
| 1 | 693.876 | 2.340 | DejaVuSans-Bold.ttf |
| 1 | 741.536 | 2.340 | DejaVuSans.ttf |
| 4 | 318.392 | 2.340 | DejaVuSansMono-Bold.ttf |
| 1 | 245.948 | 2.340 | DejaVuSansMono-Oblique.ttf |
| 3 | 335.068 | 2.340 | DejaVuSansMono.ttf |
| 9 | 345.364 | 2.340 | DejaVuSerif-Bold.ttf |
| 1 | 336.884 | 2.340 | DejaVuSerif-BoldItalic.ttf |
| 1 | 343.388 | 2.340 | DejaVuSerif-Italic.ttf |
| 4 | 367.260 | 2.340 | DejaVuSerif.ttf |
| 153 | 9.007.140 | | 21 files loaded |



