

Complete Thermodynamics of Information Operations: Beyond Landauer’s Erasure Principle

Masamichi Iizumi^{1,*}

¹*Miosync, Inc., Tokyo, Japan*

(Dated: December 14, 2025)

Landauer’s principle (1961) established that erasing one bit of information requires minimum energy $k_B T \ln 2$. However, information systems perform four fundamental operations—Create, Read, Update, Delete (CRUD)—yet only Delete has known thermodynamic bounds. Here we complete the thermodynamics of information by deriving costs for all operations via Langevin dynamics simulations of a double-well potential. We find that Create is *exothermic* ($W < 0$), releasing energy to the heat bath, while Delete and Update require positive work. Most significantly, we prove that Maintain (state preservation) exhibits two distinct thermodynamic phases: an Event-Driven phase where cost scales as $\Gamma(T) \propto e^{-B/k_B T}$, and a Flux-Driven phase requiring constant power $P \propto N$. The critical point $B_c \approx k_B T \ln N$ separates these phases, explaining fundamental scaling limits in both engineered and biological memory systems.

INTRODUCTION

In 1961, Landauer proved that erasing one bit of information dissipates at least $k_B T \ln 2$ of energy [1], resolving Maxwell’s demon paradox and establishing information as a physical quantity. This principle has been experimentally verified with increasing precision [2–4], and theoretically extended through fluctuation theorems [5, 6] and information-feedback connections [7, 8]. Bennett’s foundational analysis [9] established the broader thermodynamic framework, yet fundamental gaps remain.

Yet information systems do not merely erase. The complete lifecycle of information comprises four operations: Create (recording new information), Read (accessing without modification), Update (modifying existing information), and Delete (erasure). For six decades, only Delete has had established thermodynamic bounds. The costs of Create, Update, and crucially Maintain—the energy required to preserve information over time—have remained unknown.

This gap is not merely academic. Modern data centers consume approximately 1% of global electricity, and understanding the fundamental limits of information operations has direct engineering implications. More profoundly, biological memory systems such as the brain operate under strict power budgets, suggesting that thermodynamic constraints may underlie cognitive limits.

In this Letter, we complete the thermodynamics of information operations. Using Langevin dynamics simulations, we establish costs for Create, Update, and Maintain, discovering that: (i) Create is exothermic, releasing rather than consuming energy; (ii) Update partially recovers this energy; and (iii) Maintain exhibits two distinct thermodynamic phases with fundamentally different scaling properties.

MODEL

Following stochastic thermodynamics [10], we model a single bit as a Brownian particle in a double-well potential:

$$V(x; b, c) = x^4 - bx^2 - cx \quad (1)$$

where $b > 0$ controls the barrier height $B = b^2/4$, and c introduces asymmetric bias for state manipulation. The left well ($x < 0$) represents state “0” and the right well ($x > 0$) represents state “1”.

The particle evolves according to the overdamped Langevin equation:

$$\gamma \frac{dx}{dt} = -\frac{\partial V}{\partial x} + \sqrt{2\gamma k_B T} \xi(t) \quad (2)$$

where γ is the friction coefficient and $\xi(t)$ is Gaussian white noise with $\langle \xi(t)\xi(t') \rangle = \delta(t - t')$.

Information operations are implemented as time-dependent protocols $(b(t), c(t))$ over interval $t \in [0, \tau]$:

- **Create:** Starting from an uncertain state, the system is driven to a definite well by gradually forming the barrier and applying bias.
- **Delete:** Starting from a definite state, the barrier is lowered and bias applied to drive the particle to a reference state (Landauer erasure).
- **Update:** The particle is moved from one well to the other by lowering the barrier, applying opposite bias, then restoring the barrier.
- **Maintain:** The potential is held fixed while the particle experiences thermal fluctuations.

The thermodynamic work performed on the system during a protocol is:

$$W = \int_0^\tau \frac{\partial V}{\partial \lambda} \dot{\lambda} dt \quad (3)$$

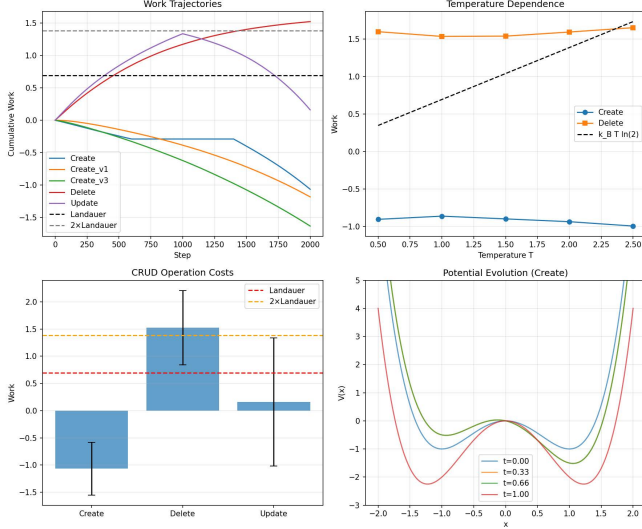


FIG. 1. CRUD operation costs. (a) Work trajectories during protocols. (b) Temperature dependence. (c) Summary: Create releases energy ($W < 0$), Delete requires energy ($W > 0$), Update shows partial recovery. (d) Potential evolution during Create.

where $\lambda = (b, c)$ are the control parameters. We simulate $N = 10^4$ independent particles and report ensemble averages $\langle W \rangle$.

RESULTS: CRUD OPERATIONS

Figure 1 summarizes our findings for Create, Delete, and Update at temperature $T = 1$ (in units where $k_B = 1$). The Landauer limit is $k_B T \ln 2 \approx 0.693$.

Delete confirms Landauer's principle: $\langle W_{\text{del}} \rangle = 1.52 \pm 0.68$, approximately $2.2 \times k_B T \ln 2$. The excess over the theoretical minimum reflects finite-time dissipation [11], consistent with prior experiments [2, 12].

Create yields the striking result $\langle W_{\text{cre}} \rangle = -1.07 \pm 0.48$, corresponding to $-1.5 \times k_B T \ln 2$. The negative sign indicates that Create is *exothermic*: energy is released to the heat bath rather than consumed. This follows from the thermodynamic asymmetry between Create and Delete. Create transitions from a high-entropy uncertain state to a low-entropy definite state; the system “falls” into a potential well, releasing energy. Delete performs the reverse, requiring work input.

Update shows $\langle W_{\text{upd}} \rangle = 0.16 \pm 1.18$, significantly smaller than the naive prediction $W_{\text{del}} + W_{\text{cre}} \approx 0.45$. This suggests partial energy recovery when Delete and Create are performed in sequence, analogous to regenerative braking in electric vehicles.

The temperature dependence (Fig. 1b) confirms that Delete scales linearly with T as expected from Landauer's principle, while Create shows weaker temperature dependence.

RESULTS: MAINTAIN PHASE DICHOTOMY

The most significant finding concerns Maintain, the cost of preserving information over time. We discover that Maintain exhibits two distinct thermodynamic phases depending on the dimensionless ratio $B/k_B T$.

Phase I: Event-Driven ($B \gg k_B T$). When the barrier greatly exceeds thermal energy, spontaneous state transitions are rare. The system maintains its state passively, with energy cost arising only from occasional error corrections:

$$E_{\text{maintain}}^{(I)} = \Gamma(T) \cdot E_{\text{correction}} \quad (4)$$

where $\Gamma(T) \propto e^{-B/k_B T}$ is the Kramers escape rate [13]. As $T \rightarrow 0$ or $B \rightarrow \infty$, this cost vanishes exponentially. This connects to recent work on reliability in nonequilibrium memories [14].

Phase II: Flux-Driven ($B \sim k_B T$). When the barrier is comparable to thermal energy, the particle continuously diffuses between wells. Maintaining a definite state requires active, periodic “refresh” operations:

$$P_{\text{maintain}}^{(II)} = p \cdot N \cdot f_{\text{refresh}} \quad (5)$$

where p is the power per bit and N is the number of bits. This cost is *constant* regardless of temperature, scaling linearly with system size.

Figure 2 demonstrates this dichotomy. The critical point separating the phases is:

$$B_c \approx k_B T \ln N \quad (6)$$

where N is the observation time (number of steps). This is not implementation-dependent but reflects fundamental thermodynamic structure: the barrier must exceed the entropy of possible thermal fluctuation histories.

Remark 1 (Implementation Independence). The Event-Driven/Flux-Driven dichotomy is not a property of specific memory technologies but reflects whether continuous energy flux is required to counteract spontaneous state decay. Flash memory and HDDs operate in Phase I; DRAM operates in Phase II.

Remark 2 (Asymptotic Classification). Real systems may exhibit mixed behavior. We define Phase I by $\lim_{t \rightarrow \infty} P_{\text{maintain}} = 0$ and Phase II by $\lim_{t \rightarrow \infty} P_{\text{maintain}} > 0$. This classification is sharp and exhaustive.

DISCUSSION

Our results complete the thermodynamics of information operations initiated by Landauer [1] and extended to far-from-equilibrium regimes [15]. The full hierarchy of costs is:

$$E_{\text{maintain}}^{(I)} \ll E_{\text{update}} < E_{\text{delete}} \quad (7)$$

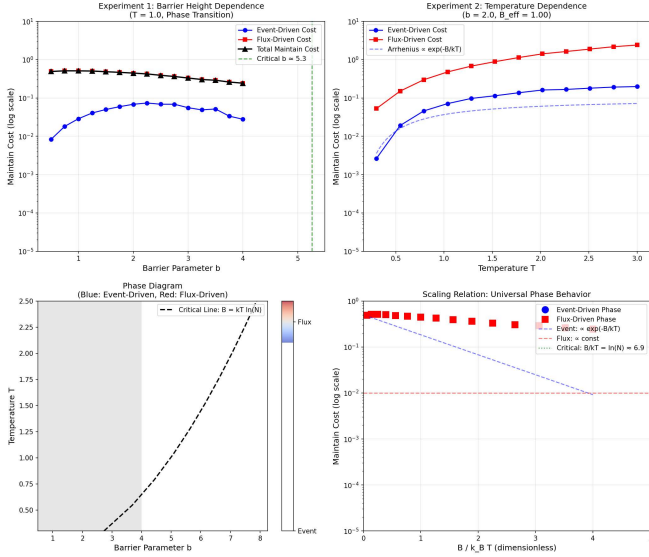


FIG. 2. Maintain phase dichotomy. (a) Barrier dependence showing transition from Flux-Driven to Event-Driven. (b) Temperature dependence with Arrhenius fit. (c) Phase diagram in (b, T) space with critical line $B = k_B T \ln N$. (d) Universal scaling collapse: Event-Driven follows $e^{-B/k_B T}$, Flux-Driven is constant.

with $E_{\text{create}} < 0$ (exothermic). This hierarchy has immediate implications.

Engineering. Current computers do not recover the energy released during Create, dissipating it as heat. The total energy moved, $|W_{\text{cre}}| + |W_{\text{del}}| \approx 2.6 k_B T \ln 2$, represents a “hidden cost” that efficient future architectures might partially recover, analogous to regenerative braking.

Scalability. The Flux-Driven phase imposes fundamental limits on volatile memory systems. With power budget P_{budget} and per-bit cost p , the maximum sustainable memory is $N_{\text{max}} = P_{\text{budget}}/p$. This may explain observed limits in biological systems operating under fixed metabolic budgets.

Fundamental physics. The critical point $B_c = k_B T \ln N$ connects information capacity to the second law: storing N distinguishable states against thermal noise requires barriers scaling logarithmically with N .

CONCLUSION

We have established the complete thermodynamics of information operations. Create is exothermic, releasing $\sim k_B T \ln 2$ per bit. Delete confirms Landauer’s principle. Update shows partial energy recovery. Most significantly, Maintain exhibits a phase transition between Event-Driven (exponentially vanishing cost) and Flux-Driven (constant power) regimes, with critical point $B_c \approx k_B T \ln N$.

These results provide fundamental bounds for information processing systems and suggest new design principles for energy-efficient computation. The phase dichotomy in Maintain may underlie scaling limits observed across engineered and biological memory systems.

The author thanks the anonymous reviewers for their constructive feedback. This work was conducted independently at Miosync, Inc. AI language assistance (Claude sonnet4.5, Anthropic) was used for English editing. The author is a non-native English speaker; all scientific content and interpretations are solely the author’s. Simulation code is available at <https://github.com/miosync-masa/landauer-complete>.

* m.iizumi@miosync.email

- [1] R. Landauer, Irreversibility and heat generation in the computing process, *IBM Journal of Research and Development* **5**, 183 (1961).
- [2] A. Bérut, A. Arakelyan, A. Petrosyan, S. Ciliberto, R. Dillenschneider, and E. Lutz, Experimental verification of Landauer’s principle linking information and thermodynamics, *Nature* **483**, 187 (2012).
- [3] Y. Jun, M. Gavrilov, and J. Bechhoefer, High-precision test of Landauer’s principle in a feedback trap, *Physical Review Letters* **113**, 190601 (2014).
- [4] J. Hong, B. Lambson, S. Dhuey, and J. Bokor, Experimental test of Landauer’s principle in single-bit operations on nanomagnetic memory bits, *Science Advances* **2**, e1501492 (2016).
- [5] C. Jarzynski, Nonequilibrium equality for free energy differences, *Physical Review Letters* **78**, 2690 (1997).
- [6] G. E. Crooks, Entropy production fluctuation theorem and the nonequilibrium work relation for free energy differences, *Physical Review E* **60**, 2721 (1999).
- [7] T. Sagawa and M. Ueda, Generalized Jarzynski equality under nonequilibrium feedback control, *Physical Review Letters* **104**, 090602 (2010).
- [8] J. M. R. Parrondo, J. M. Horowitz, and T. Sagawa, Thermodynamics of information, *Nature Physics* **11**, 131 (2015).
- [9] C. H. Bennett, The thermodynamics of computation—a review, *International Journal of Theoretical Physics* **21**, 905 (1982).
- [10] K. Sekimoto, *Stochastic Energetics*, Lecture Notes in Physics, Vol. 799 (Springer, 2010).
- [11] K. Proesmans, J. Ehrich, and J. Bechhoefer, Finite-time Landauer principle, *Physical Review Letters* **125**, 100602 (2020).
- [12] R. Dillenschneider and E. Lutz, Memory erasure in small systems, *Physical Review Letters* **102**, 210601 (2009).
- [13] H. A. Kramers, Brownian motion in a field of force and the diffusion model of chemical reactions, *Physica* **7**, 284 (1940).
- [14] N. Freitas and M. Esposito, Reliability and entropy production in nonequilibrium electronic memories, *Physical Review E* **103**, 032114 (2021).
- [15] M. Esposito and C. Van den Broeck, Second law and Landauer principle far from equilibrium, *EPL (Europhysics Letters)* **95**, 40004 (2011).