Physical primitive and separately bound contact logic

a Authored spring primitive

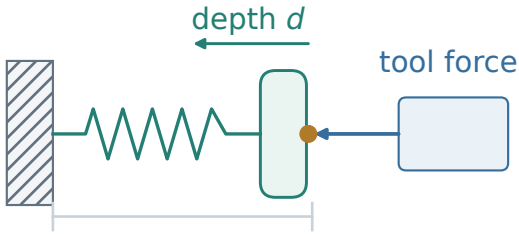

b Measured adapter input

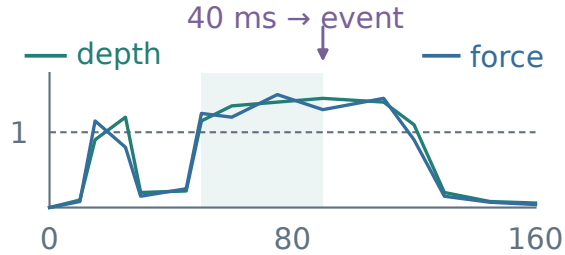

c Bound ContactButton: press, release, re-arm

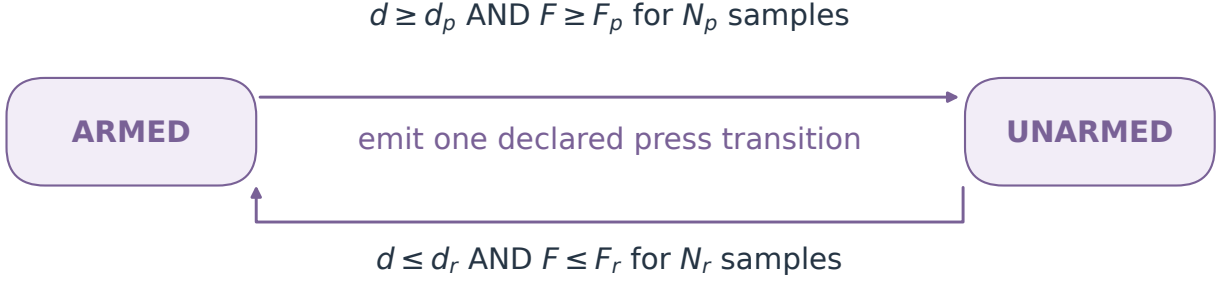

Explicit binding; missing samples reset counts; no observer pose writes.