

document - heading1

demo: self-modifying interleaved markup and shell

date - heading2

request: date --iso-8601=ns
date --iso-8601


```
'[[ "$noDate" != "true" ]] && date --iso-8601'
```

2021-10-26

images - heading2

preformatted text within paragraph



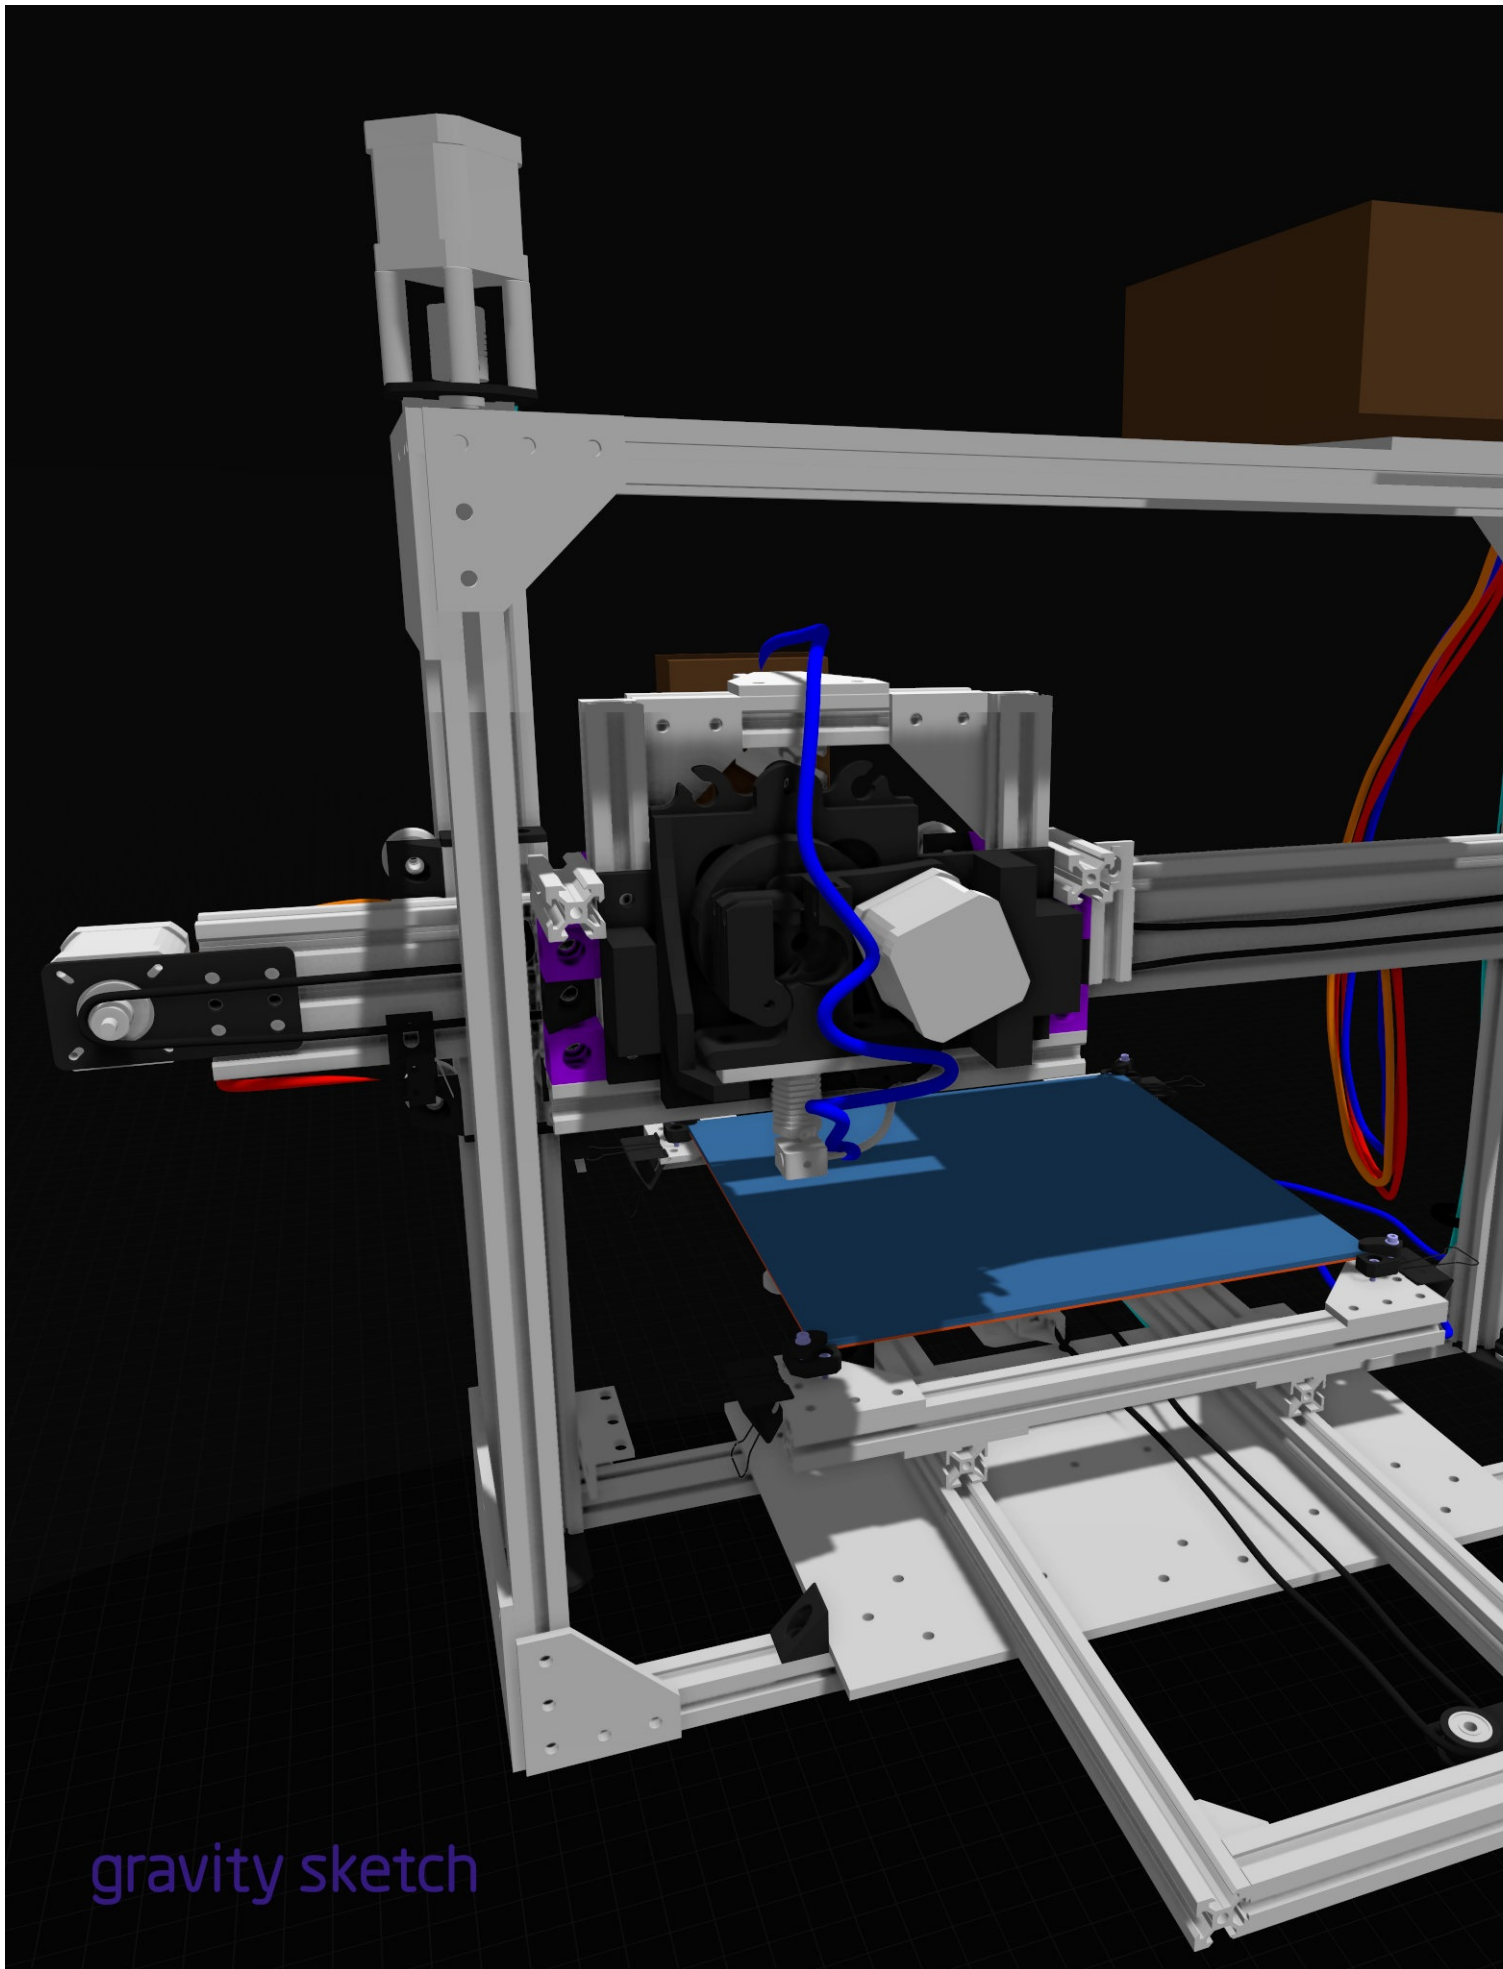

gravity sketch

```
'currentBonesPerPlayer=4'
```

```
'solve' '("$currentBitsPerSecond" == (\ "currentPlayers\" * "$currentBonesPerPlayer" * "$currentIncrementFramesPerSecond" *
"$currentIncrementFrameBytesPerBone" * "$currentByte") + (\ "currentPlayers\" * "$currentBonesPerPlayer" * "$currentInstantFramesPerSecond" *
"$currentInstantFrameBytesPerBone" * "$currentByte"), \ "currentPlayers\")''
```

```
# 5.5555556
```

```
*titleA*
```

```
<span style="font-weight:bold;font-style: italic;">*titleB*</span>
```

```
*titleC*
```

```
*titleD*
```

```
example
```

commands
with output

```
'ubiquitous_bash.sh' '_echo' 'a b'
```

```
# a b
```

```
'ubiquitous_bash.sh' '_echo' 'a
b'
```


a # b
\\ output

```
'_color_demo'
```

color demo # color demo # color demo # color demo # ubiquitousBashIDshort= uk4uPhB6 # color demo # _color_demo # _color_demo # echo _color_demo # _color_demo
"echo" _color_demo" # *echo _color_demo* # _color_demo # _color_demo # delay: InterProcess-Communication
output
raw markup

```
pre
```



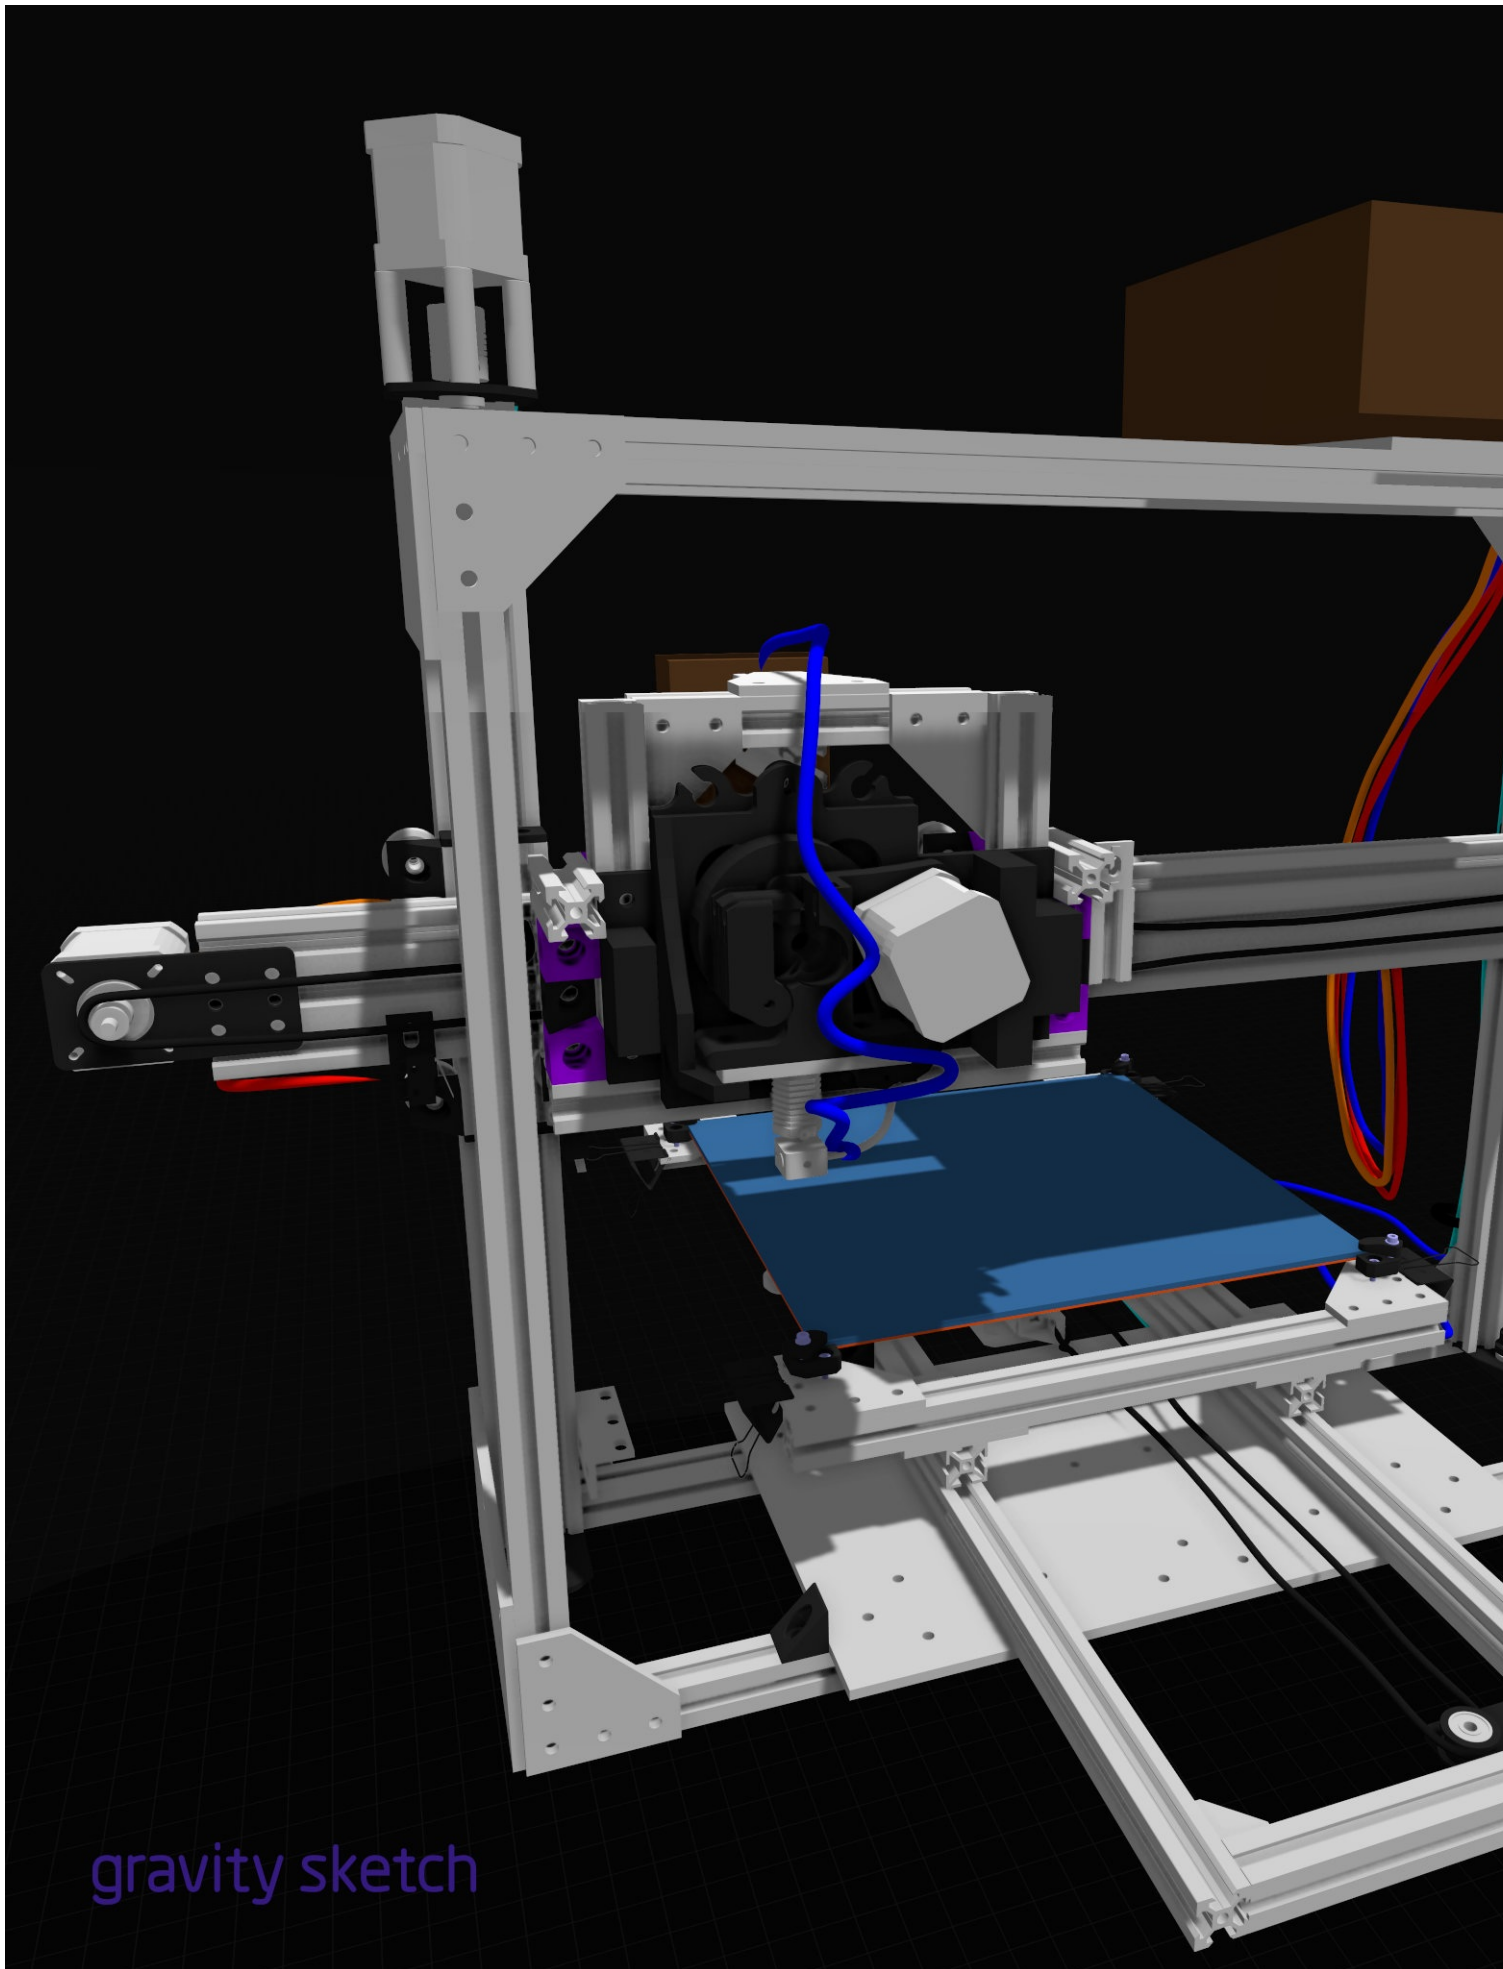

gravity sketch

```
preformatted text at paragraph_end
```

```
PageBreak -H-H-H-H- PageBreak -H-H-H-H- PageBreak -H-H-H-H- PageBreak -H-H-H-H- PageBreak
```

request: maybe the user should copy some file next to the "\$scriptAbsoluteFolder"
ubiquitousBashIDshort= uk4uPhB6

```
uk4uPhB6
```

```
&lt;pre style=&quot;margin-top: 0px;margin-bottom: 0px;white-space: pre-wrap;&quot;&gt;
```

```
preformatted
text
more
preformatted
text
```

```
&#35;
&#35; &#35;&#35;&#35;
&#35; &#35;&#35;&#35;
```

heading1

heading2

heading3

heading4

===== heading5
===== heading6

```
&#35;
```

raw markup<br \><h1>raw heading1</h2> <h2>raw heading2</h2> raw markup raw markup <p>raw paragraph</p> raw markup
raw markup
raw markup
raw markup
raw markup
 raw HTML markup within paragraph

```
preformatted
text
```

```
preformatted
text
"$ubiquitousBashIDshort"
```

```

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam,
quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse
cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
```

```
x > /dev/null
```

```
PageBreak -H-H-H-H- PageBreak -H-H-H-H- PageBreak -H-H-H-H- PageBreak -H-H-H-H- PageBreak
```


\\|||\\|||\\|||`'``''''''`\$0[]{}"'''''''

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

done: demo