


Frontend: Next.js (v0-scaffolded) on **Vercel** — lhr1 London • Primary database: **Amazon Aurora PostgreSQL (Serverless v2)** via the **RDS Data API** • AWS region: eu-west-2
How it connects: the browser is a thin client; all privileged work (auth, grading, billing, AI) runs server-side on Vercel and reaches AWS with **no static keys** (OIDC → STS).
Bridge → the offline Question-Generation pipeline (Page 2) seeds the Aurora *questions* table this app reads.



Build-time, NOT in the request path. Three independent model families propose; deterministic code judges; a human disposes. Bridge → output handoff/questions.json seeds the Aurora *questions* table the live app (Page 1) reads.

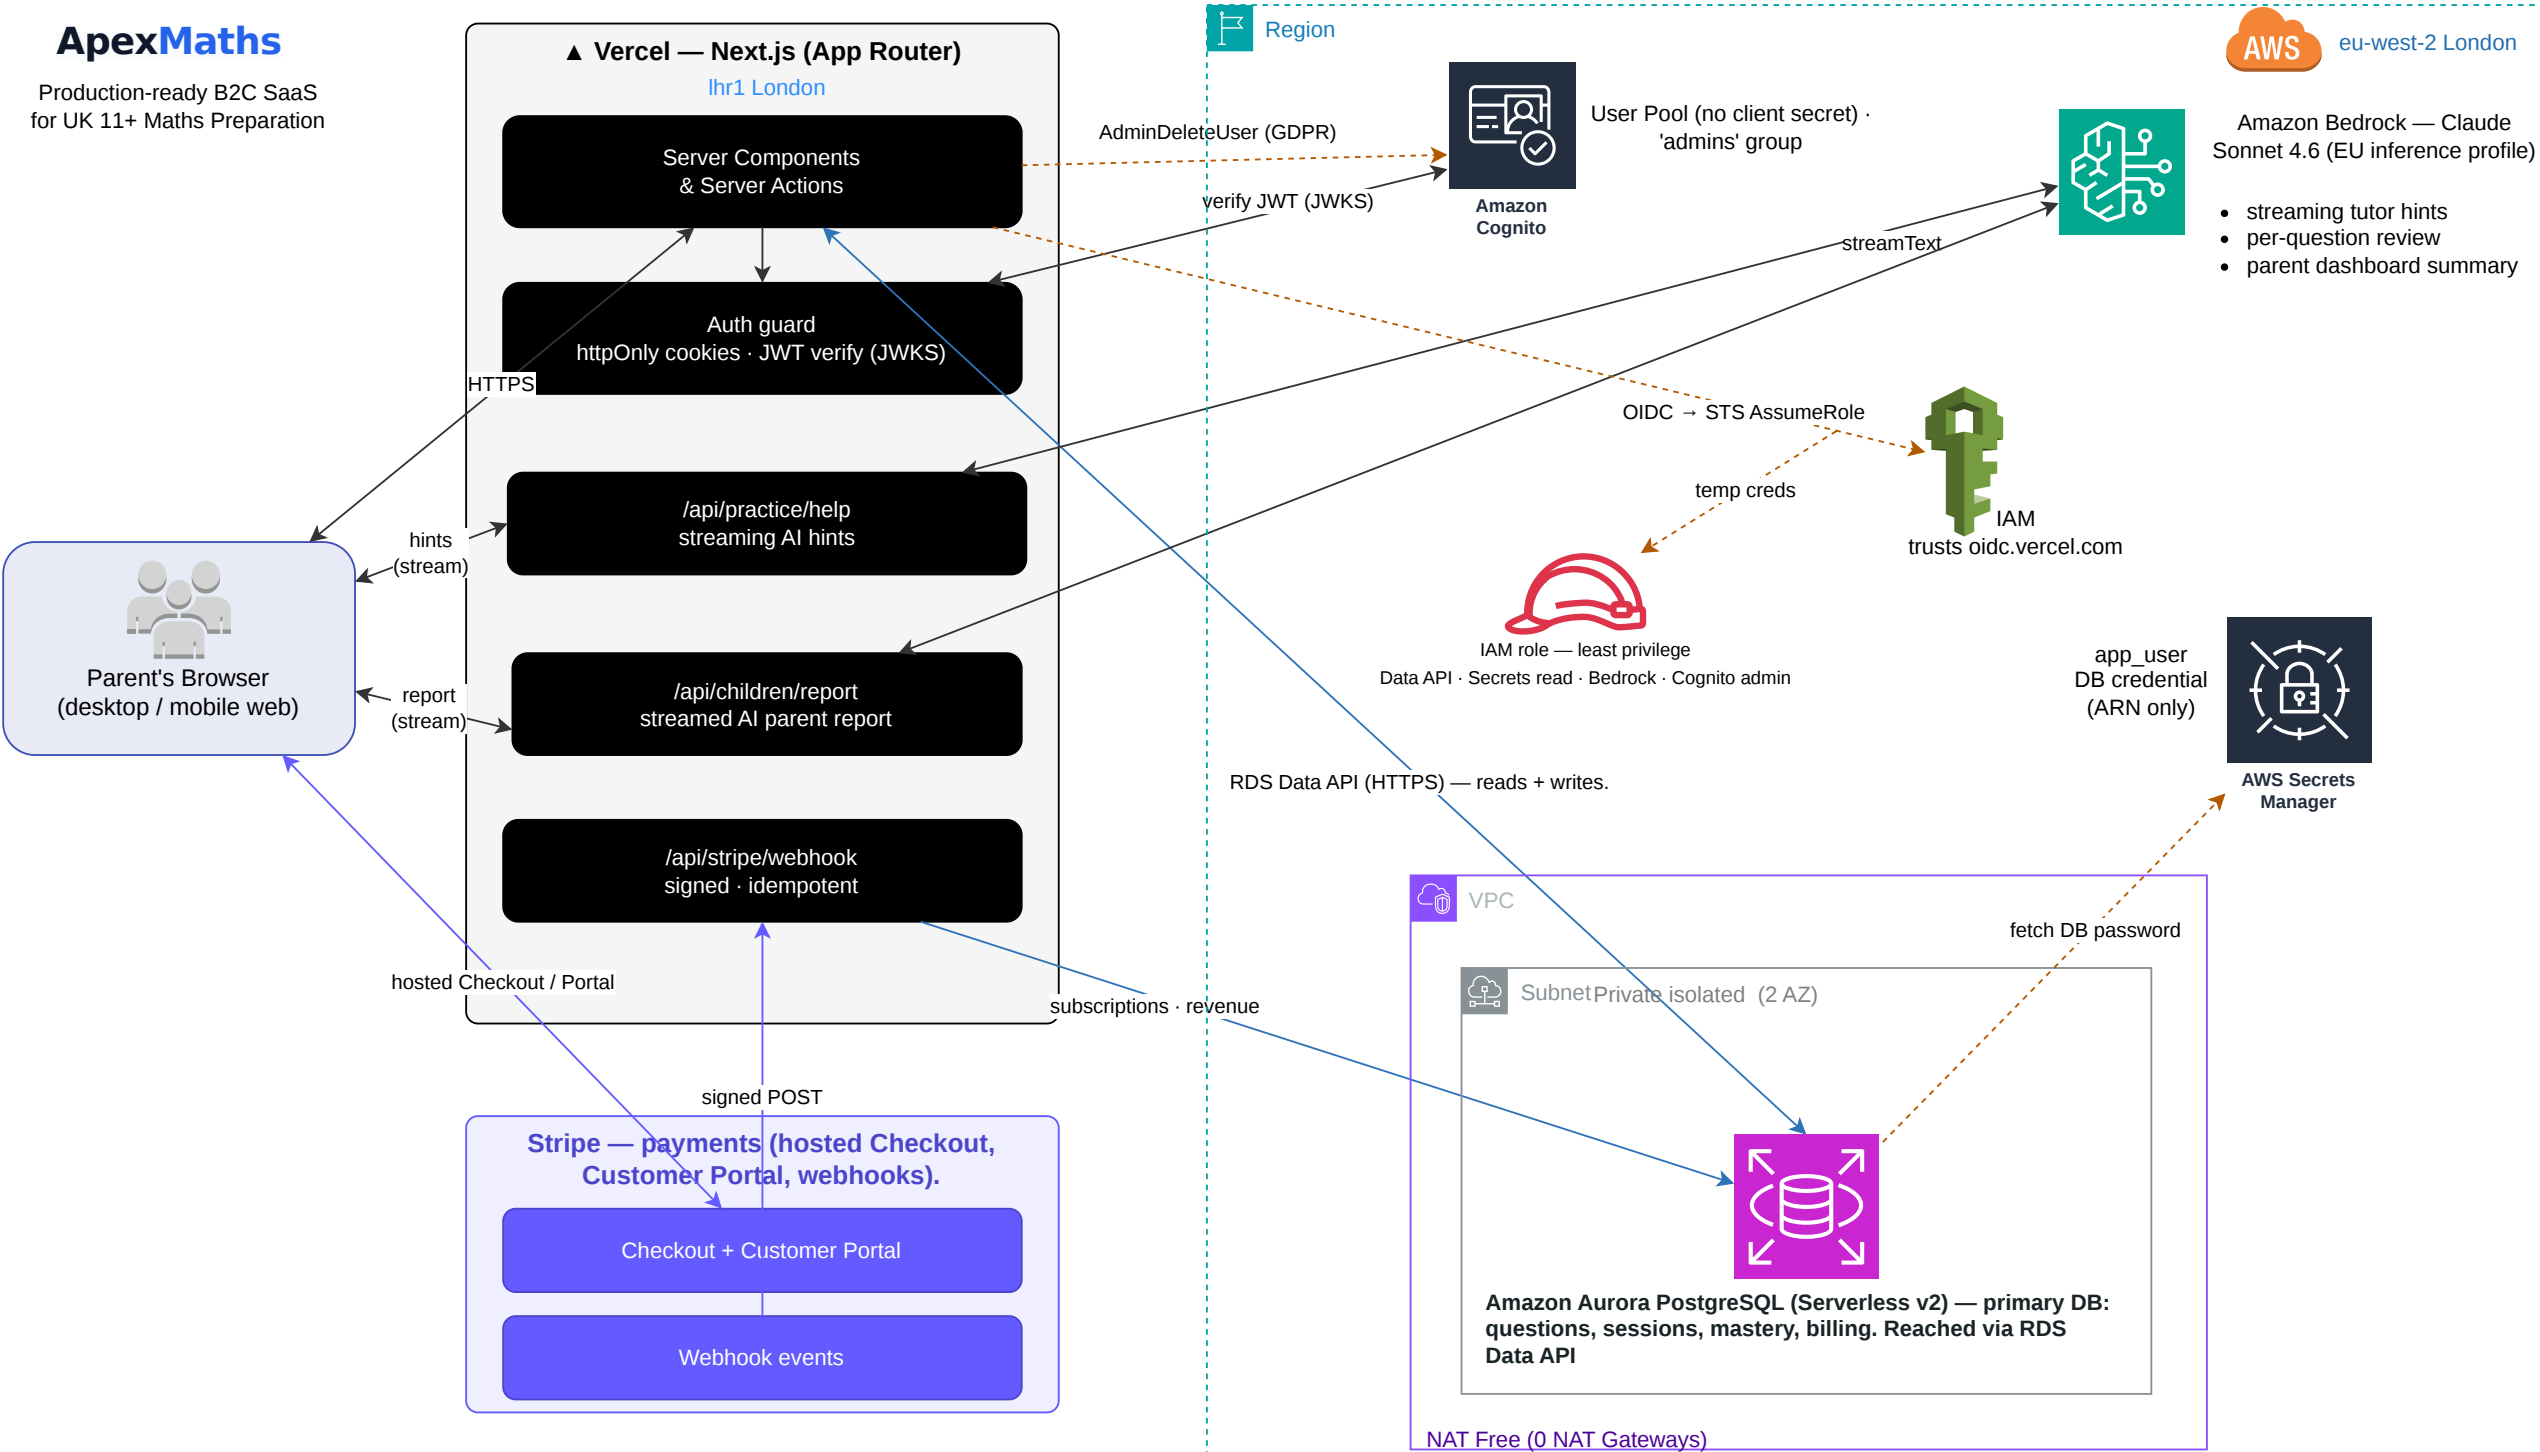